


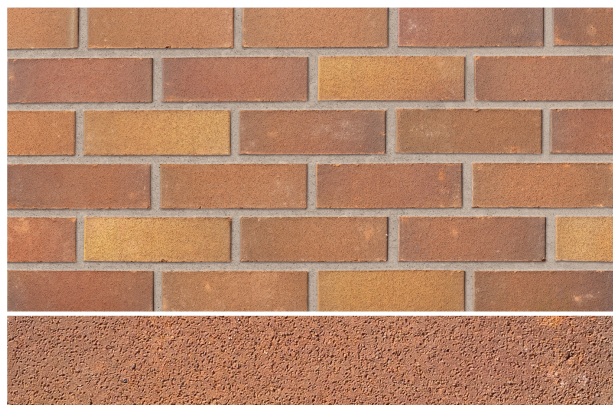

Product Information

Ibstock Code	A2949A
Type	Wirecut Extruded
Facing Description	Sandfaced
Dry Brick Weight	2.3kg
Pack Quantity	500
Packaging (standard)	Banded (Plastic)
Factory	Chesterton
EPD	Chesterton Product Group 1&3 (HUB-0823)

Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm)	215x102x65
Size Tolerances Mean & Range	T2 R1
Configuration	Vertically Perforated
Voids (%)	33-38
Compressive Strength (N/mm ²)	55
Active Soluble Salts	S2
Water Absorption (% weight)	7
Durability	F2~
Gross Dry Density (kg/m ³)	1440
Equivalent Thermal Conductivity "K" value 5% Exposed	1.16
Initial Rate of Absorption (Suction Rate) (kg/m ² /min)	0.3
EAN	5036335112328