


Connection Units

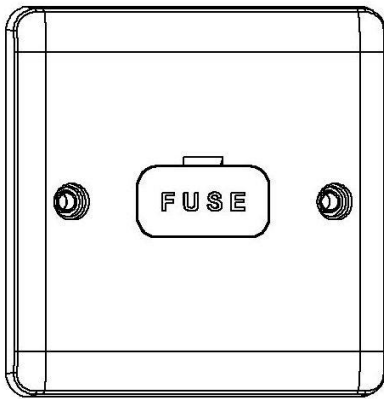

Description

This uniquely shaped range is easy to install with clear bold terminal markings and is supplied in individual protective bags suitable for display.

This range includes flex outlet and neon versions.

Features

- Contemporary designed profile
- Convex rockers
- Only one size 4mm screwdriver needed
- Terminals have clear bold markings
- Neon versions available
- Neon leads enclosed
- Fuse carrier can be locked in the out position
- 2 earth terminals
- Terminals have large lead-ins
- 25-year guarantee

Range

Unswitched spur	VC1360
Unswitched spur with neon	VC1361
Unswitched spur with bottom flex outlet	VC1364
Switched spur	VC1370
Switched spur with neon	VC1371
Switched spur with bottom flex outlet	VC1374
DP switched, neon & bottom flex outlet	VC1375

Technical Specification

Voltage rating	250Vac
Current Rating	13A
Contact gap	3mm
Size	86 x86 x 7mm (H x W x D)
Frontplate material	Urea formaldehyde

Urea flammability classification UL94 grade V-C

No user serviceable parts, except BS 1362 fuse

Back Boxes

Minimum recommended depth

	Metal Flush	Dry lining	Surface	
	25mm	35mm	25mm	33mm
1g	DB162	DB2540	VC1221	VC1222

Standards

- BS 1363 Part 4 : 1995+A4:2012
- Fuses – BS 1362

Terminal Capacity

	2.5mm ²	4mm ²	6mm ²	10mm ²
L & N	4	3	2	1