


20A DP Switches

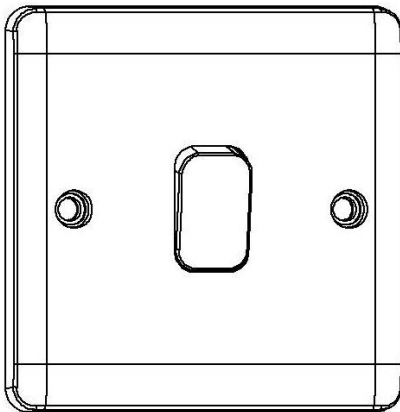

Description

This uniquely shaped range is easy to install, with clear bold terminal markings and is supplied in individual protective bags suitable for display.

This wide range includes engraved, flex outlet and neon versions.

Features

- Contemporary designed profile
- Convex rockers
- Only one size 4mm screwdriver needed
- Bold terminal markings
- Grey font engraving
- Neon versions available
- Neon leads enclosed
- Flex outlet option available
- 2 earth terminals
- Terminals have large lead-ins
- 25-year guarantee

Range

Switch	VC1390
Switch marked 'WATER HEATER'	VC1390WH
Switch with neon	VC1391
Switch with flex outlet	VC1392
Switch with flex outlet marked 'WATER HEATER'	VC1392WH
Switch with neon and flex outlet	VC1393
Dual switch with neon	VC1218P

Technical Specification

Voltage rating	250Vac
Current Rating	20A
Contact gap	3mm
Frontplate material	Urea formaldehyde

Urea flammability classification UL94 grade V-C

No user serviceable parts

Standards

- BS EN 60669-1 : 2000

Back Boxes

Minimum recommended depth

	Flush 25mm	Dry lining 35mm	Surface 25mm
1g	DB162	DB2540	VC1221

Terminal Capacity

	2.5mm ²	4mm ²	6mm ²	10mm ²
L & N	4	2	2	1