


Cooker Control Units

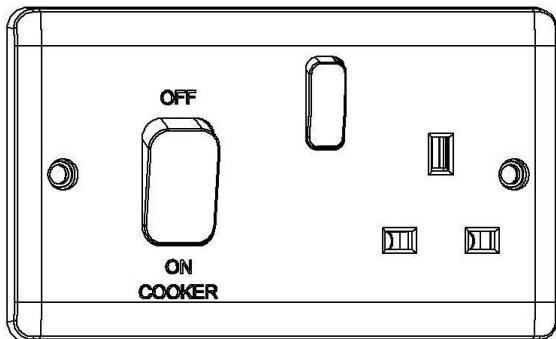

Description

This uniquely shaped range is easy to install, with clear bold terminal markings and is supplied in individual protective bags suitable for display.

This range includes red switches with an option of neon.

Features

- Contemporary designed profile
- Convex rockers
- Switches rated at 50A
- Grey font engraving
- Only one size 4mm screwdriver needed
- Terminals have clear bold markings
- Neon version available
- 2 earth terminals
- Terminals have large lead-ins
- 25-year guarantee

Range

Red switch	VC1302
Red switch with neons	VC1302P
Cooker cable outlet	VC1217

Technical Specification

Voltage rating	250Vac
Current Rating	50A
Contact gap	3mm
Frontplate material	Urea formaldehyde

Urea flammability classification UL94 grade V-

No user serviceable parts

Back Boxes

Minimum recommended depth

	Flush 47mm	Dry lining 46mm	Surface 46mm
1g	DB167	DB2542	VC1228
2g	DB168	DB2543	VC1229

Standards

- BS 4177: Part 4

Terminal Capacity

	6mm ²	10mm ²
L & N	2	1