


Connection Plates

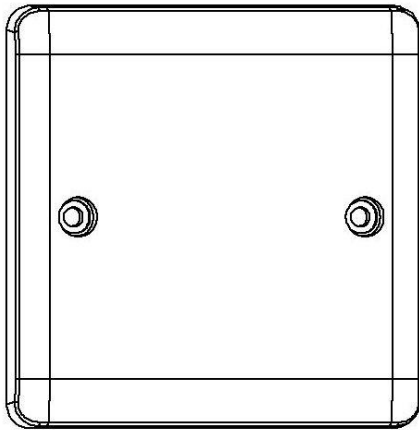

Description

This uniquely shaped range is easy to install, with clear bold terminal markings and is supplied in individual protective bags suitable for display.

Features

- Contemporary designed profile
- Only one size 4mm screwdriver needed
- Terminals have clear bold markings
- Dual terminals of live, neutral and earth
- Large terminal capacity
- 25-year guarantee

Range

1 gang blank plate	VC1200
2 gang blank plate	VC1201
25A flex outlet plate	VC1215
25A flex connection plate (no flex)	VC1216

Technical Specification

Voltage rating	250Vac
Current Rating	25A
Frontplate material	Urea formaldehyde

Urea flammability classification UL94 grade V-0

No user serviceable parts

Back Boxes

Minimum recommended depth

	Flush 25	Dry lining 35mm	Surface 25mm
1g	DB162	DB2540	V1221

Standards

- BS 5733 : 2010+A1:2014

Terminal Capacity

	2.5mm ²	4mm ²	6mm ²	10mm ²
L & N	5	3	2	1