


13A Socket with USB Charging Ports

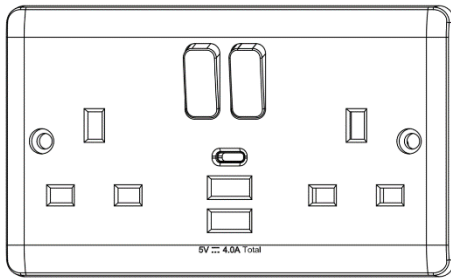

Description

13A Socket with high current Type A and Type C USB charging ports, for simultaneous charging of smart phones, tablets and other portable devices.

This range is easy to install, with clear bold terminal markings and is supplied in individual protective bags suitable for display.

Features

- Two Type A and one Type C USB ports deliver a maximum combined output of 4A
- Each port can deliver a maximum of 3A charging current
- Simultaneous charging across 3 ports
- USB ports use auto IC technology to detect connected devices and provide optimised high-speed charging
- 2-year guarantee

Range

2 gang switched with Type A and Type C USB charging ports VC1288

Technical Specification & Features

Supply voltage	240Vac
Socket rating	13A
Switch	Single Pole
USB ports output	4.0A shared
Standby power	<0.5W
Vimark Curve:	
Front plate material	Urea formaldehyde
Urea flammability classification	UL94 grade V-0

Switches control 13A sockets, not USB charging ports

No user serviceable parts

Back Boxes

Vimark Curve 25mm deep back box*
 Deeper boxes are recommended for greater wiring space

Minimum recommended depth

*Restricted bottom cable entry access

Terminal Capacity

	2.5mm ²	4mm ²
L & N	4	3

Standards

- BS 1363
- BS 5733
- BS EN 60950-1