

ROOFLINE

by **timloc**

Ambi-Verge Universal Dry Fix Verge System for Profiled Roof Tiles

A robust, attractive and weather resistant verge system alternative to wet mortar bedding.



Use

- Large format and interlocking concrete profiled tiles
- Most pitched roof types from 15-55°
- Verges with or without bargeboards
- New build and refurbishment projects

Features and Benefits

- Universal installation – LH & RH sides are interchangeable.
- Long lasting, reliable and virtually maintenance free.
- Protects against wind uplift, water ingress & general deterioration.
- Easy, fast, clean and generally safer mortar free installation.
- Allows virtually all weather installation.
- Strong but supple for easy flexing and sliding along the tiles.
- Secure fit around the tile reassurance.
- Maintains consistently smart appearance.
- Not impacted by building settlement.
- Meets mechanical fix legislation requirements.
- The system also offers a unique steel fixing bracket option that presents flexible fixing points for use with alternative size counter battens or straight onto tile batten ends. The bracket avoids the reliance of end grain fixing, which can cause splitting and consequential damp penetration issues.

Quality

- Helping to meet BS 5534 Code of practice for slating and tiling
- Complies with all other relevant regulations and standards
- Manufactured to BS EN ISO 9001 and BS EN ISO 14001
- Independently tested and complies with BS8612

Material and Colour Choice

- UV protected and colour fast polypropylene
- Galvanised steel batten end bracket (optional)
- Available in grey, terracotta, brown and black

Installation Advice

- Please refer to our website www.timloc.co.uk for full recommended installation guidance.


Products in the System

- Universal verge unit
- Eaves starter
- Half round ridge (apex) end cap
- Angled ridge (apex) end cap
- End grain batten bracket (optional)


How to Order

- Select the relevant verge system colour for the project.
- 1 verge piece is required for each roof tile in the sloping run.
- Select the ridge shape for the apex of the system – angled or round.
- Eaves starter must be installed at the beginning of each sloping run.
- 1 optional end grain batten bracket is required for each verge piece installed in the sloping run.


Product Dimensions

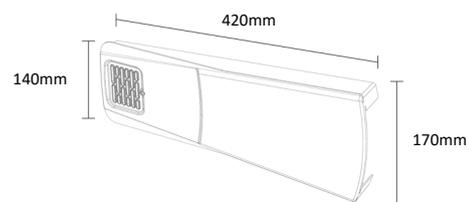


Ambi-Verge universal dry fix verge




Universal dry fix angled ridge end cap



Universal dry fix half round ridge end cap



Ambi-Verge eaves starter



End grain batten bracket




ROOFLINE

by **timloc**

Ambi-Verge Universal Dry Fix Verge System for Profiled Roof Tiles

A robust, attractive and weather resistant verge system alternative to wet mortar bedding.

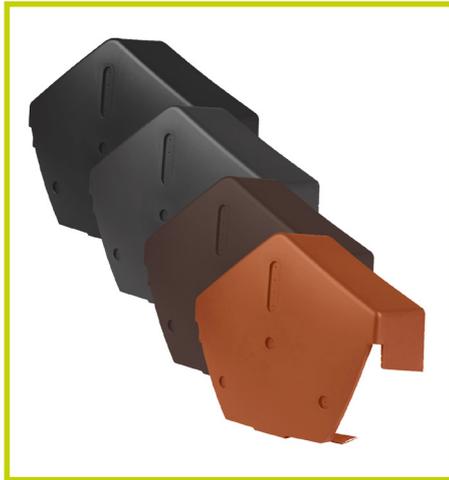

Universal dry fix angled ridge end cap




Universal dry fix half round ridge end cap



Ambi-Verge eaves starter

Product Detail

Ridge piece (half round or angled)

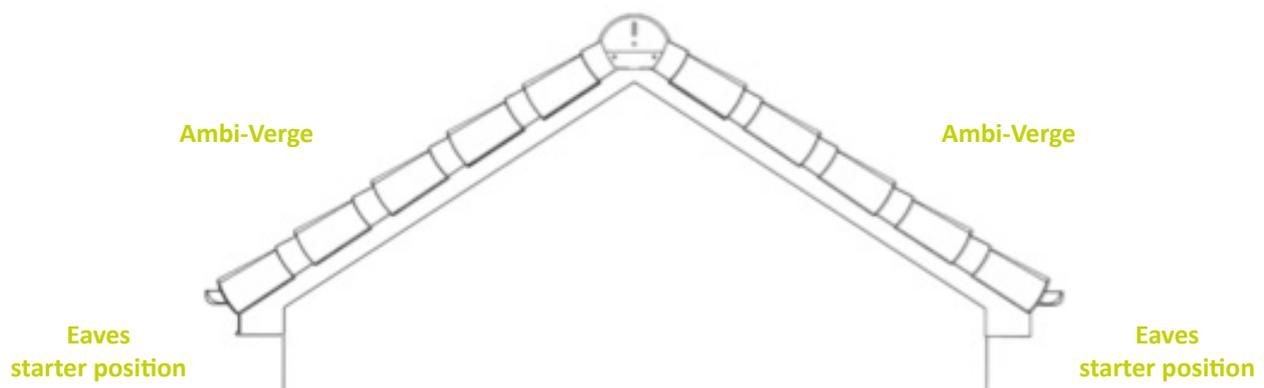

Product codes

| Description | Pack Qty | Grey Product Codes | Brown Product Codes | Black Product Codes | Terracotta Product Codes |
|---|----------|--------------------|---------------------|---------------------|--------------------------|
| Ambi-Verge universal dry fix verge | 20 | 99141 | 99142 | 99143 | 99144 |
| Universal dry fix angled ridge end cap | 1 | 99109 | 99108 | 99107 | 99110 |
| Universal dry fix half round ridge end cap | 1 | 99113 | 99112 | 99136 | 99114 |
| Ambi-Verge eaves starter | 1 | 99153 | 99155 | 99154 | 99156 |
| Dry verge profiled tile end grain batten bracket (optional) | 20 | 99124 | 99124 | 99124 | 99124 |