

Aura eco 150

Larger bathroom, utility room and kitchen ventilation (adjacent to hob)



KEY FEATURES

- Axial fan
- Ventilation up to 235 m³/h
- Slim compact styling
- Quick and easy to fit
- Quiet - 35 dB(A)
- Low Watt motor - 20 W
- Low SFP - 0.31 W/l/s
- Compatible with 150 mm ducting
- IPX4 rating
- Complies with Building Regulations
- 2 year warranty



SWITCHING



TIMER



HUMIDITY



MOTION
SENSOR

Aura eco 150 range

Highly reliable, low energy fan in a modular design for ease of installation and maintenance. The Aura eco 150 is designed to provide quiet extraction for cloakroom applications. Recessed into a wall the Aura eco 150 provides slim, compact and discreet extraction for the property. With protection in mind, the Aura eco 150 comes with IPX4 ingress protection enabling installation anywhere within Zone 2 or in Zone 1 when installed above a fixed shower head.

Available with various control options; basic switching for on/off operation using an external switch; adjustable timer with fan activation via an external switch and an adjustable overrun between 2 and 30 minutes. Adjustable humidity timer enables activation of the fan via the use of an adjustable humidity sensor, 60 to 90% RH, or via a remote switch with an adjustable timer overrun of 2 to 30 mins. motion sensor time activates the fan with the use of an integral motion sensor with a timer overrun.



MODELS


Basic	Control by Remote Switch
Timer	Adjustable timer overrun between 2 and 30 minutes
Humidity Timer	Adjustable Humidity 60 to 90% RH with adjustable timer
Motion Sensor Timer	Motion sensor activation



TECHNICAL DATA


Specification	Aura eco 150B	Aura eco 150T	Aura eco 150HT	Aura eco 150MST
Air flow m ³ /h / l/s	235 / 65	235 / 65	235 / 65	235 / 65
Fan type	Axial	Axial	Axial	Axial
Controls	Basic	Timer	Humidity Timer	Motion Sensor Timer
Mounting	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling
Sound pressure dB(A)@3 m	35	35	35	35
Power Watts	20	20	20	20
Amps	0.14	0.14	0.14	0.14
Specific Fan Power (SFP)	0.31	0.31	0.31	0.31
Duct diameter (mm)	150	150	150	150
Voltage	230 V / 1 ph / 50-60 Hz	230 V / 1 ph / 50-60 Hz	230 V / 1 ph / 50-60 Hz	230 V / 1 ph / 50-60 Hz
Rating	IPX4	IPX4	IPX4	IPX4
Material finish	Plastic	Plastic	Plastic	Plastic
Weight (kg)	0.9	0.9	0.9	0.9
Dimensions (H x W x D) mm	205 x 205 x 124	205 x 205 x 124	205 x 205 x 124	205 x 205 x 124
Part No.	9041351	9041352	9041353	9041354

DIMENSIONS (mm)

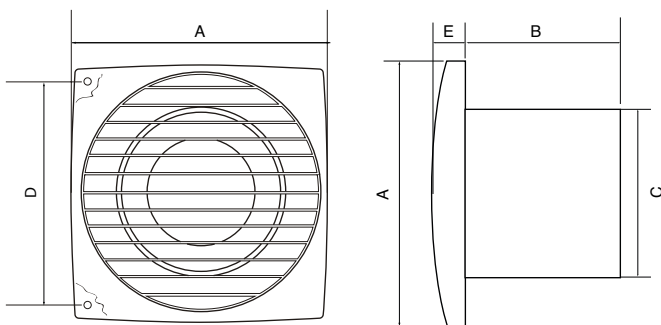

Model	A	B	C	D	E
Aura eco 150	205	124	150	174	19

PERFORMANCE

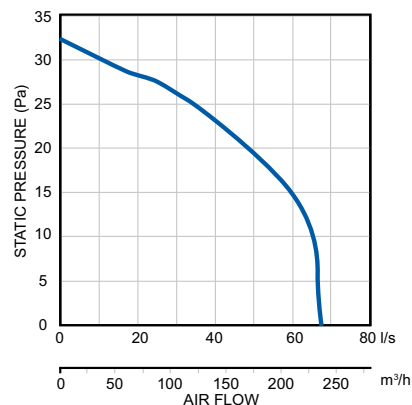

CONTROLS AND ACCESSORIES

A range of accessories including flexible and rigid ducting kits, controls, switches and grilles are available.

See accessories section for more details.

Call: 01494 525252

Visit: airflow.com



Airflow Developments Limited
Aidelle House, Lancaster Road,
Cressex Business Park,
High Wycombe, Buckinghamshire,
United Kingdom, HP12 3QP

E-mail: info@airflow.com
Telephone: +44 (0) 1494 525252

airflow.com

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request



80001409 - Issue 1 07/23