

3 Lever Lock

FITTING INSTRUCTIONS

PLEASE READ INSTRUCTIONS CAREFULLY BEFORE BEGINNING INSTALLATION


Tools Required:

- Drill
- 16mm drill bit
- Mallet
- Chisel
- Screwdriver
- Pencil
- Masking tape


1. Determine the latch direction according to door handling as shown in figure 1.

Fig 1

LEFT

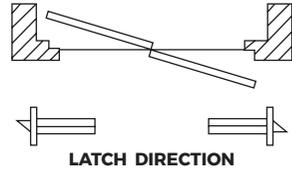


RIGHT

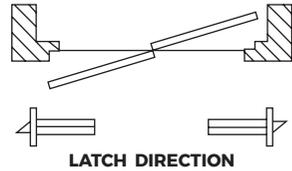

2. Refer to figure 2, if the latch direction needs reversing.

Fig 2

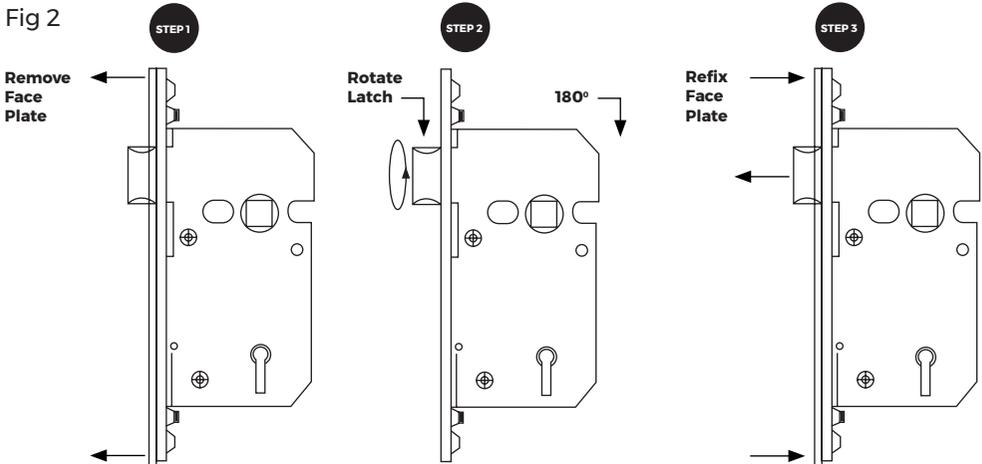

- Using the lock body as a template mark on the side of the door the mortice required and drill/machine out.
- Position lock in mortice and mark around outer forend. Remove the lock and create a recess to allow flush sitting of the lock onto the face of the door. Remove the outer forend, replace the lock. For fire door application use intumescent packs (1 pack per latch/lock, 1mm for 30 mins & 2mm for 60mins)
- Insert lock into the door and secure with screws supplied. Determine the position of the strike on the door frame and fix as required figure 3 & 4. Plastic dust box must not be used in fire door assembly

Fig 3





Fig 4

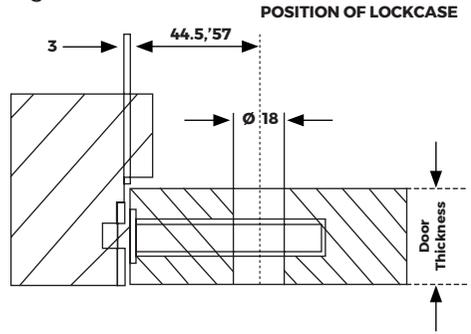

PRODUCT MAINTENANCE AND SAFETY:

Please ensure that the operation of the lock and ensure that all fixings are secure and adjust them if required. These checks must be carried out every 3 months. Ensure that the strike plate/box keep is correctly in line and that the door has not dropped. Also ensure that the strike plate/box keeps are completely clear of any obstructions and that both latch bolts and deadbolts are clear to enter without problems.

WARNING: The safety features of this product are essential to its compliance with **BS EN 12209:2003**. No modification of any kind other than those described in these instructions are permitted.

For dead lock miss out latch reversal step (i.e.2), and step 1 not required.

MAINTENANCE INSTRUCTIONS:

Keep lubricating with a lubricant after every 25000 cycle to ensure optimum performance.

	1121-CPR	Sparka UK Ltd, Unit 11 Redwood Court, Campbell Way, Sheffield, S25 3NQ								20	
	BS EN 12209:2016						For DOP: www.sparkauk.com				
	1	M	4	1	0	F	2	K	D	1	A

Products may be fitted on previously tested single-acting, door and frame assemblies with relevant intumescent as required. For particular conditions feel free to visit our website www.sparkauk.com or contact our dedicated technical support team on: 0114 350 3414 if you have any further questions.