



FORUM
LIGHTING SOLUTIONS

FORUM

LIGHTING SOLUTIONS



CONTENTS

ZINK

OUTDOOR & SENSORS

Wall/Lantern
 Ground/Deck Lights
 Post/Wall Lights
 Festoon Light
 Deck Light
 Door Number
 Security & Floodlights
 Work Lights
 Outdoor Heating
 Switches/Sockets
 Sensors

ZINK

SOLAR

Post/Lantern
Ground
Wall Lights
PIR Wall Lights
Security & Floodlights
Spike Lights
Deck Lighting
Festoon

COAST

OUTDOOR

Post Lights
 Lanterns
 Bulkheads
 Wall
 Guide Lights
 Ground/Spike
 Security & Floodlights

ELECTRALITE

COMMERCIAL

LED Strip
 LED Strip Accessories
 Under Cabinet
 LED Battens
 T-Grid Lighting
 Recessed/Downlights

SPA

BATHROOM

Ceiling/Wall
 Spotlights
 Flush
 Recessed
 Wall
 Mirrors
 Smart Toilets

SPA PRO

PREMIUM

Collections

CULINA

KITCHEN

Under Cabinet
 Kinetic Switching
 Konect Plug + Play
 Sockets/QI Charging
 Track Lighting
 Plinth
 LED Battens

INLIGHT

INDOOR & LED LAMPS

Plaster Lights
 Spotlights
 Recessed/Downlights
 Picture Light
 Task Lighting
 Cable Sets
 Shades
 LED Lamps

STANLEY

SITE LIGHTING

Security & Floodlights
 Torches
 Portable
 Festoon

INFO


Marketing
 Lighting Terms
 Colour Temp Guide
 IP Rating
 Bathroom Zoning
 Index




OUTDOOR

Domestic external lighting in both modern and traditional designs. Including ZINK Radiant Heaters, suitable for domestic or commercial applications are extremely efficient and effective. We also offer a range of LED compatible PIR, photocell and microwave sensors.

WALL/LANTERN	5-61
POST/WALL LIGHTS	62-68
GROUND/DECK LIGHTS	69-73
FESTOON	74
DECK LIGHTS	75-77
DOOR NUMBER	78-79
SECURITY & FLOODLIGHTS	80-85
WORK LIGHTS	86-87
OUTDOOR HEATING	114-137
SOCKETS/SWITCHES	138-139
SENSORS	140-149

NEW**IP54**

- Solid brass construction
- Available in 2 finishes



Bronze



Brass

BRAC Downlight


IP54
Rated

Class 1




0.49kg


Code	Description	Finish	Lamp	Dimensions
ZN-41101-BRNZ	Brac Downlight	Bronze	1 x 7W max LED GU10	W:72mm H:120mm Proj:85mm
ZN-41101-RBRS		Brass		

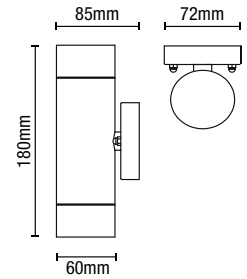NEW**IP54**

- Solid brass construction
- Available in 2 finishes



Bronze



Brass

BRAC Up/Down Wall Light

IP54
Rated

Class 1




0.71kg


Code	Description	Finish	Lamp	Dimensions
ZN-41102-BRNZ	Brac Up/Down Wall Light	Bronze	2 x 7W max LED GU10	W:72mm H:180mm Proj:85mm
ZN-41102-RBRS		Brass		

NEW

IP65



- Die-cast aluminium construction
- Available in 2 finishes



MORRO

Long Up/Down Wall Light



IP65
Rated



Class 1




0.88kg

Code	Description	Finish	Lamp	Dimensions
ZN-40001-BLK	Morro Long Up/Down Wall Light	Black	2 x 7W max LED GU10	W:75mm H:300mm Proj:110mm
ZN-40001-ANTH		Anthracite		

NEW
FOR
2023

IP54

460
Lumens



- Die-cast aluminium construction
- Wall mounted
- 9W LED
- K: 4000
- Lm: 460
- Lm/W: 51.1



BUDE


Coil LED Wall Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-42066-BLK	Black	Bude Coil LED Wall Light	12W	4000k	540	45	H:280mm W:100mm Proj:103mm

NEW
FOR
2023

IP44



- Steel & glass construction



CHESIL


Wall Lantern



Code	Description	Finish	Lamp	Dimensions
ZN-42095-BLK	Chesil Wall Lantern	Black	1 x 10W max LED E27 GLS	W:320mm H:240mm Proj:380mm

NEW
FOR
2023

IP44



Stainless Steel

- Stainless steel construction

BREAN

Up/Down Wall Light



IP44
Rated



Class 1




1.4kg

Code	Description	Finish	Lamp	Dimensions
ZN-42019-SST	Brean Up/Down Wall Light	Stainless Steel	2 x 7W max LED GU10	W:75mm H:305mm Proj:112mm

NEW
FOR
2023

IP44

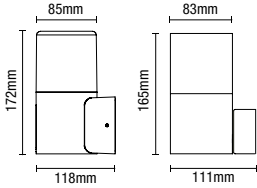

- Aluminium & PC construction
- Available in 2 round or square


BEATA Downlight



Code	Description	Shape	Lamp	Dimensions	Weight
ZN-41099-GRYSMK	Beata Downlight	Round	1 x 10W max LED E27 GLS	W:85mm H:172mm Proj:118mm	0.448kg
ZN-41100-GRYSMK		Square		W:83mm H:165mm Proj:111mm	0.53kg

NEW
FOR
2023

IP44



- Aluminium & PC construction


BEATA Up/Down Wall Light



Code	Description	Finish	Lamp	Dimensions
ZN-41711-GRYSMK	Beata Up/Down Wall Light	Grey/Smoke	2 x 10W max LED E27 GLS	W:85mm H:330mm Proj:110mm

NEW
FOR
2023

IP54



- Die-cast aluminium, PC and glass construction
- Available with or without photocell sensor

EOS Up/Down Wall Light



IP54
Rated



Class 1




0.84kg

Code	Description	Sensor	Lamp	Dimensions
ZN-32255-BLK	Eos Up/Down Wall Light	-	2 x 7W max LED GU10	W:80mm H:225mm Proj:110mm
ZN-35072-BLK	Eos Up/Down Wall Light w/	Photocell		



IP44



- IP44 rated
- Constructed from [201] stainless steel and clear glass
- Comes in 6 different finishes
- PIR & Photocell versions available



LETO

Up/Down Wall Light




Available in 6 colour options

Code	Finish	Description	Lamp	Dimensions
ZN-20941-SST	Stainless Steel	Leto Up/Down Wall Light	2 x 7W max LED GU10	H:160mm W:60mm Proj:110mm
ZN-20941-POLSST	Polished Stainless			
ZN-20941-BLK	Black			
ZN-20941-WHT	White			
ZN-20941-ANTH	Anthracite			
ZN-20941-COP	Copper			

IP44



- IP44 rated
- Constructed from [201] stainless steel and clear glass
- Adjustable lux, sensitivity and timer
- Up to 8m detection distance
- Comes in 4 different finishes



LETO

Up/Down Wall Light with PIR




Code	Finish	Description	Lamp	Dimensions
ZN-29179-SST	Stainless Steel	Leto Up/Down Wall Light with PIR	2 x 7W max LED GU10	H:215mm W:68mm Proj:107mm
ZN-29179-BLK	Black			
ZN-29179-ANTH	Anthracite			
ZN-29179-COP	Copper			

IP44



- IP44 rated
- Constructed from [201] stainless steel and clear glass
- Photocell sensor
- Available in 2 finishes

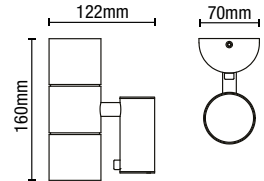

LETO

Up/Down Wall Light with Photocell Sensor





Code	Finish	Description	Lamp	Dimensions
ZN-34022-SST	Stainless Steel	Leto Up/Down Wall Light with Photocell	2 x 7W max LED GU10	H:160mm W:70mm Proj:122mm
ZN-34022-BLK	Black			



IP44

Ø60mm



- Constructed from [201] stainless steel
- Outdoor ceiling light ideal for porches
- Part of a full range of exterior fittings including, wall, ceiling, ground or spike
- 5 colour options

LETO Porch Light



Class 1




0.4kg

Code	Description	Finish	Lamp	Dimensions
ZN-37939-BLK	Leto Porch Light	Black	1 x 7W max LED GU10	H:105mm Dia:60mm
ZN-37939-ANTH		Anthracite		
ZN-37939-WHT		White		
ZN-37939-COP		Copper		

IP44



- Stainless steel [201] construction
- Part of a full range of exterior fittings including, wall, ceiling, ground or spike
- 5 colour options
- Multi-function PIR

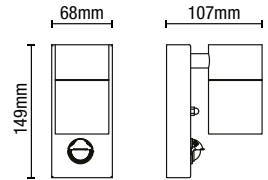

LETO

Downlight with PIR Sensor



Class 1



PIR Sensor



0.5kg




Available in 5 colour options

Code	Description	Finish	Lamp	Dimensions
ZN-37938-BLK	Leto Downlight	Black	1 x 7W max LED GU10	H:149mm W:68mm Proj:107mm
ZN-37938-SST		Stainless Steel		
ZN-37938-ANTH		Anthracite		
ZN-37938-WHT		White		
ZN-37938-COP		Copper		

IP44



- Stainless steel [201] construction
- Part of a full range of exterior fittings including, wall, ceiling, ground or spike
- 5 colour options

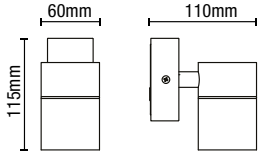

LETO

Downlight



Class 1



0.4kg




Available in 5 colour options

Code	Description	Finish	Lamp	Dimensions
ZN-37940-BLK	Leto Downlight	Black	1 x 7W max LED GU10	H:115mm W:60mm Proj:110mm
ZN-37940-SST		Stainless Steel		
ZN-37940-ANTH		Anthracite		
ZN-37940-WHT		White		
ZN-37940-COP		Copper		



IP44

NEW
COLOUR
OPTION



- IP44 rated
- Constructed from [20] stainless steel and clear glass
- Comes in 5 different finishes

LETO

Adjustable Spotlight




IP44
Rated

Class 1

0.46kg

Code	Finish	Description	Lamp	Dimensions
ZN-26536-SST	Stainless Steel	Leto Adjustable Spotlight	1 x 7W max LED GU10	H:144mm W:85mm Proj:196mm
ZN-26536-BLK	Black			
ZN-26536-WHT	White			
ZN-26536-COP	Copper			
ZN-26536-ANTH	Anthracite			






- IP44 rated
- Constructed from [201] stainless steel and clear glass
- Screw in spike or deck mount included
- Cable length: 500mm
- Available in 2 finishes




IP44

LETO Dual Mount Ground Spotlight



Code	Finish	Description	Lamp	Dimensions
ZN-29180-SST	Stainless Steel	Leto Dual Mount Spotlight	1 x 7W max LED GU10	H:276mm W:60mm Proj:107mm
ZN-29180-BLK	Black			

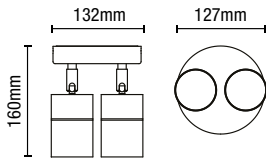

- IP44 rated
- Constructed from [201] stainless steel and clear glass
- Available in 2 finishes




IP44

LETO Adjustable Twin Spotlight



Code	Finish	Description	Lamp	Dimensions
ZN-34018-SST	Stainless Steel	Leto Adjustable Twin Spotlight	2 x 7W max LED GU10	H:132mm W:127mm Proj:160mm
ZN-34018-BLK	Black			

IP44

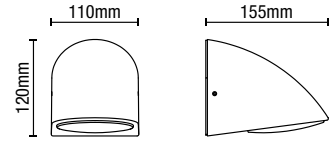

- IP44 rated
- Die-cast aluminium construction

NEVIS



Downlight



Code	Finish	Description	Lamp	Dimensions
ZN-35740-BLK	Black	Nevis Downlight	1 x 7W max LED GU10	H:120mm W:110mm Proj:155mm

900 Lumens


IP65

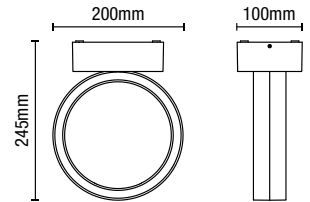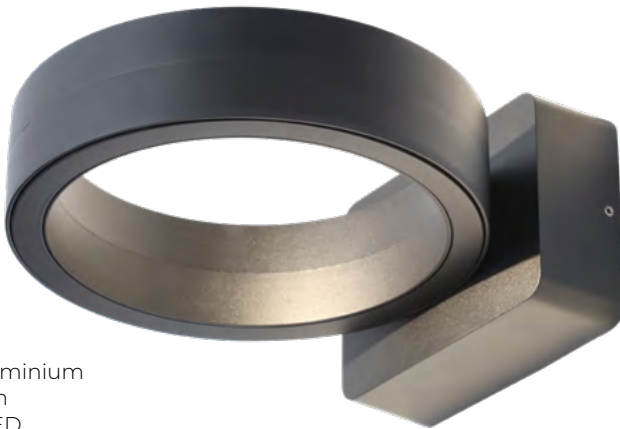

- Die-cast aluminium construction
- 16W COB LED
- K: 4000
- Lm: 900
- Lm/W: 56.25

KITT

LED Halo Wall Light




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-35739-BLK	Black	Kitt LED Halo Wall Light	16W	4000k	900	56.25	H:100mm W:200mm Proj:245



**700
Lumens**

IP54

- Die-cast aluminium construction
- Opal polycarbonate diffuser
- 5.4W COB LED
- K: 4000
- Lm: 700
- Lm/W: 130



REIMS Wall Light


Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38637-BLK	Black	Reims Wall Light	5.4W	4000k	700	H:50mm W:165mm Proj:35mm



**700
Lumens**

IP65

- Die-cast aluminium construction
- Opal diffuser
- 12W LED module (SMD)
- K: 4000
- Lm: 700
- Lm/W: 58




CORTE Wall Light

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38634-BLK	Black	Corte Wall Light	12W	4000k	700	H:115mm W:165mm Proj:209mm

620
Lumens


IP54

- Die-cast aluminium construction
- Wall mounted
- 8W LED
- K: 4000
- Lm: 620
- Lm/W: 77.5

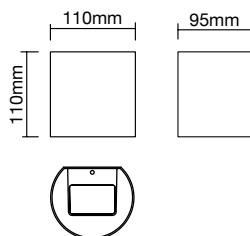

MAUI

LED Up/Down Wall Light




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-29995-BLK	Black	Mau LED Up/Down Light	8W	4000k	620	77.5	H:110mm W:110mm Proj:95mm

620
Lumens

IP54

- Die-cast aluminium construction
- Wall mounted
- 8W LED
- K: 4000
- Lm: 620
- Lm/W: 77.5

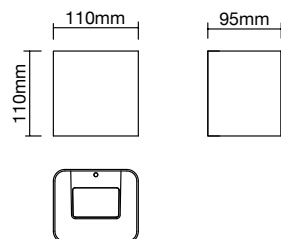

HANA

LED Up/Down Wall Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-29996-BLK	Black	Hana LED Up/Down Light	8W	4000k	620	77.5	H:110mm W:110mm Proj:95mm


700
Lumens

IP65



Ground
Spike Light

Spotlight

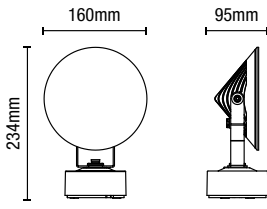

3 Different
Mounting
Options

Wall Light

- Die-cast aluminium construction
- Includes ground spike
- Cable length: 150mm
- 12W COB LED
- K: 4000
- Lm: 700
- Lm/W: 58

GORDA

LED Spotlight with Ground Spike


IP65 Rated | 4000K CW | 0.15M Cable | Class 1

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-35741-BLK	Black	Gorda LED Spotlight	12W	4000k	700	58	H:234mm W:160mm Proj:195mm

620
Lumens

IP54

- Die-cast aluminium construction
- Wall mounted
- 8W LED
- K: 4000
- Lm: 620
- Lm/W: 77.5

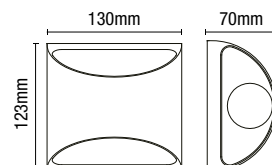

MANU



LED Up/Down Wall Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-29993-BLK	Black	Manu Up/Down LED Wall Light	8W	4000k	620	77.5	H:123mm W:130mm Proj:70mm


IP44

- Die-cast aluminium construction
- Polycarbonate diffuser

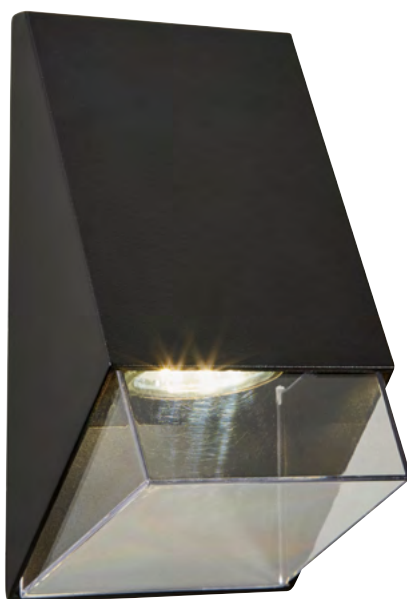

SENS

Angled Wall Light



Code	Description	Finish	Lamp	Dimensions
ZN-38631-BLK	Sens Angled Wall Light	Black	1 x 7W max LED GU10	Proj:92mm W:102mm H:180mm

- Available in 2 sizes
- Die-cast aluminium

6W LED

- K: 4000
- Lm: 275
- Lm/W: 45


12W LED

- K: 4000
- Lm: 400
- Lm/W: 33




Upto
400
Lumens

IP54

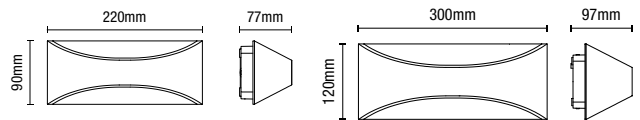

STROUD


LED Up/Down Wall Light



Code	Description	Lamp	Lumen	Dimensions
ZN-31768-BLK	Stroud Small LED Up/Down Wall Light	6W LED	275	H:90mm W:220mm Proj:77mm
ZN-31767-BLK	Stroud Large LED Up/Down Wall Light	12W LED	400	H:120mm W:300mm Proj:97mm



IP43



- PIR sensor option available

VESOUL

Wall Light




Code	Description	Finish	Lamp	Dimensions
ZN-38623-ANTH	Vesoul Wall Light	Anthracite	1 x 7W max LED GU10	Proj:94mm W:138mm H:181mm
ZN-38624-ANTH	Vesoul Wall Light with PIR sensor			

500
Lumens

IP54



- Die-cast aluminium construction
- Opal polycarbonate diffuser
- 3 colour options available
- 10W LED module (SMD)
- K: 4000
- Lm: 500
- Lm/W: 50



PAU Bulkhead



IP54
Rated



4000K
CW



Class 1



0.5kg



Available in
3 colour options


Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38621-ANTH	Anthracite	Pau Bulkhead	10W	4000k	500	H:108mm W:220mm Proj:121mm
ZN-38621-BLK	Black					
ZN-38621-WHT	White					

280
Lumens

IP54



- Die-cast aluminium construction
- 3 colour options available
- 10W LED module (SMD)
- K: 4000
- Lm: 280
- Lm/W: 28

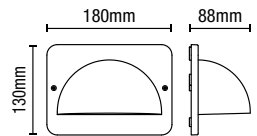

RENNES

LED Guide/Wall Light



IP54
Rated



4000K
CW



Class 1




0.4kg



Available in
3 colour options

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38622-ANTH	Anthracite	Rennes LED Guide/Wall Light	10W	4000k	280	H:130mm W:180mm Proj:88mm
ZN-38622-BLK	Black					
ZN-38622-WHT	White					

IP44

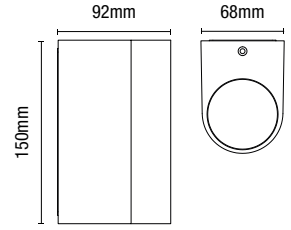

- IP44 rated
- Available in 2 finishes


ANTAR

Up/Down Light



Code	Finish	Description	Lamp	Dimensions
ZN-20930-BLK	Black	Antar Up/Down Wall Light	2 x 7W max LED GU10	Proj:92mm W:68mm H:150mm
ZN-20930-SIL	Silver			

IP44

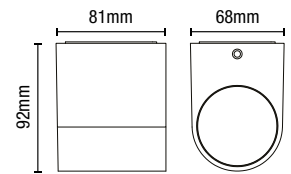


- IP44 rated
- Available in 2 finishes

ANTAR

Downlight



Code	Finish	Description	Lamp	Dimensions
ZN-29181-BLK	Black	Antar Downlight	1 x 7W max LED GU10	Proj:81mm W:68mm H:92mm
ZN-29181-SIL	Silver			

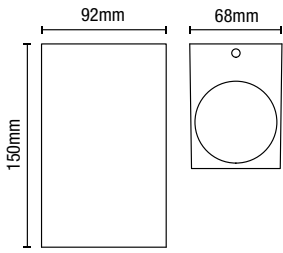

IP44


- IP44 rated
- Available in 2 finishes

FLEET

Square Up/Down Light



Code	Finish	Description	Lamp	Dimensions
ZN-31759-ANTH	Anthracite	Fleet Square Up/Down Wall Light	2 x 7W max LED GU10	Proj:92mm W:68mm H:150mm
ZN-31759-SIL	Silver			

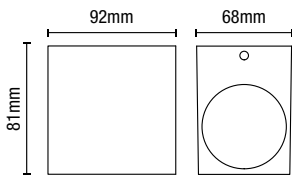

IP44

- IP44 rated
- Available in 2 finishes



FLEET

Square Downlight



Code	Finish	Description	Lamp	Dimensions
ZN-31758-ANTH	Anthracite	Fleet Square Downlight	1 x 7W max LED GU10	Proj:92mm W:68mm H:81mm
ZN-31758-SIL	Silver			

IP44

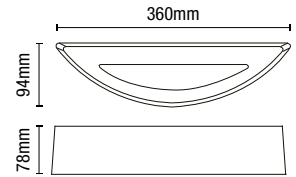

- IP44 rated
- Die-cast aluminium construction

MOKU


Up/Down Wall Light




Code	Finish	Description	Lamp	Dimensions
ZN-29992-BLK	Black	Moku Up/Down Wall Light	1 x 9W LED Max E27 GLS	H:94mm W:360mm Proj:78mm

480 Lumens

IP54

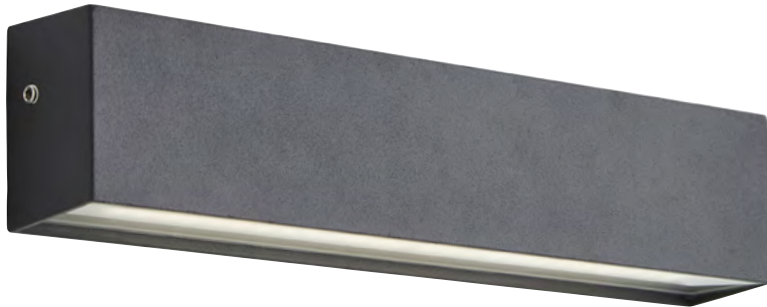

- Aluminium body with glass diffuser
- 9W LED module (SMD)
- K: 4000
- Lm: 408
- Lm/W: 53

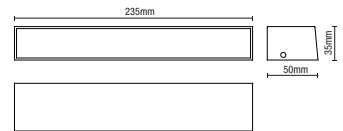

CANNES

Linear Wall Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38636-ANTH	Anthracite	Cannes LED Linear Wall Light	9W	4000k	480	H:50mm W:235mm Proj:33mm







850
Lumens

IP44

- Stainless steel construction
- 10W LED module (SMD)
- K: 4000
- Lm: 850
- Lm/W: 85

MELO

Up/Down Wall Light

 IP44 Rated
  4000K CW
  Class 1
  0.51kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-33460-BLK	Black	Melo Up/Down Wall Light	10W	4000k	850	H:180mm W:86mm Proj:123mm
ZN-33460-SST	Stainless Steel					



850
Lumens






IP44



- Stainless steel construction
- 10W LED module (SMD)
- K: 4000
- Lm: 850
- Lm/W: 85
- Photocell sensor


MELO

Up/Down Wall Light with Photocell Sensor

 IP44 Rated
  4000K CW
  Photocell Sensor
  Class 1
  0.51kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-34555-BLK	Black	Melo Up/Down Wall Light	10W	4000k	850	H:180mm W:86mm Proj:123mm
ZN-34555-SST	Stainless Steel					



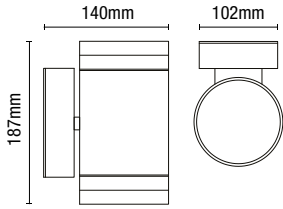

IP44



- IP44 rated
- Die-cast aluminium construction Anthracite finish
- Available with or without photocell sensor


• Photocell option available

LENS

Up/Down Wall Light



Code	Sensor	Description	Lamp	Dimensions
ZN-29189-ATR	-	Lens Up/Down Wall Light	2 x 7W max LED GU10	H:187mm W:102mm Proj:140mm
ZN-34042-ANTH	Photocell			

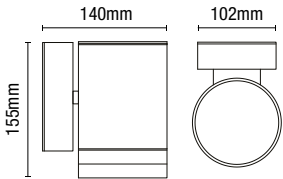

IP44



- IP44 rated
- Die-cast aluminium construction Anthracite finish
- Available with or without photocell sensor

• Photocell option available

LENS

Downlight




Code	Sensor	Description	Lamp	Dimensions
ZN-29190-ATR	-	Lens Downlight	1 x 7W max LED GU10	H:155mm W:102mm Proj:140mm
ZN-34043-ANTH	Photocell			





- IP44 rated
- Die-cast aluminium construction
- Black ridged finish
- Available with or without photocell sensor

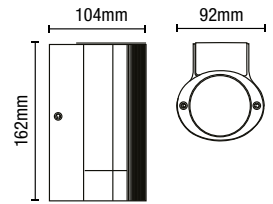


HELIX Downlight



Code	Sensor	Description	Lamp	Dimensions
ZN-35593-BLK	-	Helix Down Light	1 x 7W max LED GU10	H:162mm W:92mm Proj:104mm
ZN-35686-BLK	Photocell			



- IP44 rated
- Die-cast aluminium construction
- Black ridged finish
- Available with or without photocell sensor

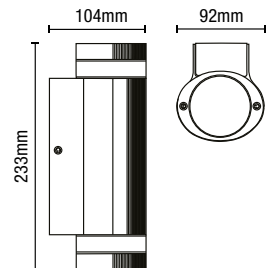


HELIX Up/Down Wall Light



Code	Sensor	Description	Lamp	Dimensions
ZN-35594-BLK	-	Helix Up/Down Wall Light	2 x 7W max LED GU10	H:233mm W:92mm Proj:104mm
ZN-35685-BLK	Photocell			

**1200
Lumens**

IP54



- Die-cast aluminium construction
- 3 colour options available
- 20W LED module (SMD)
- Lm/W: 60
- Hrs: 30,000


MIZAR Up/Down Wall Light

IP54 Rated |
 4000K CW |
 Class 1 |
 1.35kg |
 Available in 3 colour options

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-34019-ANTH	Anthracite	Mizar Up/Down Wall Light	20W	4000k	1200	H:255mm W:90mm Proj:130mm
ZN-34019-BLK	Black					
ZN-34019-WHT	White					

**740
Lumens**

IP54




- Die-cast aluminium construction
- 3 colour options available
- 10W LED module (SMD)
- Lm/W: 74
- Hrs: 30,000

MIZAR Downlight

IP54 Rated |
 4000K CW |
 Class 1 |
 0.83kg |
 Available in 3 colour options

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-34020-ANTH	Anthracite	Mizar Downlight	10W	4000k	740	H:255mm W:90mm Proj:130mm
ZN-34020-BLK	Black					
ZN-34020-WHT	White					

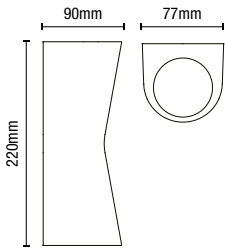

IP44





- Die-cast aluminium construction
- Available in 3 finishes

SKYE

Double Cone Up/Down Wall Light



Code	Description	Finish	Lamp	Dimensions
ZN-29347-SIL	Skye Double Cone Up/Down Wall Light	Silver	2 x 7W max LED GU10	H:220mm W:77mm Proj:90mm
ZN-29347-BLK		Black		
ZN-29347-ANTH		Anthracite		

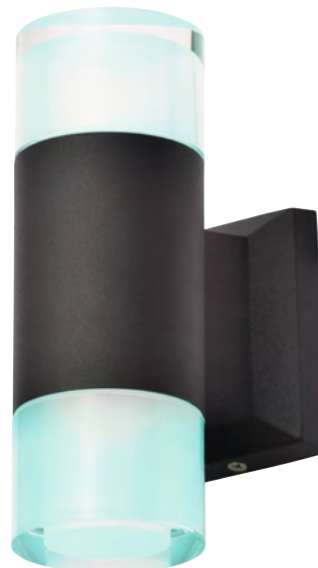

130 Lumens

IP44



- Remote control operated
- Steel construction
- 5W RGB LED module (SMD)
- K: 4000
- Lm: 130
- Hrs: 20,000


ASHBY

RGB LED Up/Down Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-31765-BLK	Black	Ashby RGB LED Up/Down Wall Light	5W	RGB	130	H:180mm W:65mm Proj:115mm

IP44

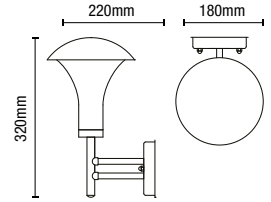

- Steel & PC construction
- Fluted lantern design

OMEGA

Wall Lantern



IP44
Rated




Class 1



0.63kg

Code	Description	Finish	Lamp	Dimensions
ZN-15136-SST	Omega Wall Lantern	Stainless Steel	1 x 10W max LED E27 GLS	Proj:220mm W:180mm H:320mm

IP44



- Stainless steel construction
- Durable polycarbonate diffuser
- Available in 2 finishes

DELTA

Slat Wall Lantern



IP44
Rated




Class 1



0.55kg

Code	Description	Finish	Lamp	Dimensions
ZN-15871-SST	Delta Slat Wall Lantern	Stainless Steel	1 x 10W max LED E27 GLS	H:260mm W:100mm Proj:115mm
ZN-15871-BLK		Black		

IP23

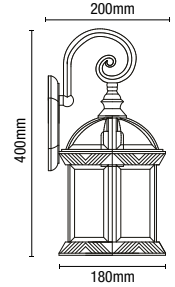

- Aluminium and glass construction
- Antique brass finish

EMILE

Wall Lantern



IP23
Rated



Class 1




1.5kg

Code	Description	Finish	Lamp	Dimensions
ZN-29203-ABR	Emile Wall Lantern	Antique Brass	1 x 10W max LED E27 GLS	Proj:200mm W:180mm H:400mm

274
Lumens

IP54



- Diecast aluminium construction
- 4.5W LED
- K: 4000
- Lm: 274

LEIGH

LED Wall Light



IP54
Rated



4000K
CW




Class 1


Code	Description	Finish	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-29962-BLK	Leigh LED Wall Light	Black	4.5W	4000k	274	H:65mm W:140mm Proj:105mm

NEW

IP44

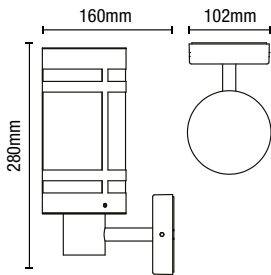

- Stainless steel [201] construction
- Available in 2 finishes
- Mesh insert design



brass mesh



stainless steel mesh

GADA Wall Light



IP44
Rated




Class 1



0.75kg

Code	Description	Finish	Lamp	Dimensions
ZN-40004-BLK/BRS	Gada Wall Light	Black with Brass Mesh	1 x 10W max LED E27	W:102mm H:280mm Proj:160mm
ZN-40004-BLK/SST		Black with Stainless Steel Mesh		

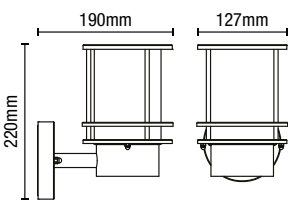

- Stainless steel construction
- Durable polycarbonate shade
- Available in 2 finishes



IP44

LEONIS

Wall Lantern



IP44
Rated




Class 1



0.83kg

Code	Description	Finish	Lamp	Dimensions
ZN-34002-SST	Leonis Wall Lantern	Stainless Steel	1 x 10W max LED E27 GLS	H:220mm W:127mm Proj:190mm
ZN-34003-BLK		Black		

IP44

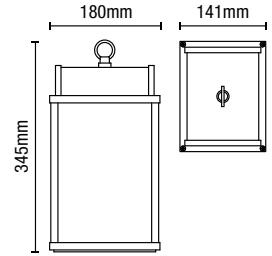

- Die-cast aluminium construction
- Frosted glass
- Hook feature



CHARLOTTE

Frame Wall Lantern



Code	Description	Finish	Lamp	Dimensions
ZN-38603-BLK	Charlotte Frame Wall Lantern	Black	1 x 10W max LED E27 GLS	Proj:141mm W:180mm H:345mm

IP44

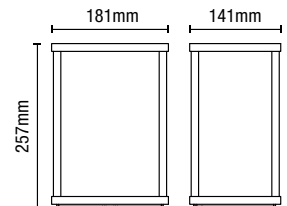

- Die-cast aluminium construction
- Contemporary styling
- Water glass effect


KEB

Wall Lantern



Code	Description	Finish	Lamp	Dimensions
ZN-32069-BLK	Keb Wall Lantern	Black	1 x 10W max LED E27 GLS	Proj:141mm W:181mm H:257mm

IP44

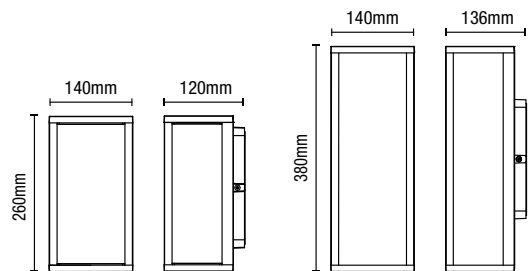

- Die-cast aluminium construction
- Contemporary styling

CHINON

Panel Light Box Lantern



 IP44

 Rated



 Class 1


Code	Description	Finish	Weight	Lamp	Dimensions
ZN-38640-BLK	Chinon Panel Box Lantern	Black	1.45kg	1 x 10W max LED E27 GLS	Proj:140mm W:140mm H:260mm
ZN-38641-BLK	Chinon Panel 2LT Box Lantern	Black	2.05kg	2 x 10W max LED E27 GLS	Proj:136mm W:140mm H:380mm

1200
Lumens

IP44



- Stainless steel construction
- PVC opal cover
- 13.5W LED module (SMD)
- K: 4000
- Lm: 600
- Lm/W: 45

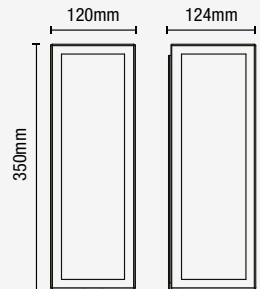

THETIS

Box Lantern




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38354-BLK	Black	Thetis Box Lantern	13.5W	4000k	600	H:350mm W:120mm Proj:124mm
ZN-38354-SIL	Silver					

IP44



- Stainless steel construction
- Contemporary box lantern
- Available in 3 finishes

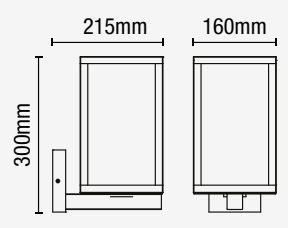


HESTIA

Glass Panel Box Lantern

IP44 Rated | Class 1 | 2.3kg

Code	Description	Finish	Lamp	Dimensions
ZN-38205-BLK		Black		
ZN-38205-SIL	Hestia Glass Panel Box Lantern	Silver	1 x 10W max LED E27 GLS	W:160mm H:300mm Proj:215mm
ZN-38205-ANTH		Anthracite		

IP44

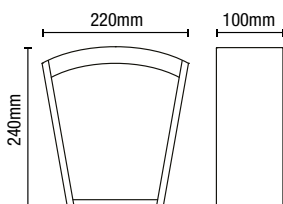

- Stainless steel construction
- Contemporary box lantern
- Available in 2 finishes



ARTEMIS

Box Lantern



IP44
Rated




Class 1



1.75kg

Code	Description	Finish	Lamp	Dimensions
ZN-20945-BLK	Artemis Box Lantern	Black	1 x 10W max LED E27 GLS	Proj:100mm W:220mm H:240mm
ZN-20945-SST		Stainless Steel		

IP44

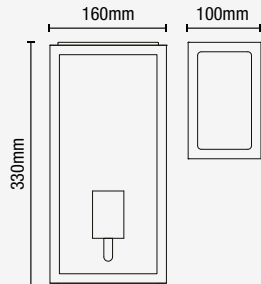

- Stainless steel construction
- Contemporary box lantern
- Available in 3 finishes

MINERVA


Box Lantern

 IP44 Rated
 Class 1
 1.7kg

Code	Description	Finish	Lamp	Dimensions
ZN-20944-BLK	Minerva Box Lantern	Black	1 x 10W max LED E27 GLS	W:160mm H:330mm Proj:100mm
ZN-20944-SIL		Silver		
ZN_20944-ANTH		Anthracite		

NEW

IP44

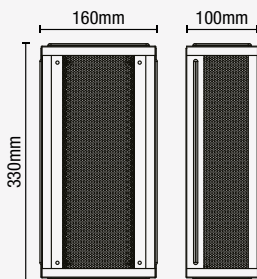


- Contemporary box lantern
- Available in 3 finishes
- Mesh insert design

CUBA

Box Lantern with Mesh Insert



Code	Description	Finish	Lamp	Dimensions
ZN-40002-ANTH		Anthracite/Silver Insert		
ZN-40002-BLK	Minerva Box Lantern with Mesh Insert	Black/Brass Insert	1 x 10W max LED E27 GLS	W:160mm H:330mm Proj:100mm
ZN-40002-SIL		Silver/Black Insert		

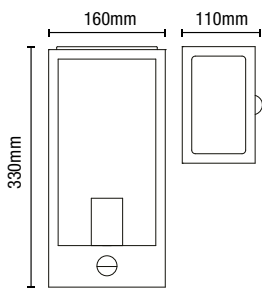

- Contemporary box lantern
- PIR Sensor
- 3-2000 LUX (adjustable)



IP44




MINERVA

Box Lantern with PIR Sensor




Code	Description	Finish	Lamp	Dimensions
ZN-32070-BLK	Minerva Box Lantern	Black	1 x 10W max LED E27 GLS	Proj:110mm W:160mm H:330mm
ZN-32070-ANTH	Minerva Box Lantern	Anthracite	1 x 10W max LED E27 GLS	Proj:110mm W:160mm H:330mm

IP44

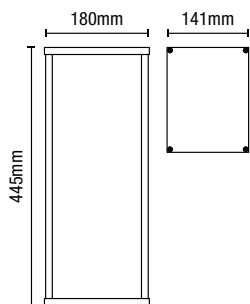

- Stainless steel construction
- Contemporary wall lantern
- Ribbed glass effect



MEMPHIS

Wall Lantern



IP44
Rated



Class 1



1.75kg


Code	Description	Finish	Lamp	Dimensions
ZN-38602-BLK	Memphis Wall Lantern	Black	1 x 10W max LED E27 GLS	Proj:141mm W:180mm H:445mm



**1000
Lumens**



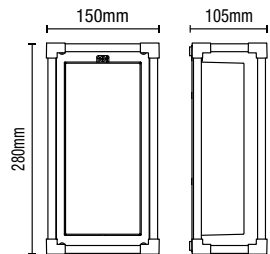

IP54

- Die-cast aluminium construction
- Opal polycarbonate diffuser
- 18W LED module (SMD)
- K: 4000
- Lm: 1000
- Lm/W: 55



PESSAC

Frame LED Wall Light

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38620-BLK	Black	Pessac Frame Wall Light	18W	4000k	1000	H:280mm W:150mm Proj:105mm



IP44



ZN-31757-PBLU



ZN-31757-MNT




ZN-31757-IVO



ZN-31757-ANTH

- Die-cast aluminium construction
- Clear polycarbonate diffuser
- Traditional styling

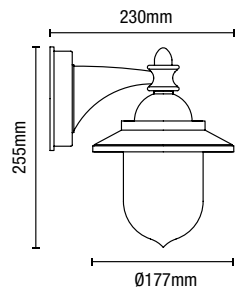

LEEK

Mini Fisherman's Lantern



Code	Description	Finish	Lamp	Dimensions
ZN-31757-ANTH	Leek Mini Fisherman's Lantern	Anthracite	1 x 10W max LED E27 GLS	Proj:230mm W:177mm H:255mm
ZN-31757-PBLU		Pale Blue		
ZN-31757-MNT		Mint		
ZN-31757-IVO		Ivory		



IP44



ZN-20957-PBLU



ZN-20957-MNT



ZN-20957-DOVG




ZN-20957-IVO



ZN-20957-BLK

- Die-cast aluminium construction
- Traditional styling

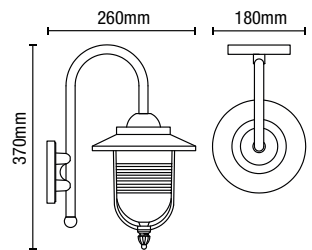

ERIS

Fisherman's Lantern



Available in 5 colour options

Code	Description	Finish	Lamp	Dimensions
ZN-20957-BLK	Eris Fisherman's Lantern	Black	1 x 10W max LED E27 GLS	Proj:260mm W:180mm H:370mm
ZN-20957-PBLU		Pale Blue		
ZN-20957-MNT		Mint		
ZN-20957-DOVG		Dove Grey		
ZN-20957-IVO		Ivory		

IP44



ZN-31809-PBLU



ZN-31809-MNT




ZN-31808-POLSST



ZN-31809-IVO



ZN-31809-SST

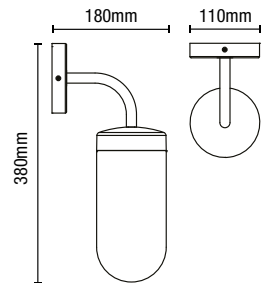

- Contemporary styling
- Available in 6 different finishes

KEW Wall Lantern



IP44
Rated



Class 1



0.91kg



Available in
5 colour options

Code	Description	Finish	Lamp	Dimensions
ZN-31808-POLSST	Kew Wall Lantern	Polished Steel	1 x 10W max LED E27 GLS	Proj:180mm W:110mm H:380mm
ZN-31809-SST		Stainless Steel		
ZN-31809-PBLU		Pale Blue		
ZN-31809-MNT		Mint		
ZN-31809-IVO		Ivory		

IP23



ZN-20955-PBLU



ZN-20955-MNT



ZN-20955-DOVG




ZN-20955-IVO



ZN-20955-BLK

- Die-cast aluminium construction with glass panels
- Traditional styling

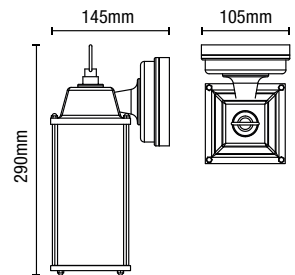

CERES Wall Lantern



IP23
Rated



Class 1




0.98kg



Available in
5 colour options

Code	Description	Finish	Lamp	Dimensions
ZN-20955-BLK	Ceres Wall Lantern	Black	1 x 10W max LED E27 GLS	Proj:145mm W:105mm H:290mm
ZN-20955-PBLU		Pale Blue		
ZN-20955-MNT		Mint		
ZN-20955-DOVG		Dove Grey		
ZN-20955-IVO		Ivory		

IP44

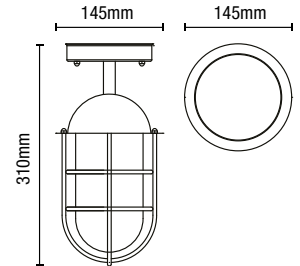


- Vintage styling
- Stainless steel finish

KARI Porch Lantern



Code	Description	Lamp	Dimensions
ZN-24507-SST	Kari Porch Lantern	1 x 10W max LED E27 GLS	H:310mm Dia:145mm

IP44

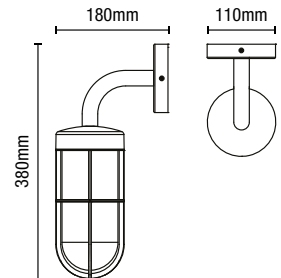

- Vintage styling
- Black satin finish


WOKING Wall Lantern



Code	Description	Lamp	Dimensions
ZN-31807-TBLK	Woking Wall Lantern	1 x 10W max LED E27 GLS	Proj:180mm W:110mm H:380mm



IP44

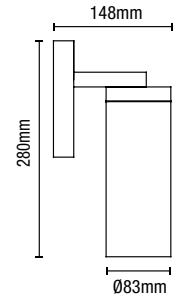

- Stainless steel construction
- Polycarbonate diffuser

CARNAC


Up or Down Wall Lantern



Code	Description	Finish	Lamp	Dimensions
ZN-38630-BLK	Carnac Wall Lantern	Black	1 x 10W max LED E27 GLS	Proj:148mm W:83mm H:280mm



IP44

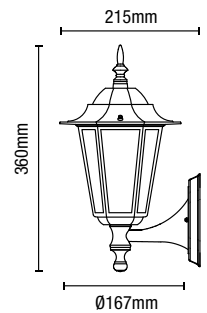

- Traditional style outdoor lantern
- Die-Cast Aluminium/Glass
- PIR sensor option available
- 2 colour options

Without PIR

LIBOURNE

6 Panel Wall Lantern




Code	Description	Finish	Lamp	Dimensions
ZN-38605-BLK	Libourne Wall Lantern	Black	1 x 10W max LED E27 GLS	Proj:215mm W:167mm H:360mm
ZN-38605-WHT		White		
ZN-38606-BLK	Libourne Wall Lantern with PIR sensor	Black		
ZN-38606-WHT		White		

IP44



- Die-cast aluminium and polycarbonate construction
- IP44 rated
- Vintage style lantern
- Black satin finish

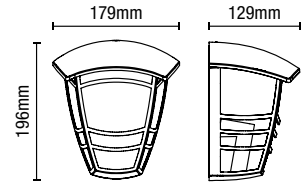

PERDITA

Half Lantern




Code	Description	Lamp	Dimensions
ZN-25464-BLK	Perdita Half Lantern	1 x 10W max LED E27 GLS	Proj:129mm W:179mm H:196mm

IP44



- Die-cast aluminium and polycarbonate construction
- IP44 rated
- Vintage style lantern
- Black satin finish

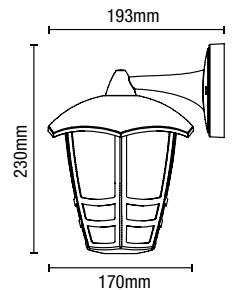


PERDITA

Curved Wall Lantern



Code	Description	Lamp	Dimensions
ZN-25463-BLK	Perdita Curved Wall Lantern	1 x 10W max LED E27 GLS	Proj:193mm W:170mm H:230mm

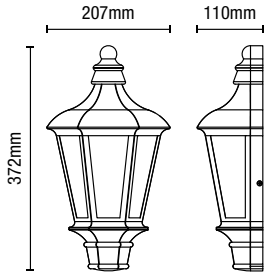

IP44




- IP44 rated
- Die-cast aluminium construction
- Traditional styled half lantern
- Available with or without photocell sensor

PERSEI Half Lantern



Code	Sensor	Description	Lamp	Dimensions
ZN-33994-BLK	-	Persei Half Lantern	1 x 10W max LED E27 GLS	H:372mm W:207mm Proj:110mm
ZN-33995-BLK	Photocell			

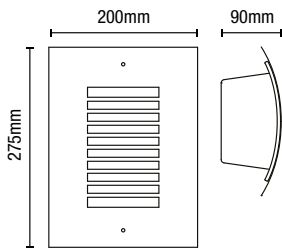

IP44




- IP44 rated
- Stainless steel construction
- Available in 2 finishes
- Available with or without PIR sensor

SIGMA Slatted Wall Lantern



Code	Finish	Sensor	Description	Lamp	Dimensions
ZN-25340-SST	Stainless Steel	-	Sigma Slatted Wall Lantern	1 x 10W max LED E27 GLS	H:275mm W:200mm Proj:90mm
ZN-28708-SST	Stainless Steel	PIR			
ZN-28708-BLK	Black	PIR			

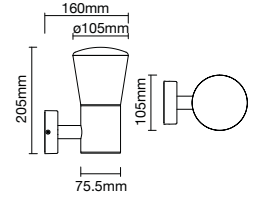NEW**IP44**

- Aluminium & polycarbonate construction
- Matching bollard light available
- Available in 2 finishes
- Compatible with most E27 lamps



GAMMA

Wall Light



IP44
Rated




Class 1




0.53kg

Code	Description	Finish	Lamp	Dimensions
ZN-39171-ANTH	Gamma Wall Light	Anthracite	1 x 10W max LED E27 GLS	W:105mm H:205mm Proj:160mm
ZN-39171-BLK		Black		

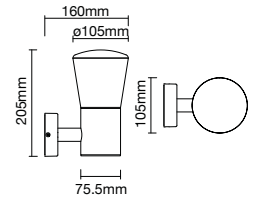NEW**IP44**

- Aluminium & polycarbonate construction
- Photocell Sensor
- Matching bollard light available
- Available in 2 finishes
- Compatible with most E27 lamps



GAMMA

Wall Light with Photocell Sensor



IP44
Rated



Photocell
Sensor



Class 1



0.53kg


Code	Description	Finish	Lamp	Dimensions
ZN-39172-ANTH	Gamma Wall Light with Photocell Sensor	Anthracite	1 x 10W max LED E27 GLS	W:105mm H:205mm Proj:160mm
ZN-39172-BLK		Black		

NEW

IP44



- Aluminium & polycarbonate construction
- Matching wall light available
- Available in black & anthracite
- Compatible with most E27 lamps
- Supplied with 3 ground bolts and fixings
- Three height options: 300mm/550mm/800mm

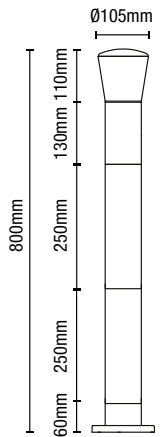


GAMMA

Post Light



Code	Description	Finish	Lamp	Dimensions
ZN-39173-ANTH	Gamma Post Light	Anthracite	1 x 10W max LED E27 GLS	H:800mm Dia:105mm
ZN-39173-BLK		Black		

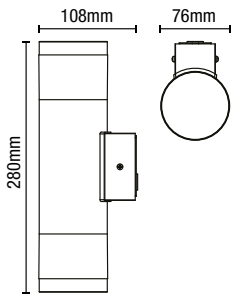

- Stainless steel and polycarbonate construction
- Matching bollard light available
- 2 x 4W LED module (SMD)
- Lm/W: 100
- 30,000 hours lifetime



NEW

400 Lumens


IP44

POLLUX

Wall Light

IP44 Rated |
 3000K WW |
 Class 1 |
 0.56kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-39998-BLK	Black	Pollux Up/Down Wall Light	8W	3000k	400	H:280mm W:76mm Proj:108mm
ZN-39998-SST	Stainless Steel					

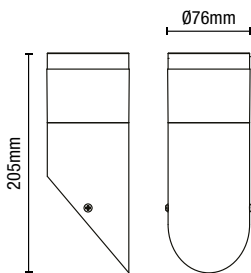

- Stainless steel and polycarbonate construction
- Matching bollard light available
- 4W LED module (SMD)
- K: 3000
- Lm: 200
- Lm/W: 50



200 Lumens


IP44

POLLUX

Angled Wall Light

IP44 Rated |
 3000K WW |
 Class 1 |
 0.35kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38615-BLK	Black	Pollux Angled Wall Light	4W	3000k	200	Dia:76mm H:205mm
ZN-38615-SST	Stainless Steel					

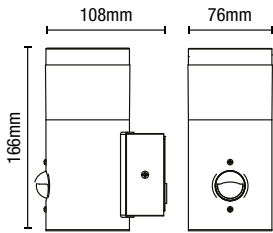

- Stainless steel and polycarbonate construction
- Matching bollard light available
- 4W LED module (SMD)
- Lm/W: 50
- PIR sensor



200 Lumens

IP44



POLLUX

Wall Light with PIR Sensor



IP44 Rated



3000K WW



PIR Sensor




Class 1



0.35kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38616-BLK	Black	Pollux Wall Light with PIR Sensor	4W	3000k	200	H:166mm W:76mm Proj:108mm
ZN-38616-SST	Stainless Steel					

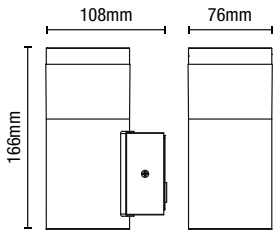

- Stainless steel and polycarbonate construction
- Matching bollard light available
- 4W LED module (SMD)
- Lm/W: 50



200 Lumens

IP44

POLLUX

Wall Light



IP44 Rated



3000K WW



Class 1




0.35kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38614-BLK	Black	Pollux Wall Light	4W	3000k	200	H:166mm W:76mm Proj:108mm
ZN-38614-SST	Stainless Steel					



200
Lumens

IP44

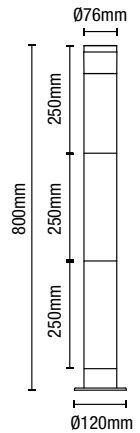

- Stainless steel construction
- Floor mounted
- Other matching items available
- Available in 2 finishes
- 3 variable heights - 300 / 550 / 800mm
- 4W LED module (SMD)
- K: 3000
- Lm: 200
- Lm/W: 50


POLLUX LED Post Light




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-33394-BLK	Black	Pollux LED Post Light	4W LED	3000K	200	H:800mm Dia:120mm
ZN-33394-SST	Stainless Steel					

NEW
FOR
2023

IP44

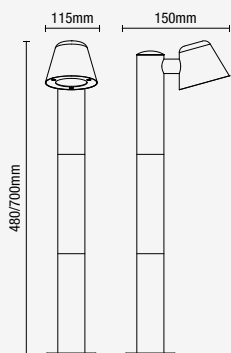

- Durable stainless steel construction
- Textured black finish
- Post light has variable heights of - 480/700mm

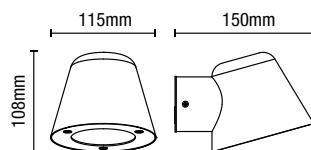


IVES

Post Light | Wall Light



Code	Description	Finish	Lamp	Dimensions	Weight
ZN-42097-BLK	Ives Wall Light	Black	1 x 7W max LED GU10	L:150mm W:115mm H:108mm	0.4kg
ZN-42098-BLK	Ives Post Light	Black		L:240mm W:128mm H:700mm	1.14kg

IP67

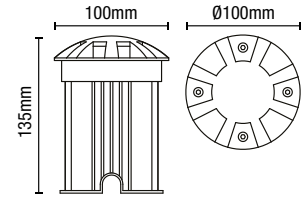

- Die-cast aluminium with glass lens
- robust construction
- Min void: 115mm
- Cable length: 300mm

PAN Ground Light



IP67
Rated



87mm
Cut-out




Class 1



0.35kg

Code	Description	Finish	Lamp	Dimensions	Cutout
ZN-29184-BLK	Pan Ground Light	Black	1 x 7W max LED GU10	Dia:100mm H:135mm	Dia:87mm

IP67

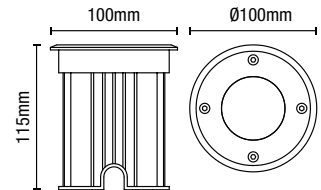

- Stainless steel with glass lens
- robust construction
- Min void: 115mm
- Cable length: 300mm

PAN Ground Light



IP67
Rated



87mm
Cut-out





Class 1



0.35kg

Code	Description	Finish	Lamp	Dimensions	Cutout
ZN-20965-SST	Pan Ground Light	Stainless Steel	1 x 7W max LED GU10	Dia:100mm H:115mm	Dia:87mm
ZN-20965-BLK	Pan Ground Light	Black	1 x 7W max LED GU10	Dia:100mm H:115mm	Dia:87mm




160 Lumens

IP67



- Die-cast aluminium
- 4W LED module (SMD)
- K: 4000
- Lm: 160
- Lm/W: 40

SCOUT

Surface Mount Ground Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-29997-BLK	Black	Scout Surface Mount Ground Light	4W	4000k	100	40	Dia:210 Proj:54mm




100 Lumens

IP67

- Die-cast aluminium
- 3W LED module (SMD)
- K: 4000
- Lm: 100
- Lm/W: 33

SCOUT

Surface Mount Ground Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-35738-BLK	Black	Scout Surface Mount Ground Light - 150mm	3W	4000k	100	33	Dia:150mm Proj:53mm




NEW
FOR
2023

250
Lumens
Per Lamp

IP65

- Plug and play 24V garden deck light kit with add-ons available
- Add extra spikes to the circuit for added coverage - upto 8 spikes max
- 2m spacing between spikes as standard
- 6.2m between plug and first head
- Tough H05RN-F rubber cable
- IP65 rated (adaptor rated to IP20)
- Plug adapter requires IPX5 minimum housing if plugged in externally
- Add on photocell sensor available for auto on/off function at dusk/dawn
- 5m extension cable available

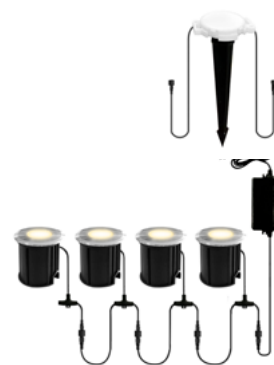

LAPIN

Recessed Deck Light Kit



Code	Description	Cable Length	Power (w)	Colour (k)	Total Flux (lm)	Dimensions	Weight (kg)
ZN-41736	Lapin Recessed Deck 4 Light Kit	13.2m	4 x 3W	4000k	250lm per lamp	Dia. 41.5mm H:47mm	0.86kg
ZN-41737	Lapin Recessed Deck Add-on 2 Light Kit	4m	2 x 3W	4000k		Dia. 41.5mm H:49mm	0.278kg
ZN-41739	Lapin Add-on Photocell Sensor	0.4m	-	-	-	Dia: 52mm H:	0.048kg
ZN-41738	Lapin Add-on Extension Cable	5m	-	-	-	L:5000mm	0.102kg



NEW
FOR
2023

240
Lumens
Per Lamp

IP65

**PLUG
+
PLAY**

- Plug and play 24V garden spike light kit with add-ons available
- Lamps can be deck mounted or come with a ground spike
- Add extra spikes to the circuit for added coverage - upto 8 spikes max
- 2m spacing between spikes as standard
- 6.2m between plug and first head
- Tough H05RN-F rubber cable
- IP65 rated (adaptor rated to IP20)
- Plug adaptor requires IPX5 minimum housing if plugged in externally
- Add on photocell sensor available for auto on/off function at dusk/dawn
- 5m extension cable available



LAPIN

Garden Spike Light Kit


IP65
Rated


Class 3

Code	Description	Cable Length	Power (w)	Colour (k)	Total Flux (lm)	Dimensions	Weight (kg)
ZN-41732	Lapin Garden Spike 4 Light Kit	13.2m	4 x 3W	4000k	240lm per lamp	Dia. 60mm H:150mm	0.93kg
ZN-41733	Lapin Garden Spike Add-on 2 Light Kit	4m	2 x 3W	4000k		Dia. 60mm H:150mm	0.34kg
ZN-41739	Lapin Add-on Photocell Sensor	0.4m	-	-	-	Dia: 52mm H:	0.048kg
ZN-41738	Lapin Add-on Extension Cable	5m	-	-	-	L:5000mm	0.102kg



NEW
FOR
2023

250
Lumens
Per Lamp

IP65

**PLUG
+
PLAY**

- Plug and play 24V garden pathway light kit with add-ons available
- Add extra spikes to the circuit for added coverage - upto 8 spikes max
- 2m spacing between spikes as standard
- 6.2m between plug and first head
- Tough H05RN-F rubber cable
- IP65 rated (adaptor rated to IP20)
- Plug adaptor requires IPX5 minimum housing if plugged in externally
- Add on photocell sensor available for auto on/off function at dusk/dawn
- 5m extension cable available



LAPIN

Pathway Light Kit



Code	Description	Cable Length	Power (w)	Colour (k)	Total Flux (lm)	Dimensions	Weight (kg)
ZN-41734	Lapin Pathway 4 Light Kit	13.2m	4 x 3W	4000k	250lm per lamp	Dia. 35mm H:230mm	0.70kg
ZN-41735	Lapin Pathway Add-on 2 Light Kit	4m	2 x 3W	4000k		Dia. 35mm H:230mm	0.34kg
ZN-41739	Lapin Add-on Photocell Sensor	0.4m	-	-	-	Dia: 52mm H:	0.048kg
ZN-41738	Lapin Add-on Extension Cable	5m	-	-	-	L:5000mm	0.102kg



NEW

IP44

**PLUG
+
PLAY**



- Plug and play - no driver required
- Rubber H05RN-F 2 x 1.0mm² Cable
- Lamps not included
- 11.4m total length
- 5m from plug to first lampholder
- 48cm spacing between each head
- Connect multiple festoon lights together
- Suitable bulbs are shown on P.352



Loop multiple festoons together with weatherproof connectors

HARDY

20 x E27 Lampholder Festoon



IP44
Rated



11.4M
Cable



Class 2

Code	Description	Finish	Lamp	Dimensions
ZN-41106	Hardy 20 x E27 Lampholder Festoon	Black Rubber	20 x 10W max LED E27 GLS	Length: 11.4m

PLUG + SOCKET

Cable Connectors

NEW

IP68



Code	Description	Size
ZN-41157	32A, 3 Pole, IP68 Cable Connector (1 x fast-fit connector)	H:30mm x L:95mm x D:30mm
ZN-41158	16A, 3 Pole, IP68 T 3-Way Cable Connector (3 x fast-fit connectors)	H:30mm x L:150mm x D:30mm




20 Lumens

IP65

NO DRIVER REQ.

- Mains connected - no driver required
- Brushed steel finish with opal polycarbonate diffuser
- Available in 3000K/6000K
- 1m cable included
- 0.5W LED module (SMD)
- Lm: 20



OHIO

Circular Decking Light



IP65 Rated



35mm Cut-out



1M Cable



Class 2



0.13kg

Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-26465-WW	Ohio Circular 240V Decking Light	0.5W LED	3000	20	Dia:40mm
CUL-26465-CW	Ohio Circular 240V Decking Light	0.5W LED	6000	20	Dia:40mm




NEW

80 Lumens

IP65



- [304] Stainless steel construction
- 1.2m cable between each head
- 10 x 0.5W LED module (SMD)
- 1 x 12V IP20 in-line transformer with 5m cable
- Easy to install
- Available in cool and warm white

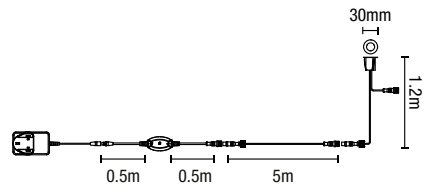

AUBIN

Deck light kit

 IP67 Rated
 Class 3
 0.414kg


Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-40063	Stainless Steel	Aubin Deck Light Kit	10x 0.5W	3000k	80	Dia:30mm Proj:1200mm
ZN-40064				6500k		



RGB



RGBW

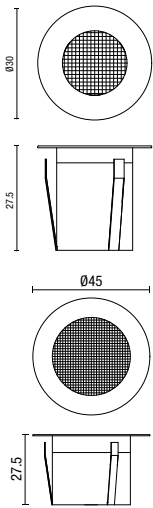


NEW

200 Lumens

IP65

Smart Wi-fi

- [304] Stainless steel construction
- 1.2m cable between each head
- 10 x 0.5W LED module (SMD)
- 1 x 12V IP20 inline transformer with 5m cable
- Easy to install
- Smart wi-fi capability

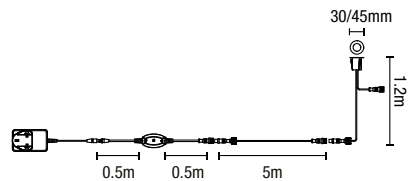

BARU

RGB Deck light kit

Alexa | Google Home | Powered by Tuya Smartlife | IP67 Rated | Class 3 | 0.414kg

Code	Finish	Description	Power (w)	Colour	Total Flux (lm)	Dimensions
ZN-40065	Stainless Steel	Baru Deck Light Kit	10x 0.5W	RGB	55	Dia:30mm Proj:1200mm

BARU


RGBW Deck light kit

Alexa | Google Home | Powered by Tuya Smartlife | IP67 Rated | Class 3 | 0.414kg

Code	Finish	Description	Power (w)	Colour	Total Flux (lm)	Dimensions
ZN-40066	Stainless Steel	Baru Deck Light Kit	10x 0.5W	RGBW	200	Dia:45mm Proj:1200mm

390
Lumens

IP54

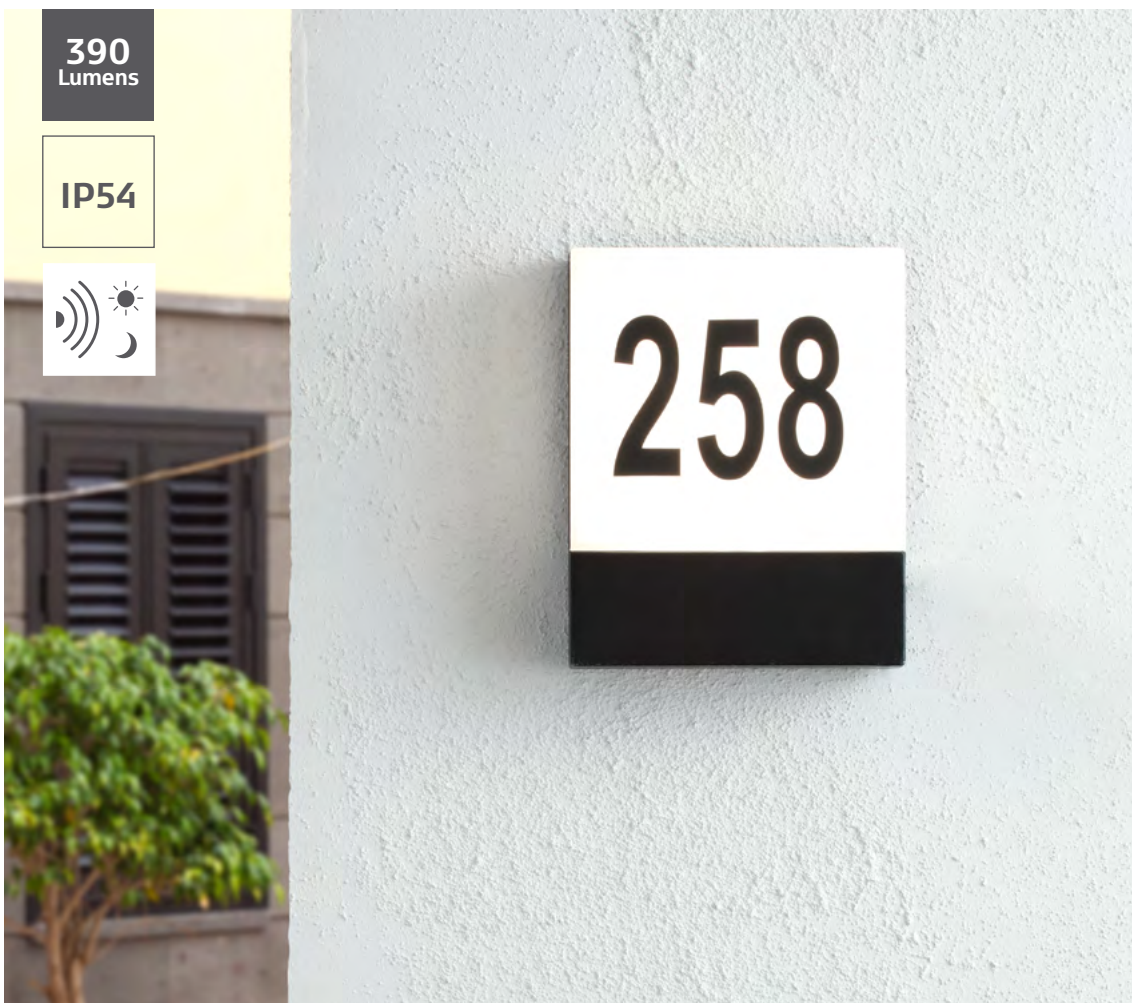

- Includes full number/letter set
- 6W LED module (SMD)
- K: 4000
- Lm: 390
- Lm/W: 65
- Hours: 30,000
- Dusk/Dawn photocell sensor

IOTA

LED Door Number



IP54
Rated



4000K
CW



Photocell
Sensor



Class 1



0.8kg

Code	Description	Finish	Lamp	Lumen	Dimensions
ZN-34044-BLK	Iota LED Door Number	Black	6W LED	390	H:200mm W:195mm Proj:36mm



1300
Lumens

IP65



- IK10 vandal resistant
- Polycarbonate construction
- 16W LED module (SMD)
- K: 3000
- Lm: 1300
- Lm/W: 81.25
- Hours: 20,000
- Automatically turns on/off at night with adjustable lux sensor <3-50 LUX

• Adhesive numbering option

MESA

LED Door Number



IK10



IP65
Rated



3000K
WW



LUX
Sensor



Class 1

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-35689	Black/Opal	Mesa LED Door Number	16W	3000k	1300	81.25	H:195mm W:300mm Proj:70mm

750 Lumens **IP65** 



- Polycarbonate construction
- PIR sensor with adjustable LUX sensitivity and timer
- 5-12m Detection Distance
- 10W LED module (SMD)
- Lm/W: 75
- Hrs: 20,000

LYNN PIR Security Spotlight

 IP65 Rated |  4000K CW |  PIR Sensor |  Class 2 |  0.35kg





Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-35687-BLK	Black	Lynn Security Spotlight with PIR Sensor	10W	4000k	750	H:205mm W:127mm Proj:140mm
ZN-35687-DGRY	Dark Grey					
ZN-35687-WHT	White					

750 Lumens **IP65**



- Polycarbonate construction
- 10W LED module (SMD)
- Lm/W: 75
- Hrs: 20,000

LYNN Security Spotlight

 IP65 Rated |  4000K CW |  Class 2 |  0.3kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38627-BLK	Black	Lynn Security Spotlight	10W	4000k	750	H:127mm W:127mm Proj:160mm
ZN-38627-DGRY	Dark Grey					
ZN-38627-WHT	White					



IP65

1500 Lumens



- Polycarbonate construction
- PIR sensor with adjustable LUX sensitivity and timer
- 5-12m Detection Distance
- 20W LED module (SMD)
- Lm/W: 75
- Hrs: 20,000



LYNN PIR Twin Security Spotlight



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-35688-BLK	Black	Lynn Security Twin Spotlight with PIR Sensor	20W	4000k	1500	H:205mm W:305mm Proj:135mm
ZN-35688-DGRY	Dark Grey					
ZN-35688-WHT	White					



1500 Lumens

IP65


- Polycarbonate construction
- 20W LED module (SMD)
- K: 4000
- Lm: 1500
- Lm/W: 75
- Hrs: 20,000



LYNN Twin Security Spotlight



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38628-BLK	Black	Lynn Security Twin Spotlight	20W	4000k	1500	H:127mm W:179mm Proj:145mm
ZN-38628-DGRY	Dark Grey					
ZN-38628-WHT	White					

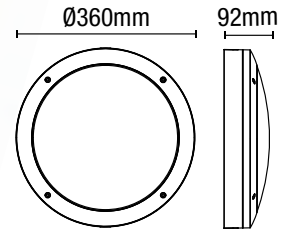NEW**1700 Lumens****IP65**


- Die-cast aluminium with polycarbonate diffuser
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 20W LED module (SMD)
- 50,000 hours lifetime

ROSA

Bulkhead



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-39742-BLK	Black	Rosa Round Bulkhead	20W	CCT	1700	85	Dia:360mm Proj:92mm

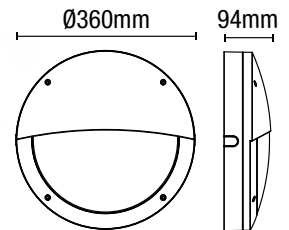NEW**1700 Lumens****IP65**

- Die-cast aluminium with polycarbonate diffuser
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 20W LED module (SMD)
- 50,000 hours lifetime

GIGI


Eyelid Bulkhead



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-39746-BLK	Black	Gigi Eyelid Bulkhead	20W	CCT	1700	85	Dia:360mm Proj:94mm

480
Lumens

IP44

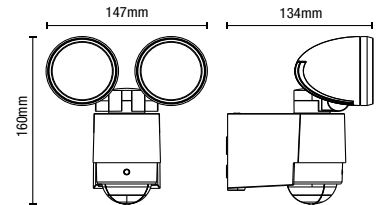

- Polycarbonate construction
- PIR sensor with adjustable LUX sensitivity and timer
- 5-12m Detection Distance
- Hrs: 20,000

SIROCCO

PIR Twin Security Spotlight



IP44
Rated



6000K
DW



PIR
Sensor




Class 2

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-23454-BLK	Black	Sirocco Security Twin Spotlight with PIR Sensor	6W	6000k	480	80	H:160mm W:147mm Proj:134mm
ZN-23454-WHT	White						

200
Lumens

IP44

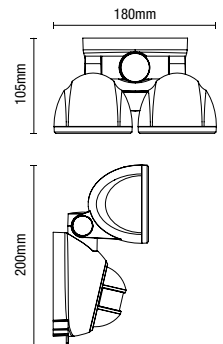

- Battery-operated for use on buildings without mains electricity supply
- Requires 4x AA batteries (not supplied)
- Concealed auto or off switch
- Adjustable swivel heads
- Up to 10m detection distance

FELIS


LED Battery Operated Twin Spotlight

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Batteries
ZN-30508-BLK	Felis Battery Operated Twin Spotlight	2W LED	5000k	200	4 x 1.5V AA (not included)

NEW

Upto
22000
Lumens

IP65

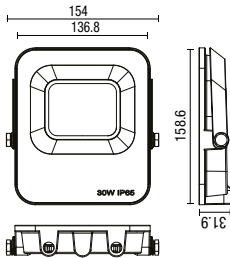

- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime

REINA

LED Slimline Floodlight




Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
ZN-38688-BLK	Reina LED Slimline Floodlight	30W LED	3300	0.55kg	H:158mm W:154mm Proj:31mm
ZN-38689-BLK		50W LED	5500	0.78kg	H:193mm W:183mm Proj:32mm
ZN-38690-BLK		100W LED	11000	1.24kg	H:233mm W:218mm Proj:33mm
ZN-38691-BLK		150W LED	16500	1.8kg	H:268mm W:248mm Proj:33mm
ZN-38692-BLK		200W LED	22000	2.3kg	H:309mm W:285mm Proj:33mm

NEW

Upto
11000
Lumens

IP65

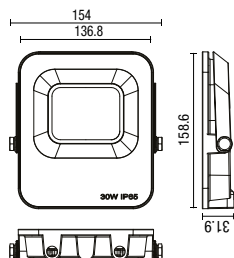

- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime
- PIR sensor with adjustable LUX sensitivity and timer
- 12m Detection Distance



CLARA

LED Slimline Floodlight with PIR Sensor



PIR Sensor



IP65 Rated



180° Beam



6500K DW



0.5M Cable



Class 1

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
ZN-38694-BLK	Clara LED Slimline Floodlight with PIR Sensor	30W LED	3300	0.78kg	H:193mm W:183mm Proj:32mm
ZN-38695-BLK		50W LED	5500	1.24kg	H:233mm W:218mm Proj:33mm
ZN-38696-BLK		100W LED	11000	1.8kg	H:268mm W:248mm Proj:33mm

Upto
1400
Lumens

IP54




· Tripod supplied separately

- Tough aluminium construction
- Rotates 360° on base
- Non-slip carry handle
- 40,000 hours LED lifetime
- Fully charged in 4-5 hours
- Supplied with power adapter and in-car charger
- Extendable tripod available which extends up to 1.58m for use with both 10/20W models



· Power adapter and in-car charger

RECHARGEABLE Worklight



Description	Code	Power (w)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Charge Time (h)	Run Time (h)	Dimensions
Rechargeable Work Light	ZN-31385	10W	700	70	6000k	4-5 Hours	4 Hours	L:135mm W:120mm H:255mm
	ZN-31386	20W	1400	70			8 Hours	L:160mm W:160mm H:300mm
Heavy Duty Tripod	ZN-31387	-	-	-	-	-	-	Dia:800mm W:500mm H:1580mm



**3000
Lumens**






IP65

- Durable rubber casing
- Heavy duty extendable tripod up to 1.6m
- 1.8m H07RN-F cable
- 2 x 20W LED module (SMD)
- K: 6000
- Lm: 3000
- Lm/W: 75
- Hrs: 20,000



TWIN LED

Worklight with Tripod

				
IP65 Rated	6000K DW	1.8M Cable	Class 1	3.4kg

Code	Description	Voltage	Lamp	Lumen	Dimensions
ZN-34870	Twin Work Light with Tripod	220-240V	2 x 20W LED	3000	Dia:1000mm H:1600mm



OUTDOOR HEATING

New extensive range of Zink radiant heaters perfect for outdoor settings.



IP34



- Single heat setting
- Aluminium cover, size: 420 x 420mm
- Heating element: Carbon tube
- Outdoor use only
- Pull-string switch control
- Tip over switch

CORAL

Outdoor Pedestal Heater



 IP34
 Rated 9.5kg

Code	Description	Finish	Power (w)	Dimensions
ZR-38155-SIL	Coral Outdoor Pedestal Heater	Silver	1500	H:1800mm Dia:510mm



BLAZE

STAND FOR WALL
MOUNT HEATERS




- Adjustable height

Code	Weight	Dimensions
ZR-32302-BLK	18.7kg	H:1700mm Dia:410mm

IP44



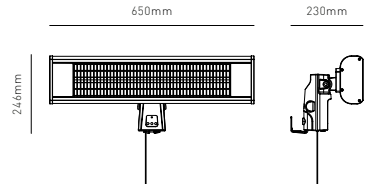

- Pull ON/OFF switch
- Wall or stand mounted
- Tip over safety switch
- Heat coverage approx 12m²
- IP44 rating
- Outdoor use only
- Stand available separately (ZR-32302)



BLAZE

Wall Mounted Patio Heater

 IP44 Rated
 2.4kg


Code	Description	Finish	Power (w)	Dimensions
ZR-32298-BLK	Blaze Wall Mounted Patio Heater	Black	1800	H:246mm W:650mm Proj:230mm



IP44



- Remote control operated
- Wall or stand mounted
- Tip over safety switch
- Heat coverage approx 12m²
- IP44 rating
- Outdoor use only
- 2 x 1W integrated LED lamps
- Stand available separately (ZR-32302)

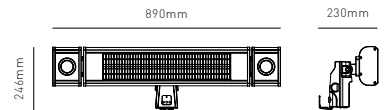

BLAZE

Wall Mounted Patio Heater with LED Lights



Code	Description	Finish	Power (w)	Dimensions
ZR-32299-BLK	Blaze Wall Mounted Patio Heater with LED Lights	Black	1800	H:246mm W:890mm Proj:230mm




3
HEAT
SETTINGS

IP24



- Pull switch
- 3 variable heat settings
- Wall or stand mounted
- Tip over safety switch
- Heat coverage approx 12m²
- IP24 rating
- Outdoor use only
- Stand available separately (ZR-32302)

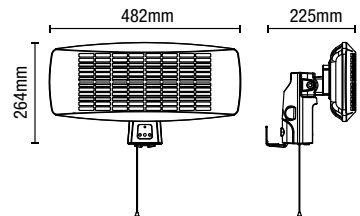

BLAZE

Wall Mount Patio Heater Variable Watt

 3 Heat Settings |  IP24 Rated |  2.0kg

Code	Description	Finish	Power (w)	Dimensions
ZR-32297-BLK	Blaze Wall Mount Patio Heater	Black	2000	H:264mm W:482mm Proj:225mm



IP34



Pendant Heater

- ON/OFF switch
- Remote control operated
- Integrated LED light
- Heat coverage approx 20m²
- IP34 rating
- Outdoor use only

Floor Standing Heater

- Pull string switch
- 2 heat setting
- Tip over safety switch
- Heat coverage approx 20m²
- IPX4 rating
- Outdoor use only

MARL
Outdoor Heaters



Code	Description	Finish	Power (w)	Dimensions	Weight
ZR-38532-SST	Marl Pendant Heater	Stainless Steel	2000	H:290mm Dia:510mm	2.1kg
ZR-38831-SST	Marl Floor Standing Heater	Stainless Steel	2000	H:2000mm Dia:500mm	8.4kg


IP34




- Pull string switch
- Heat coverage approx 15m²
- IP34 rating
- Outdoor use only

CORAL

Pendant Heater



Code	Description	Finish	Power (w)	Dimensions
ZR-38529-SST	Coral Pendant Heater	Stainless Steel	1500	H:240mm Dia:420mm

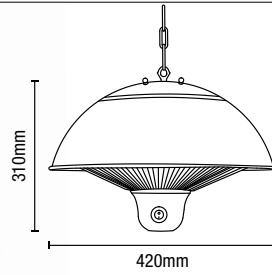

IP34



Pendant Heater

- Remote control operated
- Integrated LED light
- Heat coverage approx 15m²
- IP34 rating
- Outdoor use only

Floor Standing Heater

- Pull string switch
- Single heat setting
- Tip over safety switch
- Heat coverage approx 15m²
- IP34 rating
- Outdoor use only

Onyx
Outdoor Heaters



Code	Description	Finish	Power (w)	Dimensions	Weight
ZR-38833-BLK	Onyx Pendant Heater	Black	1500	H:2000mm Dia:500mm	8.8kg
ZR-38834-BLK	Onyx Floor Standing Heater	Black	1500	H:420mm Dia:310mm	2.5kg

3
HEAT
SETTINGS



IP44



- Free standing or wall mounted
- 3 heat settings
- Heat coverage approx 12m²
- Steel cover, size: 500 x 360mm
- Heating element: Carbon tube
- Outdoor use only
- Waterproof: IP44
- Pull-string switch control
- Tip over switch
- Stand included

OPAL

Outdoor/Indoor Pedestal Heater


3 Heat
Settings


IP44
Rated


8.4kg

Code	Description	Finish	Power (w)	Dimensions
ZR-38156-BLK	Opal Outdoor/Indoor Pedestal Heater	Black	2000	H:1710-2100mm Dia:500mm




3
HEAT
SETTINGS

IP55



- Remote control
- Hanging and wall mount type
- 3 heat settings - 900/1900/2800W
- Heat coverage approx 25m²
- 4 Hour timer
- 1.9M Cable
- Black brushed aluminium finish
- PIR economy function

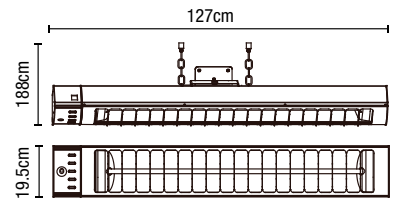

JET

Outdoor Ceiling Mount Heater



3 Heat
Settings

IP55
Rated


7.8kg

Code	Description	Finish	Power (w)	Dimensions
ZR-37443-BLK	Jet Outdoor Ceiling Mount Heater	Black	2800	H:188mm W:1270mm L:195mm



3
HEAT
SETTINGS

IP65

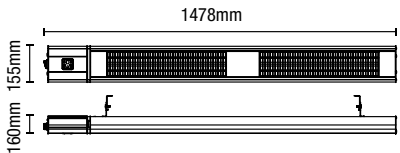




- Ideal for commercial applications
- Remote control operated
- Variable heat setting
- 1-9 Hour Timer
- Heat coverage 20m²
- IP65 rating
- Outdoor use only



GLOW

Wall Mounted Heater

 3 Heat Settings |  IP65 Rated |  4.96kg

Code	Description	Finish	Power (w)	Dimensions
ZR-32301-BLK	Glow Wall Mounted Heater	Black	3000	H:160mm W:1478mm Proj:155mm

3
HEAT
SETTINGS

IP55



- Ideal for indoor/outdoor use
- Remote control operated
- 3 variable heat settings
- 0-24 Hour Timer
- Heat coverage approx 12m²
- IP55 rating

INDOOR/OUTDOOR

Wall Mount Heater with 24Hr Timer



Code	Description	Finish	Power (w)	Dimensions
ZR-32328-BLK	Wall Mount Heater with 24Hr Timer	Black	2000	H:140mm W:900mm L:90mm

IP65



- Bluetooth speaker
- Remote control operated
- Heat coverage approx 12m²
- 1.5M HO7RN-F 3G1.5MM cable
- ON/OFF and power adjust for remote
- IPX5
- Outdoor use only

FLINT

Wall Mount Heater with Bluetooth Speaker

Bluetooth Speaker

IPX5 Rated


KG
3.5kg

Code	Description	Finish	Power (w)	Dimensions
ZR-37444-BLK	Flint Wall Mounted Heater with Bluetooth	Black	2000	H:120mm W:745mm L:110mm

IP45




- Carbon fibre tube
- ON/OFF switch
- Fabric-flocked vents area
- 1.8M cable
- Heat coverage approx 4m²
- IP45 rated

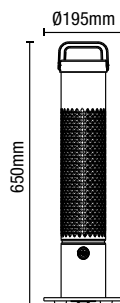

HARRY

Outdoor Portable Table Heater



Code	Description	Finish	Power (w)	Dimensions
ZR-37441-BLK	Harry Outdoor Portable Table Heater	Matt Black	1200	H:650mm Dia:195mm




3
HEAT
SETTINGS

IP55



- Remote control operated
- Tip over safety switch
- 3 variable heat settings
- Heat coverage approx 10m²
- IP55 rated
- Outdoor use only

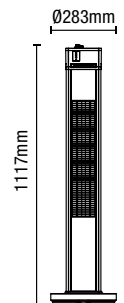

BLAZE

Standing Patio Heater


3 Heat
Settings


IP55
Rated



7.8kg

Code	Description	Finish	Power (w)	Dimensions
ZR-32300-BLK	Blaze Standing Patio Heater	Black	1600	H:1117mm Dia:283mm



IP55

CCT

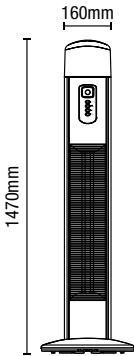

- 2 heat settings: 1480/2960W
- Carbon fibre heating technology
- Large, effective heating area of up to 30m²
- PIR economy system
- IP55 rated
- 12W LED Colour changing light: Warm/Daylight/Cool
- Gun metal hammered finish with fabric flocked grille with storage cover
- Magnetic remote control

AMBER

Floor Standing Outdoor Heater



2 Heat Settings



IP55 Rated




21.8kg

Code	Description	Finish	Power (w)	Dimensions
ZR-37442-GMTL	Amber Free Standing Heater	Gun Metal	3000	H:1470mm Dia:160mm

IPX3



- Iron lamp case
- 1.4M HO5RN-F 3G1.0MM cable
- Heat coverage approx 10m²
- IPX3 rated
- BS1363 plug
- Ruby halogen lamp
- Each lamp independently switched
- Outdoor use only



TOPAZ


2 x 800W Parasol Heater



Code	Description	Finish	Power (w)	Dimensions
ZR-37448-BLK	Topaz Parasol Heater	Black	2 x 800	H:2141mm W:804mm Proj:198mm



- Aluminium diecast lamp case
- 1.4M HO5RN-F 3G1.0MM cable
- Heat coverage approx 12m²
- IPX3 rated
- BS1363 plug
- Ruby halogen lamp
- ON/OFF switch
- Outdoor use only

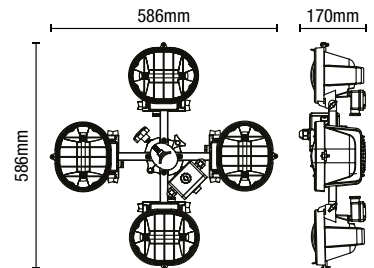

RUBY

4 x 450W Parasol Heater



Code	Description	Finish	Power (w)	Dimensions
ZR-37445-BLK	Ruby Parasol Heater	Black	4 x 450	H:170mm W:586mm Proj:586mm

IP66 13A SWITCHED SOCKET

IP66

IK08

- IP66 / IK08 rated
- Lockable lid
- Multiple 20mm cable entries
- Certified to BS 1363-2



Code	Description
ZN-38865	1 Gang IP66 13A Socket
ZN-38863	2 Gang IP66 13A Socket

IP66 RCD 13A SWITCHED SOCKET

IP66

IK08

- IP66 / IK08 rated
- Lockable lid
- Multiple 20mm cable entries
- Trip Current: 30mA
- Trip Speed: 100ms
- Certified to BS 1363-2
- RCD Type A



Code	Description
ZN-38864	2 Gang IP66 RCD 13A Socket

FUSED SPUR SWITCHED

IP66

IK08

- IP66 / IK08 rated
- Lockable lid
- Multiple 20mm cable entries




Code	Description
ZN-38870	Switched + Indicator

IP66 EMPTY ENCLOSURE

IP66

IK08

- Accepts standard switches and sockets
- IP66 / IK08 rated
- Multiple 20mm cable entries

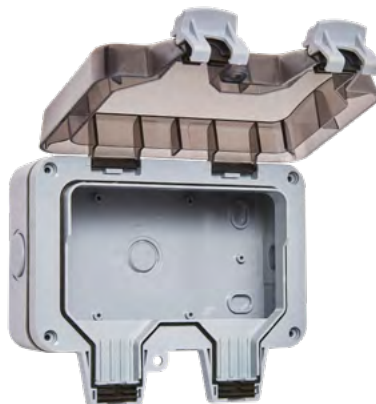

Code	Description
ZN-38869	1 Gang Empty Enclosure
ZN-38868	2 Gang Empty Enclosure

IP66 20A SWITCH

IP66

IK08

- Neon indicator
- Multiple 20mm cable entries
- Manufactured to BS EN 60669-1



Code	Description
ZN-38866	1 Gang 1 Way 20A Switch
ZN-38867	2 Gang 2 Way 20A Switch

IP66 20A BELL SWITCH

IP66

IK08

- IP66 / IK08 rated
- Neon indicator
- Multiple 20mm cable entries
- Manufactured to BS EN 60669-1



Code	Description
ZN-38871	1 Gang 1 Way 20A Bell Switch

**390
Lumens**



- Polycarbonate construction
- Can detect day or night with adjustable LUX
- 6m Detection Distance
- 10 secs - 5min adjustable timer
- 8W LED module (SMD)

RENO

LED Recessed PIR Spotlight



Code	Power (w)	Colour (k)	Total Flux (lm)	Distance	Range	LUX (adjustable)	Time Delay (adjustable)	Dimensions
ZN-35690-WHT	8W	4000k	500	Max 6m	360°	<3-2000 LUX	Min.10sec±3sec Max.5min±1min	Dia:105mm H:48mm

**MANUAL
OVERRIDE**



IP44



- Polycarbonate construction
- LED compatible
- Manual override function
- 20m max detection distance
- Can be installed up to 6m high

NAPA

Adjustable Wall PIR Sensor



Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-35691-BLK	2 – 6m	Max 20m	360°	3-2000 LUX (adjustable)	2000W Halogen 600W LED	H:56mm W:87mm Proj:173mm



**MANUAL
OVERRIDE**

IP65



- Polycarbonate construction
- LED compatible
- Adjustable LUX and timer
- Manual override (8 hrs)
- Detection Distance: 5 - 12m
- Timer: 10 secs - 15min



DION Adjustable Motion Sensor



IP65
Rated



PIR
Sensor



0.15kg

Code	Finish	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-33579-BLK	Black	1.6 – 2.5m	5 – 12m	180°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:51.5mm W:80mm Proj:119.5mm
ZN-33579-WHT	White						
ZN-33579-DGRY	Dark Grey						



IP44



- Polycarbonate construction
- LED compatible
- Detection Distance: 5 - 12m
- Timer: 10 secs - 7min

DION Motion Sensor



IP44
Rated



PIR
Sensor



0.18kg

Code	Finish	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25151-BLK	Black	1.6 – 2.5m	5 – 12m	180°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:150mm W:90mm Proj:120mm
ZN-25151-WHT	White						
ZN-25151-DGRY	Dark Grey						

IP65



- Polycarbonate construction
- LED compatible
- Easy to adjust LUX & time
- 12m max detection distance
- 2 sensors for extended range of detection
- Creep sensor

DION

Stealth Motion Sensor



IP65
Rated



PIR
Sensor



0.15kg

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-31787-WHT	1.6 – 2.5m	5 – 12m	180°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	Proj:119.5mm W:80mm H:51.5mm

IP44

MANUAL
OVERRIDE



Corner or flush mounted

- Polycarbonate construction
- LED compatible
- Detection Distance: max 12m

ALIA

Adjustable Motion Sensor



IP44
Rated



PIR
Sensor



0.15kg

Code	Finish	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-33615-BLK	Black	1.6 – 2.5m	max 12m	180°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:120mm W:78mm
ZN-33615-WHT	White						Proj:53mm



IP20



**x3
SENSOR**

- LED compatible
- 3 integral sensors
- 20m max detection distance
- 360° detection range
- 10 secs – 30 mins adjustable timer
- Polycarbonate construction

LOCA

Advanced Motion Sensor



Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-29177-WHT	1.6 – 2.5m	Max 20m	360°	3-2000 LUX (adjustable)	1200W Halogen 500W LED	L:102mm W:102mm H:58mm



IP20



**x3
SENSOR**

- LED compatible
- 3 integral sensors
- 12m max detection distance
- 360° detection range
- 10 secs – 7 mins adjustable timer
- Polycarbonate construction

LOCA

Motion Sensor



Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25154-WHT	1.6 – 2.5m	12m max	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:55mm Dia:88mm

ALIA

CORNER MOTION SENSOR



AVAILABLE SETTINGS

TIME DELAY
Min: 10 sec±3sec
Max: 7min±1min

DETECTION RANGE
360°

DETECTION DISTANCE
Max 12m (<24°)

IP44



- Polycarbonate construction
- LED compatible
- Can be fitted to an external or internal corner.
- Mount can be removed to fit flush against walls.
- Detection Distance: 5 - 12m
- Detection Range: 360°
- Timer: 10 secs - 7min

- Removeable corner mount

ALIA

Corner Motion Sensor



IP44
Rated



PIR
Sensor



0.18kg

Code	Finish	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25152-BLK	Black	1.6 – 2.5m	5 – 12m	360°	3-2000 LUX (adjustable)	1200W Halogen	H:79mm W:60mm Proj:119mm
ZN-25152-WHT	White					300W LED	
ZN-25152-DGRY	Dark Grey					NEW	



- LED compatible
- 6m max detection distance
- 360° detection range
- 10 secs – 15 mins adjustable timer
- Polycarbonate construction



LOCA

Motion Sensor

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25153-WHT	2 – 2.4m	Max 6m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:46mm Dia:88mm



- LED compatible
- 3-20m max detection distance
- 360° detection range
- 10 secs – 30 mins adjustable timer
- Polycarbonate construction



LOCA

Extended Range Motion Sensor

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-31786-WHT	1.6 – 2.5m	Max 3-20m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:51mm Dia:120mm



- Easily remove cover when recessed to adjust settings
- LED compatible
- 6m max detection distance
- 360° detection range
- 10 secs – 15 mins adjustable timer
- Polycarbonate construction



LOCA

Recessed Motion Sensor

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25155-WHT	1.6 – 2.5m	Max 8m	360°	3-2000 LUX (adjustable)	1200W Halogen 200W LED	H:16.8mm Dia:50mm

- 3 mounting positions
- LED compatible
- 8m max detection distance
- 360° detection range
- 10 secs – 30 mins adjustable timer
- Polycarbonate construction



THEA

Conduit Motion Sensor



78mm
Cut-out



PIR
Sensor



0.05kg

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-31805-WHT	1.6 – 2.5m	Max 8m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:39mm Dia:80mm

- LED compatible
- Adjustable LUX level
- 1, 2, 3, 4, 5, 6, 7, 8, 9 hours timer
- Polycarbonate construction



ADRA

Dusk Till Dawn Sensor



IP65
Rated



Photocell
Sensor



0.13kg

Code	Timer	LUX	Max Rated Load	Dimensions
ZN-25156-BLK	1, 2, 3, 4, 5, 6, 7, 8, 9 Hours	3-500 LUX (adjustable)	1200W Halogen 250W LED	H:190mm W:70mm Proj:41mm

- Greater installation height
- Increased detection range
- Can sense movement through most building materials
- LED compatible
- 2 – 15m detection distance when wall mounted
- 1.8mm radius when ceiling mounted
- 180/360° detection range
- 10 secs – 12 mins adjustable timer



THEA

Wall/Ceiling Microwave Sensor




Microwave
Sensor




0.045kg

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-29185-WHT	1.6 – 3.5m	2 – 15m	180/360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	L:76mm W:37mm H:25mm

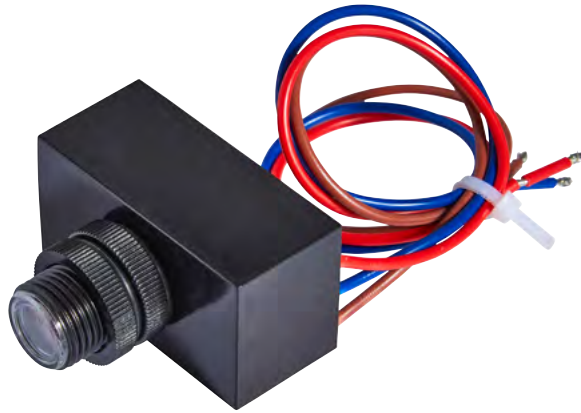


- Rated current: 10A
- Ambient light: <10LUX

ADRA Photocell Sensor



Code	Description	Finish	Max Rated Load	Dimensions
ZN-38599-BLK	Adra Photocell Sensor	Black	1200W Halogen 300W LED	H:70mm W:110mm Proj:35mm



- Polycarbonate construction
- LED compatible
- Detection Distance: max 10m
- Detection Range: 360°
- Timer: 10 secs - 30min

DION Batten Motion Sensor



Code	Finish	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-38600-WHT	White	1.6 – 2.5m	max 10m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:28mm W:33mm Proj:113mm

IP20



- Greater installation height
- Increased detection range
- Can sense movement through most building materials
- LED compatible
- 1 – 8m detection distance
- 360° detection range
- 10 secs – 12 mins adjustable timer



THEA

Stealth Microwave Sensor



Microwave Sensor

0.11kg

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-29186-WHT	1.6 – 3.5m	1 – 8m	360°	3-2000 LUX (adjustable)	1200W Halogen 500W LED	H:24mm Dia:115mm

IP44



- Greater installation height
- Increased detection range
- Can sense movement through most building materials
- LED compatible
- 5 – 15m detection distance
- 360° detection range
- 10 secs – 12 mins adjustable timer



THEA

Recessed Microwave Sensor



62mm Cut-out




Microwave Sensor



0.10kg

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-29187-WHT	1.6 – 3.5m	5 – 15m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:75.4mm Dia:76mm

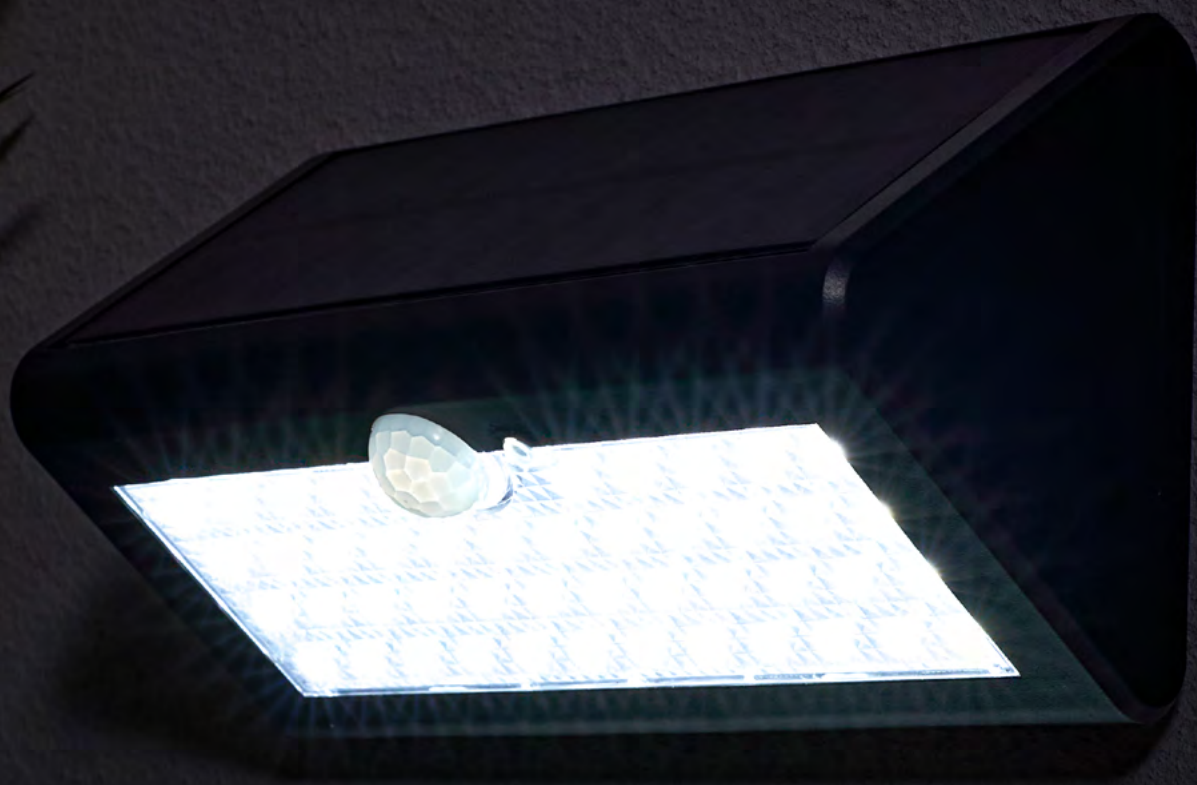

SOLAR

The new Zink solar range offers a wide selection of solar powered, functional, aesthetic, domestic light fittings, that are easily installed without the expense and damage caused by laying cable for traditional 240V lighting.


POST/LANTERN	126-130
GROUND	131
WALL LIGHTS	132-134
PIR WALL LIGHTS	135-140
SECURITY & FLOODLIGHTS	141
SPIKE LIGHTS	142-147
DECK LIGHTING	148
FESTOON	149



NEW
FOR
2023




IP44



- ABS & Polycrystalline construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant

CADEBY

LED Solar Wall Lantern




Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42031	Black	Cadeby Solar LED Wall Lantern	1W	3000k	15	6-8hrs	1 x 1.2V AA NiMH 900mAh	W:140mm H:205mm Proj:160mm

NEW
FOR
2023



IP44



- ABS & Polycrystalline construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant

CADEBY

LED Solar Post Lantern



Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42032	Black	Cadeby Solar LED Post Lantern	1W	3000k	15	6-8hrs	1 x 1.2V AA NiMH 900mAh	H:575mm Dia. 170mm



NEW
FOR
2023



IP44



- OFF/Low/High light function
- Iron, aluminium and glass construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant

HORDEN

LED Solar Hanging Wall Lantern



Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42033	Black	Horden Solar LED Wall Lantern	1W	3000k	15	6-8hrs	1 x 1.2V AA NiMH 1000mAh	W:175mm H:380mm Proj:225mm

NEW
FOR
2023



IP44



- OFF/Low/High function
- Iron, aluminium and glass construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant

TANFIELD

LED Solar Post Lantern



Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42034	Black	Tanfield Solar LED Post Lantern	1W	3000k	200	6-8hrs	1 x 1.2V AA NiMH 900mAh	H:575mm Dia. 170mm

NEW
FOR
2023




**ENERGY
SAVING**

IP44



SOLAR

- Stainless steel (201) construction
- OFF/Low/High switch function
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



CRESWELL

LED Solar Wall Light



IP44
Rated



6000K
DW



0.53kg



Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42043	SST	Creswell Solar LED Wall Light	0.6W	6000k	30	6-8hrs	2 x 1.2V AA NiMH 900mAh	W:117mm H:365mm Proj:145mm

NEW
FOR
2023



**ENERGY
SAVING**

IP44



SOLAR

- Stainless steel (201) construction
- OFF/Low/High switch function
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



CRESWELL

LED Solar Spike Light



IP44
Rated



6000K
DW



0.53kg



Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42044	SST	Creswell Solar LED Spike Light	0.6W	6000k	30	6-8hrs	2 x 1.2V AA NiMH 900mAh	H:365mm Dia. 117mm

NEW
FOR
2023



**ENERGY
SAVING**

IP65



SOLAR



- Low level design for installation almost anywhere
- 121mm x 121mm design to fit on top of a fence post as well as a ground light
- Aluminium and PVC construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Built in photocell sensor for auto ON at dusk/dawn
- Charge lasts up to 8 hours after full charge
- IP65 weather resistant



TANFIELD

LED Solar Post/Ground Light



IP44
Rated



4000K
CW



0.28kg



Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42035	Black	Tanfield Solar LED Post/Ground Light	1W	4000k	30	6-8hrs	1 x 1.2V AA NiMH 600mAh	L:121mm W:121mm Proj:29mm

NEW
FOR
2023



**ENERGY
SAVING**

IP44



SOLAR



- Stainless steel (201) and glass construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



WISTOW

LED Solar Wall Light



IP44
Rated



3000K
WW



0.6kg



Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42039	Black	Wistow Solar LED Wall Light	0.4W	3000k	10	6-8hrs	1 x 1.2V AA NiMH 1000mAh	W:83mm H:205 Proj:53mm



NEW
FOR
2023

**ENERGY
SAVING**

IP44

SOLAR

- Stainless steel (201) construction
- OFF/Dim 1/Dim 2/Dim 3 push button switch
- Separate solar panel with 5m cable allows installation in areas with no mains power
- Solar panel can be charge with the mini USB-A cable
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



ELDON

LED Up/Down Solar Wall Light

 IP44 Rated
 3000K WW
 0.66kg
 Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42040	SST	Eldon Solar LED Wall Light	2W	3000k	150	6-8hrs	1 x 3.7V Li-ion 2000mAh	W:77mm H:185mm Proj:110mm
ZN-42041	Black							

NEW
FOR
2023



ENERGY
SAVING

IP44

SOLAR



- Stainless steel (201) & PC construction
- OFF/Low/High switch function
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant




TRIMDON


LED Solar Downlight



Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42045	SST							
ZN-42046	Black	Trimdon Solar LED Downlight	1W	3000k	100	6-8hrs	1 x 3.7V Li-ion 1200mAh	W:90mm H:135mm Proj:120mm
ZN-42047	Anth							

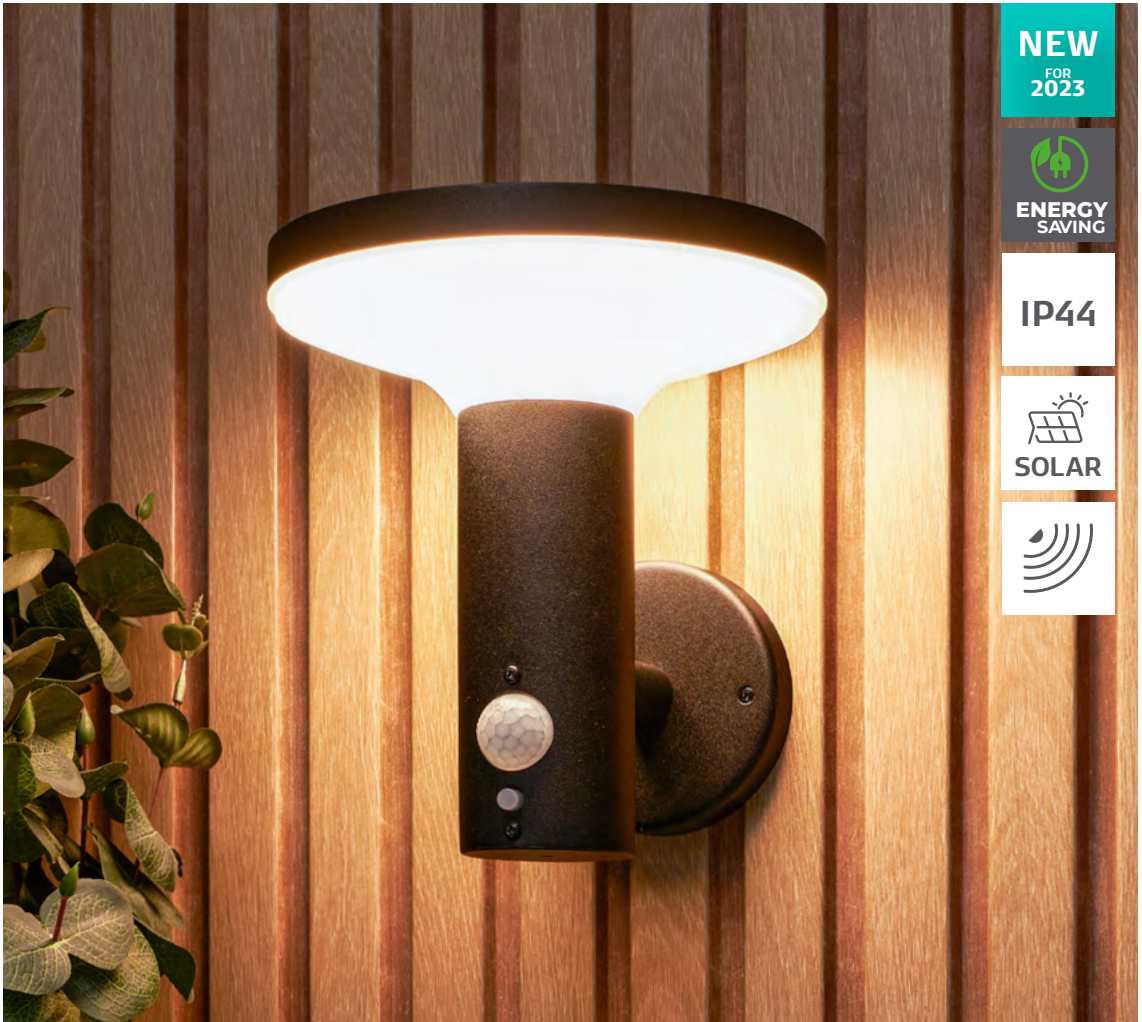

- 3 Modes: a) Always ON 60lm b) Always ON 60lm, Motion Detected 240lm 25secs c) Always OFF, Motion Detection Detected 600lm 25secs d) OFF
- Stainless steel (201) & PC construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- 8-12m detection distance
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



CLAIRE

LED Solar Wall Light with PIR Sensor



Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42048	SST	Claire Solar LED	5.6W	3000k	600	6-8hrs	1 x 3.7V	W:160mm H:180mm
ZN-42049	Black	Wall Light with PIR					Li-ion 2200mAh	Proj:162mm

200
Lumens


IP44



SOLAR



- Glass lens with ABS and steel construction
- Battery: 1800mAh Li-ion
- Time on: 30 seconds
- 3-5m Detection Distance
- 2W LED module (SMD)
- K: 6000
- Lm: 200
- Lm/W: 100
- Hrs: 20,000

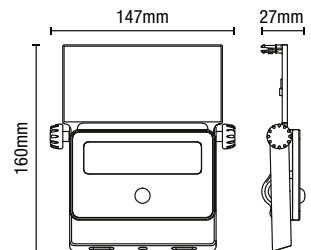

SOLAR

Security Sensor Light



IP44
Rated



6000K
DW



PIR
Sensor

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-37052-BLK	Black	Solar Security Sensor Light	2W	6000k	200	100	H:160mm W:147mm Proj:134mm



- OFF/High/Low push button function
- ABS construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- PIR sensor turns light on for 15 seconds after sensing movement with 3-5m detection distance
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



MARLEY

LED Solar Wall Light with PIR Sensor



Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42037	Black	Marley Solar LED Wall Light w/ PIR	4W	6000k	230 (hi) 100 (low)	6-8hrs	1 x 3.7V Li-ion 1500mAh	H:125mm W:95mm Proj:49mm

NEW
FOR
2023




**ENERGY
SAVING**

IP44



SOLAR

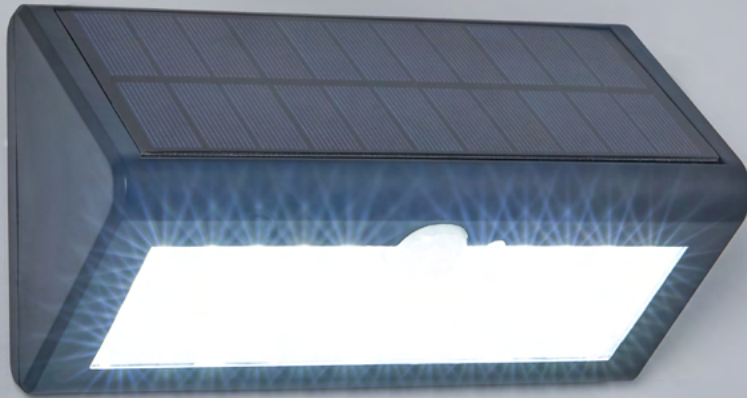

- OFF/High/Low push button function
- ABS & PC construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- PIR sensor turns light on for 25 seconds after sensing movement with 3-5m detection distance
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



DAWDON

LED Solar Wall Light with PIR Sensor



IP44
Rated



6000K
DW



0.39kg



Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42042	Black	Dawdon Solar LED Wall Light w/ PIR	9.2W	6000k	450	6-8hrs	2 x 3.7V Li-ion 2000mAh	H:115mm W:207mm Proj:85mm



- Battery > 30% AUTO ON 20lm at Dusk/Dawn, 400lm when motion detected by microwave sensor 15secs
- Battery < 30% OFF Dusk/Dawn, 400lm when motion detected by microwave sensor 15secs
- ABS construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Microwave and photocell sensor
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



BLACKHALL

LED Solar Wall Light with Microwave Sensor

 IP44 Rated
  6500K DW
  0.54kg
  Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42056	Black	Blackhall Solar LED Wall Light	4.5W	6500k	400	6-8hrs	2 x 3.7V Li-ion 3000mAh	H:195mm W:230mm Proj:103mm

NEW
FOR
2023



**ENERGY
SAVING**

IP44



SOLAR



- Battery > 30% AUTO ON 20lm at Dusk/Dawn, 230/300lm when motion detected by microwave sensor 15secs < 30% OFF Dusk/Dawn, 230/300lm when motion detected by microwave sensor 15secs
- ABS construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Microwave and photocell sensor
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



BLACKHALL

LED Solar Wall Light with Microwave Sensor



IP44
Rated




6500K
DW



Class 3

Code	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions	Weight (kg)
ZN-42054	Blackhall Solar LED Wall Light	2.5W	6500k	230	4-6hrs	1x 3.7V Li-ion 1500mAh	H:190mm W:95mm Proj:90mm	0.22kg
ZN-42055		3.5W	6500k	300		1x 3.7V Li-ion 1800mAh	H:225mm W:115mm Proj:105mm	0.28kg

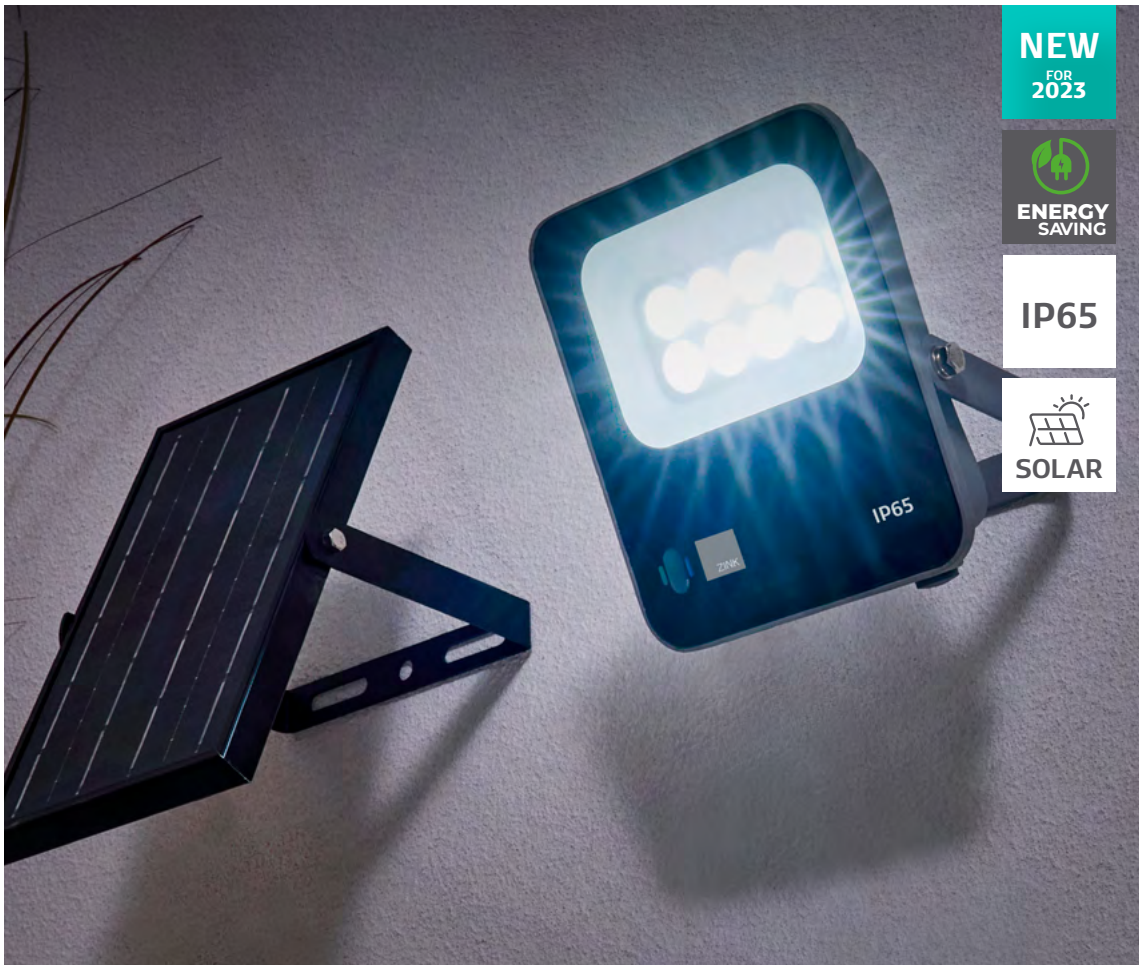

- Remote control operated with adjustable functions. ON/OFF, Brightness ±, Timer 3, 5 or 8 Hours, Automatic.
- Aluminium, glass & steel construction
- Separate solar panel with 1m cable allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 12 hours after full charge
- IP65 weather resistant
- Available in 3 sizes and wattages




DENBY LED Solar Floodlight



Code	Description	Power (w)	Colour (k)	Lumen (lm)	Working Time	Batteries	Dimensions	Weight (kg)
ZN-42051	Denby LED Solar Floodlight	1.5W	6500k	300	12hrs	1 x 3.7V LiPo 2500mAh	W:150mm H:170mm Proj:113mm	1.076kg
ZN-42052	Denby LED Solar Floodlight	2.5W	6500k	450	12hrs	2 x 3.7V LiPo 5000mAh	W:182mm H:203mm Proj:135mm	1.6kg
ZN-42053	Denby LED Solar Floodlight	6W	6500k	1000	12hrs	2 x 3.2V LiPo 1000mAh	W:195mm H:230mm Proj:155mm	2.1kg



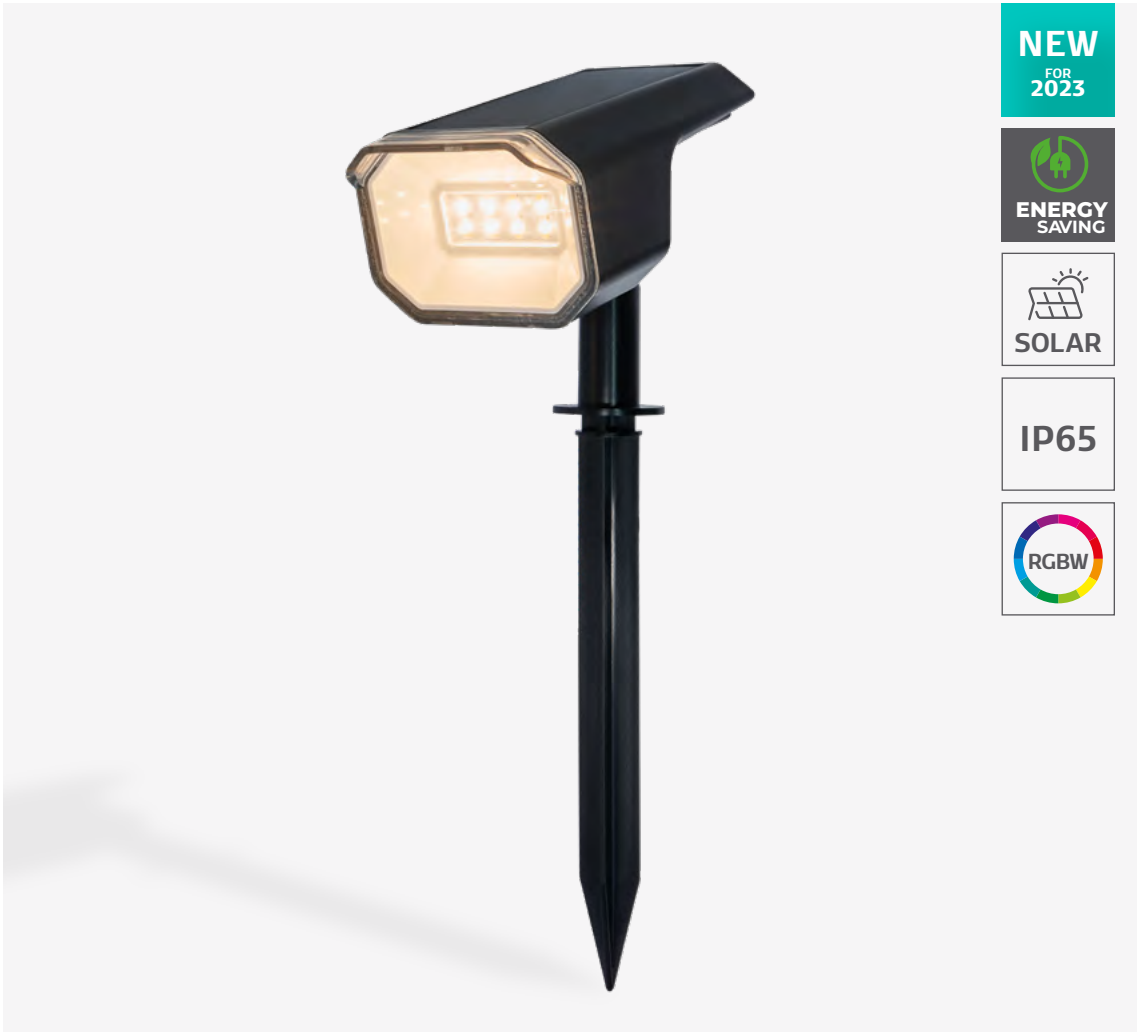

- Compatible with Smart Apps
- ABS & PC construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 6 hours on high, 12 hours on low brightness after full charge
- IP44 weather resistant



BYERMOOR

LED Solar Smart Spike Light

 Bluetooth |
  Alexa |
  Google Home |
  Tuya Smartlife |
  IP65 Rated |
  RGBW CCT |
  0.3kg |
  Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42050	Black	Byermoor LED Solar Smart Spike Light	1W	RGB+W CCT	50	6hrs	1 x 5.5V Li-ion 1200mAh	H:420mm W:107 D:145mm





NEW
FOR
2023

**ENERGY
SAVING**

SOLAR

IP54



- 4 Modes: a) Always ON 90lm b) Always ON 90lm, Motion Detected 500lm 30secs c) Always OFF, Motion Detection Detected 500lm 30secs d) SOS
- ABS & PC construction
- Supplied with IR remote control
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- 4-6m detection distance
- Charge lasts up to 8 hours after full charge
- IP54 weather resistant



BRADLEY

LED Solar Floodlight with Ground Spike

 IP54 Rated
  6500K DW
  0.38kg
  Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42057	Black	Blackhall Solar LED Wall Light	3W	6500k	500	8-9hrs	1 x 3.7V Li-ion 1200mAh	H:610mm W:345mm Proj:130mm

NEW
FOR
2023



**ENERGY
SAVING**



SOLAR

IP65



- Supplied with IR remote control
- ABS & Glass construction
- Solar panel has 4m cable until first lamp then 2m spacing between each lamp
- Energy saving solar powered LED light
- Lamps can be spike or deck mounted
- IP65 weather resistant



MALTBY

LED Solar Spike Light Kit



IP65
Rated



RGB
+4000k



0.82kg



Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42058	Black	Maltby LED Solar Spike Light Kit	2W	RGB+ 4000K	200	8-10hrs	2 x 3.7V Li-ion 2400mAh	H:250mm Dia. 40mm (per lamp)



NEW
FOR
2023

ENERGY SAVING

SOLAR

IP65

RGB +4K

- Supplied with IR remote control
- ABS & PC construction
- Solar panel has 4m cable until first lamp then 2m spacing between each lamp
- Energy saving solar powered LED light
- Lamps can be spike or deck mounted
- IP65 weather resistant



DAW

LED Solar Spike Light Kit


IP65 Rated
 RGB +4000k
 0.65kg
 Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42059	Black	Daw LED Solar Spike Light Kit	2W	RGB+ 4000K	200	8-10hrs	2 x 3.7V Li-ion 2400mAh	H:230mm Dia. 37mm (per lamp)


NEW
FOR
2023



IP65

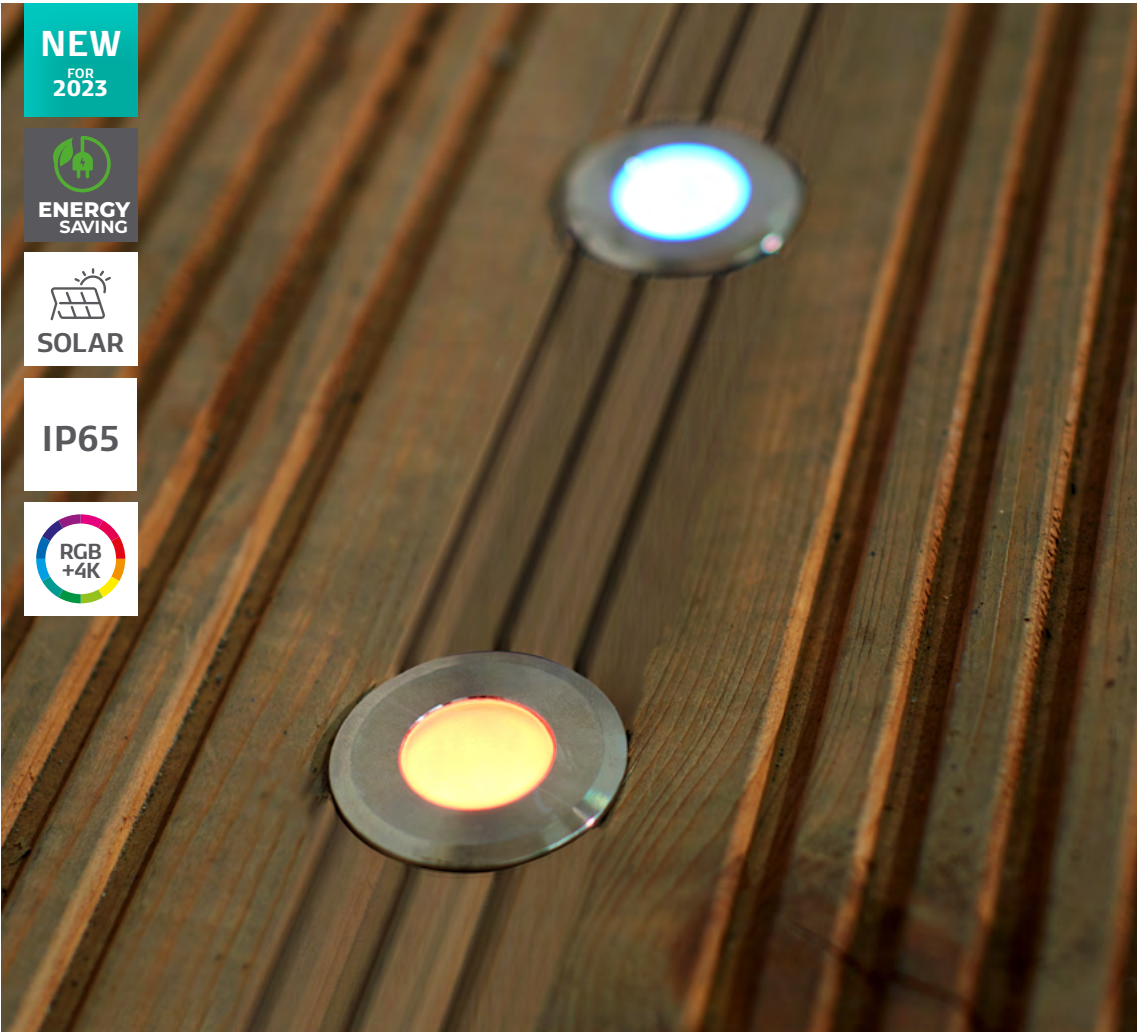

- Supplied with IR remote control
- Stainless steel (201), ABS & Glass construction
- Solar panel has 4m cable until first lamp then 2m spacing between each lamp
- Energy saving solar powered LED light
- Solar panel can be spike or deck mounted
- IP65 weather resistant



AYLE

LED Solar Deck Light Kit



Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42060	Black	Ayle LED Solar Deck Light Kit	2W	RGB+ 4000K	200	8-10hrs	2 x 3.7V Li-ion 2400mAh	H:47mm Dia. 41.5mm (per lamp)



NEW
FOR
2023


**ENERGY
SAVING**


SOLAR




IP44

- 4 Light Modes: ON/Slow Flash/Fast Flash/Pulsating
- Solar panel can be wall or spike mounted and recharged with the USB-A cable supplied
- Solar panel has 4m cable until first lamp then 0.6m spacing between each lamp
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



WYE

LED Solar Festoon Light Kit

 IP44 Rated
  2700K WW
  1.1kg
  Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42229	Black	Wye LED Solar Festoon Light Kit	5W	2700	60 (each)	8-10hrs	1 x 3.7V Li-ion 2200mAh	Overall L:1000mm




COASTAL

An extensive range of outdoor lighting constructed from polycarbonate with grade 316 stainless steel fixings. Domestic light fittings, designed with coastal areas in mind.

POST LIGHTS	152-153
LANTERN	154-159
BULKHEADS	160-167
WALL	168-173
GUIDE LIGHTS	175-177
GROUND	179
SECURITY & FLOODLIGHTS	180-181

IP44

ADJUSTABLE
HEIGHT

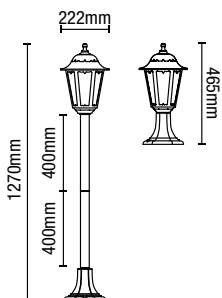

- Polycarbonate construction
- Corrosion resistant
- Three height options:
1260mm/860mm/460mm



BIANCA

Post Lantern




Code	Description	Lamp	Dimensions
CZ-25148-BLK	Bianca Tall Post Lantern (3 Heights)	1 x 10W max LED E27 GLS	W:222mm H:1270mm

IP44



- Polycarbonate construction
- Corrosion resistant

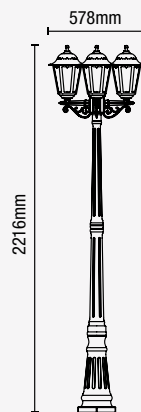


BIANCA

Triple Head Tall Post Lantern



Code	Description	Lamp	Dimensions
CZ-25149-BLK	Bianca Triple Head Tall Post Lantern	3 x 10W max LED E27 GLS	Dia: 578 H:2216mm

IP44

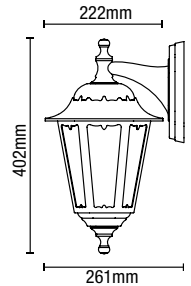

- Polycarbonate construction
- Corrosion resistant
- 2 alternate installation options

BIANCA

Up or Down Wall Lantern



IP44
Rated

Class 2


0.73kg

Code	Description	Lamp	Dimensions
CZ-25145-BLK	Bianca Up or Down Wall Lantern	1 x 10W max LED E27 GLS	Proj:261mm W:222mm H:402mm

IP44



MANUAL
OVERRIDE

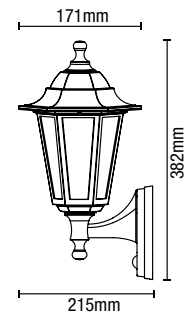

- Polycarbonate construction
- Corrosion resistant
- 6m Detection Distance
- Manual override function enables you to switch off PIR

BIANCA

Wall Lantern with PIR



IP44
Rated

PIR
Sensor

Class 2


0.84kg

Code	Description	Lamp	Dimensions
CZ-25150-BLK	Bianca Wall Lantern with PIR	1 x 10W max LED E27 GLS	Proj:215mm W:171mm H:382mm



IP44

- Polycarbonate construction
- Corrosion resistant
- Vintage style half lantern
- Available with or without PIR sensor
- 6m Detection Distance



ATHENA

Half Wall Lantern



IP44
Rated



PIR
Sensor




Class 2

Code	Sensor	Description	Lamp	Dimensions
CZ-31748-BLK	-	Athena Wall Lantern	1 x 10W max LED E27 GLS	Proj:110mm W:180mm H:370mm
CZ-26743-BLK	PIR			



IP44

- ABS & PC construction
- Corrosion resistant

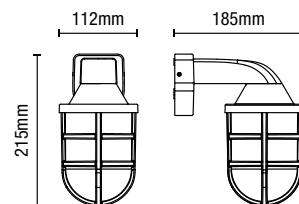

JURA

Wall Lantern



IP44
Rated



Class 2

Code	Description	Lamp	Dimensions
CZ-35742-BLK	Jura Wall Lantern	1 x 10W LED Max E27 GLS	Proj:185mm W:112mm H:215mm




IP54



· Alternative mounting option

- Polycarbonate construction
- Corrosion resistant
- Available in black & anthracite
- Can be fitted either upward, downward or sideways

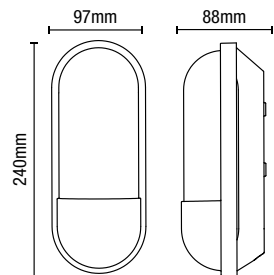


PILULE

Wall Light

IP54 Rated | Class 2 | 0.3kg

Code	Description	Finish	Lamp	Dimensions
CZ-38639-BLK	Pilule Wall Light	Black	1 x 10W max LED E27 GLS	W:97mm H:240mm Proj:88mm
CZ-38639-ANTH		Anthracite		

IP44

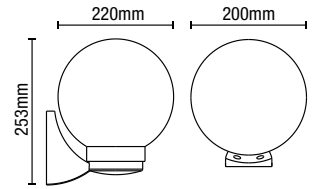

- Polycarbonate construction
- Corrosion resistant


YORK

Globe Wall Lantern



Code	Description	Lamp	Dimensions
CZ-31811-BLK	York Globe Wall Lantern	1 x 10W max LED E27 GLS	Proj:220mm W:200mm H:253mm

IP44

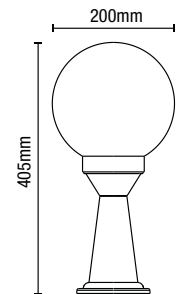

- Polycarbonate construction
- Corrosion resistant

YORK

Globe Post Lantern




Code	Description	Lamp	Dimensions
CZ-31812-BLK	York Globe Wall Lantern	1 x 10W max LED E27 GLS	Dia:220mm H:405mm

IP44



- Polycarbonate construction
- Corrosion resistant
- Contemporary styling
- Vandal resistant materials

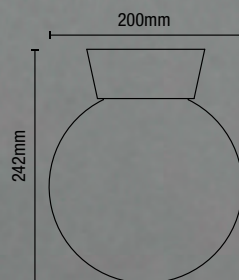

YORK

Globe Porch Lantern



Code	Description	Lamp	Dimensions
CZ-33461-BLK	York Globe Porch Lantern	1 x 10W max LED E27 GLS	Dia:200mm H:242mm

750
Lumens

IP65


- Black PC / Opal diffuser
- Corrosion resistant
- Wall or ceiling mounted (vertical or horizontal)

CZ-34026-BLK

- 8W LED module (SMD)
- Lm/W: 50
- Hrs: 25,000

CZ-34027-BLK

- 15W LED module (SMD)
- Lm/W: 50
- Hrs: 25,000

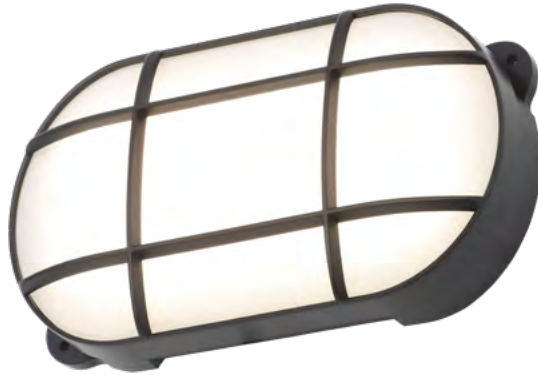

CAPELLA

Oval Grid Bulkhead




Code	Size	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-34026-BLK	Small	Capella Oval Grid Bulkhead	8W	4000k	400	50	H:115mm W:160mm Proj:57mm
CZ-34027-BLK	Large		15W	4000k	750	50	H:135mm W:210mm Proj:57mm

750
Lumens

IP65

- Black PC / Opal diffuser
- Corrosion resistant
- 15W LED module (SMD)
- Lm/W: 50
- Hrs: 25,000



CAPELLA

Round Grid Bulkhead




Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-34025-BLK	Capella Round Grid Bulkhead	15W	4000k	750	50	Proj:57mm Dia:165mm



IP44

- Durable polycarbonate construction with glass cover
- Corrosion resistant
- Protective grille



MARS

Round Bulkhead


 IP44 Rated
 Class 2
 0.69kg

Code	Description	Lamp	Dimensions
CZ-20947-BLK	Mars Round Bulkhead	1 x 10W max LED E27 GLS	Proj:100mm Dia:180mm






IP44

- Durable polycarbonate construction with glass cover
- Corrosion resistant
- Protective grille



PUCK

Oval Eyelid Bulkhead

 IP44 Rated
 Class 2
 1.06kg

Code	Description	Lamp	Dimensions
CZ-25142-BLK	Puck Oval Eyelid Bulkhead	1 x 10W max LED E27 GLS	Proj:110mm W:260mm H:150mm



CZ-34023-BLK



**Upto
750
Lumens**

IP65



- Black PC / Opal diffuser
- Corrosion resistant
- Wall or ceiling mounted
- 6m Detection Distance

CZ-33397-BLK

- 8W LED module (SMD)
- K: 4000
- Lm: 400
- Lm/W: 50
- Hrs: 25,000

CZ-34023-BLK

- 15W LED module (SMD)
- K: 4000
- Lm: 750
- Lm/W: 50
- Hrs: 25,000

CANO
LED Round Bulkhead




Code	Size	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-33397-BLK	Small	Cano Round PIR Bulkhead	8W	4000k	400	50	Proj:57mm Dia:155mm
CZ-34023-BLK	Large	Cano Round PIR Bulkhead	15W	4000k	750	50	Proj:60mm Dia:195mm





- Upto
1200
Lumens
- 
- IP65**
- 

- Black PC / Opal diffuser
- Corrosion resistant
- Colour changing technology
- Switch between 3000K/4000K/6000K
- Available with or without PIR sensor
- 6m Detection Distance
- 15W LED module (SMD)
- Push-fit connectors

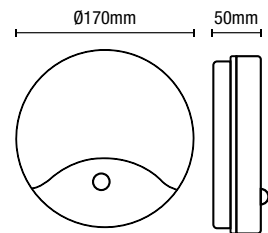

TURUS

LED Round Bulkhead

- 
 IP65
 Rated
- 
 CCT
- 
 PIR
 Sensor
- 
 Class 2

Code	Sensor	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-34014-BLK	-	Turus Round Bulkhead	15W	CCT	1200	80	Proj:50mm Dia:170mm
CZ-34015-BLK	PIR	Turus Round Bulkhead	15W	CCT	840	56	Proj:50mm Dia:170mm



- Black PC / Opal diffuser
- Corrosion resistant
- Colour changing technology
- Switch between 3000K/4000K/6000K
- Available with or without PIR sensor
- 6m Detection Distance
- 15W LED module (SMD)
- Lm/W: 50
- Hrs: 25,000
- Push-fit connectors



TURUS


LED Oval Bulkhead



Code	Sensor	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-34016-BLK	-	Turus Oval Bulkhead	15W	CCT	1200	80	H:210mm W:115mm Proj:50mm
CZ-34017-BLK	PIR	Turus Oval Bulkhead	15W	CCT	840	56	H:210mm W:115mm Proj:50mm




- Polycarbonate and ABS construction
- Corrosion resistant
- Can be wall or ceiling mounted
- 8W LED module (SMD)
- Lm/W: 73
- Hrs: 20,000



OXFORD

Round LED Bulkhead



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31750-BLK	Oxford Round Bulkhead	8W	4000k	590	73	Proj:83mm Dia:213mm

- Polycarbonate construction
- Corrosion resistant
- Can be wall or ceiling mounted

CZ-31745-BLK

- 15W LED module (SMD)
- Lm/W: 60
- Hrs: 20,000


CZ-31743-BLK

- 18W LED module (SMD)
- Lm/W: 70
- Hrs: 20,000






**Upto
1245
Lumens**

IP65



RIPON
LED Bulkhead






Code	Size	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31745-BLK	Small	Ripon LED Bulkhead	15W	4000k	900	60	Proj:44mm Dia:270mm
CZ-31743-BLK	Large	Ripon LED Bulkhead	18W	4000k	1245	70	Proj:44mm Dia:310mm







**510
Lumens**

IP65



- Polycarbonate and ABS construction
- Corrosion resistant
- Can be wall or ceiling mounted
- 8W LED module (SMD)
- Lm/W: 63
- Hrs: 20,000

OXFORD
Oval LED Bulkhead


Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31751-BLK	Oxford Oval Bulkhead	8W	4000k	510	63	H:142mm W: 213mm Proj:79mm

648
Lumens

IP65



- Polycarbonate and ABS construction
- Corrosion resistant
- 12W LED module (SMD)
- Lm/W: 64
- Hrs: 20,000

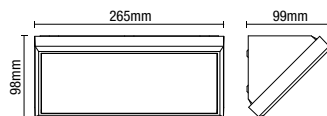

LUTON

LED Wedge




Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31746-BLK	Luton LED Wedge	12W	4000k	648	64	Proj:99mm W:265mm H:98mm

IP65

1260
Lumens




- Corrosion resistant PC & ABS construction
- Adjustable sensitivity, hold time, lux level, standby time & standby dim level.
- Microwave & daylight Sensor

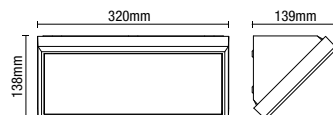

DERBY

LED Wedge with Hi-Lo Dimmer




Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31740-BLK	Derby LED Wedge with Hi-Lo Dimmer	21W	4000k	1260	60	Proj:139mm W:320mm H:138mm



IP44

- ABS construction
- Corrosion resistant



IONA Downlight




Code	Description	Lamp	Dimensions
CZ-35704-BLK	Iona Downlight	1 x 5W Max LED GU10	Proj:90mm W:70mm H:95mm



IP44

- ABS construction
- Corrosion resistant

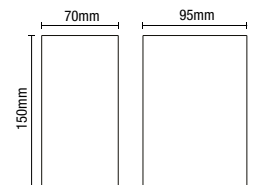


IONA Up/Down Wall Light



Code	Description	Lamp	Dimensions
CZ-35705-BLK	Iona Up/Down Wall Light	2 x 5W Max LED GU10	Proj:95mm W:70mm H:150mm

IP65



- Polycarbonate construction
- Corrosion resistant
- PIR sensor
- 6m Detection Distance

NESO

Up/Down Wall Light with PIR




IP65
Rated

PIR
Sensor

Class 2

Code	Description	Lamp	Dimensions
CZ-31744-BLK	Neso Up/Down Wall Light	2 x 7W Max LED GU10	Proj:110mm W:63mm H:205mm

IP65



- Polycarbonate construction
- Corrosion resistant

NESO

Up/Down Wall Light



IP65
Rated


Class 2

Code	Description	Lamp	Dimensions
CZ-25144-BLK-65	Neso Up/Down Wall Light	2 x 7W Max LED GU10	Proj:110mm W:81mm H:160mm

IP65



- Polycarbonate construction
- Corrosion resistant



NESO Downlight

IP65 Rated
 Class 2


Code	Description	Lamp	Dimensions
CZ-25143-BLK	Neso Downlight	1 x 7W Max LED GU10	Proj:86mm W:81mm H:122mm

IP44



- Marine grade stainless steel (316) construction
- Corrosion resistant

316
 Marine Grade Steel

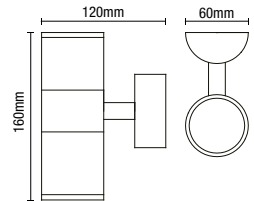

ISLAY Up/Down Wall Light


IP44 Rated
 Class 1
 0.7kg

Code	Description	Finish	Lamp	Dimensions
CZ-29320-SST	Islay Up/Down Wall Light	Stainless Steel	2 x 7W max LED GU10	H:160mm W:70mm Proj:120mm
CZ-29320-BLK		Black		
CZ-29320-ANTH		Anthracite		





- Marine grade stainless steel (316) construction
- Corrosion resistant
- PIR sensor
- Adjustable lux and timer
- Detection Angle: 90°
- Detection Distance: 7m



ISLAY


PIR Up/Down Wall Light



Code	Description	Finish	Lamp	Dimensions
CZ-29319-SST	Islay PIR Up/Down Wall Light	Stainless Steel	2 x 7W max LED GU10	H:143mm W:60mm Proj:125mm
CZ-29319-BLK		Black		
CZ-29319-ANTH		Anthracite		



- Marine grade stainless steel (316) construction
- Corrosion resistant

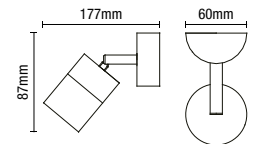

ISLAY

Spotlight




Code	Description	Finish	Lamp	Dimensions
CZ-29321-SST	Islay Spotlight	Stainless Steel	1 x 7W max LED GU10	H:87mm W:60mm Proj:177mm
CZ-29321-BLK		Black		
CZ-29321-ANTH		Anthracite		





**280
Lumens**

IP65

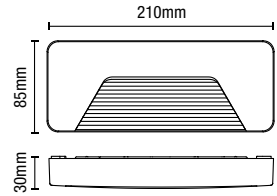

- Polycarbonate construction
- Anthracite finish
- Corrosion resistant
- 3W LED module (SMD)
- Lm/W: 93
- Hrs: 20,000

BREEZ

Surface Brick/Guide Light


IP65 Rated
 4000K CW
 Class 2
 0.19kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-29192-ATR	Breez Surface Brick/Guide Light	3W	4000k	290	93	Proj:30mm W:210mm H:85mm



**180
Lumens**

IP65



- Polycarbonate construction
- Anthracite finish
- Corrosion resistant
- 2W LED module (SMD)
- Lm/W: 90
- Hrs: 20,000

BREEZ

Surface Brick/Guide Light

IP65 Rated
 4000K CW
 Class 2
 0.16kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-29193-ATR	Breez Surface Brick/Guide Light	2W	4000k	180	90	Proj:30mm Dia:128mm




**280
Lumens**

IP65







- Polycarbonate construction
- Anthracite finish
- Corrosion resistant
- 3W LED module (SMD)
- Lm/W: 93
- Hrs: 20,000




BREEZ

Surface Brick/Guide Light


 IP65 Rated
  4000K CW
  Class 2
  0.19kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-29191-ATR	Breez Surface Brick/Guide Light	3W	4000k	290	93	Proj:30mm W:210mm H:85mm

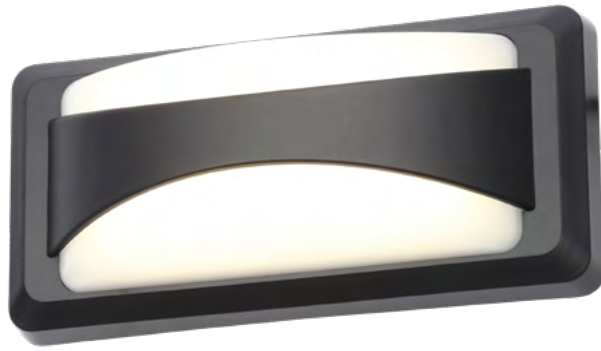

**590
Lumens**

IP65



- Polycarbonate construction
- Black finish with opal diffuser
- Corrosion resistant
- 12.5W LED module (SMD)
- Lm/W: 47
- Hrs: 20,000

POOLE LED Up/Down Wall Light

IP65 Rated
 4000K CW
 Class 2
 0.32kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31749-BLK	Poole LED Up/Down Wall Light	12.5W	4000k	590	47	Proj:78mm W:230mm H:110mm




IP65

**300
Lumens**



- Polycarbonate construction
- Black finish with opal diffuser
- Corrosion resistant
- PIR sensor (option)
- 6m detection range
- 12.5W LED module (SMD)
- Lm/W: 47
- Hrs: 20,000



POOLE LED Wall Downlight

PIR Sensor
 IP65 Rated
 4000K CW
 Class 2
 0.32kg


Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31752-BLK	Poole Downlight	6W	4000k	300	50	Proj:51mm W:220mm H:113mm
CZ-31747-BLK	Poole Downlight with PIR	6.5W	4000k	300	46	Proj:51mm W:220mm H:113mm



IP44



- Polycarbonate construction
- Corrosion resistant
- Detachable ground spike

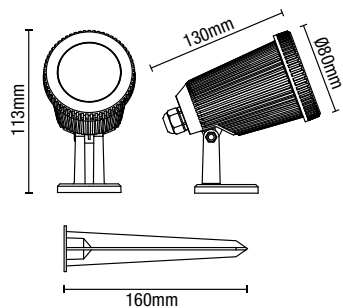

WELLS

Dual Mount Ground/Spike Light

0.4M Cable | IP44 Rated | Class 2 | 0.34kg

Code	Description	Lamp	Dimensions
CZ-31806-BLK	Wells Ground Light	1 x 6W Max LED GU10	Proj:130mm Dia:80mm H:273mm

NEW

Upto
9000
Lumens

IP65



- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime



VISBY

LED Slimline Floodlight



IP65
Rated



180°
Beam



6500K
DW



0.5M
Cable



Class 1

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
CZ-41087-BLK	Visby LED Slimline Floodlight	20W LED	1500	0.24kg	H:90mm W:120mm Proj:95mm
CZ-41088-BLK		30W LED	2500	0.35kg	H:125mm W:190mm Proj:95mm
CZ-41089-BLK		50W LED	4100	0.59kg	H:155mm W:195mm Proj:120mm
CZ-41090-BLK		100W LED	9000	0.87kg	H:190mm W:260mm Proj:120mm

NEW

Upto
4100
Lumens

IP54



- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime
- PIR sensor with adjustable LUX sensitivity and timer
- 12m Detection Distance



TROSA

LED Slimline Floodlight with PIR Sensor



PIR
Sensor



IP54
Rated



180°
Beam



6500K
DW



0.5M
Cable



Class 1

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
CZ-41091-BLK	Trosa LED Slimline Floodlight with PIR Sensor	20W LED	1500	0.27kg	H:155mm W:120mm Proj:120mm
CZ-41092-BLK		30W LED	2500	0.38kg	H:190mm W:160mm Proj:115mm
CZ-41093-BLK		50W LED	4100	0.64kg	H:225mm W:195mm Proj:160mm





ELECTRALITE

COMMERCIAL

Great quality and installer friendly LED Commercial lighting, including our NEW LED range of tapes, downlights, bulkheads and battens.

LED STRIP	184-193
LED STRIP ACCESSORIES	194-199
UNDER CABINET	200
LED BATTENS	201-203
T-GRID LIGHTING	204-205
RECESSED	206-213

PROFESSIONAL 24V LED STRIPS



3M 200MP high performance acrylic adhesives used on all professional LED strips.

Our high grade 24V LED strips are ideal if you require 5 metres or more in a single length. Built from the highest specification components, they are consistent in brightness and reliability as there is less current. Therefore less voltage drop and less wiring is required. 24V strips or tapes are the choice of the professional installer.

How to choose an LED strip

1. Choose LED type

Choose from White LED (single colour), or RGBW LED (16 selectable colour options). Available in a range of different variants to suit all applications.

2. Choose colour temperature

Choose from warm white, cool white and daylight white LED colour temperatures to suit your application. For RGB skip to step 3.

3. Choose installation environment

Select the protection you require for the installation environment. Choose from IP65 water resistant LED strip for wet areas or IP20 non water resistant LED strip for dry areas.

4. Choose profile

Designed to hold your LED strip, providing diffusion and protection. We offer a range of profiles, including surface mounted, recessed and corner mounted.

5. Choose your driver

Calculate the overall wattage of the LED strip to be used. Then select the driver that is higher in wattage than your LED strip (tape).

6. Accessories

We offer strip connectors and strip live-end connectors for our full range of LED strip, enabling you to cut and size your strip for any application or even extend LED strip where required.

7. Remote control receivers

Remote controlled receivers offer precise and user-friendly control over integral LED strip lighting, allowing you to change the colour and brightness of your room with the touch of a finger.

560
Lumens

6W
LED

IP20


3M
200MP



- 24V to avoid voltage drop on longer runs
- IP20 for use indoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with receiver / controller (page .100)

5m
50m

IP20 8MM 6W LED Strip



Code	LED Colour	Kelvin	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34280	Warm White	2700K	525	5.76W p/m	60	SMD2835	8mm	>80	5m
ELA-34281	Cool White	4000K	588						
ELA-34282	Daylight White	6000K	569						
ELA-34857	Warm White	2700K	525						50m
ELA-34858	Cool White	4000K	588						
ELA-34859	Daylight White	6000K	569						





560
Lumens

6W
LED


IP65

3M
200MP

- 24V to avoid voltage drop on longer runs
- IP65 for use outdoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with receiver / controller (page .100)

5m
50m

IP65 8MM 6W LED Strip



Code	LED Colour	Kelvin	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34283	Warm White	2700K	525	5.76W p/m	60	SMD2835	8mm	>80	5m
ELA-34284	Cool White	4000K	588						
ELA-34285	Daylight White	6000K	569						
ELA-34860	Warm White	2700K	525						50m
ELA-34861	Cool White	4000K	588						
ELA-34862	Daylight White	6000K	569						

1000
Lumens

12W
LED

IP20


3M
200MP



- 24V to avoid voltage drop on longer runs
- IP20 for use indoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with RGB remote control & receiver (page .100)

5m
50m

IP20 10MM RGB 12W LED Strip



Code	LED Colour	IP Rating	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34290	RGB	IP20	1000	11.52W p/m	60	SMD5050	10mm	>80	5m
ELA-34871									50m



1000
Lumens

12W
LED


IP65

3M
200MP

- 24V to avoid voltage drop on longer runs
- IP65 for use outdoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with RGB remote control & receiver (page .100)

5m
50m

IP65 10MM RGB 12W LED Strip



Code	LED Colour	IP Rating	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34291	RGB	IP65	1000	11.52W p/m	60	SMD5050	10mm	>80	5m
ELA-34872									50m





**1000
Lumens**

**19.2W
LED**

IP65


**3M
200MP**



- 24V to avoid voltage drop on longer runs
- IP65 for use outdoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with RGB/CCT remote control & receiver (page .100)

5m
50m

IP65 12MM RGB/CCT 19.2W LED Strip



Code	LED Colour	IP Rating	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34296	RGB/CCT	IP65	1000	19.2W p/m	60	SMD5050	12mm	>80	5m
ELA-34873									50m





915
Lumens

12W
LED

IP20


3M
9080A

5m
50m

- 24V to avoid voltage drop on longer runs
- IP20 for use indoor
- 3M self-adhesive backing
- Strips can be cut every 62.5mm
- More flexible than SMD LED strip
- Spot free lighting array
- Very high colour rendering index producing true light colour RA>90. RA90
- Dimmable with receiver (page .100)



COB IP20 8MM 12W LED Strip




Code	LED Colour	Kelvin	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-35750	Warm White	3000K	896	12W p/m	512	COB	8mm	>90	5m
ELA-35751	Cool White	4000K	934						50m
ELA-35752	Warm White	3000K	896						50m
ELA-35753	Cool White	4000K	934						50m

ALUMINIUM PROFILES



· Fits 8mm, 10mm & 12mm LED Strip

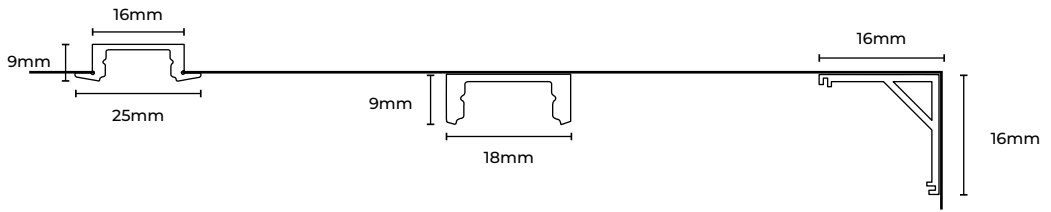

Recessed

Surface-mount

Corner



ELA-34308



ELA-34306



ELA-34307

Code	Description	Dimensions
ELA-34308	Aluminium Recessed Profile	L:2000mm W:25mm Proj:9mm
ELA-34306	Aluminium Surface-mount Profile	L:2000mm W:18mm Proj:9mm
ELA-34307	Aluminium 45° Corner Surface-mount Profile	L:2000mm W:16mm Proj:16mm

LED DRIVERS

Constant Voltage

ELA-36974



ELA-36975



ELA-34302



ELA-34301



ELA-34303



ELA-34300



ELA-34304



ELA-34305



Code	Description	Weight	Dimensions
ELA-36974	LED Driver Constant Voltage 24V 10W	-	-
ELA-36975	LED Driver Constant Voltage 24V 20W	-	-
ELA-34300	LED Driver Constant Voltage 24V 36W	0.13kg	H:48mm W:45mm L:140mm
ELA-34301	LED Driver Constant Voltage 24V 60W	0.17kg	H:20mm W:40mm L:140mm
ELA-34302	LED Driver Constant Voltage 24V 100W	0.24kg	H:28mm W:61mm L:178mm
ELA-34303	IP67 LED Driver Constant Voltage 24V 60W	0.42kg	H:30mm W:58mm L:200mm
ELA-34304	IP67 LED Driver Constant Voltage 24V 150W	0.81kg	H:58mm W:82mm L:260mm
ELA-34305	IP67 LED Driver Constant Voltage 24V 200W	0.81kg	H:58mm W:82mm L:260mm

LED RECEIVERS

Remote Control

ELA-34286



ELA-34287



- Remote and controller are RF (radio frequency) not IR (infra-red)
- Compatible with single colour LED strip
- Smooth dimming and switch without any flickering

- Remote and controller are RF (radio frequency) not IR (infra-red)
- Compatible with single colour/RGB/RGBW LED strip
- Smooth dimming and switch without any flickering



ELA-34292



ELA-34293

Code	Description	Dimensions
ELA-34286	1 Channel LED Receiver	H:20mm W:37mm L:115mm
ELA-34287	1 Zone Programmable Remote Control	H:9mm W:59mm L:107mm
ELA-34292	4 Channel RGB LED Receiver	H:20mm W:37mm L:115mm
ELA-34293	4 Zones Programmable RGB/W Remote Control	H:9mm W:59mm L:107mm

RGB/CCT Controller

- **Wi-Fi controller, Use Smartlife/Tuya App to control your strip through your phone**
- Kit includes Remote and controller
- RF(radio frequency) not IR (infra-red)
- Touch wheel for easy colour change
- RGB & CCT function
- Over 16 million colours to choose from
- Pre-set dynamic mode
- 0-100% brightness
- 30 meter control distance



Code	Description	Dimensions
ELA-38126	RGB/CCT LED Strip Controller & Remote Control	L:120mm W:44mm H:27mm

LED STRIP CONNECTORS

Solder Free

NEW
FOR
2023



ELA-41718



ELA-41719



ELA-41721



ELA-41720



ELA-41722



ELA-41723



ELA-41725



ELA-41724



ELA-41726



ELA-41727



ELA-41729



ELA-41728

Code	Description	Fits
ELA-41718	Wire To Strip Connector 2PIN 8MM PCB	8mm Strip
ELA-41719	Strip To Strip Connector Easy Fit 2PIN 8MM PCB	
ELA-41720	Strip To Wire to Strip Connector 2PIN 8MM PCB	
ELA-41721	Wire To Strip Connector Easy Fit 2PIN 8MM PCB	
ELA-41722	Wire To Strip Connector 4PIN 10MM PCB	10mm Strip
ELA-41723	Strip To Strip Connector Easy Fit 4PIN 10MM PCB	
ELA-41724	Strip To Wire To Strip Connector 4PIN 10MM PCB	
ELA-41725	Wire To Strip Connector Easy Fit 4PIN 10MM PCB	
ELA-41726	Wire To Strip Connector 6PIN 12MM PCB	12mm Strip
ELA-41727	Strip To Strip Connector Easy Fit 6PIN 12MM PCB	
ELA-41728	Strip To Wire To Strip Connector 6PIN 12MM PCB	
ELA-41729	Wire To Strip Connector Easy Fit 6PIN 12MM PCB	



NEW

**Upto
1700
Lumens**

CCT

**NO
DRIVER
REQ.**


Cool White

Natural White

Warm White

Ultra slim LED under cabinet lights ideal for kitchen, cabinet, cove lighting or other applications. Linkable end-to-end or using link leads available separately.

- White PC body with opal diffuser
- Switchable between 3000K/4000K/6000K
- ON/OFF rocker switch
- No driver required
- C7 cable type
- Supplied with 2m power lead
- Versatile and simple to install
- Can be mounted horizontally or vertically
- Energy efficient and long life

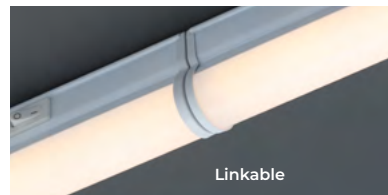


Linkable



BODHI

CCT Adjustable Under Cabinet Link Light



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Weight	Length	Dimensions
ELA-41712	Bodhi Link Light	5W LED	3 CCT	500	0.34kg	312mm	L:312mm W:22mm Proj:36mm
ELA-41713		9W LED	3 CCT	900	0.172kg	611mm	L:611mm W:22mm Proj:36mm
ELA-41714		14W LED	3 CCT	1300	0.210kg	911mm	L:911mm W:22mm Proj:36mm
ELA-41715		18W LED	3 CCT	1700	0.246kg	1210mm	L:1210mm W:22mm Proj:36mm
ELA-21665	Bodhi Link Lead 8 Type	-	-	-	0.30kg	500mm	Length: 500mm
ELA-21666		-	-	-	0.52kg	1000mm	Length: 1000mm

Upto
1200
Lumens

**NO
DRIVER
REQ.**



· 7mm clip



· 20mm clip

- Aluminium body with polycarbonate diffuser
- No driver required
- Available in 3000k/4000k/6000k
- Available in 5 different lengths
- Kit includes: 1 x light fitting, 2 x 7mm clips, 2 x 20mm clips, instructions and fixing kit
- Optional suspension kit available

RENO

LED Batten



Class 2

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Length	Dimensions
CUL-30700		30W LED	3000	2690	900mm	L:900mm W:75mm Proj:24mm
CUL-30702		40W LED	3000	3600	1200mm	L:1200mm W:75mm Proj:24mm
CUL-30699		20W LED	4000	1850	600mm	L:600mm W:75mm Proj:24mm
CUL-30701		30W LED	4000	2730	900mm	L:900mm W:75mm Proj:24mm
CUL-30703		40W LED	4000	3650	1200mm	L:1200mm W:75mm Proj:24mm

Upto
6900
Lumens

**NO
DRIVER
REQ.**



· 7mm clip



· 20mm clip

- Aluminium body with polycarbonate diffuser
- No driver required
- Available in 3000k/4000k/6000k
- Available in 5 different lengths
- Kit includes: 1 x light fitting, 2 x 7mm clips, 2 x 20mm clips, instructions and fixing kit
- Optional suspension kit available

RENO

LED Batten



Class 2

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Length	Dimensions
CUL-30704	Reno LED Batten	60W LED	3000	5200	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30707		80W LED	3000	6600	1800mm	L:1800mm W:75mm Proj:24mm
CUL-30705		60W LED	4000	5300	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30708		80W LED	4000	6700	1800mm	L:1800mm W:75mm Proj:24mm
CUL-30706		60W LED	6000	5500	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30709		80W LED	6000	6900	1800mm	L:1800mm W:75mm Proj:24mm



RENO

Suspension Kit


Code	Description	Dimensions
CUL-30710	Reno 1m Suspension Kit	L:1000mm
CUL-30711	Reno 2m Suspension Kit	L:2000mm

GAMMA LED T-GRID LIGHTING SOLUTIONS


The Gamma LED T-Grid is an innovative lighting product solution for T-Grid suspension ceilings. Engineered to work with 15mm, 24mm and 25mm T-Grid ceiling structures in order to minimise building materials and waste. Also helping reduce installation costs and improve ceiling appearance.

Works with different tile edges:

15mm T-Grid Bar




24mm T-Grid Bar




Remarkable installation savings:

Installation steps:

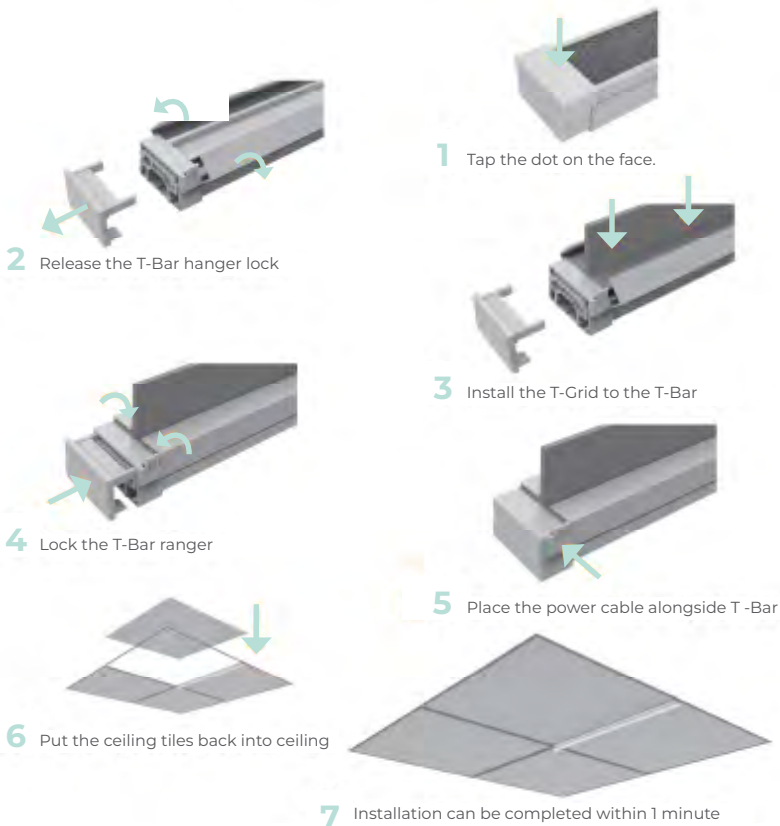

**Upto
3700
Lumens**

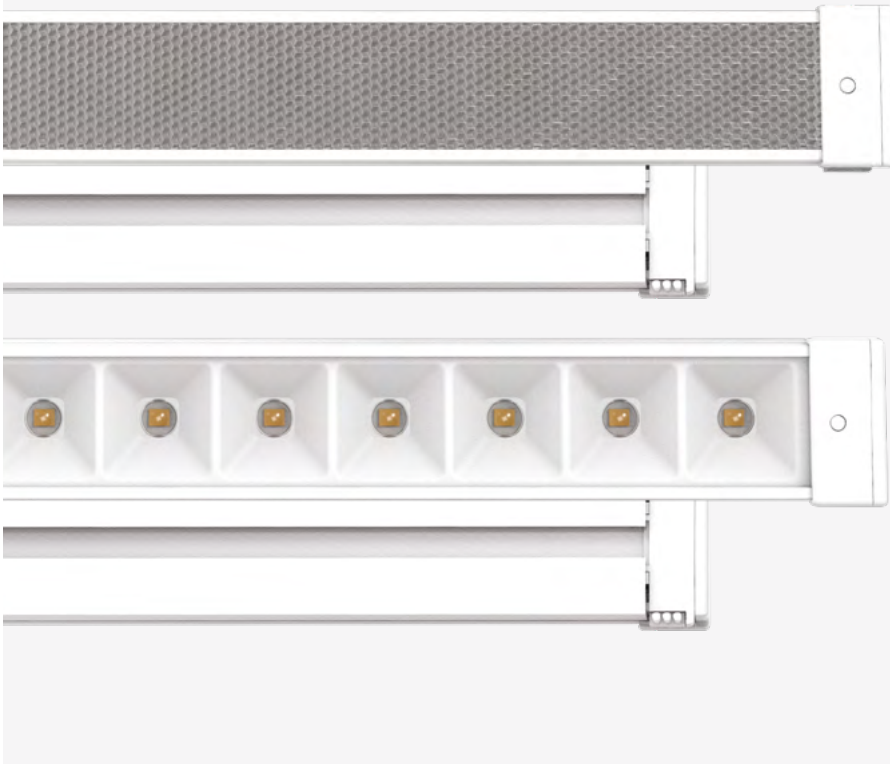

- An innovative lighting fixture that takes the place of LED panels
- Engineered to work with 15mm , 24mm & 25mm T-Grid ceilings
- Simple to install (Up to 60% faster Installation)
- Reduces installation costs
- Even light distribution
- Improves ceiling appearance



GAMMA

LED T-Grid Lighting



Code	Description	PCS	Finish	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Length
ELA-35745	14W T-Grid Kit with Driver	2 Pack	Lens	4000k	1764	126	>80	580mm
ELA-35743	15W T-Grid Kit with Driver	2 Pack	Prismatic	4000k	1545	103	>80	
ELA-35746	28W T-Grid Kit with Driver	1 Pack	Lens	4000k	3696	132	>80	1180mm
ELA-35744	30W T-Grid Kit with Driver	1 Pack	Prismatic	4000k	2970	99	>80	



NEW

700
Lumens

IP65

FAST
FIT

CCT



- Dimmable
- Fire rated
- Fast fit terminals
- 7W LED module (COB)
- 3000/4000/6000K (CCT)

- Lm: 700
- Lm/W: 100
- CRI: 80
- Hrs: 50,000



EDEN

IP65 Tiltable Fire-rated Downlight



Code	Pack Size	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
SPA-41111-WHT	Single	White	7W	700	100	3 CCT	Dia:87mm H:30mm Cutout:70mm
SPA-41111-BLK		Black					
SPA-41111-CHR		Chrome					
SPA-41111-SBRS		Satin Brass					

NEW


**900
Lumens**

4 CCT

**FAST
FIT**





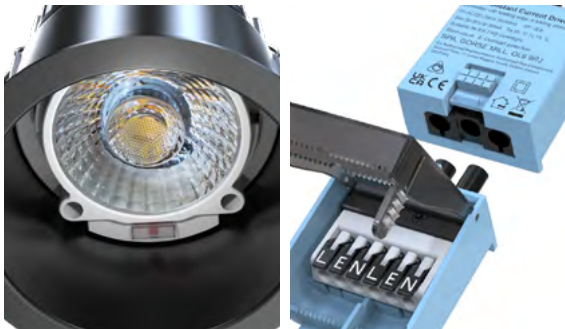




- Dimmable
- Fire rated
- Colour changing technology
- Switch between 2700K 3000K/4000K/6000K
- Fast fit terminals
- 8W LED module (COB)
- Lm: 900
- Lm/W: 112.5
- CRI: 80
- Hrs: 50,000
- Anti-glare reflector



JENN

Anti-glare Fire-rated Downlight

 Fire-rated |
  IP65 Rated |
  60° Beam |
  70mm Cut-out |
  CCT |
  Class 2 |
  0.286kg

Code	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
SPA-41112-BLK/WHT	Black/White	8W	900	112.5	4 CCT	Dia:84mm H:65mm Cutout:70mm

500
Lumens

IP65

FAST
FIT










- Dimmable
- Fire rated
- 30mm Super low profile
- Fast fit terminals
- Available in 7 finishes / 3 pack or single
- 5W LED module (SMD)
- K: 4000
- Lm: 500
- Lm/W: 100
- CRI: 80
- Hrs: 50,000



COMO

IP65 Tiltable Fire-rated Downlight

 Fire-rated |
  IP65 Rated |
  60° Beam |
  70mm Cut-out |
  4000K CW |
  Class 2 |
  0.15kg

Code	Pack Size	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
SPA-38570/38571-ACOP	3 Pack/ Single	Antique Copper	5W	500	100	4000	Dia:87mm H:30mm Cutout:70mm
SPA-38570/38571-BCHR		Black Chrome					
SPA-38570/38571-CHR		Chrome					
SPA-38570/38571-MWHT		Matt White					
SPA-38570/38571-SBLK		Satin Black					
SPA-38570/38571-SBR5		Satin Brass					
SPA-38570/38571-SNIC		Satin nickel					



900
Lumens

CCT

FAST
FIT

- Dimmable
- Fire rated
- Colour changing technology
- Switch between 3000K/4000K/6000K
- Fast fit terminals
- Available in 7 finishes
- 8W LED module (SMD)
- Lm: 900
- Lm/W: 112.5
- CRI: 80
- Hrs: 50,000



RHOM

IP65 Fixed Fire-rated Downlight



Code	Pack Size	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
SPA-38572-ACOP	Single	Antique Copper	8W	900	112.5	CCT	Dia:87mm H:65mm Cutout:70mm
SPA-38572-BCHR		Black Chrome					
SPA-38572-CHR		Chrome					
SPA-38572-MWHT		Matt White					
SPA-38572-SBLK		Satin Black					
SPA-38572-SBRS		Satin Brass					
SPA-38572-SNIC		Satin nickel					

**FAST
FIT**



- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes

- Fast-fit connector box

YATE

Adjustable Fire Rated Downlight



Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27466-WHT	White	IP20	1 x 7W max LED GU10	Ø85mm	Dia:93mm Proj:120mm H:135mm
ELA-27466-CHR	Chrome				
ELA-27466-BCHR	Black Chrome				
ELA-27466-SCHR	Satin Chrome				
ELA-27466-MBLK	Matt Black				
ELA-27466-SBRS	Satin Brass				

**FAST
FIT**




- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes

- Fast-fit connector box

YATE

Fixed Fire Rated Downlight



Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27465-WHT	White	IP20	1 x 7W max LED GU10	Ø72mm	Dia:80mm Proj:115mm H:135mm
ELA-27465-CHR	Chrome				
ELA-27465-BCHR	Black Chrome				
ELA-27465-SCHR	Satin Chrome				
ELA-27465-MBLK	Matt Black				
ELA-27465-SBRS	Satin Brass				

**FAST
FIT**

IP65




- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes

• Fast-fit connector box

YATE

Fixed IP65 Fire Rated Downlight



Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27467-WHT	White	IP65	1 x 7W max LED GU10	Ø85mm	Dia:80mm Proj:115mm H:125mm
ELA-27467-CHR	Chrome				
ELA-27467-BCHR	Black Chrome				
ELA-27467-SCHR	Satin Chrome				
ELA-27467-MBLK	Matt Black				
ELA-27467-SBRS	Satin Brass				



BATHROOM

A beautiful range of decorative lighting and mirrors, designed to brighten any bathroom.

CEILING/WALL	216-258
SPOTLIGHTS	259-261
FLUSH	262-268
RECESSED	269-277
WALL	278-282
MIRRORS	283-293
SMART TOILETS	294-295

NEW
FOR
2023

IP44



- Stainless steel and glass construction
- Available in 3 finishes
- Ceiling cup fits into recess at top of shade to enable fitting to be used as a semi-flush

TULIP

Glass Pendant/Semi-Flush



IP44
Rated



Class 2



1.4kg

Code	Finish	Description	Lamp	Dimensions
SPA-41223-CHR	Chrome	Bryn Glass Tulip Pendant	1 x 10W max LED E27 GLS	Max Height: 1295mm Min Height: 295mm Dia:205mm
SPA-41224-SBRS	Satin Brass	Rhys Glass Tulip Pendant		
SPA-41225-SBLK	Satin Black	Dylan Glass Tulip Pendant		

NEW
FOR
2023

900
Lumens

IP44



- Steel construction with opal glass shade
- Available in 3 finishes
- 12W LED module (SMD)
- Lm/W: 75
- CRI: 80



OPIE

LED Glass Dome Flush



IP44
Rated



4000K
CW



Class 1




1.3kg


Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-41694-MBLK	Matt Black	Opie LED Glass Dome Flush	12W	4000k	900	H:110mm Dia:300mm
SPA-41694-CHR	Chrome					
SPA-41694-SNIC	Satin Nickel					

280
Lumens

IP44

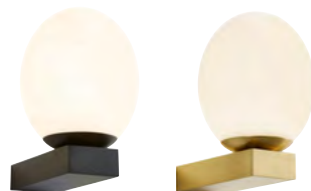

- Aluminium construction with opal glass shade
- Available in 3 finishes
- 3W LED module (SMD)
- Lm/W: 93
- CRI: 80



AGIOS

LED Bathroom Wall Light



IP44
Rated



Non
Dimmable



4000K
CW



Class 1



0.6kg




Available in
3 colour options

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-38573-TBLK	Textured Black	Agios Bathroom Wall Light	3W	4000k	280	H:190mm W:130mm Proj:180mm
SPA-38573-CHR	Chrome					
SPA-38573-SBRS	Satin Brass					

IP44



- Contemporary bathroom wall light
- Available in 3 finishes



THIVA

Bathroom Wall Light



IP44
Rated



Class 1



0.5kg



Available in
3 colour options


Code	Finish	Description	Lamp	Dimensions
SPA-38576-TBLK	Textured Black	Thiva Bathroom Wall Light	1 x 3W max LED G9	H:167mm W:160mm Proj:167mm
SPA-38576-CHR	Chrome			
SPA-38576-SBRS	Satin Brass			



400 Lumens

IP44

- Crackle effect diffuser
- 5W LED module (SMD)
- Lm/W: 80
- CRI: 80



RHODES

LED Bathroom Wall Light




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36300-CHR	Chrome	Rhodes LED Wall Light	5W	4000k	400	H:220mm W:100mm Proj:140mm



800 Lumens

IP44

- Crackle effect diffuser
- 10W LED module (SMD)
- K: 4000
- Lm: 800
- Lm/W: 80
- CRI: 80

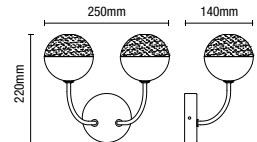

RHODES


LED Bathroom 2 Light Wall Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36301-CHR	Chrome	Rhodes LED 2 Light Wall Light	10W	4000k	800	H:220mm W:250mm Proj:140mm

500
Lumens

IP44



· Matching ceiling lights available


EDESSA LED Wall Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36309-CHR	Chrome	Edessa LED 2 Light Wall Light	10W	4000k	500	H:320mm W:225mm Proj:50mm

Upto
1200
Lumens

IP44

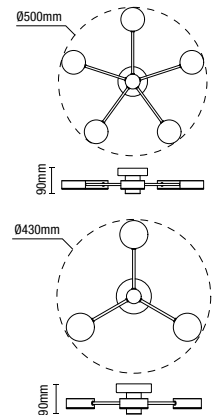

· Matching wall light available


EDESSA LED Ceiling Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions	Weight
SPA-36310-CHR	Chrome	Edessa 3 Light Ceiling Light	15W	4000k	800	H:90mm Dia:430mm	0.7kg
SPA-36311-CHR	Chrome	Edessa 5 Light Ceiling Light	25W	4000k	1200	H:90mm Dia:500mm	1kg




Upto
1400 Lumens
IP44

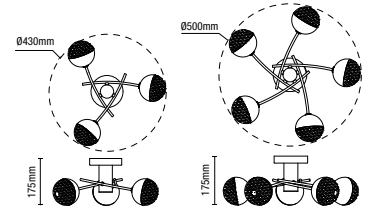

- Crackle effect diffuser
- Matching wall light available

RHODES


LED Ceiling Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions	Weight
SPA-36302-CHR	Chrome	Rhodes 3 Light Ceiling Light	15W	4000k	900	H:175mm Dia:430mm	1.15kg
SPA-36303-CHR	Chrome	Rhodes 5 Light Ceiling Light	24W	4000k	1400	H:175mm Dia:500mm	1.55kg




IP44

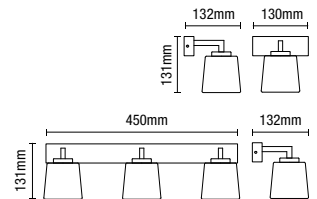

- Contemporary bathroom wall light
- Steel construction with glass opal shades

PARGA

Bathroom Wall Light




Code	Finish	Description	Lamp	Dimensions	Weight
SPA-38574-CHR	Chrome	Parga 1 Light Wall Light	1 x 3W max LED G9	H:131mm W:130mm Proj:132mm	0.35kg
SPA-38575-CHR	Chrome	Parga 3 Light Wall Light	3 x 3W max LED G9	H:131mm W:450mm Proj:132mm	1.05kg

IP44



- Contemporary bathroom wall light
- Diamond cut glass designed shades



VOLOS

Wall Light




Code	Finish	Description	Lamp	Dimensions
SPA-35808-CHR	Chrome	Volos 2 Light Wall Light	2 x 3W max LED G9	H:330mm W:150mm Proj:105mm

IP44



- Contemporary bathroom ceiling light
- Diamond cut glass designed shades

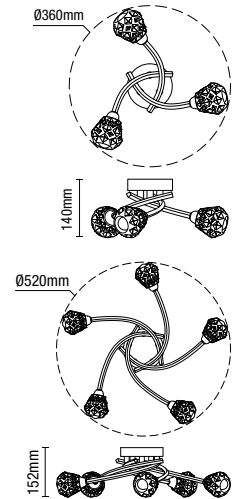

VOLOS


Ceiling Light



Code	Finish	Description	Lamp	Dimensions	Weight
SPA-35782-CHR	Chrome	Volos 3 Light Ceiling Light	3 x 3W max LED G9	H:140mm Dia:360mm	1.15kg
SPA-35783-CHR	Chrome	Volos 5 Light Ceiling Light	5 x 3W max LED G9	H:152mm Dia:520mm	2.05kg



IP44



- Available in satin brass/champagne glass or chrome/smoked glass

PATRAS

3 Light Plate Ceiling Light



IP44
Rated



Class 2




1.05kg

Code	Finish	Description	Lamp	Dimensions
SPA-35809-CHAMP	Satin Brass/Champagne	Patras 3 Light Plate Ceiling Light	3 x 3W max LED G9	H:115mm Dia:230mm
SPA-35809-CHR	Chrome/Smoke			



IP44

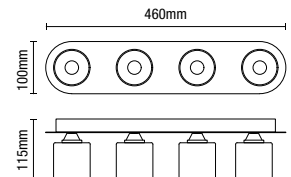

- Available in satin brass/champagne glass or chrome/smoked glass

PATRAS

4 Light Bar Ceiling Light



IP44
Rated




Class 2



1.35kg

Code	Finish	Description	Lamp	Dimensions
SPA-35810-CHAMP	Satin Brass/Champagne	Patras 4 Light Bar Ceiling Light	4 x 3W max LED G9	H:115mm W:460mm Proj:100mm
SPA-35810-CHR	Chrome/Smoke			

IP44



- Available in satin brass/champagne glass or chrome/smoked glass


PATRAS

1 Light Wall Light



Code	Finish	Description	Lamp	Dimensions
SPA-35811-CHAMP	Satin Brass/Champagne	Patras 1 Light Wall Light	1 x 3W max LED G9	H:185mm W:110mm Proj:135mm
SPA-35811-CHR	Chrome/Smoke			

IP44

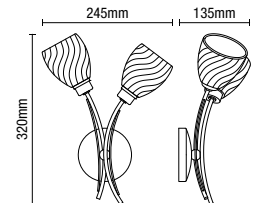

- Twisted style glass shades
- Available in satin brass or chrome

VERIA

2 Light Wall Light




Code	Finish	Description	Lamp	Dimensions
SPA-35830-SBRS	Satin Brass/Clear	Veria 2 Light Wall Light	2 x 3W max LED G9	H:320mm W:245mm Proj:135mm
SPA-35830-CHR	Chrome/Smoke			

IP44



- Twisted style glass shades
- Available in satin brass or chrome



VERIA

3 Light Ceiling Light




Code	Finish	Description	Lamp	Dimensions
SPA-35828-SBRS	Satin Brass/Clear	Veria 3 Light Ceiling Light	3 x 3W max LED G9	H:170mm Dia:390mm
SPA-35828-CHR	Chrome/Smoke			

IP44



- Twisted style glass shades
- Available in satin brass or chrome




VERIA

5 Light Ceiling Light



Code	Finish	Description	Lamp	Dimensions
SPA-35829-SBRS	Satin Brass/Clear	Veria 5 Light Ceiling Light	3 x 3W max LED G9	H:195mm Dia:480mm
SPA-35829-CHR	Chrome/Smoke			

IP44



• Available in chrome or satin brass


LINDOS

3 Light Ceiling Light



Code	Finish	Description	Lamp	Dimensions
SPA-35836-CHR	Chrome/Smoke	Lindos 3 Light Ceiling Light	3 x 3W max LED G9	H:265mm Dia:390mm
SPA-35836-SBRS	Satin Brass/Opal			

IP44



• Available in chrome or satin brass

LINDOS

5 Light Ceiling Light




Code	Finish	Description	Lamp	Dimensions
SPA-35837-CHR	Chrome/Smoke	Lindos 5 Light Ceiling Light	5 x 3W max LED G9	H:275mm Dia:465mm
SPA-35837-SBRS	Satin Brass/Opal			

IP44



• Available in chrome or satin brass




LINDOS

2 Light Wall Light

IP44 Rated | Class 1 | 0.4kg

Code	Finish	Description	Lamp	Dimensions
SPA-35838-CHR	Chrome/Smoke	Lindos 2 Light Wall Light	2 x 3W max LED G9	H:325mm W:210mm Proj:120mm
SPA-35838-SBRS	Satin Brass/Opal			


IP44



- Chrome finish with clear or smoke glass shades
- Decorative crystal style glass droplets


MEGARA

3 Light Ceiling Light



Code	Finish	Description	Lamp	Dimensions
SPA-35840-CLR	Chrome/Clear	Megara 3 Light Ceiling Light	3 x 3W max LED G9	H:126mm Dia:320mm
SPA-35840-SMK	Chrome/Smoke			


IP44



- Chrome finish with clear or smoke glass shades
- Decorative crystal style glass droplets

MEGARA

5 Light Ceiling Light




Code	Finish	Description	Lamp	Dimensions
SPA-35841-CLR	Chrome/Clear	Megara 5 Light Ceiling Light	5 x 3W max LED G9	H:126mm Dia:350mm
SPA-35841-SMK	Chrome/Smoke			



IP44

- Chrome finish with clear or smoke glass shades
- Decorative crystal style glass droplets



MEGARA

2 Light Cloche Ceiling Light


IP44 Rated
 Class 2
 1.3kg

Code	Finish	Description	Lamp	Dimensions
SPA-35839-CLR	Chrome/Clear	Megara 2 Light Cloche Ceiling Light	2 x 3W max LED G9	H:250mm Dia:200mm
SPA-35839-SMK	Chrome/Smoke			



IP44

- Available in chrome or satin brass



SPARTI

Wall Light

IP44 Rated
 Class 2
 0.6kg


Code	Finish	Description	Lamp	Dimensions
SPA-35843-CHR	Chrome	Sparti Wall Light	1 x 3W max LED G9	H:270mm W:110mm Proj:120mm
SPA-35843-SBRS	Satin Brass			

900
Lumens

IP44



- 26W LED module (SMD)
- Lm/W: 34
- CRI: 80



CHIOS

LED Ceiling Light



IP44
Rated



Non
Dimmable



4000K
CW




Class 2




0.8kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36129-CHR	Chrome	Chios LED Ceiling Light	26W	4000k	900	H:56mm Dia:400mm

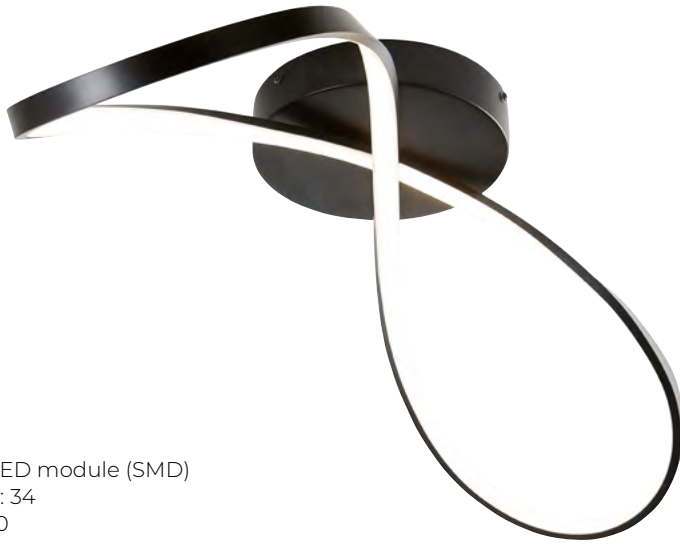

**1000
Lumens**

IP44

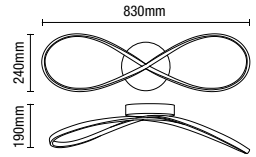

- 32W LED module (SMD)
- Lm/W: 34
- CRI: 80

DAFNI LED Ceiling Light



IP44
Rated



Non
Dimmable



4000K
CW



Class 2



1.2kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36130-MBLK	Matt Black	Dafni LED Ceiling Light	32W	4000k	1100	H:190mm W:830mm Proj:240mm



**400
Lumens**

IP44

- 11W LED module (SMD)
- Lm/W: 36
- CRI: 80

MANDRA LED Ceiling Light



IP44
Rated



Non
Dimmable



4000K
CW



Class 2




0.6kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36140-CHR	Chrome	Mandra LED Ceiling Light	11W	4000k	400	H:130mm Dia:340mm



IP44

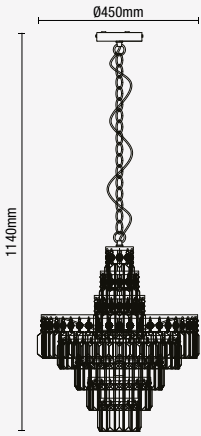

- Chrome finish
- Decorative chiselled glass droplets

BELLE

4 Light Chandelier




Code	Description	Lamp	Dimensions
SPA-24677-CHR	Belle 4 Light Chandelier	4 x 3W max LED C9	H:1140mm Dia:450mm

IP44



- Chrome finish
- Decorative chiselled glass droplets

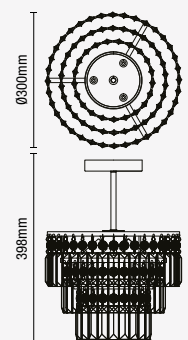

BELLE

3 Light Semi Flush



Code	Description	Lamp	Dimensions
SPA-24678-CHR	Belle 3 Light Semi-flush	3 x 3W max LED C9	H:398mm Dia:300mm

IP44



- Chrome finish
- Clear crystal shades
- Adjustable chain length

PEGASI

9 Light Chandelier



Code	Description	Lamp	Dimensions
SPA-33929-CHR	Pegasi 9 Light Chandelier	9 x 3W max LED C9	H:1200mm Dia:550mm



IP44



- Chrome finish
- Clear crystal shades

PEGASI

5 Light Flush Chandelier


IP44
Rated



Class 1

Code	Description	Lamp	Weight	Dimensions
SPA-33930-CHR	Pegasi 5 Light Flush	5 x 3W max LED G9	3.58kg	H:390mm Dia:480mm

IP44



- Chrome finish
- Clear crystal shades




PEGASI

3 Light Flush Chandelier




Code	Description	Lamp	Dimensions
SPA-33974-CHR	Pegasi 3 Light Semi-flush	3 x 3W max LED G9	H:370mm Dia:460mm

IP44

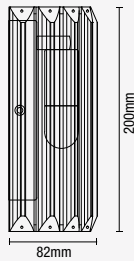

SPA-33931-CHR



SPA-33932-CHR

- Chrome finish
- Clear crystal shades

PEGASI

Wall Light


IP44
Rated


Class 1

Code	Description	Lamp	Weight	Dimensions
SPA-33931-CHR	Pegasi Shield Wall Light	1 x 3W max LED G9	1.25kg	H:200mm W:160mm Proj:82mm
SPA-33932-CHR	Pegasi Wall Light	1 x 3W max LED G9	0.77kg	H:195mm W:110mm Proj:175mm



IP44



- Clear glass crystal droplets
- Available in chrome & brass

VELA

9 Light Chandelier



IP44
Rated




Class 1



6.4kg

Code	Finish	Description	Lamp	Dimensions
SPA-19714-CHR	Chrome	Vela 9 Light Chandelier	9 x 3W max LED G9	H:1060mm Dia:580mm
SPA-19714-BRS	Brass			

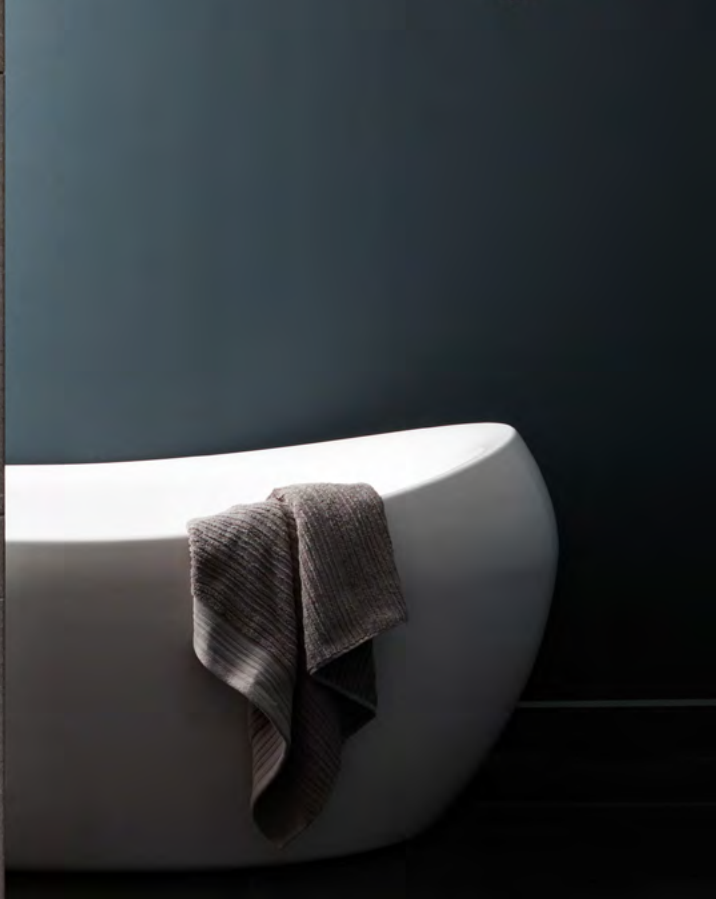

IP44



- Clear glass crystal droplets
- Available in chrome & brass

VELA

Flush Chandelier



IP44
Rated




Class 1



KG
3.9kg

Code	Finish	Description	Lamp	Dimensions
SPA-19713-CHR	Chrome	Vela 5 Light Flush	5 x 3W max LED G9	H:620mm Dia:500mm
SPA-19713-BRS	Brass			

IP44

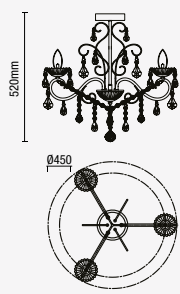

- Clear glass crystal droplets
- Available in chrome & brass


VELA

Flush Chandelier

 IP44 Rated
 Class 1
 2.6kg

Code	Finish	Description	Lamp	Dimensions
SPA-20182-CHR	Chrome	Vela 3 Light Flush	3 x 3W max LED G9	H:520mm Dia:450mm
SPA-20182-BRS	Brass			

IP44

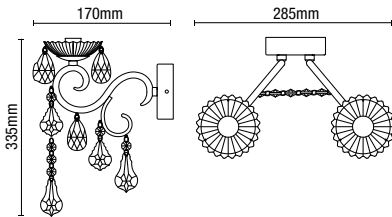

- Clear glass crystal droplets
- Available in chrome & brass



VELA Wall Light




Code	Finish	Description	Lamp	Dimensions
SPA-20831-CHR	Chrome	Vela Wall Light	2 x 3W max LED G9	Proj:170mm W:285mm H:335mm
SPA-20831-BRS	Brass			

3
SIZES
AVAILABLE

IP44



- Clear glass crystal droplets
- Available in chrome & brass

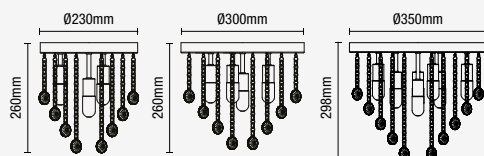

CELESTE

Flush



IP44
Rated



Class 1

Code	Finish	Description	Lamp	Dimensions
SPA-24869-CHR	Chrome	Celeste 4 Light Flush	4 x 3W max LED G9	H:260mm Dia:230mm
SPA-24870-CHR		Celeste 6 Light Flush	6 x 3W max LED G9	H:260mm Dia:300mm
SPA-24871-CHR		Celeste 9 Light Flush	9 x 3W max LED G9	H:298mm Dia:350mm
SPA-24870-BRS	Brass	Celeste 6 Light Flush	6 x 3W max LED G9	H:260mm Dia:300mm
SPA-24871-BRS		Celeste 9 Light Flush	9 x 3W max LED G9	H:298mm Dia:350mm

2
SIZES
AVAILABLE

IP44



- Clear glass crystal droplets
- Available in chrome & brass

ORLANDO

Flush



Code	Finish	Description	Lamp	Weight	Dimensions
SPA-24468-CHR	Chrome	Orlando 4 Lt Flush	4 x 3W max LED G9	2.36kg	L:230mm W:230mm H:189mm
SPA-24468-BRS	Brass				
SPA-24467-BRS	Brass	Orlando 5 Lt Flush	5 x 3W max LED G9	4kg	L:300mm W:300mm H:227mm



IP44



- Chrome finish
- Bulb covers

REENA


Ceiling/Wall Light

 IP44
Rated  Class 1

Code	Description	Lamp	Weight	Dimensions
SPA-28327-CHR	Reena 6 Light Flush	6 x 3W max LED G9	4.4kg	H:220mm Dia:660mm
SPA-28326-CHR	Reena 3 Light Flush	3 x 3W max LED G9	1.7kg	H:190mm Dia:410mm
SPA-29195-CHR	Reena Wall Light	2 x 3W max LED G9	1.0kg	Proj:138mm W:270mm H:140mm



IP44

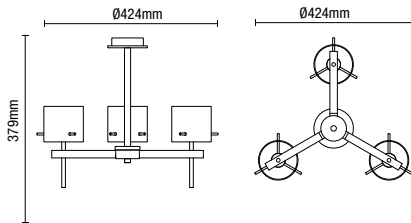

- Glass cylinder shade
- Bulb covers for use in bathroom
- Matching items available
- Available in chrome & satin brass



GENE Ceiling Light

 IP44 Rated
 Class 1
 1.58kg

Code	Finish	Description	Lamp	Dimensions
SPA-31726-CHR	Chrome	Gene Cylinder Ceiling Light	3 x 3W max LED G9	H:379mm Dia:424mm
SPA-31726-SATBRS	Satin Brass			



IP44



- Glass cylinder shade
- Bulb covers for use in bathroom
- Matching items available
- Available in chrome & satin brass

GENE Wall Light



IP44
Rated




Class 1



0.55kg

Code	Finish	Description	Lamp	Dimensions
SPA-31725-CHR	Chrome	Gene Cylinder Wall Light	1 x 3W max LED G9	H:205mm W:100mm Proj:165mm
SPA-31725-SATBRS	Satin Brass			

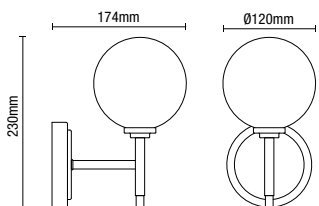

- Opal glass shade
- Matching items available
- Available in 3 finishes



IP44

PORTO

Wall Light



IP44
Rated


Class 1

0.58kg

Code	Finish	Description	Lamp	Dimensions
SPA-31306-CHR	Chrome	Porto 1 Light Wall Light	1 x 3W max LED G9	H:230mm W:120mm Proj:174mm
SPA-31306-MBLK	Matt Black			
SPA-31306-SBRS	Brass			

350
Lumens

IP44

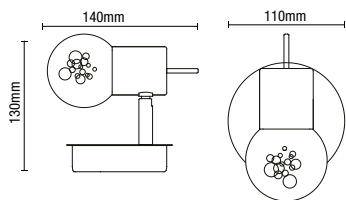

- 5W LED module (SMD)
- Lm/W: 70
- CRI: 80
- Hrs: 20,000



BUBBLE

LED Spotlight



IP44
Rated


4000K
CW

Class 1

0.56kg


Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-30781-CHR	Bubble LED Spotlight	5W	3000k	350	70	Proj:140mm W:110mm H:130mm

IP44

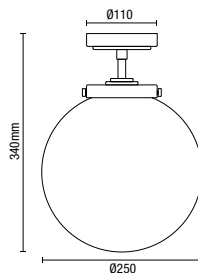



- Opal glass shade
- Matching items available
- Available in 3 finishes

PORTO Semi Flush



Code	Finish	Description	Lamp	Dimensions
SPA-31309-CHR	Chrome	Porto 1 Light Semi-Flush	1 x 10W max LED E27 GLS	H:340mm Dia:250mm
SPA-31309-MBLK	Matt Black			
SPA-31309-SBRS	Brass			

IP44

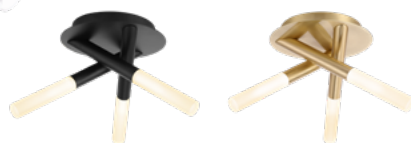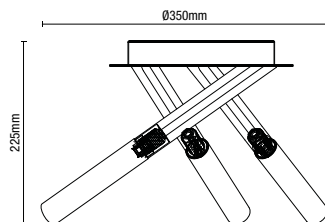


- Decorative tubular shades
- Available in 3 finishes

CRUX 3 Light Ceiling Fitting



Code	Finish	Description	Lamp	Dimensions
SPA-20829-CHR	Chrome	Crux 3 Light Ceiling Fitting	3 x 3W max LED G9	H:225mm Dia:350mm
SPA-20829-MBLK	Matt Black			
SPA-20829-SATBRS	Satin Brass			

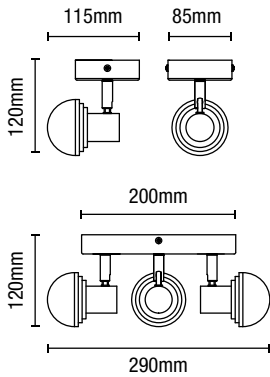

IP44

**Upto
960
Lumens**




- 5W LED module (SMD) per head
- Lm/W: 64
- CRI: 80
- Hrs: 20,000
- Single spot can be wall or ceiling mounted

MILAN LED Spotlight



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31733-CHR	Milan 3 Light Spotlight	15W	3000k	960	64	L:255mm W:290mm H:120mm
SPA-31732-CHR	Milan Single Spotlight	5W	3000k	320	64	Proj:115mm W:85mm H:120mm

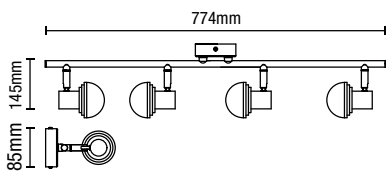

IP44

**1280
Lumens**

- 4 x 5W LED module (SMD)
- Lm/W: 64
- CRI: 80
- Hrs: 20,000


MILAN LED 4 Light Bar Spotlight



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31734-CHR	Milan 4 Light Bar Spotlight	20W	3000k	1280	64	L:774mm W:85mm H:145mm

900
Lumens

IP44

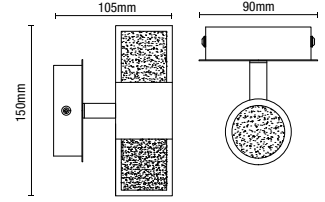

- 10W LED module (SMD)
- Lm/W: 64
- CRI: 80
- Hrs: 20,000

OSLO

Crackle LED Spotlight



IP44
Rated



3000K
WW



Class 1




0.45kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31730	Oslo Wall Light	10W	3000k	740	90	H:150mm W:90mm Proj:105mm

3600
Lumens

IP44

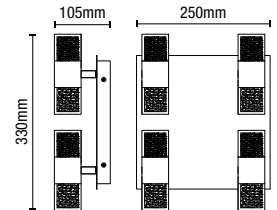

- 40W LED module (SMD)
- Lm/W: 45
- CRI: 80
- Hrs: 20,000

OSLO

Crackle LED 4 Light Spotlight



IP44
Rated



3000K
WW




Class 1



2.25kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31731	Oslo 8 Ceiling Fitting	40W	3000k	1800	90	H:105mm W:250mm L:330mm



1100
Lumens

IP44


- 15W LED module (SMD)
- Lm/W: 74
- CRI: 80
- Hrs: 20,000

FELIX

Bubble LED 3 Light Spotlight



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31735-CHR	Felix 3 Light Bubble Spotlight	15W	4000k	1100	74	H:115mm Dia:200mm

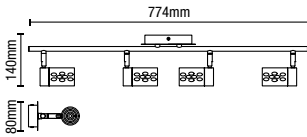

1480
Lumens

IP44

- 20W LED module (SMD)
- Lm/W: 74
- CRI: 80
- Hrs: 20,000

FELIX


Bubble LED 4 Light Spotlight



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31780-CHR	Felix Bubble 4 Light Bar	20W	4000k	1480	74	L:774mm W:80mm H:140mm


1350
Lumens

IP44

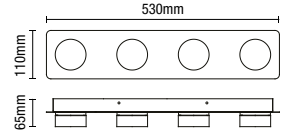

- Chrome finish with opal acrylic diffusers
- 20W LED module (SMD)
- Lm/W: 67
- CRI: 80
- Hrs: 20,000


AMALFI LED 4 Light Bar



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31737-CHR	Amalfi 4 Light Bar	20W	4000k	1350	67	L:530mm W:110mm H:65mm


950
Lumens

IP44




- Chrome finish with opal acrylic diffusers
- 15W LED module (SMD)
- Lm/W: 63
- CRI: 80
- Hrs: 20,000

AMALFI LED 3 Light Flush



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31736-CHR	Amalfi 3 Light Flush	15W	4000k	950	63	H:65mm Dia:250mm

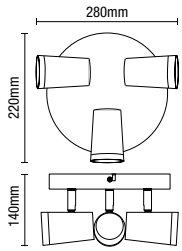

IP44

- Chrome finish
- Directable spotlights

FREYA

3 Light Spotlight



Code	Description	Lamp	Dimensions
SPA-35080-CHR	Freya 3 Light Spotlight	3 x 7W max LED GU10	H:140mm W:280mm L:220mm

IP44



- Chrome finish
- Directable spotlights

FREYA

4 Light Bar Spotlight




Code	Description	Lamp	Dimensions
SPA-35081-CHR	Freya 4 Light Bar Spotlight	4 x 7W max LED GU10	H:140mm W:620mm L:80mm




IP44

- Available in 3 finishes
- Directable spotlights

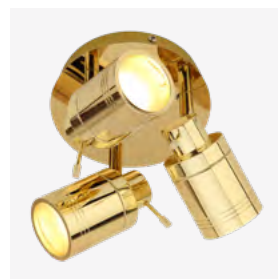

SCORPIUS

3 Light Spotlight





Code	Description	Finish	Lamp	Dimensions
SPA-27405-CHR	Scorpius 3 Light Spotlight	Chrome	3 x 7W max LED GU10	H:140mm W:220mm L:280mm
SPA-27405-MBLK	Scorpius 3 Light Spotlight	Matt Black	3 x 7W max LED GU10	H:140mm W:220mm L:280mm
SPA-27405-BRS	Scorpius 3 Light Spotlight	Brass	3 x 7W max LED GU10	H:140mm W:220mm L:280mm

IP44



- Available in 3 finishes
- Directable spotlights

SCORPIUS

4 Light Bar Spotlight



Code	Finish	Description	Lamp	Dimensions
SPA-22560-CHR	Chrome	Scorpius 4 Light Bar Spotlight	4 x 7W max LED GU10	L:620mm W:80mm H:140mm
SPA-22560-MBLK	Matt Black			
SPA-22560-BRS	Brass			

Upto
900
Lumens

IP44

2
SIZES
AVAILABLE



- Glass opal diffuser
- Stylish & practical ceiling flush
- Available in 2 sizes & 4 colour options

Small - 180mm

- 12W LED module (SMD)
- K: 4000
- Lm: 600
- Lm/W: 50
- Hrs: 20,000

Large - 310mm

- 18W LED module (SMD)
- K: 4000
- Lm: 900
- Lm/W: 50
- Hrs: 20,000

DELPHI

LED Flush



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Dimensions
SPA-34046-CHR	Chrome	Delphi Small LED Flush	12W	4000k	600	50	>80	H:55mm Dia:180mm
SPA-34046-SNIC	Satin Nickel							
SPA-34046-BRS	Brass							
SPA-34046-SATBLK	Satin Black							
SPA-34047-CHR	Chrome	Delphi Large LED Flush	18W	4000k	900	50	>80	H:85mm Dia:310mm
SPA-34047-SNIC	Satin Nickel							
SPA-34047-BRS	Brass							
SPA-34047-SATBLK	Satin Black							



IP44

2
SIZES
AVAILABLE



- Glass opal diffuser
- Stylish & practical ceiling flush
- Available in 2 sizes & 4 colour options

DELPHI Flush



Code	Finish	Description	Lamp	Dimensions
SPA-34049-CHR	Chrome	Delphi Small Flush	1 x 6W max LED E14 Candle	H:55mm Dia:180mm
SPA-34049-SNIC	Satin Nickel			
SPA-34049-BRS	Brass			
SPA-34049-SATBLK	Satin Black			
SPA-34050-CHR	Chrome	Delphi Large Flush	2 x 10W max E27 CLS	H:85mm Dia:310mm
SPA-34050-SNIC	Satin Nickel			
SPA-34050-BRS	Brass			
SPA-34050-SATBLK	Satin Black			





**600
Lumens**



IP44



- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K



- Multi-role bracket and CCT switch

TAURI

6W LED Wall/Ceiling 5 in 1 Light



Code	Finish	Description	Lamp	Lumen	Weight	Dimensions
SPA-34008-WHT	White	Tauri LED Light	6W LED	600	0.3kg	H:15mm Dia:139mm
SPA-34010-SNIC	Satin Nickel	Tauri Magnetic Ring (Fits 6W model)	-	-	0.11kg	H:15mm Dia:139mm
SPA-34012-CHR	Chrome					
SPA-35711-SBLK	Satin Black					
SPA-35712-SBRS	Satin Brass					

1200
Lumens



IP44



- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K

- Multi-role bracket and CCT switch

TAURI

12W LED Wall/Ceiling 5 in 1 Light



55-125mm
Cut-out



IP44
Rated



CCT



Class 2

Code	Finish	Description	Lamp	Lumen	Weight	Dimensions
SPA-35709	White	Tauri LED Light	12W LED	1200	0.42kg	H:15mm Dia:164mm
SPA-35713	Satin Nickel	Tauri Magnetic Ring (Fits 12W model)	-	-	0.17kg	H:15mm Dia:164mm
SPA-35716	Chrome					
SPA-35714	Satin Black					
SPA-35715	Satin Brass					

1800
Lumens



IP44



- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K



- Multi-role bracket and CCT switch

TAURI

18W LED Wall/Ceiling 5 in 1 Light



55-175mm
Cut-out



IP44
Rated



CCT



Class 2

Code	Finish	Description	Lamp	Lumen	Weight	Dimensions
SPA-34009-WHT	White	Tauri LED Light	18W LED	1800	0.58kg	H:15mm Dia:217mm
SPA-34011-SNIC	Satin Nickel	Tauri Magnetic Ring (Fits 18W model)	-	-	0.21kg	H:15mm Dia:217mm
SPA-34013-CHR	Chrome					
SPA-35717	Satin Black					
SPA-35718	Satin Brass					



2400
Lumens



IP44



- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K

- Multi-role bracket and CCT switch

TAURI

24W LED Wall/Ceiling 5 in 1 Light



60-250mm
Cut-out



IP44
Rated



CCT



Class 2

Code	Finish	Description	Lamp	Lumen	Weight	Dimensions
SPA-35710	White	Tauri LED Light	24W LED	2400	0.66kg	H:15mm Dia:290mm
SPA-35719	Satin Nickel	Tauri Magnetic Ring (Fits 24W model)	-	-	0.27kg	H:15mm Dia:290mm
SPA-35722	Chrome					
SPA-35720	Satin Black					
SPA-35721	Satin Brass					

**FAST
FIT**

IP65




- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes

- Fast-fit connector box

YATE

Fixed IP65 Fire Rated Downlight



Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27467-WHT	White	IP65	1 x 7W max LED GU10	Ø85mm	Dia:80mm Proj:115mm H:125mm
ELA-27467-CHR	Chrome				
ELA-27467-BCHR	Black Chrome				
ELA-27467-SCHR	Satin Chrome				
ELA-27467-MBLK	Matt Black				
ELA-27467-SBRS	Satin Brass				

**FAST
FIT**



- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes

- Fast-fit connector box

YATE

Adjustable Fire Rated Downlight



Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27466-WHT	White	IP20	1 x 7W max LED GU10	Ø85mm	Dia:93mm Proj:120mm H:135mm
ELA-27466-CHR	Chrome				
ELA-27466-BCHR	Black Chrome				
ELA-27466-SCHR	Satin Chrome				
ELA-27466-MBLK	Matt Black				
ELA-27466-SBRS	Satin Brass				

**FAST
FIT**



- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes



- Fast-fit connector box

YATE

Fixed Fire Rated Downlight



Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27465-WHT	White	IP20	1 x 7W max LED GU10	Ø72mm	Dia:80mm Proj:115mm H:135mm
ELA-27465-CHR	Chrome				
ELA-27465-BCHR	Black Chrome				
ELA-27465-SCHR	Satin Chrome				
ELA-27465-MBLK	Matt Black				
ELA-27465-SBRS	Satin Brass				

NEW

700 Lumens

IP65

FAST FIT

CCT



- Dimmable
- Fire rated
- Fast fit terminals
- 7W LED module (COB)
- 3000/4000/6000K (CCT)

- Lm: 700
- Lm/W: 100
- CRI: 80
- Hrs: 50,000



EDEN

IP65 Tiltable Fire-rated Downlight



Code	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
SPA-41111-WHT	White	7W	700	100	3 CCT	Dia:87mm H:30mm Cutout:70mm
SPA-41111-BLK	Black					
SPA-41111-CHR	Chrome					
SPA-41111-SBRS	Satin Brass					

NEW

900 Lumens

4 CCT

FAST FIT










- Dimmable
- Fire rated
- Colour changing technology
- Switch between 2700K/3000K/4000K/6000K
- Fast fit terminals
- 8W LED module (COB)
- Lm: 900
- Lm/W: 112.5
- CRI: 80
- Hrs: 50,000
- Anti-glare reflector



JENN

Anti-glare Fire-rated Downlight

 Fire-rated |
  IP65 Rated |
  60° Beam |
  70mm Cut-out |
  CCT |
  Class 2 |
  0.286kg

Code	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
SPA-41112-BLK/WHT	Black/White	8W	900	112.5	4 CCT	Dia:84mm H:65mm Cutout:70mm

500
Lumens

IP65

FAST
FIT




- Dimmable
- Fire rated
- 30mm Super low profile
- Fast fit terminals
- Available in 7 finishes / 3 pack or single
- 5W LED module (SMD)
- K: 4000
- Lm: 500
- Lm/W: 100
- CRI: 80
- Hrs: 50,000



COMO


IP65 Tiltable Fire-rated Downlight



Code	Pack Size	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
SPA-38570/38571-ACOP	3 Pack/ Single	Antique Copper	5W	500	100	4000	Dia:87mm H:30mm Cutout:70mm
SPA-38570/38571-BCHR		Black Chrome					
SPA-38570/38571-CHR		Chrome					
SPA-38570/38571-MWHT		Matt White					
SPA-38570/38571-SBLK		Satin Black					
SPA-38570/38571-SBRS		Satin Brass					
SPA-38570/38571-SNIC		Satin nickel					




- Dimmable
- Fire rated
- Colour changing technology
- Switch between 3000K/4000K/6000K
- Fast fit terminals
- Available in 7 finishes
- 8W LED module (SMD)
- Lm: 900
- Lm/W: 112.5
- CRI: 80
- Hrs: 50,000

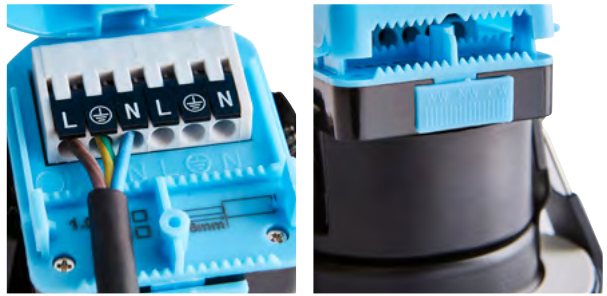

RHOM

IP65 Fixed Fire-rated Downlight



Code	Pack Size	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
SPA-38572-ACOP	Single	Antique Copper	8W	900	112.5	CCT	Dia:87mm H:65mm Cutout:70mm
SPA-38572-BCHR		Black Chrome					
SPA-38572-CHR		Chrome					
SPA-38572-MWHT		Matt White					
SPA-38572-SBLK		Satin Black					
SPA-38572-SBRS		Satin Brass					
SPA-38572-SNIC		Satin nickel					

IP65



Tilted



Fixed



- Die-cast aluminium with glass lens
- Adjustable tilt, max 40°
- Available in 6 finishes


CALI

Tiltable Downlight



Code	Description	Finish	Lamp	Dimensions
SPA-30841-BRCOP	Cali Tiltable Downlight	Brushed Copper	1 x 7W max LED GU10	Dia:92mm H:100mm Cutout:74mm
SPA-30841-MWHT		Matt White		
SPA-30841-MBLK		Matt Black		
SPA-30842-CHR		Chrome		
SPA-30842-SBRS		Satin Brass		
SPA-30842-SCHR		Satin Chrome		

IP65

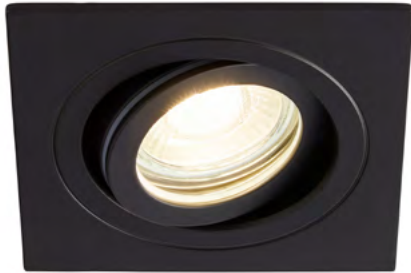


Tilted



Fixed



- Die-cast aluminium with glass lens
- Adjustable tilt, max 40°
- Available in 6 finishes

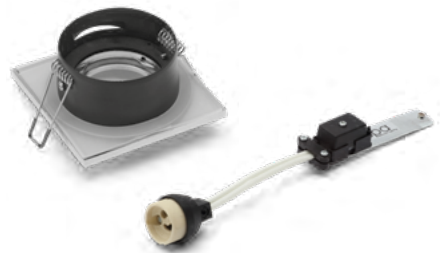

CALI

Square Tiltable Downlight



IP65
Rated



74mm
Cut-out



Class 2



0.17kg

Code	Description	Finish	Lamp	Dimensions
SPA-38577-BRCOP	Cali Square Tiltable Downlight	Brushed Copper	1 x 7W max LED GU10	L:82mm W:82mm H:100mm Cutout:74mm
SPA-35724-MWHT		Matt White		
SPA-35725-MBLK		Matt Black		
SPA-35727-CHR		Chrome		
SPA-35723-SBRS		Satin Brass		
SPA-35726-SCHR		Satin Chrome		

IP44



- Chrome finish
- Pull switch

ARIES

2 Light Wall Light



Code	Description	Lamp	Dimensions
SPA-PR12744-CHR	Aries 2 Light Wall Light	2 x 3W max LED G9	Proj:115mm W:360mm H:60mm

IP44



- Chrome finish
- Pull switch

AQUARIUS

Wall Light

IP44 Rated | Class 1 | 0.55kg

Code	Description	Lamp	Dimensions
SPA-PR17146-CHR	Aquarius Wall Light	1 x 3W max LED G9	Proj:180mm W:110mm H:220mm

395
Lumens

IP44



- Available in 4 finishes
- Pull Switch
- 8W LED module (SMD)
- K: 3000
- Lm: 395
- Lm/W: 70
- CRI: 80
- Hrs: 20,000



CHAI

Picture/Mirror Light



IP44
Rated



3000K
WW



Class 1



0.5kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-30993-CHR	Chrome	Chai Bathroom Picture/Mirror LED Light	8W	3000k	395	70	H:80mm W:40mm Proj:160mm
SPA-30993-SNIC	Satin Nickel						
SPA-30993-SATBRS	Satin Brass						
SPA-30993-MBLK	Matt Black						

IP44



- Available in chrome & satin brass
- Pull switch


CORVUS

Wall Light

 IP44 Rated
 Class 1
 0.5kg

Code	Finish	Description	Lamp	Dimensions
SPA-6888.014-CHR	Chrome	Corvus Wall Light	2 x 3W max LED G9	W:205mm H:105mm Proj:155mm
SPA-6888.014-SATBRS	Satin Brass			

IP44

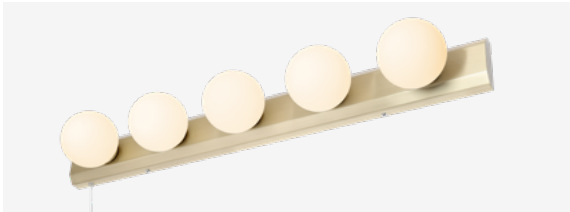

- Available in 3 finishes
- Pull switch

ARA

Hollywood 5 Light Bar Wall Light

IP44 Rated | Class 1 | 2kg

Code	Finish	Description	Lamp	Dimensions
SPA-PR13145-CHR	Chrome	Ara 5 Light Wall Light	5 x 3W max LED G9	W:680mm H:80mm Proj:110mm
SPA-PR13145-MBLK	Matt Black			
SPA-PR13145-SATBRS	Satin Brass			

356
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Rocker ON/OFF switch
- Integrated shaver socket
- Can be mounted landscape or portrait
- 12W LED module (SMD)
- K: 5000
- Lm: 356
- Lm/W: 29



ECTI

Illuminated Bathroom Mirror



Shaver
Socket



IP44
Rated



5000K
DW



Class 1



6.65kg

Code	Description	Lamp	Dimensions
SPA-34035	Ecti Illuminated Bathroom Mirror	12W LED	H:700mm W:500mm Proj:56mm

763
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Touch switch
- Can be mounted landscape or portrait
- 16W LED module (SMD)
- K: 5000
- Lm: 763
- Lm/W: 47



FLEC

Illuminated Bathroom Mirror



Demist
Pad



IP44
Rated



5000K
DW



Class 1




8.95kg

Code	Description	Lamp	Dimensions
SPA-34036	Flec Illuminated Bathroom Mirror	16W LED	H:800mm W:600mm Proj:33mm

504
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Touch switch
- Can be mounted landscape or portrait
- 18W LED module (SMD)
- K: 5000
- Lm: 504
- Lm/W: 18

REF

Illuminated Bathroom Mirror



Demist Pad



IP44 Rated



5000K DW



Class 1




6.3kg

Code	Description	Lamp	Dimensions
SPA-34037	Ref Illuminated Bathroom Mirror	18W LED	H:700mm W:500mm Proj:46mm

1337
Lumens

IP44

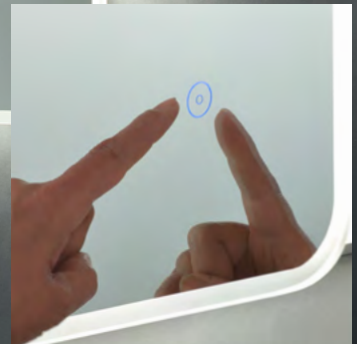

- Mirrored glass
- Bathroom Zone 2
- Touch switch
- Can be mounted landscape or portrait
- 22W LED module (SMD)
- K: 5000
- Lm: 1337
- Lm/W: 60

NOR

Illuminated Bathroom Mirror



Demist
Pad



IP44
Rated



5000K
DW



Class 1




6.7kg

Code	Description	Lamp	Dimensions
SPA-34038	Nor Illuminated Bathroom Mirror	22W LED	H:800mm W:600mm Proj:46mm

296
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Rocker ON/OFF switch
- Can be mounted landscape or portrait
- 8W LED module (SMD)
- K: 5000
- Lm: 296
- Lm/W: 60

ION

Illuminated Bathroom Mirror

IP44 Rated | 5000K DW | Class 1 | 3.7kg

Code	Description	Lamp	Dimensions
SPA-34039	Ion Illuminated Bathroom Mirror	8W LED	H:500mm W:400mm Proj:46mm





1690
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Touch sensor switch
- 12W LED module (SMD)
- K: 5000
- Lm: 1690
- Lm/W: 140

NYX Illuminated Bathroom Mirror



Touch
Switch



IP44
Rated



5000K
DW



Class 1



KG
6.9kg


Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Dimensions
SPA-35706	Nyx Illuminated Mirror	12W	5000k	1690	140	>80	Dia:600mm Proj:35mm





2190
Lumens

IP44



- Soft close hinged single door
- Door mirrored on both sides
- Adjustable height tempered glass shelves
- Touch sensor ON/OFF switch
- Demist pad & shaver socket
- 34W LED module (SMD)
- K: 5000
- Lm: 2190
- Lm/W: 64



ARTE

Illuminated Bathroom Mirror Cabinet




Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Dimensions
SPA-35707	Arte Illuminated Single Door Mirrored Cabinet	34W	5000k	2190	64	>80	W:500mm H:700mm Proj:130mm





2190 Lumens

IP44



- Soft close hinged double doors
- Door mirrored on both sides
- Adjustable height tempered glass shelves
- Touch sensor ON/OFF switch
- Demist pad & shaver socket
- 34W LED module (SMD)
- K: 5000
- Lm: 2500
- Lm/W: 73.5



HYM Illuminated Bathroom Mirror Cabinet



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Dimensions
SPA-35708	Hym Illuminated 2 Door Mirrored Cabinet	34W	5000k	2500	73.5	>80	W:600mm H:800mm Proj:130mm



IPX4

- Heated seat with five adjustable temperature settings
- Front and rear wash modes provide warm water for cleansing
- Adjustable water temperature and water pressure
- Choose oscillating or pulsating spray
- Warm-air drying system with adjustable air speed and temperature
- Automatic deodorization with carbon filter for odour control
- Soft-close seat and lid to prevent from slamming
- Automatic opening and closing seat cover
- Integral LED night light
- Ceramic toilet bowl

WALL MOUNT

Smart Toilet



Code	Description	Finish	Material	Dimensions
SPA-37153	Wall Mount Smart Toilet	White	Ceramic	L:598mm x W:380mm x H:332mm

IP67



- Heated seat with five adjustable temperature settings
- Front and rear wash modes provide warm water for cleansing
- Adjustable water temperature and water pressure
- Choose oscillating or pulsating spray
- Warm-air drying system with adjustable air speed and temperature
- Automatic deodorisation with carbon filter for odour control
- Soft-close seat and lid to prevent from slamming
- Easy installation



- Includes fused spur and fixing kit

MITO

Electric Bidet Toilet Seat



Code	Description	Finish	Material	Dimensions
SPA-34865	Electric Bidet Toilet Seat	White	Plastic	H:180mm W:435mm L:485mm



Spa^{PRO}

PREMIUM

Spa PRO beautifully designed, premium glass decorative lighting that will bring a touch of glamour to any home.

COLLECTIONS

298-307

IP44



- Chrome finish
- Clear crystal shades

BRESNA

Small 3 Light Flush



Code	Description	Lamp	Dimensions
SP-25204-CHR	Bresna 3 Light Flush	3 x 3W max LED G9	H:350mm Dia:350mm

IP44



- Chrome finish
- Clear crystal shades

BRESNA

Small 3 Light Flush


IP44
Rated


Class 1

Code	Description	Lamp	Dimensions
SP-31450-CHR	Bresna Small 3 Light Flush	3 x 3W max LED G9	H:350mm Dia:280mm

IP44



- Chrome finish
- Clear crystal shades

BRESNA

6 Light Pendant


IP44
Rated


Class 1

Code	Description	Lamp	Dimensions
SP-25202-CHR	Bresna 6 Light Pendant	6 x 3W max LED G9	H:1200mm Dia:500mm

IP44



- Chrome finish
- Clear crystal shades

BRESNA

Wall Light



Code	Description	Lamp	Dimensions
SP-25203-CHR	Bresna Wall Light	2 x 3W max LED G9	Proj:175mm W:300mm H:200mm

IP44



- Chrome finish
- Clear crystal shades

ANNALEE

3 Light Chandelier


IP44
Rated


Class 1

Code	Description	Lamp	Dimensions
SP-31449-CHR	Annalee 3 Light Chandelier	3 x 3W max LED G9	H:1520mm Dia:450mm

IP44



- Chrome finish
- Clear crystal shades

ANNALEE

Small 5 Light Chandelier

IP44
Rated

Class 1

Code	Description	Lamp	Dimensions
SP-25256-CHR	Annalee 5 Light Chandelier	5 x 3W max LED G9	H:1000mm Dia:385mm

IP44



- Chrome finish
- Clear crystal shades

ANNALEE

5 Light Chandelier

IP44
Rated

Class 1

Code	Description	Lamp	Dimensions
SP-25254-CHR	Annalee 5 Light Chandelier	5 x 3W max LED C9	H:1580mm Dia:500mm

IP44



- Chrome finish
- Clear crystal shades

ANNALEE

8 Light Chandelier


IP44
Rated


Class 1

Code	Description	Lamp	Dimensions
SP-25255-CHR	Annalee 8 Light Chandelier	8 x 3W max LED C9	H:1650mm Dia:400mm

IP44



- Chrome finish
- Clear crystal shades

ANNALEE

Wall Light

IP44
Rated

Class 1

Code	Description	Lamp	Dimensions
SP-25253-CHR	Annalee Wall Light	2 x 3W max LED G9	Proj:156mm W:297mm H:420mm

IP44



- Chrome finish
- Clear crystal shades

NORE

Small Encased Flush


IP44
Rated


Class 1

Code	Description	Lamp	Dimensions
SP-25211-CHR	Nore Small Encased Flush	5 x 3W max LED C9	H:300mm Dia:400mm



KITCHEN

A range of modern LED kitchen lighting, including tape, under cabinet lights, link lights and plinth lights.

UNDER CABINET	310-317
KINETIC SWITCHES	318-321
KONECT PLUG & PLAY	322-330
SOCKETS/QI CHARGING	331
TRACK LIGHTING	332-336
PLINTH LIGHTING	337
LED BATTENS	338-339



**Upto
150
Lumens**

**NO
DRIVER
REQ.**

**WARM WHITE
3000K**

**COOL WHITE
4000K**





**DAYLIGHT WHITE
6000K**

- Mains connected - no driver required
- Brushed satin nickel finish with opal polycarbonate diffuser
- Available in 3000K/4000K/6000K
- 1m cable included
- 1.5W LED module (SMD)
- Lm: 150
- Lm/W: 100



FORTE

LED Under Cabinet Light


Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-25319	Fonte Under Cabinet Light	1.5W LED	3000	130	H:126mm W:145mm Proj:32mm
CUL-21626	Fonte Under Cabinet Light	1.5W LED	4000	140	H:126mm W:145mm Proj:32mm
CUL-25219	Fonte Under Cabinet Light	1.5W LED	6000	150	H:126mm W:145mm Proj:32mm

- Mains connected - no driver required
- Brushed satin nickel finish with opal polycarbonate diffuser
- Available in 3000K/4000K
- 1.5W LED module (SMD)
- Lm/W: 100



POZZA

Recessed LED Under Cabinet Light




Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-25317	Pozza Under Cabinet Light	1.5W LED	3000	130	Dia:65mm Proj:20mm
CUL-21624	Pozza Under Cabinet Light	1.5W LED	4000	140	Dia:65mm Proj:20mm

- Mains connected - no driver required
- Brushed satin nickel finish with opal polycarbonate diffuser
- Available in 3000K/4000K/6000K
- 1.5W LED module (SMD)
- Lm/W: 100



LAGHETTO

LED Under Cabinet Light



Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-25318	Laghetto Under Cabinet Light	1.5W LED	3000	130	Dia:75mm Proj:26mm
CUL-21625	Laghetto Under Cabinet Light	1.5W LED	4000	140	Dia:75mm Proj:26mm
CUL-25218	Laghetto Under Cabinet Light	1.5W LED	6000	150	Dia:75mm Proj:26mm

- Mains connected - no driver required
- Brushed satin nickel finish with opal polycarbonate diffuser
- Available in 3000K/4000K/6000K
- 1.5W LED module (SMD)
- Lm/W: 100



LAGO

LED Under Cabinet Light



Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-25320	Lago Under Cabinet Light	1.5W LED	3000	130	H:142mm W:80mm Proj:32mm
CUL-21627	Lago Under Cabinet Light	1.5W LED	4000	140	H:142mm W:80mm Proj:32mm
CUL-25220	Lago Under Cabinet Light	1.5W LED	6000	150	H:142mm W:80mm Proj:32mm



180
Lumens



NO
DRIVER
REQ.

WARM WHITE
3000K

COOL WHITE
4000K

DAYLIGHT WHITE
6000K

- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Can be recessed or surface mounted with removeable spacer
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 3W LED module (SMD)
- Lm/W: 60



ARGI

LED Round Under Cabinet Light



Code	Description	Lamp	Lumen	Dimensions
CUL-35864	Argi Round LED CCT Under Cabinet Light	3W LED	180	Dia:75mm H:29mm

- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Can be recessed or surface mounted with removeable spacer
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 1.5W LED module (SMD)
- Lm/W: 80



ELLEN

LED Round Under Cabinet Light



Code	Description	Lamp	Lumen	Dimensions
CUL-35860	Ellen Round LED CCT Under Cabinet Light	1.5W LED	120	Dia:75mm Proj:29mm

- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 1.5W LED module (SMD)
- Lm/W: 80



FARO

LED Triangle Under Cabinet Light



Code	Description	Lamp	Lumen	Dimensions
CUL-35861	Faro Triangle LED CCT Under Cabinet Light	1.5W LED	120	H:122mm W:142mm Proj:36mm

- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 3W LED module (SMD)
- Lm/W: 60



AYLA

LED Triangle Under Cabinet Light




Code	Description	Lamp	Lumen	Dimensions
CUL-35865	Ayla Triangle LED CCT Under Cabinet Light	3W LED	180	H:122mm W:142mm Proj:36mm



LEGARE

LINK LEAD

2
SIZES
AVAILABLE

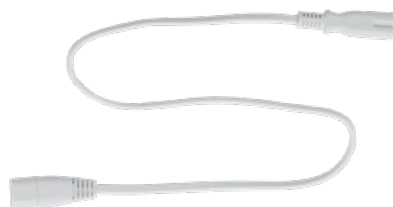

- Enables you to connect 2 legare or bude link lights on the same circuit
- Available in 2 lengths
- IEC C8 cable

Code	Length
CUL-21665	0.5 meters
CUL-21666	1 meter



Upto
1200
Lumens

**NO
DRIVER
REQ.**

- SMD LED
- Silver aluminium body with opal polycarbonate diffuser
- Available in 3000/4000K
- ON/OFF rocker switch
- No driver required
- Supplied with 2m power lead
- Simple connection system



Simple to butt connect fittings together

LEGARE

Under Cabinet Link Light



Class 2

Code	Description	Power (w)	Kelvin	Lumen	Weight	Length	Dimensions
CUL-25321	Legare Under Cabinet Link Light	4W LED	3000	400	0.21kg	300mm	L:300mm W:24mm Proj:34mm
CUL-25323		12W LED	3000	1000	0.4kg	870mm	L:870mm W:24mm Proj:34mm
CUL-25324		14W LED	3000	1200	0.59kg	1200mm	L:1200mm W:24mm Proj:34mm
CUL-21661		4W LED	4000	400	0.21kg	300mm	L:300mm W:24mm Proj:34mm
CUL-21662		7W LED	4000	700	0.3kg	500mm	L:500mm W:24mm Proj:34mm
CUL-21663		12W LED	4000	1000	0.4kg	870mm	L:870mm W:24mm Proj:34mm
CUL-21664		14W LED	4000	1200	0.59kg	1200mm	L:1200mm W:24mm Proj:34mm




Upto
1200
Lumens



**NO
DRIVER
REQ.**

- Silver aluminium body with opal polycarbonate diffuser
- Switch between 3000K/OFF/4000K
- No driver required
- Supplied with 2m power lead
- Simple connection system



• Simple to butt connect fittings together

LEGARE

CCT Under Cabinet Link Light



Code	Description	Lamp	Lumen	Weight	Length	Dimensions
CUL-34223-CCT	Legare CCT Link Light	4W LED	400	0.21kg	300mm	L:300mm W:24mm Proj:34mm
CUL-34224-CCT	Legare CCT Link Light	7W LED	700	0.3kg	500mm	L:500mm W:24mm Proj:34mm
CUL-34225-CCT	Legare CCT Link Light	12W LED	1000	0.4kg	870mm	L:870mm W:24mm Proj:34mm
CUL-34226-CCT	Legare CCT Link Light	14W LED	1200	0.59kg	1200mm	L:1200mm W:24mm Proj:34mm



Upto
350
Lumens

- Ideal for multiple applications
- No wiring required
- PIR sensor with 3M detection distance
- AUTO ON/ALWAYS ON/OFF function
- 4 hours charge time



LIGERO


Rechargeable Under Cabinet Light



Code	Power (w)	Colour (k)	Total Flux (lm)	Battery	Charge Time	Run Time	Dimensions
CUL-37386	1W	4000k	90	750mAh Li-ion	4 Hours	4 Hours	L:200mm W:40mm H:9mm
CUL-37387	2W	4000k	160	1100mAh Li-ion	4 Hours	5 Hours	L:400mm W:40mm H:9mm
CUL-37388	3W	4000k	230	1500mAh Li-ion	4 Hours	5 Hours	L:564mm W:40mm H:9mm
CUL-37389	4W	4000k	350	2200mAh Li-ion	4 Hours	5 Hours	L:864mm W:40mm H:9mm



PLUG & PLAY SYSTEM

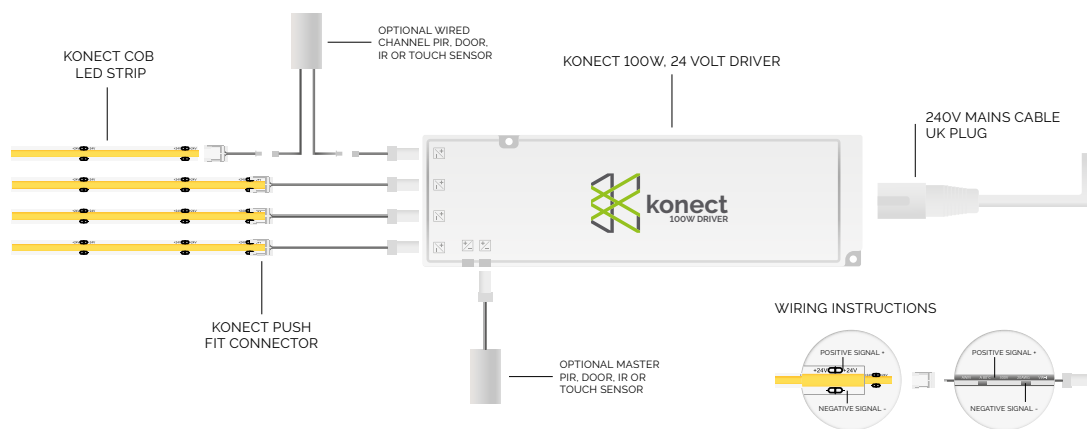

The Konec plug and play system features revolutionary wiresafe technology. Designed to protect all ports from overloading, short circuits and electrical surges, ensuring lighting systems stay as safe as possible. In turn conforming to BS7671 Regulations.

The new Konec connectors on each components are designed to only fit into the respective ports further enhancing safety. Offering this balance of maximum safety and simplicity means less need for electrical qualifications on installation, saving you time and money on your next lighting project.

We have a range of drivers with a range of up to 7 connection ports and can power up to 100 watts worth of LED Lights in one 24 Volt lighting system. Full customisable with UK plugs available in 3 lengths, extension cables and a range of lighting you will be sure to find something suitable for your needs.

KINETIC WIRELESS SWITCHING



KINETIC SYSTEM OVERVIEW



Push switch to create kinetic energy



Internal module collects kinetic energy



Kinetic energy is converted into electricity



Communication module transmits signal



Receiver controls light and switches on/off

The wireless switch uses micro-energy acquisition technology. Kinetic energy is generated to create and transmit a radio signal to the receiver which in turn, will switch lamps or other loads on or off.

There is no longer the constraint of wiring location and no need to install back boxes or cut holes into walls. The kinetic switch can be installed anywhere or placed to maximise convenience.

Lighting can be controlled manually by using the switch, smart phone or tablet using the Smart Life App or connecting it to a voice controlled device such as Amazon Alexa or Google Home.

The kinetic switches require no wiring or batteries which eliminates the need for installing back boxes, creating channels in walls and adjusting decor, thus speeding up the installation process and reducing labour time & costs.

The switch can be installed anywhere in the home, including the bathroom due to its IP67 rating. The switches can be screwed to the surface, or stuck on with the adhesive pads supplied. They can also be retro-fit onto existing back boxes as they are the same size as standard switches.



1/2/3 GANG SWITCH

- IP65 rated
- For use with 40038, 40039 & 40040 (dimmable by app only with 40040)
- 12-150m Range

Code	Description	Finish
CUL-40031-65	1 gang self powered wall switch	White
CUL-40032-65	1 gang self powered wall switch	Black
CUL-40033-65	2 gang self powered wall switch	White
CUL-40034-65	2 gang self powered wall switch	Black
CUL-40035-65	3 gang self powered wall switch	White
CUL-40036-65	3 gang self powered wall switch	Black



GRID SWITCH

NEW

- IP20 rated
- No wiring required
- Switches compatible with industry leading grids
- Dimmable switch for use with dimmable receiver only

Code	Description	Finish
CUL-42495	1 Gang Slim Grid Kinetic Switch	White
CUL-42497	1 Gang Dimmable Slim Grid Kinetic Switch	White

GRID SWITCH SURROUNDS

NEW

- For use with grid switches

Code	Description	Finish
CUL-42499	1 Gang Kinetic Switch Frame For Slim Grid	White
CUL-42501	2 Gang Kinetic Switch Frame For Slim Grid	White

Illustration shows CUL-42501 - 2 gang kinetic switch frame with 2 x kinetic switches (CUL-42495/42497) inserted.





1 GANG FOB SWITCH

NEW

- IP65 rated
- 8-40m range
- No battery or wiring required
- Silicone finish

Code	Description	Finish
CUL-40037	1 gang fob switch	Grey



NON-DIMMABLE RF RECEIVER

NEW

- IP20 rated
- 8-40m range

Code	Description	Finish
CUL-40038	Non-dimmable RF receiver	White



NON-DIMMABLE WI-FI RECEIVER

NEW

- IP20 rated
- 8-40m range
- Compatible with alexa, google home using the smart life app



Alexa



Google Home



Powered By
Tuya
Smartlife

Code	Description	Finish
CUL-40039	Non-dimmable Wi-Fi receiver	White



DIMMABLE WI-FI RECEIVER

NEW

- IP20 rated
- 8-40m range
- Compatible with alexa, google home using the smart life app



Alexa



Google Home



Powered By
Tuya
Smartlife

Code	Description	Finish
CUL-40040	Dimmable Wi-Fi receiver	White


350
Lumens



- Brushed steel finish
- 5W (SMD) LED
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Easy to install

SLIMLINE

Under Cabinet Spotlight



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
CUL-37797	Brushed Steel	Slimline Under Cabinet Spotlight	5W	3000k	350	L:190mm x W:70mm Proj:4mm
CUL-37798	Brushed Steel			4000k		



150
Lumens




- Brushed steel finish
- Designed for surface mounting or recessed
- 1.8W (SMD) LED
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Easy to install



RECESSED/SURFACE

Under Cabinet Spotlight



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
CUL-37795	Brushed Steel	Recessed/Surface Under Cabinet Spotlight	1.8W	3000k	150	Dia:65mm H:10mm
CUL-37796	Brushed Steel			4000k		

Upto
460
Lumens



- Infrared sensor ideal for kitchen drawers and wardrobes
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Easy to install

IR MINI

Under Cabinet/Drawer Light



IR
Sensor



120°
Beam



2M
Cable


Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
CUL-37787	Brushed Steel	IR Mini Under Cabinet/Drawer Light	3.5W	3000k	220	L:563mm x W:13mm Proj:15.5mm
CUL-37788	Brushed Steel			4000k		
CUL-37789	Brushed Steel		5.2W	3000k	460	L:863mm x W:13mm Proj:15.5mm
CUL-37790	Brushed Steel			4000k		



Upto
934
Lumens



- Flexible 12W/m LED COB tape
- CRI: >90
- Can be cut every 60mm
- 5m roll
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Requires power cord
- Easy to install

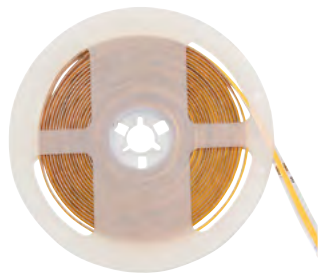

8MM LED COB

Flexible Strip



Code	Description	Power (w)	Colour (k)	CRI	Total Flux (lm)	Length
ELA-35750	8mm LED COB Flexible Strip	12W/m	3000k	>90	150	5m
ELA-37551			4000k	>90		


100
Lumens



- Matt silver finish
- Super slim profile
- 1.2W (SMD) LED
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Easy to install



ROUND Plinth Light




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
CUL-37791	Matt Silver	Round Plinth Light	1.2W	3000k	100	Dia:35mm H:13.5mm
CUL-37792	Matt Silver			4000k		


100
Lumens



- Matt silver finish
- Super slim profile
- 1.2W (SMD) LED
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konec drivers
- Easy to install



SQUARE Plinth Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
CUL-37793	Matt Silver	Square Plinth Light	1.2W	3000k	100	L:35mm W:35mm H:13.5mm
CUL-37794	Matt Silver			4000k		

60W/24V DRIVER/CONVERTER



- Plug & Play with Konect sensors, dimmers and lighting
- Driver applies to BS7671 regulations

Code	Input	Output	Load	Output Sockets	Dimensions
CUL-37770	AC200-240V	24V	60W	7 ports	L:189mm W:55mm H:15mm

100W/24V DRIVER/CONVERTER



- Plug & Play with Konect sensors, dimmers and lighting
- Driver applies to BS7671 regulations


Code	Input	Output	Load	Output Sockets	Dimensions
CUL-37771	AC200-240V	24V	100W	7 ports	L:239mm W:56mm H:18mm

MICRO DISTRIBUTOR




- Connect up to 6 accessories using 1 port from your driver

Code	Connector	Cable Length	Output Sockets	Dimensions
CUL-37786	Micro24	140mm	6 ports	L:60mm W:45mm H:45mm



POWER CONNECTOR

Code	Description
CUL-37801	8mm COB dupont to strip soldering free connector



STRIP TO STRIP WIRE CONNECTOR

Code	Description
CUL-37802	8mm COB strip to wire to strip soldering free connector




STRIP TO STRIP CONNECTOR

Code	Description
CUL-37803	8mm COB strip to strip soldering free connector



UK PLUG TO 'FIGURE-8' (C7) TYPE MAINS LEAD

Code	Input	Cable Length	Colour
CUL-37783	AC200-240V	1000mm	White
CUL-37784	AC200-240V	1500mm	White
CUL-37785	AC200-240V	1800mm	White



EXTENSION CABLE

Code	Connector	Cable Length	Colour
CUL-37772	Micro 24 male/female connector	1200mm	White
CUL-37773	Micro 24 male/female connector	1800mm	White
CUL-37774	Micro 24 male/female connector	2400mm	White

KONECT SENSORS



IR DOOR SENSOR

The infrared door sensor automatically senses when the cupboard door is opened and switches the light on, and when the cupboard door is shut the lights are instantly switched off, saving energy and money.

Code	Control Mode	Max Load	Cable Length
CUL-37775	Master	-	1500mm
CUL-37776	Channel	60W	2 x 1500mm



HAND MOTION SENSOR

Simply swipe your hand below the sensor within a 8cm distance enabling you to switch on and off any lighting without touching any buttons.

Code	Control Mode	Max Load	Cable Length
CUL-37781	Master	-	1500mm
CUL-37782	Channel	60W	2 x 1500mm



PIR SENSOR

Turns on the lighting when movement is detected within a 3m distance. The sensor has a 35 second timing delay so once no further movement is detected the lighting will power off. This can be recessed or mounted flush with the extra bracket provided.



Code	Control Mode	Max Load	Cable Length
CUL-37777	Master	-	1500mm
CUL-37778	Channel	60W	2 x 1500mm



TOUCH SENSOR

The touch sensor features a blue backlit light has a slimline design and is great for a recessed application. Short touch for on/off function or long press for dimming.



Code	Control Mode	Max Load	Cable Length
CUL-37779	Master	-	1500mm
CUL-37780	Channel	60W	2 x 1500mm


IP54



- 2W Bluetooth speaker
- 2 x USB charging ports
- 2 x power outlets
- Qi charger
- IP54 rated
- NOTE: finish is grey not black, images for illustration purposes only

POP UP

Socket with Bluetooth Speaker



Code	Finish	Description	USB Ports	Speaker	Dimensions
CUL-37800	Grey	Pop Up Socket with Bluetooth Speaker	2 x 4.5W	1 x 2W	H:260mm (extended) Dia:99.5mm

NEW
FOR
2023



- Ceiling cup to track insert supplied with 0.5m cable and 1m track
- Constructed from steel & ABS plastic
- Available in 2 finishes
- Fully adjustable lamp heads
330° rotation and 90° tilt
- Matching compatible track in the range

CAYO

3 Head Track Light Kit



Class 1



1.2kg

Code	Description	Colour	Lamp	Dimensions
INL-41730-BLK	Cayo 3 Head Track Light Kit	White	3 x 7W max LED GU10	L:1000mm Proj:180mm
INL-41730-WHT	Cayo 3 Head Track Light Kit	Black	3 x 7W max LED GU10	L:1000mm Proj:180mm

NEW
FOR
2023



- Ceiling cup to track insert supplied with 0.5m cable and 2 x 0.8m track
- Constructed from steel & ABS plastic
- Available in 2 finishes
- Fully adjustable lamp heads
330° rotation and 90° tilt
- Matching compatible track in the range

CAYO

5 Head Track Light Kit




Class 1



2.07kg

Code	Description	Colour	Lamp	Dimensions
INL-41731-BLK	Cayo 5 Head Track Light Kit	White	5 x 7W max LED GU10	2 x L:800mm Proj:180mm
INL-41731-WHT	Cayo 5 Head Track Light Kit	Black	5 x 7W max LED GU10	2 x L:800mm Proj:180mm

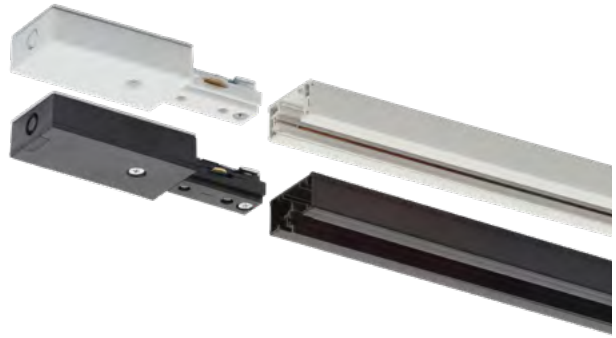

- 220-240V
- Die-cast Aluminium and ABS construction
- Includes 1 x live end & 1 x dead end

TOR

Single Circuit Track



Code	Description	Colour	Length	Dimensions
CUL-21637-WHT	Tor Single Circuit Track	White	1000mm	L:1000mm W:37mm Proj:17mm
CUL-21638-WHT	Tor Single Circuit Track	White	1500mm	L:1500mm W:37mm Proj:17mm
CUL-21639-WHT	Tor Single Circuit Track	White	2000mm	L:2000mm W:37mm Proj:17mm
CUL-26333-BLK	Tor Single Circuit Track	Black	1000mm	L:1000mm W:37mm Proj:17mm
CUL-26334-BLK	Tor Single Circuit Track	Black	1500mm	L:1500mm W:37mm Proj:17mm
CUL-26335-BLK	Tor Single Circuit Track	Black	2000mm	L:2000mm W:37mm Proj:17mm



- For use with Tor Single Circuit Track
- Steel and ABS construction

LUSTRO

Track Light



Code	Description	Colour	Lamp	Dimensions
CUL-21660-WHT	Lustro Track Light	White	1 x 7W max LED GU10	H:103mm Proj:89mm
CUL-26346-BLK	Lustro Track Light	Black	1 x 7W max LED GU10	H:103mm Proj:89mm



- For use with Tor Single Circuit Track
- Die-cast Aluminium and ABS construction

LUCIDO Track Light



Class 1



0.13kg

Code	Description	Colour	Lamp	Dimensions
CUL-21658-WHT	Lucido Track Light	White	1 x 7W max LED GU10	H:135mm Proj:75mm
CUL-26345-BLK	Lucido Track Light	Black	1 x 7W max LED GU10	H:135mm Proj:75mm



- For use with Tor Single Circuit Track
- Die-cast Aluminium and ABS construction

RIBALTA Track Light



Class 1



0.29kg

Code	Description	Colour	Lamp	Dimensions
CUL-21656-WHT	Ribalta Track Light	White	1 x 7W max LED GU10	H:200mm Proj:78mm
CUL-26344-BLK	Ribalta Track Light	Black	1 x 7W max LED GU10	H:200mm Proj:78mm

TRACK ACCESSORIES



PENDANT
ADAPTER
FITS FLUSH
IN TRACK

White	Black	Description	Dimensions
CUL-26342	CUL-26341	Flexible Connector	L:296mm W:35mm Proj:17mm
CUL-21645	CUL-26337	Double Live End Connector	L:184mm W:35mm Proj:17mm
CUL-33996	CUL-33996	Track Pendant Adapter	L:81mm W:34mm Proj:46mm
CUL-21651	CUL-26339	T Live End Connector	L:109mm W:183mm Proj:17mm
CUL-21649	CUL-26340	X Live End Connector	L:183mm W:183mm Proj:17mm
CUL-21647	CUL-26338	L Live End Connector	L:109mm W:109mm Proj:17mm
CUL-21643	CUL-26336	Butt Connector	L:79mm W:35mm Proj:17mm
CUL-21653	CUL-26332	Track Pendant Adapter	L:39mm W:36mm Proj:46mm








**20
Lumens**

- Mains connected - no driver required
- Brushed steel finish with opal polycarbonate diffuser
- Available in 3000K/6000K
- 0.5W LED module (SMD)



OHIO

Circular Plinth Light

 IP65 Rated
  40mm Cut-out
  1M Cable
  Class 2
  0.13kg

Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-26465-WW	Ohio Circular 240V Decking Light	0.5W LED	3000	20	Dia:40mm
CUL-26465	Ohio Circular 240V Decking Light	0.5W LED	6000	20	Dia:40mm



**Upto
6000
Lumens**

**NO
DRIVER
REQ.**



· 7mm clip



· 20mm clip

- Aluminium body with polycarbonate diffuser
- No driver required
- Available in 3000k/4000k/6000k
- Available in 5 different lengths
- Kit includes: 1 x light fitting, 2 x 7mm clips, 2 x 20mm clips, instructions and fixing kit
- Optional suspension kit available

RENO

LED Batten



Class 2

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Length	Dimensions
CUL-30700		30W LED	3000	2690	900mm	L:900mm W:75mm Proj:24mm
CUL-30702		40W LED	3000	3600	1200mm	L:1200mm W:75mm Proj:24mm
CUL-30699		20W LED	4000	1850	600mm	L:600mm W:75mm Proj:24mm
CUL-30701		30W LED	4000	2730	900mm	L:900mm W:75mm Proj:24mm
CUL-30703		40W LED	4000	3650	1200mm	L:1200mm W:75mm Proj:24mm
CUL-30704		60W LED	3000	5200	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30707		80W LED	3000	6600	1800mm	L:1800mm W:75mm Proj:24mm
CUL-30705		60W LED	4000	5300	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30708		80W LED	4000	6700	1800mm	L:1800mm W:75mm Proj:24mm
CUL-30706		60W LED	6000	5500	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30709		80W LED	6000	6900	1800mm	L:1800mm W:75mm Proj:24mm

RENO

Suspension Kit



Code	Description	Dimensions
CUL-30710	Reno 1m Suspension Kit	L:1000mm
CUL-30711	Reno 2m Suspension Kit	L:2000mm



INDOOR

Indoor lighting including a comprehensive range of decorative cable sets, shades and our new Illuminate task lighting. LED Lamps with attractive design and energy saving performance, INLIGHT LED lamps superbly compliment the Forum Lighting range.

PLASTER LIGHTS	342-347
SPOTLIGHTS	348-353
RECESSED	354-357
PICTURE LIGHT	359
TASK LIGHTING	360-361
CABLE SETS	362-369
SHADES	371-373
LED LAMPS	374-385


PAINT
TO MATCH
DECOR



- White plaster finish
- Can be painted to match decor

UBEDA

Downlight



Code	Lamp	Dimensions
INL-37213-WHT	1 x 7W max LED GU10	Dia:70mm H:110mm

PAINT
TO MATCH
DECOR



- White plaster finish
- Can be painted to match decor

CADIZ

Tiltable Downlight



Code	Lamp	Dimensions
INL-37214-WHT	1 x 7W max LED GU10	Dia:135mm H:160mm

PAINT
TO MATCH
DECOR



- White plaster finish
- Can be painted to match decor

CABRA

Flush Downlight



Code	Lamp	Dimensions
INL-37211-WHT	1 x 7W max LED GU10	Dia:130mm H:50mm



**PAINT
TO MATCH
DECOR**

- White plaster finish
- Can be painted to match decor

CARMONA

Up/Down Wall Light



Code	Description	Finish	Lamp	Dimensions
INL-37225-WHT	Carmona Up/Down Wall Light	White	2 x 7W max LED GU10	H:250mm W:70mm Proj:95mm



**PAINT
TO MATCH
DECOR**

- White plaster finish
- Can be painted to match decor


GETXO

Up/Down Wall Light



Code	Description	Finish	Lamp	Dimensions
INL-37226-WHT	Getxo Up/Down Wall Light	White	2 x 6W max LED E14 Candle	H:70mm W:350mm Proj:105mm

PAINT
TO MATCH
DECOR

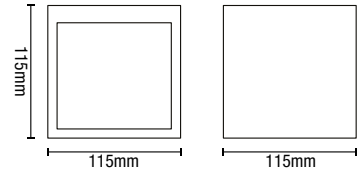

- White plaster finish
- Can be painted to match decor


MONTILLA

Up/Down Light



Code	Lamp	Dimensions
INL-37219-WHT	1 x 3W max LED G9	H:115mm W:115mm Proj:115mm

PAINT
TO MATCH
DECOR

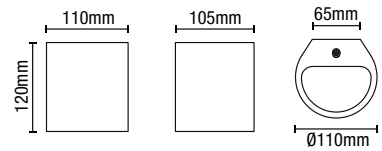

- White plaster finish
- Can be painted to match decor


OSUNA

Up/Down Light



Code	Lamp	Dimensions
INL-37224-WHT	1 x 3W max LED G9	H:120mm W:110mm Proj:105mm

PAINT
TO MATCH
DECOR

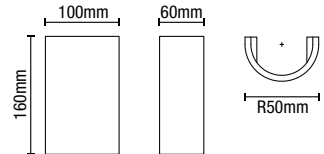


- White plaster finish
- Can be painted to match decor

MARTOS

Up/Down Light



Code	Lamp	Dimensions
INL-37221-WHT	1 x 3W max LED G9	H:160mm W:100mm Proj:60mm

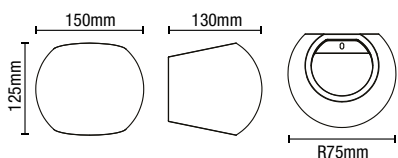

- White plaster finish
- Can be painted to match decor

PAINT
TO MATCH
DECOR



MARTOS

Round Up/Down Light




Class 1



0.95kg

Code	Lamp	Dimensions
INL-37222-WHT	1 x 3W max LED G9	H:1205mm W:150mm Proj:130mm



- White plaster finish
- Can be painted to match decor

PAINT
TO MATCH
DECOR



BAZA

Up/Down Light




Class 1



1.2kg

Code	Lamp	Dimensions
INL-37220-WHT	1 x 6W max LED E14 Candle	H:75mm W:300mm Proj:100mm

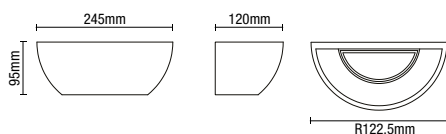

- White plaster finish
- Can be painted to match decor

PAINT
TO MATCH
DECOR



RHONDA

Up/Down Light



Class 1



1.05kg

Code	Lamp	Dimensions
INL-37223-WHT	1 x 6W max LED E14 Candle	H:95mm W:245mm Proj:122.5mm

PAINT
TO MATCH
DECOR



- White plaster finish
- Can be painted to match decor

TELDE

Wall Uplighter




Class 1



1.85kg

Code	Lamp	Dimensions
INL-38609-WHT	1 x 10W max LED E27 GLS	H:105mm W:425mm Proj:212mm

PAINT
TO MATCH
DECOR



- White plaster finish
- Can be painted to match decor

MAO

Wall Uplighter



Class 1



1.2kg

Code	Lamp	Dimensions
INL-38610-WHT	1 x 10W max LED E27 GLS	H:125mm W:250mm Proj:127mm

PAINT
TO MATCH
DECOR



- White plaster finish
- Can be painted to match decor

ARUCAS

Wall Uplighter




Class 1



2.1kg

Code	Lamp	Dimensions
INL-38611-WHT	1 x 6W max LED E14 Candle	H:170mm W:3535mm Proj:158mm



- White plaster finish
- Integral LED option

PAINT
TO MATCH
DECOR



TOLEDO

Wall Uplighter




Class 1



1.2kg

Code	Lamp	Dimensions
INL-38612-WHT	2 x 7W max LED GU10	H:245mm W:137mm Proj:78mm
INL-38613-WHT	2 x 3W integral LED	H:245mm W:137mm Proj:78mm

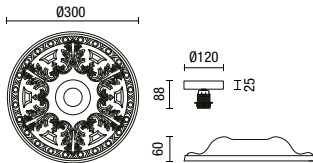

- White plaster finish
- Can be painted to match decor

PAINT
TO MATCH
DECOR




MOTRIL

Plaster Ceiling Mount



Class 1

Code	Lamp	Dimensions
INL-37215-WHT	1 x 10W max LED E27 GLS	H:60mm Dia:300mm
INL-37216-WHT	E27 GLS	H:85mm Dia:500mm

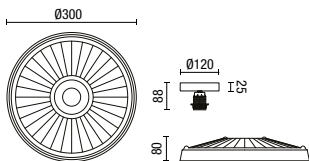

- White plaster finish
- Can be painted to match decor

PAINT
TO MATCH
DECOR



LUCENA

Plaster Ceiling Mount



Class 1

Code	Lamp	Dimensions
INL-37217-WHT	1 x 10W max LED E27 GLS	H:60mm Dia:300mm
INL-37218-WHT	E27 GLS	H:80mm Dia:550mm



- Satin nickel and chrome finish
- Contemporary styling
- ON/OFF toggle switch

ELARA

Wall Spotlight



Class 1



0.4kg

Code	Description	Lamp	Dimensions
INL-740000-SNIC	Elara Wall Spotlight	1 x 7W max LED GU10	L:110mm W:100mm H:115mm



- Satin nickel and chrome finish
- Contemporary styling
- Adjustable lamps

ELARA

4 Light Bar Spotlight



Class 1



1.33kg

Code	Description	Lamp	Dimensions
INL-598410-SNIC	Elara 4 Light Bar Spotlight	4 x 7W max LED GU10	L:800mm W:165mm H:145mm



- Satin nickel and chrome finish
- Contemporary styling
- Adjustable lamps

ELARA

3 Light Plate Spotlight



Code	Description	Lamp	Dimensions
INL-598310-SNIC	Elara 3 Light Plate Spotlight	3 x 7W max LED GU10	H:115mm Dia:290mm



3
SIZES
AVAILABLE



- Black Chrome finish
- Contemporary styling
- Adjustable lamps

PEDRO

Spotlight



Code	Description	Lamp	Weight	Dimensions
INL-28201-BCHR	Pedro Wall/Ceiling Spotlight	1 x 7W max LED GU10	0.5kg	H:120mm Dia:100mm
INL-28202-BCHR	Pedro 2 Light Plate Spotlight	2 x 7W max LED GU10	1.1kg	H:120mm Dia:190mm
INL-28203-BCHR	Pedro 3 Light Plate Spotlight	3 x 7W max LED GU10	1.2kg	H:120mm Dia:260mm



- Black Chrome finish
- Contemporary styling
- Adjustable lamps

PEDRO

4 Light Plate Spotlight



Class 1



1.65kg

Code	Description	Lamp	Dimensions
INL-28205-BCHR	Pedro 4 Light Plate Spotlight	4 x 7W max LED GU10	W:220mm L:220mm H:120mm



2
SIZES
AVAILABLE

- Black Chrome finish
- Contemporary styling
- Adjustable lamps

PEDRO

Bar Spotlight



Class 1

Code	Description	Lamp	Weight	Dimensions
INL-28204-BCHR	Pedro 4 Light Bar Spotlight	4 x 7W max LED GU10	1.9kg	L:100mm W:640mm H:120mm
INL-31790-BCHR	Pedro 6 Light Bar Spotlight	6 x 7W max LED GU10	2.92kg	L:100mm W:900mm H:120mm



- Contemporary styling
- Ceiling or wall mounted
- 350° rotation
- Available in 4 finishes



HARVEY Spotlight



Class 1



0.19kg



Available in
4 colour options

Code	Finish	Description	Lamp	Dimensions
INL-31775-SNIC	Satin Nickel	Harvey Spotlight	1 x 7W max LED GU10	L:100mm W:85mm H:120mm
INL-31775-BLK	Black			
INL-31775-WHT	White			
INL-31775-SATBRS	Satin Brass			



- Contemporary styling
- Ceiling or wall mounted
- 350° rotation
- Available in 4 finishes

HARVEY 3 Light Plate Spotlight



Class 1



0.75kg



Available in
4 colour options

Code	Finish	Description	Lamp	Dimensions
INL-31776-SNIC	Satin Nickel	Harvey 3 Light Spotlight	3 x 7W max LED GU10	Dia:215mm H:120mm
INL-31776-BLK	Black			
INL-31776-WHT	White			
INL-31776-SATBRS	Satin Brass			



- Contemporary styling
- Ceiling or wall mounted
- 350° rotation
- Available in 4 finishes

HARVEY

4 Light Bar Spotlight



Class 1



0.75kg



Available in
4 colour options

Code	Finish	Description	Lamp	Dimensions
INL-31723-SNIC	Satin Nickel	Harvey 4 Light Bar Spotlight	4 x 7W max LED GU10	L:774mm W:85mm H:120mm
INL-31723-BLK	Black			
INL-31723-WHT	White			
INL-31723-SATBRS	Satin Brass			

IP65



Tilted



Fixed







- Die-cast aluminium with glass lens
- Adjustable tilt, max 40°
- Available in 6 finishes




CALI

Tiltable Downlight

 IP65 Rated
  78mm Cut-out
  Class 2
  0.16kg

Code	Description	Finish	Lamp	Dimensions
SPA-30841-BRCOP	Cali Tiltable Downlight	Brushed Copper	1 x 7W max LED GU10	Dia:92mm H:115mm Cutout:78mm
SPA-30841-MWHT		Matt White		
SPA-30841-MBLK		Matt Black		
SPA-30842-CHR		Chrome		
SPA-30842-SBRS		Satin Brass		
SPA-30842-SCHR		Satin Chrome		

IP65

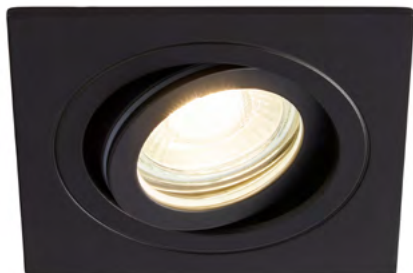


Tilted



Fixed



- Die-cast aluminium with glass lens
- Adjustable tilt, max 40°
- Available in 6 finishes

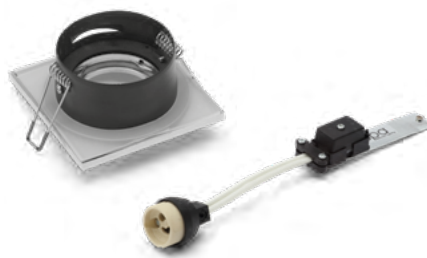

CALI

Square Tiltable Downlight



IP65
Rated



78mm
Cut-out




Class 2



0.17kg

Code	Description	Finish	Lamp	Dimensions
SPA-38577-BRCOP	Cali Square Tiltable Downlight	Brushed Copper	1 x 7W max LED GU10	L:82mm W:82mm H:115mm Cutout:78mm
SPA-35724-MWHT		Matt White		
SPA-35725-MBLK		Matt Black		
SPA-35727-CHR		Chrome		
SPA-35723-SBRS		Satin Brass		
SPA-35726-SCHR		Satin Chrome		

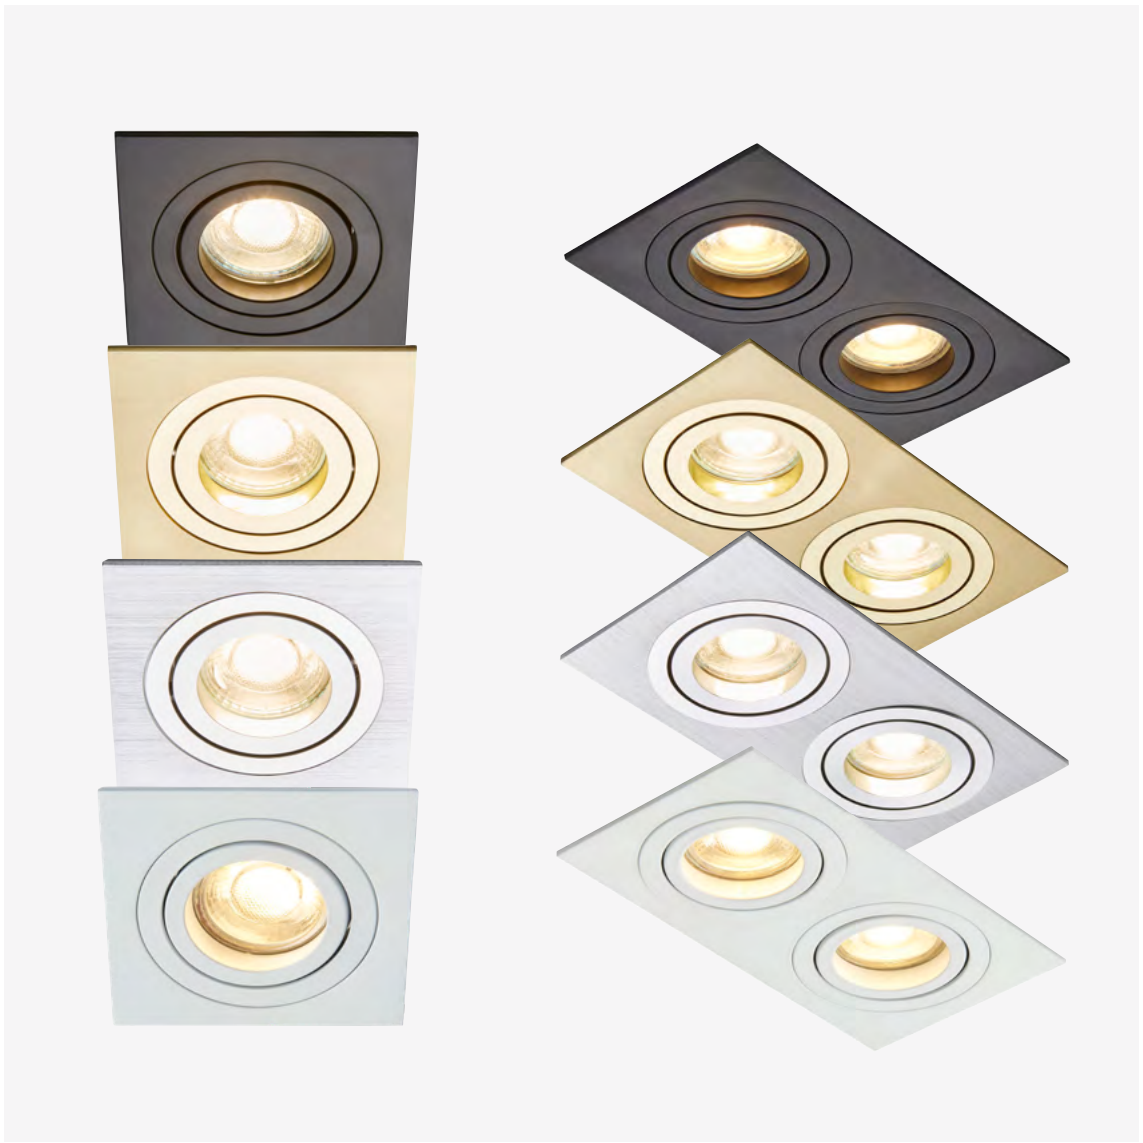

PASTO

Adjustable Downlight





Code	Description	Finish	Lamp	Dimensions
INL-38617-BLK	Pasto Single Adjustable Downlight	Black	1 x 7W max LED GU10	L:92mm W:92mm H:3mm Cutout:80mm
INL-38617-POLBRS		Polished Brass		
INL-38617-POLSIL		Polished Silver		
INL-38617-WHT		White		
INL-38618-BLK	Pasto Double Adjustable Downlight	Black	2 x 7W max LED GU10	L:174mm W:92mm H:3mm Cutout:160 x 80mm
INL-38618-POLBRS		Polished Brass		
INL-38618-POLSIL		Polished Silver		
INL-38618-WHT		White		



PASTO

Triple Adjustable Downlight

245 x 80mm Class 2
Cut-out

Code	Description	Finish	Lamp	Dimensions
INL-38619-BLK		Black		
INL-38619-POLBRS	Pasto Triple Adjustable Downlight	Polished Brass	3 x 7W max LED GU10	L:257mm W:92mm H:3mm Cutout:245 x 80mm
INL-38619-POLSIL		Polished Silver		
INL-38619-WHT		White		



395
Lumens

IP44



- Available in 4 finishes
- Pull Switch
- 8W LED module (SMD)
- K: 3000
- Lm: 395
- Lm/W: 70



CHAI

Picture/Mirror Light

IP44 Rated | 3000K WW | Class 1 | 0.5kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-30993-CHR	Chrome	Chai Bathroom Picture/Mirror LED Light	8W	3000k	395	70	H:80mm W:410mm Proj:160mm
SPA-30993-SNIC	Satin Nickel						
SPA-30993-SATBRS	Satin Brass						
SPA-30993-MBLK	Matt Black						

610
Lumens

3x



- 1.5 meter cable with BS1636 plug
- 3 flexibility joints for full adjustability
- 5" optical lens with 3x magnification
- Supplied with C-clamp base
- Optional floor stand available (ILL-34557-WHT)
- On/Off Rocker Switch
- 8W LED module (SMD)
- K: 6000
- Lm: 610
- Lm/W: 76



- Task lamp simply slots into stand

BUDA

LED Task Lamp



1.5M
Cable



6000K
DW



Class 2



2.46kg

Code	Description	Lamp	Finish	Dimensions
INL-34557-WHT	Buda LED Task Lamp	8W LED	Matt White	L:400mm W:210mm H:1000mm

1100
Lumens



- 1.5 meter cable with BS1636 plug
- 3 flexibility joints for full adjustability
- 5" optical lens with 3x magnification
- Supplied with C-clamp base
- Optional floor stand available (ILL-34557-WHT)
- On/Off Rocker Switch
- 22W T4 Fluorescent lamp - included
- Lm: 1100

BUDA

Task Lamp



1.5M
Cable



Class 2



2.46kg

Code	Description	Lamp	Finish	Dimensions
INL-34556-WHT	Buda Task Lamp	22W T4 Fluorescent	Matt White	L:415mm W:200mm H:1000mm

RIMINI

E27/ES CABLE SET



- Fits E27 lamps
- Adjustable height
- Available in 3 finishes
- Max cable height 1000mm including ceiling cup and lampholder

Code	Finish	Description	Lamp	Dimensions
INL-37894-BCOP	Brushed Copper	Lampholder Flush	1 x max 10W LED E27 GLS	Dia:105mm H:100mm
INL-37894-PEW	Pewter			
INL-37894-BRZ	Bronze			

DALE

E27/ES CABLE SET



- Fits E27 lamps
- Adjustable height
- Available in 4 finishes
- Vintage styling
- Lamps supplied separately

Code	Description	Finish	Lamp	Dimensions
INL-23519-BLK	Cable Set	Black Nickel with Black Twisted cable	1 x 42W Max E27	Dia:118mm H:1100mm
INL-23519-GRY	Cable Set	Black Nickel with Grey Twisted cable	1 x 42W Max E27	Dia:118mm H:1100mm
INL-23519-RED	Cable Set	Polished Nickel with Red Twisted cable	1 x 42W Max E27	Dia:118mm H:1100mm
INL-23519-HERR	Cable Set	Polished Nickel with Herringbone cable	1 x 42W Max E27	Dia:118mm H:1100mm



DALE

E27/ES CABLE SET



- Fits E27 lamps
- Can be fitted to almost any easyfit shade
- Adjustable height
- Available in 5 finishes
- Vintage styling
- Lamps supplied separately

Code	Description	Lamp	Dimensions
INL-27988-ABRS	Antique Brass Cable Set with Champagne Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm
INL-27988-ACOP	Antique Copper Cable Set with Black Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm
INL-27988-PEW	Pewter Cable Set with Black Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm
INL-27988-BRZ	Bronze Cable Set with Black Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm
INL-27988-SNIC	Satin Nickel Cable Set with Grey Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm



- Height adjustable

NAPOLI

Rope Cable Set



Class 1



0.4kg

Code	Finish	Description	Lamp	Dimensions
INL-37839	Pewter/Natural	Napoli Rope Cable Set	1 x 10W max LED E27 GLS	H:1050mm Dia:100mm



- Supplied with hook and loop fixing kit to create your own style
- Height adjustable

NAPOLI

Rope 6 Light Ceiling Light



Class 1



2.4kg

Code	Finish	Description	Lamp	Dimensions
INL-37829	Pewter/Natural	Napoli Rope 6 Light Ceiling Light	6 x 10W max LED E27 GLS	H:1420mm Dia:2550mm (extd.)



SHADE
RING



- Supplied with hook and loop fixing kit to create your own style
- Can be fitted with most easyfit shades
- Height adjustable

PADUA

Ceiling Light



Class 1

Code	Finish	Description	Lamp	Dimensions	Weight
INL-37877-ACOP	Copper/Black	Padua 3 Light Ceiling Light	3 x 10W max LED E27 GLS	Min H:110mm Max H:1180mm	0.8kg
INL-37878-ACOP	Copper/Black	Padua 5 Light Ceiling Light	5 x 10W max LED E27 GLS	Min H:110mm Max H:1180mm	1.3kg
INL-31789-ACOP	Copper/Black	Padua 7 Light Ceiling Light	7 x 10W max LED E27 GLS	Min H:110mm Max H:2000mm	1.81kg



RIGEL

DINER SHADES

INL-33818-ACOP



- Supplied with B22 shade ring adapter
- Cable set not supplied
- Fits INL-27988 E27 cable sets

INL-33819-ABRS



- Supplied with B22 shade ring adapter
- Cable set not supplied
- Fits INL-27988 E27 cable sets

Description	Colour	Small	Dimensions	Large	Dimensions
Rigel Diner Shade	Antique Brass	INL-33818-ABRS	H:67mm Dia:236mm	INL-33819-ABRS	H:67mm Dia:360mm
Rigel Diner Shade	Matt Black	INL-33818-MBLK	H:67mm Dia:236mm	-	-
Rigel Diner Shade	Polished Nickel	INL-33818-PNIC	H:67mm Dia:236mm	INL-33819-PNIC	H:67mm Dia:360mm
Rigel Diner Shade	Antique Copper	INL-33818-ACOP	H:67mm Dia:236mm	INL-33819-ACOP	H:67mm Dia:360mm
Rigel Diner Shade	Matt Grey	INL-33818-MGRY	H:67mm Dia:236mm	INL-33819-MGRY	H:67mm Dia:360mm



DECORATIVE SHADES



INL-33136-SMK



INL-33140-ACOP

Key Features

- Supplied with B22 shade ring adapter
- Cable set not supplied
- Fits INL-27988 E27 cable sets

Code	Description	Colour	Dimensions
INL-33136-SMK	Algol Coolie Glass Easyfit Shade	Smoke	Dia:250mm H:125mm
INL-33140-ACOP	Castor Diamond Wire Easyfit Shade	Antique Copper	Dia:263mm H:210mm

- Fits E27 lamps
- Perfect replacement for standard ceiling rose pendants



CEILING ROSE

E27/ES

Code	Finish	Description	Lamp	Dimensions
INL-34942-SNIC	Satin Nickel	Ceiling Rose	1 x max 10W LED E27 GLS	Dia:180mm H:120mm
INL-34942-ABRS	Antique Brass			
INL-34942-ACOP	Antique Copper			



SHADE RING



- Fits E27 lamps
- Can be fitted with most easyfit shades
- Space between ceiling and shade ring

PADUA LAMPHOLDER

E27/ES

Code	Finish	Description	Lamp	Dimensions
INL-38239-BRZ	Bronze	Lampholder Flush	1 x max 10W LED E27 GLS	Dia:105mm H:100mm
INL-38239-PEW	Pewter			
INL-38239-SNIC	Satin Nickel			



- 360° Beam angle
- Dimmable
- Available in amber or smoke




LARGE VINTAGE LAMPS


E27/ES




INL-34028-SMK




INL-34029-SMK




INL-34030-SMK




INL-34031-SMK




INL-34028-AMB




INL-34029-AMB



INL-34030-AMB



INL-34031-AMB




Code	Description	Kelvin	Lumen	Dimensions
INL-34028-AMB/SMK	G180 6W LED E27 Filament Lamp	2000/4000	450	Dia:180mm H:230mm
INL-34029-AMB/SMK	A165 6W LED E27 Filament Lamp	2000/4000	450	Dia:165mm H:300mm
INL-34030-AMB/SMK	BT180 6W LED E27 Filament Lamp	2000/4000	450	Dia:180mm H:360mm
INL-34031-AMB/SMK	T80 6W LED E27 Filament Lamp	2000/4000	450	Dia:80mm H:330mm


VINTAGE LAMPS

E27/ES





580
LUMEN
DIMMABLE





650
LUMEN
DIMMABLE




400
LUMEN
DIMMABLE





450
LUMEN
DIMMABLE

Code	Description	Colour	Kelvin	Lumen	Dimensions
INL-ST64-LED-ES-TNT	ST64 6W E27 LED Filament Lamp	Tinted	2000	580	Dia:64mm H:140mm
INL-ST64-LED-BC-TNT	ST64 6W B22 LED Filament Lamp	Tinted	2000	580	Dia:64mm H:140mm
INL-ST64-LED-ES-CLR	ST64 6W E27 LED Filament Lamp	Clear	2000	650	Dia:64mm H:140mm
INL-ST64-LED-BC-CLR	ST64 6W B22 LED Filament Lamp	Clear	2000	650	Dia:64mm H:140mm
INL-G80-LED-ES-TNT	G80 4W E27 LED Filament Lamp	Tinted	2000	400	Dia:80mm H:120mm
INL-G80-LED-BC-TNT	G80 4W B22 LED Filament Lamp	Tinted	2000	400	Dia:80mm H:120mm
INL-G80-LED-ES-CLR	G80 4W E27 LED Filament Lamp	Clear	2000	450	Dia:80mm H:120mm
INL-G80-LED-BC-CLR	G80 4W B22 LED Filament Lamp	Clear	2000	450	Dia:80mm H:120mm


VINTAGE LAMPS

E27/ES





580
 LUMEN
 DIMMABLE




650
 LUMEN
 DIMMABLE





165
 LUMEN
 DIMMABLE




180
 LUMEN
 DIMMABLE




350
 LUMEN
 DIMMABLE

Code	Description	Colour	Kelvin	Lumen	Dimensions
INL-G95-LED-ES-TNT	G95 6W E27 LED Filament Lamp	Tinted	2000	580	Dia:95mm H:140mm
INL-G95-LED-BC-TNT	G95 6W B22 LED Filament Lamp	Tinted	2000	580	Dia:95mm H:140mm
INL-G95-LED-ES-CLR	G95 6W E27 LED Filament Lamp	Clear	2000	650	Dia:95mm H:140mm
INL-C35L-LED-SES-TNT	C35L 2W E14 LED Filament Lamp	Tinted	2000	165	Dia:35mm H:120mm
INL-C35L-LED-SES-CLR	C35L 2W E14 LED Filament Lamp	Clear	2000	180	Dia:35mm H:120mm
INL-A60-LED-ES-TNT	A60 4W E27 LED Filament Lamp	Tinted	2200	350	Dia:60mm H:120mm

G9

COB LED LAMPS



▼
WARM WHITE
200 LUMEN



▼
WARM WHITE
200 LUMEN
3 PACK



▼
WARM WHITE
200 LUMEN
6 PACK



▼
COOL WHITE
200 LUMEN



▼
COOL WHITE
200 LUMEN
3 PACK



▼
COOL WHITE
200 LUMEN
6 PACK

Code	Description	Cap Type	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Beam Angle	Dimensions
INL-38119	2W COB LED G9	G9	2W	3000k	200	100lm/W	360°	H:50mm Dia:14mm
INL-38120				Warm White				
INL-38122				4500k				
INL-38123				Cool White				
INL-38124								
INL-38125								

FILAMENT

LED LAMPS




600
 LUMEN
 DIMMABLE


600
 LUMEN
 DIMMABLE




400
 LUMEN
 DIMMABLE


400
 LUMEN
 DIMMABLE

Code	Bulb Shape	Cap Type	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Beam Angle	Dimensions
INL-36014	GLS (Classic)	B22	6W	3000k	600	100lm/W	360°	Dia:60mm H:108mm
INL-36013	GLS (Classic)	E27	6W	Warm White	600			Dia:60mm H:108mm
INL-36012	Candle	E14	4W	Warm White	400			Dia:35mm H:100mm
INL-36017	GLS (Classic)	B22	6W	4000k	600			Dia:60mm H:108mm
INL-36016	GLS (Classic)	E27	6W	Cool White	600			Dia:60mm H:108mm
INL-36015	Candle	E14	4W	White	400			Dia:35mm H:100mm

G9 LED LAMPS



NEW
FOR
2023

500
LUMEN

5W
LED

- Available as singles, 3 pack or 6 packs
- Warm white 3000k or cool white 4000k colour temperatures



NEW
FOR
2023

800
LUMEN

8W
LED

- Available as singles, 3 pack or 6 packs
- Warm white 3000k or cool white 4000k colour temperatures



NEW
FOR
2023

300
LUMEN

3.5W
LED

- Available as singles, 3 pack or 6 packs
- Warm white 3000k or cool white 4000k colour temperatures



NEW
FOR
2023

550
LUMEN

6.7W
LED

- Available as singles, 3 pack or 6 packs
- Warm white 3000k or cool white 4000k colour temperatures

Warm White 3k	Cool White 4k	Description	Pack Size	Hours	Lumen	Dimmable	Dimensions
INL-42264	INL-42265	5W G9 LED Clear	Single	500lm	500lm	Non Dimmable	Dia. 16.5mm H:61mm
INL-42266	INL-42267		3 Pack				
INL-42268	INL-42269		6 Pack				
INL-42270	INL-42271	8W G9 LED Clear	Single	800lm	800lm	Non Dimmable	Dia. 18mm H:75mm
INL-42272	INL-42273		3 Pack				
INL-42274	INL-42275		6 Pack				
INL-42276	INL-42277	3.5W G9 LED Frosted	Single	300lm	300lm	Dimmable	Dia. 17mm H:50mm
INL-42278	INL-42279		3 Pack				
INL-42280	INL-42281		6 Pack				
INL-42282	INL-42283	6.7W G9 LED Frosted	Single	550lm	550lm	Dimmable	Dia. 21mm H:69mm
INL-42284	INL-42285		3 Pack				
INL-42286	INL-42287		6 Pack				

ANTI-GLARE

DIMMABLE GU10 LED LAMPS



Code	Description	Colour	Kelvin	Hours	Lumen	Dimmable	Dimensions
INL-41999	5W Anti-Glare GU10 LED Lamp	Black	3000k	30000	369	Yes	Dia:50mm H:56mm
INL-42000			4000k		367		
INL-42001		White	3000k		369		
INL-42002			4000k		367		
INL-42003		Chrome	3000k		369		
INL-42004			4000k		367		
INL-42005		Satin Chrome	3000k		369		
INL-42006	4000k		367				

G9

LED LAMPS



▼
WARM
WHITE


180
LUMEN



▼
WARM
WHITE

180
LUMEN

3
PACK

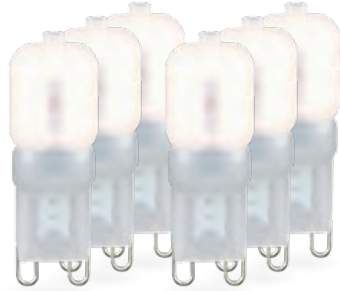

▼
WARM
WHITE

180
LUMEN

6
PACK



▼
COOL
WHITE

180
LUMEN



▼
COOL
WHITE

180
LUMEN

3
PACK



▼
COOL
WHITE

180
LUMEN



6
PACK

Code	Description	Pack Size	Kelvin	Lumen	Dimensions
INL-28573	2.5W G9 LED Lamp	Single	3000	180	W:16mm H:48mm
INL-28575	2.5W G9 LED Lamp	3 Pack	3000	180	W:16mm H:48mm
INL-28577	2.5W G9 LED Lamp	6 Pack	3000	180	W:16mm H:48mm
INL-28574	2.5W G9 LED Lamp	Single	4000	180	W:16mm H:48mm
INL-28576	2.5W G9 LED Lamp	3 Pack	4000	180	W:16mm H:48mm
INL-28578	2.5W G9 LED Lamp	6 Pack	4000	180	W:16mm H:48mm



GU10

LED LAMPS




400
LUMEN
 
38°
BEAM ANGLE




400
LUMEN
 
38°
BEAM ANGLE

Code	Description	Hours	Kelvin	Lumen	Dimmable	Dimensions
INL-34150-3K	5W LED GU10 LED Lamp	30000	3000	400	-	Dia:50mm H:53mm
INL-34151-3K	5W LED GU10 LED Lamp	30000	3000	400	Yes	Dia:50mm H:53mm
INL-34150-4K	5W LED GU10 LED Lamp	30000	4000	400	-	Dia:50mm H:53mm
INL-34151-4K	5W LED GU10 LED Lamp	30000	4000	400	Yes	Dia:50mm H:53mm

DUSK TILL DAWN

LED LAMPS



DUSK
TILL
DAWN

800
LUMEN



DUSK
TILL
DAWN

800
LUMEN

Code	Description	Hours	Kelvin	Lumen	Dimensions
INL-29464-WW	9W LED E27 D2D LED Lamp	40000	2700	800	Dia:60mm H:115mm
INL-29464-CW	9W LED E27 D2D LED Lamp	40000	4000	800	Dia:60mm H:115mm
INL-29465-WW	9W LED B22 D2D LED Lamp	40000	2700	800	Dia:60mm H:115mm
INL-29465-CW	9W LED B22 D2D LED Lamp	40000	4000	800	Dia:60mm H:115mm

CCT

LED LAMPS



	1050 LUMEN	200° BEAM ANGLE
--	----------------------	------------------------------



	1050 LUMEN	200° BEAM ANGLE
--	----------------------	------------------------------



	500 LUMEN	120° BEAM ANGLE
--	---------------------	------------------------------

- 3 colour choices
- Not dimmable
- Switch between 3000K warm white, 4000K cool white and 6000K daylight white

Code	Description	Hours	Kelvin	Lumen	Dimensions
INL-34400-CCT	6W LED GU10 LED Lamp	25000	CCT	500	Dia:50mm H:53mm
INL-34401-CCT	12W LED E27 GLS LED Lamp	25000	CCT	1050	Dia:60mm H:111mm
INL-35728-CCT	12W LED B22 GLS LED Lamp	25000	CCT	1050	Dia:60mm H:111mm



WORKSITE


A professional range of robust, high output and long lasting LED site lighting.

SECURITY/FLOODLIGHTS	388-395
TORCHES	396-402
PORTABLE	403-423
FESTOON	424-425

NEW
FOR
2023

Upto
16500
Lumens

IP65

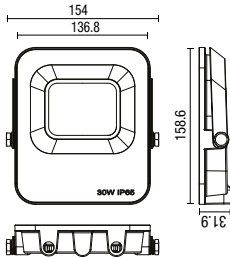

- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime

SLIMLINE LED Floodlight




Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
SXLS38687E	Slimline LED Floodlight	20W LED	2200	0.32kg	H:120mm W:120mm Proj:33mm
SXLS38688E		30W LED	3300	0.55kg	H:158mm W:154mm Proj:33mm
SXLS38689E		50W LED	5500	0.78kg	H:193mm W:183mm Proj:33mm
SXLS38690E		100W LED	11000	1.24kg	H:233mm W:218mm Proj:33mm
SXLS38691E		150W LED	16500	1.8kg	H:268mm W:248mm Proj:33mm

NEW
FOR
2023

Upto
16500
Lumens

IP65

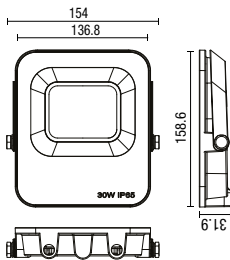

- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime
- PIR sensor with adjustable LUX sensitivity and timer
- 12m Detection Distance



SLIMLINE

LED Floodlight with PIR Sensor



Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
SXLS38693E	Slimline LED Floodlight with PIR Sensor	20W LED	2200	0.35kg	H:190mm W:120mm Proj:54mm
SXLS38694E		30W LED	3300	0.78kg	H:193mm W:183mm Proj:54mm
SXLS38695E		50W LED	5500	1.24kg	H:233mm W:218mm Proj:54mm
SXLS38696E		100W LED	11000	1.8kg	H:268mm W:248mm Proj:54mm
SXLS38697E		150W LED	16500	1.83kg	H:350mm W:250mm Proj:54mm

NEW
FOR
2023

Upto
4500
Lumens

IP65



- Die-cast aluminium with frosted polycarbonate diffuser
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime



FROSTED LED Floodlight



Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
SXLS38927E	Frosted LED Floodlight	10W LED	900	0.32kg	H:80mm W:117mm Proj:55mm
SXLS38928E		20W LED	1800	0.4kg	H:100mm W:150mm Proj:55mm
SXLS38929E		30W LED	2700	0.55kg	H:120mm W:185mm Proj:55mm
SXLS38930E		50W LED	4500	0.7kg	H:145mm W:215mm Proj:55mm

NEW
FOR
2023

Upto
4500
Lumens

IP54



**MANUAL
OVERRIDE**



- Die-cast aluminium with frosted polycarbonate diffuser
- Horizontal & Vertical adjustment on bracket
- Adjustable timer, LUX and sensitivity
- 25,000 hours lifetime

FROSTED

LED Floodlight with PIR Sensor

PIR Sensor | IP54 Rated | 180° Beam | 6500K DW | Class 1

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
SXLS38933E	Frosted LED Floodlight with PIR Sensor	10W LED	900	0.32kg	H:150mm W:117mm Proj:70mm
SXLS38934E		20W LED	1800	0.4kg	H:155mm W:150mm Proj:75mm
SXLS38935E		30W LED	2700	0.55kg	H:185mm W:185mm Proj:75mm
SXLS38936E		50W LED	4500	0.77kg	H:205mm W:215mm Proj:55mm

NEW
FOR
2023

Upto
3500
Lumens


IP65



- Die-cast aluminium with frosted polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime



DIECAST LED Floodlight



Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
SXLS38937E	Die-cast LED Floodlight	10W LED	700	0.21kg	H:105mm W:105mm Proj:45mm
SXLS38938E		20W LED	1400	0.35kg	H:130mm W:130mm Proj:45mm
SXLS38939E		30W LED	2100	0.51kg	H:165mm W:165mm Proj:45mm
SXLS38940E		50W LED	3500	0.72kg	H:200mm W:200mm Proj:45mm



NEW
FOR
2023

Upto
3500
Lumens

IP54

**MANUAL
OVERRIDE**

- Die-cast aluminium with frosted polycarbonate diffuser
- Pre wired with 500mm cable
- Adjustable timer, LUX and sensitivity
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime

DIECAST

LED Floodlight with PIR Sensor

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
SXLS38941E	Die-cast LED Floodlight with PIR Sensor	10W LED	700	0.25kg	H:160mm W:105mm Proj:78mm
SXLS38942E		20W LED	1400	0.42kg	H:185mm W:130mm Proj:78mm
SXLS38943E		30W LED	2100	0.57kg	H:215mm W:165mm Proj:78mm
SXLS38944E		50W LED	3500	0.78kg	H:240mm W:200mm Proj:78mm

Upto
8000
Lumens

IP65



- Die-cast aluminium
- Pre wired with 500mm cable
- 180° beam angle
- Angled bracket for easy installation

SLIMLINE LED Floodlight



IP65
Rated



180°
Beam



6500K
DW



0.5M
Cable



Class 1

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
SXLS343544KBE	Slimline LED Floodlight	10W LED	800	0.18kg	H:120mm W:103mm Proj:65mm
SXLS312944KBE		20W LED	1600	0.41kg	H:162mm W:159mm Proj:85mm
SXLS312954KBE		30W LED	2400	0.41kg	H:162mm W:159mm Proj:85mm
SXLS312964KBE		50W LED	4000	0.74kg	H:180mm W:205mm Proj:115mm
SXLS317644KBE		100W LED	8000	1.37kg	H:230mm W:270mm Proj:142mm









**Upto
4000
Lumens**

IP65



- Die-cast aluminium
- Pre wired with 500mm cable
- 180° beam angle
- Angled bracket for easy installation
- PIR sensor with adjustable LUX sensitivity and timer
- 12m Detection Distance
- Hrs: 20,000

SLIMLINE LED Floodlight with PIR

 PIR Sensor |
  IP65 Rated |
  180° Beam |
  6500K DW |
  0.5M Cable |
  Class 1

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
SXLS343594KBE		10W LED	800	0.23kg	H:140mm W:103mm Proj:148mm
SXLS343604KBE	Slimline LED Floodlight with PIR	20W LED	1600	0.46kg	H:180mm W:158mm Proj:159mm
SXLS343614KBE		30W LED	2400	0.46kg	H:180mm W:158mm Proj:159mm
SXLS343624KBE		50W LED	4000	0.82kg	H:200mm W:205mm Proj:150mm

NEW
FOR
2023

300
Lumens

2
Modes
1 HI | 2 LO

25m

4.5
Hours



- Aluminium construction with adjustable nylon headband for a snug and comfortable fit
- Magnetic design to one side
- Adjustable light angle without removing from your head
- Push button ON/OFF switch with 2 modes (low 100lm/high 300lm)
- Beam projects up to 25m
- Battery lasts up to 10 hours on low, 4.5 hours on high brightness
- Supplied with Duracell batteries



ALUMINIUM

Magnetic LED Headtorch

Code	Description	Power (w)	Total Flux (lm)	Weight	Batteries
SXLS50100E	LED Headtorch	3W COB LED	100/300	0.10kg	3 x 1.5V AAA (included)



NEW
FOR
2023

300
Lumens

3 Modes
1 HI
2 LO
3 FL

150m

1.2/6
Hours

- Aluminium construction with adjustable nylon headband for a snug and comfortable fit
- Push button ON/OFF switch with 3 modes (low 100lm/high 300lm/flash)
- Adjustable rotating focus
- Beam projects up to 150m
- Battery lasts up to 6 hours on low, 1.2 hours on high brightness
- Supplied with Duracell batteries



ALUMINIUM

Adjustable LED Headtorch

Code	Description	Power (w)	Total Flux (lm)	Weight	Batteries
SXLS50101E	LED Headtorch	3W CREE LED	90/300	0.114kg	3 x 1.5V AAA (included)

NEW
FOR
2023

600
Lumens

3
Modes

270m

2
Hours

IP44



- Aluminium construction
- Push button ON/OFF switch with 3 modes (low 45lm/high 600lm/flash)
- Rotating adjustable focus
- Beam projects up to 270m
- Battery lasts up to 20 hours on low, 2 hours on high brightness
- IP44 water resistant
- Supplied with Duracell batteries



600LM ALUMINIUM

Adjustable LED Torch

Code	Description	Power (w)	Total Flux (lm)	Weight	Batteries
SXLS50102E	600lm LED Torch	5W LED	45/600	0.155kg	4 x 1.5V AAA (included)



- Aluminium construction
- Push button ON/OFF switch with 3 modes (low 50lm/high 800lm/flash)
- Rotating adjustable focus
- Beam projects up to 260m
- Battery lasts up to 50 hours on low, 18 hours on high brightness
- IP44 water resistant
- Supplied with Duracell batteries



800LM ALUMINIUM

Adjustable LED Torch

Code	Description	Power (w)	Total Flux (lm)	Weight	Batteries
SXLS50103E	800lm LED Torch	7W LED	50/800	0.305kg	3 x 1.5V C (included)

NEW
FOR
2023

350
Lumens

3
Modes

175m

4
Hours

IP44



- Aluminium construction
- Push button ON/OFF switch with 3 modes (low 25lm/high 350lm/flash)
- Rotating adjustable focus
- Beam projects up to 175m
- Battery lasts up to 25 hours on low, 4 hours on high brightness
- IP44 water resistant
- Supplied with Duracell batteries



350LM ALUMINIUM

Adjustable LED Torch

Code	Description	Power (w)	Total Flux (lm)	Weight	Batteries
SXLS50105E	350lm LED Torch	3W LED	25/350	0.085kg	3 x 1.5V AAA (included)



NEW
FOR
2023

280
Lumens

3
Modes

150m

4
Hours

IP44

- Aluminium construction
- Push button ON/OFF switch with 3 modes (low 25m/high 280m/flash)
- Rotating adjustable focus
- Beam projects up to 150m
- Battery lasts up to 25 hours on low, 4 hours on high brightness
- IP44 water resistant
- Supplied with Duracell batteries



280LM ALUMINIUM

Adjustable LED Torch

Code	Description	Power (w)	Total Flux (lm)	Weight	Batteries
SXLS50106E	280lm LED Torch	3W LED	50/800	0.081kg	2 x 1.5V AA (included)



NEW
FOR
2023

650
Lumens

3
Modes

240m

5
Hours

IP44



- Aluminium construction
- Rechargeable USB-C port with charge indicator
Red (charging) Green (charged)
- Push button ON/OFF switch with 3 modes
(low 350lm/high 650lm/flash)
- Rotating adjustable focus
- Beam projects up to 240m
- Battery lasts up to 9 hours on low, 5 hours on
high brightness
- Charge time 4.5hrs
- IP44 water resistant



650LM RECHARGEABLE

Adjustable LED Torch

Code	Description	Power (w)	Total Flux (lm)	Weight	Batteries
SXLS50104E	Rechargeable LED Torch	5W CREE LED	350/650	0.156kg	1 x 3.7V 2200mAh Rechargeable



NEW
FOR
2023

5200
Lumens

60W
LED


IP65

PACK
INCLUDES
WORKLIGHT
& TRIPOD

- NEW improved Twin LED work light with extendable heavy duty tripod
- Tripod has a bar clamp for fast secure fitting and a built in cord wrap
- 2m H05RN-F 3G 1.0mm cable
- 2 x 30W SMD LED for powerful energy efficient light

TWIN LED

Work Light with Tripod

 3M Cable |
  IP65 Rated |
  6000K DW |
  Class 1 |
  4.45kg

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS34624/31333LE	Twin Work Light with Tripod	220-240V	2 x 30W LED	5200	Dia:1160mm H:1170/1700mm


NEW
FOR
2023

Upto
1500
Lumens

IP54



- Rechargeable SAMSUNG battery cells
- Durable ABS with heavy duty rubber surround
- 25% / 50% / 100% / OFF brightness modes
- 1m H05RN-F 3G 1.0mm charging cable with IEC connector
- 2 hours run time at full brightness, 50% brightness, 5 hours & 25% brightness, 8 hours
- 4-5 hours charge time
- 25,000 hours LED lifetime



RECHARGEABLE

Work Light



Code	Description	Voltage	Battery	Lamp	Lumen	Dimensions
SXLS31329E	Rechargeable Work Light	220-240V	3.7V 4400mAh	10W LED	1000	L:58mm W:158mm H:225mm
SXLS31330E	Rechargeable Work Light	220-240V	3.7V 8800mAh	20W LED	1500	L:58mm W:158mm H:225mm



NEW
FOR
2023

4000
Lumens

50W
LED

IP54

- Durable ABS / PC body with steel legs
- Foldable stand and carry handle
- 2m H05RN-F 3G 1.5mm cable
- 1 x external socket outlet
- 50W LED module (SMD)
- K: 6000
- Lm: 4000
- Lm/W: 80



PLASTERERS

Area Work Light



Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS37673E	Plasterers Work Light	240V	50W LED	4000	L:880mm W:880mm H:1070mm





8400
Lumens


80W
LED

IP54

- 180° and 360° directional light heads helps prevent light wastage or pollution
- Telescopic pole with manual quick release handles for speedy height adjustment
- Adjustable height from 1.5 to 2m
- Integrated carry handle
- Each head can be switched ON/OFF independently
- 3m H05RN-F 3G 1.5mm cable
- 1 x external socket outlet



360° AREA Tower Light

 3M Cable	 IP54 Rated	 6500K DW	 Class 1	 5.6kg
--	--	--	--	--

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SXLS37182E	360° Area Tower Light	80W	6500	8600	H:1500-2000mm Dia:920mm



4800
Lumens

IP65

60W
LED



- Durable steel frame and die-cast aluminium body
- Frosted shatterproof lens
- Light can be angled exactly where needed
- 2m H05RN-F 3G 1.5mm cable
- IP65 rated
- Tripod mountable

TWIN

2 x 30W Worklight



2M
Cable



IP65
Rated



4000K
CW



Class 1



1.7kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SXLS37952E	Twin 2 x 30W Worklight	60W	4000	4800	L:175mm W:485mm H:315mm



3000
Lumens

40W
LED

IP65

- Durable steel frame and die-cast aluminium body
- Frosted shatterproof lens
- Light can be angled exactly where needed
- 2m H05RN-F 3G 1.5mm cable
- IP65 rated
- Tripod mountable

TWIN

2 x 20W Worklight


2M
Cable


IP65
Rated


4000K
CW


Class 1


2kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SXLS37951E	Twin 2 x 20W Worklight	40W	4000	3000	L:175mm W:485mm H:315mm

Upto
4000
Lumens

IP44

3
SIZES
AVAILABLE



- Durable steel frame and die-cast aluminium body
- Frosted shatterproof lens
- Light can be angled exactly where needed
- 1.5m H05RN-F 3G 1.0mm cable

PORTABLE

Work Light



1.5M
Cable



IP44
Rated



4000K
CW



Class 1

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Weight (kg)	Dimensions
SXLS36383E	Folding Work Light	20W	4000	1600	1kg	L:115mm x W:190mm x H:290mm
SXLS35584E		30W	4000	2400	1.25	L:145mm W:220mm H:320mm
SXLS35585E		50W	4000	4000	1.45	L:185mm W:250mm H:330mm






Upto
3600
Lumens

IP65

3
SIZES
AVAILABLE

- Durable steel frame and die-cast aluminium body
- Frosted shatterproof lens
- Foldable stand for easy storage and transportation
- 1.5m H05RN-F 3G 1.0mm cable

FOLDING Work Light

 1.5M Cable |
  IP65 Rated |
  4000K CW |
  Class 1

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Weight (kg)	Dimensions
SXLS35525E	Folding Work Light	20W	4000	1500	0.93	L:165mm x W:225mm x H:275mm
SXLS35526E		30W	4000	2200	1.28	L:185mm W:250mm H:335mm
SXLS35527E		50W	4000	3600	1.7	L:185mm W:280mm H:375mm

8400
Lumens

120W
LED

IP65

IK10



- Tripod mountable
- Durable polycarbonate body
- Heavy duty shockproof base
- 360° beam angle for shadow free illumination
- 5m H05RN-F 3G 1.5mm cable
- IK10 vandal resistant
- 120W LED module (SMD)
- K: 6000
- Lm/W: 70

AREA Work Light



Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31324ES	Area Work Light	110V	120W LED	8400	L:349mm W:347mm H:436mm



**7500
Lumens**

**50W
LED**

IP65



- EVE Energy rechargeable battery cells
- Durable steel frame and die-cast aluminium body
- Battery: 6 x 3.7V 2600mAh
- 20% / 60% / 100% / OFF brightness modes
- Run time
 - 100% - 4 hours
 - 60% 9 hours
 - 20% 12 hours
- 5-6 hours charge time
- 25,000 hours LED lifetime

RECHARGEABLE

Folding Worklight

 Rechargeable	 IP65 Rated	 6000K DW	 Class 3	 1.65kg
--	--	--	---	--

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SXLS37177E	Rechargeable Worklight	20W	6000	3000	L:185mm W:229mm H:285mm
SXLS37178E	Rechargeable Worklight	30W	6000	4500	L:195mm W:260mm H:320mm
SXLS37179E	Rechargeable Worklight	50W	6000	7500	L:220mm W:300mm H:385mm

NEW

**2600
Lumens**

**30W
LED**

IP54



- 3m H07RN-F 3G 1.5mm cable
- 1 x external socket outlet
- Magnetic base
- Hanging hook
- Suitable for tripod mounting with Stanley Universal Tripod
- IP54 Rated



MAGNETIC & LINKABLE

Globe Area Light



3M
Cable



IP54
Rated



6000K
DW



1.93kg

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS36986E	Globe Area Light	220-240V	30W LED	2600	H:260mm W:200mm D:210mm




2100
Lumens


35W
LED

IP44

- Durable ABS / PC body
- Heavy duty rubber surround
- Folding carry handle acts as a stand and wall mountable fixture
- 5m H05RN-F 3G 1.5mm cable
- 1 x external socket outlet
- 35W LED module (SMD)
- K: 6000
- Lm: 2100
- Lm/W: 70

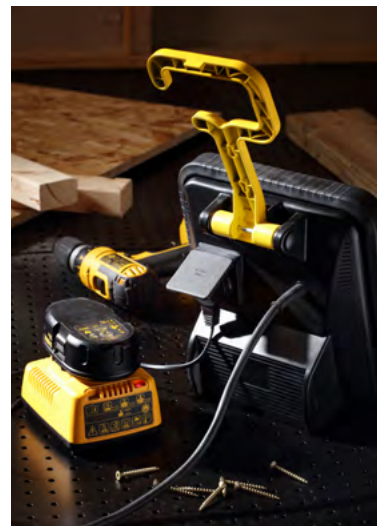

PORTABLE Work Light

 5M Cable	 IP44 Rated	 6000K DW	 Class 2	 2.24kg
--	--	--	--	---

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31326E	Portable Work Light	220-240V	35W LED	2100	L:120mm W:270mm H:275mm

4000
Lumens

50W
LED

IK10



- Durable ABS / PC body
- Heavy duty shockproof base with moulded carry handle
- IK10 impact resistant for tough working environments
- 2 x external socket outlets
- 5m H05RN-F 3G 1.5mm cable
- 50W LED module (SMD)
- Lm/W: 80



PANEL Work Light



5M
Cable



IK10



IP44
Rated



6000K
DW



Class 1



2.96kg

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31325ES	Panel Work Light	110V	50W LED	4000	L:150mm W:300mm H:465mm



**4000
Lumens**

**33W
LED**

IP65



- Durable die-cast aluminium and steel
- Floorstanding or can be tripod mounted
- 50% / 100% / OFF brightness modes
- 2m H05RN-F 3G 1.5mm cable
- 33W LED module (SMD)
- K: 6000
- Lm: 4000
- Lm/W: 80
- Hrs: 20,000

• Fits tripod SXLS31333E

WORK LIGHT



Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31331E	Work Light	220-240V	33W LED	4000	L:183mm W:215mm H:330mm





8000
Lumens

66W
LED

IP65



- Durable die-cast aluminium and steel
- Floorstanding or can be tripod mounted
- 50% / 100% / OFF brightness modes
- 2m H05RN-F 3G 1.5mm cable
- 2 x 33W LED module (SMD)
- K: 6000
- Lm: 8000
- Lm/W: 80
- Hrs: 20,000

• Fits tripod SXLS31333E

WORK LIGHT

 2M Cable	 IP65 Rated	 6000K DW	 Class 2	 4.45kg
--	--	--	--	---

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31332E	Twin Work Light	220-240V	2 x 33W LED	8000	L:183mm W:540mm H:370mm





**Upto
3900
Lumens**

IP65

- Durable die-cast body with plastic protective bumpers
- Foldable stand for easy storage and transportation
- 1.8m H05RN-F 3G 1.0mm cable

FOLDING Work Light



Code	Description	Voltage	Lamp	Lumen	Weight	Dimensions
SXLS31334E	Folding Work Light	220-240V	10W LED	800	1.6kg	L:235mm W:276mm H:283mm
SXLS31335E	Folding Work Light	220-240V	20W LED	1500	1.7kg	L:245mm W:292mm H:295mm
SXLS31336E	Folding Work Light	220-240V	30W LED	2100	1.84kg	L:255mm W:332mm H:295mm
SXLS31337E	Folding Work Light	220-240V	50W LED	3900	1.92kg	L:255mm W:322mm H:295mm




**Upto
1800
Lumens**

IP65



- Durable die-cast body with plastic protective bumpers
- 30% / 50% / 100% / OFF brightness modes
- Foldable stand for easy storage and transportation
- 1.5m H05RN-F 3G 1.0mm charging cable
- USB charging port with Android & IOS compatibility

RECHARGEABLE Folding Work Light



Code	Description	Battery	Charge-Time	Run-Time (100%)	Lamp	Lumen	Weight	Dimensions
SXLS31338E	Rechargeable	2 x 2200mAh	3 Hours	3 Hours	8W LED	600	1.6kg	L:235mm W:276mm H:283mm
SXLS31339E	Folding Work Light	4 x 2200mAh	4.5 Hours	3 Hours	18W LED	1350	1.7kg	L:245mm W:292mm H:295mm
SXLS31340E		6 x 2200mAh	4.5 Hours	3 Hours	24W LED	1800	1.8kg	L:255mm W:332mm H:295mm

NEW

4500
Lumens

50W
LED

IP54



- 3 Lighting Heads (Side lights adjustable)
- 1.5M H05RN-F 3G 1.5mm cable
- 3 Switch modes 4500LM / 2250LM / OFF
- Quick release mechanism
- Suitable for tripod mounting with Stanley Universal Tripod
- IP54 Rated



Multi Directional Work Light



1.5M
Cable



IP54
Rated



6000K
DW



2.15kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
v	Multi Directional Work Light	50W	6000	2600	H:235mm (w/o handle) W:405mm D:185mm

HEAVY DUTY TRIPOD



- Tough powder coated finish to prevent rust and corrosion
- Bar clamp for fast and secure fitting
- Locking mechanism securely locks legs into position
- Collapsible for easy transportation
- Height adjustable up to 1.4m
- Steel construction
- Built-in cord wrap function for easy storage

Code	Description	Colour	Weight	Dimensions
SXLS31333E	Heavy duty tripod	Black	2.24kg	Dia:780mm H:1400mm



800
Lumens

10W
LED

IP44



- Durable ABS / PC body
- 10 x E27 lampholders with protective guards
- 22m H05RN-F 3G 1.5mm cable
- 2m lampholder spacing
- 10 x 10W LED lamps included

FESTOON

10 Light

 22M Cable	 IP44 Rated	 6500K DW	 Class 1	 7.76kg
---	--	--	--	---

Code	Description	Voltage	Lamp	Lumen	Dimensions (Each Head)
SXLS31361E	10 Light Festoon	220-240V	10 x 10W Max LED E27 GLS	800	H:182mm Dia:115mm



6400
Lumens

80W
LED

IP44



- Durable ABS / PC construction
- 10 x 8W LED lamps
- 22m H05RN-F 3G 1.5mm cable
- 10 x 8W LED module (SMD)
- Lm: 6400
- Lm/W: 80

LED FESTOON

10 Light

 22M Cable	 IP44 Rated	 6500K DW	 Class 1	 7.76kg
---	--	--	---	--

Code	Description	Voltage	Lamp	Lumen	Dimensions (Each Head)
SXLS31362ES	10 Light LED Festoon	110V	10 x 8W LED	10 x 640	H:67mm Dia:115mm
SXLS31362E	10 Light LED Festoon	240V	10 x 8W LED	10 x 640	H:67mm Dia:115mm

MARKETING.

At Forum we offer a variety of Point of Sale and Marketing material, from counter top to wall board and ceiling displays.

Please speak to your internal or local sales person for more details.





INFORMATION

LIGHTING TERMS

Bathroom Zone

Suitability for a product to be installed near or in water.

CCT

Colour Changing Technology.

Colour Switchable

Colour temperature can be switched between 3000K to 4000K or 6000K.

Cool White (CW) 4000K

Light with a CCT kelvin temperature of 4000K.

Daylight White (DW) 6000K

Light with a CCT kelvin temperature of 6000K.

Downlight

A luminaire designed to be installed in a ceiling, with the light source pointed vertically downwards.

Floodlight

A luminaire featuring a wide beam angle, designed to provide illumination over a wide area.

IK Rating

Indicates the protection against mechanical impact. Rated from IK00 to IK10.

IP Rating

Ingress Protection Rating.

Kelvin (K)

Kelvin is the scientific unit for measuring CCT.

LED (Light Emitting Diode)

Emits light through the conversion of electrical energy.

Lifetime

The definition of LED luminaire lifetime is the period in hours after which the luminaire no longer delivers the correct amount of light,

either insufficient light is produced or none at all. This may be a combination of many factors not limited to just the LED performance.

Lumens (lm)

The quantity of light emitted from a light source that is visible. The higher the lumens, the brighter the light.

LUX

A measure of the intensity of light, defined as 1lm /m².

Microwave Sensor

An active intrusion sensor that detects the movement of a person or object through a pattern of microwave energy

Photocell

Sometimes known as a dusk to dawn sensor. The sensor reacts to the ambient light and will turn the fitting on when a pre-set light level is reached

PIR Sensor

Passive Infrared Device, used to activate lighting when a person enters a room or area.

Power Supply / Driver

Power source for the LED luminaire.

RGB

Red, Green, Blue. Used to describe colour changing products that can be used to dynamically add colour to any environment.

RGBW

Stands for Red, Green, Blue, White. Used to describe colour changing products that can be used to dynamically add colour to any environment. Can also be run on white when natural lighting is required.

Spotlight

A light source featuring a narrow beam angle, designed to allow highlighting or illumination of specific features in an area.

Task Lighting

Lighting specifically designed to provide functional illumination of an environment.

Warm White (WW) 3000K

Light with a CCT kelvin temperature of 3000K.

Watt (W)

The unit of electrical power stating the amount of electricity consumed by the product.

Work Lighting

Lighting specifically designed to provide functional illumination of a work site environment.

COLOUR TEMPERATURE

GUIDE

LEDs make it possible to have a choice of white colours or 'tones'. This allows easy customisation of an area to bring out the best in the materials and design of a room. With standard white LED lighting, these tones range from warm-yellow, to daylight-blue light, with options in between. The graphic below is a reference that starts at a warm yellow colour on the left and fades into a blue colour on the right.

Colour temperature ratings describe the tones of white light available. Colour temperature options range from 2000-3000K for Warm White lighting, 3100-4500 for Cool White lighting and 4600-6500 for Daylight White lighting. It can be a tricky decision to know what is best for your installation, but our skilled technical sales team are on hand to guide you through choosing the perfect white tone for your room.



Colour temperature	2000-3000K	3100-4500K	4600-6500K
Light appearance	Warm White	Cool White	Daylight White
Best for	Warmer whites are generally preferred for creating a more relaxed environment in dining, living or reception areas	Cool white is a good choice for retail and office environments where a simulated natural, outdoor light is preferred. Use in contemporary kitchens and bathroom to complement décor	Perfect for industrial, security, garages and task lighting where the most natural lighting is required

IP RATING

INGRESS PROTECTION

Ingress protection rating (IP); this relates to the degree of protection the light provides against solid objects and water ingress. IP ratings are relevant to anywhere that moisture is prevalent, such as bathrooms, utility rooms and outdoor environments. Written as IPXX, the first X denotes the level of protection offered from dust; the second X denotes the level of protection offered from moisture. The higher the numbers are, the better the protection will be.

SOLID OBJECTS

0	No special protection
1	Protection from a large part of the body such as a hand (but no protection from deliberate access); from solid objects greater than 50mm in diameter
2	Protection against fingers or other objects not greater than 80mm in length and 12mm in diameter
3	Protection from entry by tools, wires etc, with a diameter of 2.5mm or more
4	Protection against solid bodies larger than 1mm
5	Protection against dust that may harm equipment
6	Totally dust-tight; no ingress of dust

LIQUIDS

0	No special protection
1	Protected against dripping water; vertically falling drops
2	Protected against vertical falling drops of water with enclosure tilted up to 15 degrees from the vertical; limited ingress permitted
3	Protected against sprays of water up to 60 degrees from the vertical; limited ingress permitted
4	Protection from splashing water from any direction
5	Protection against low pressure water jets (all directions)
6	Protection against high pressure water jets and waves
7	Protection against temporary immersion
8	Watertight against the effects of immersion in water under pressure for long periods

Ingress protection ----- **IP65**

BATHROOM ZONING

WHAT IS BATHROOM ZONING?


All bathroom lighting installations must comply to the guidelines set out in Amendment 1 of the 17th edition of the IEE Wiring Regulations (BS7671). The bathroom is divided into zones, with prescribed minimum IP ratings for the light fittings in each zone. To illustrate IP zoning regulations, the bathroom area is divided up into areas or 'ZONES'. Light fittings are then assigned an 'IP rating' which indicates how much protection they provide against ingress of water and other particles. Each zone has a minimum IP requirement that must be met if a fitting is to be installed in this area.

Zone 0 \geq IPX7

Inside bath or shower. Only 12V AC rms or 30V ripple-free DC SELV fittings with a minimum rating of IPX7 (protected against immersion in water). Transformers must be sited outside Zones 0,1,2.

Zone 1 \geq IPX5

The area above the bath or shower up to a height of 2.25 metres. Fittings must be rated at IPX5 or higher (protected from jets of water).

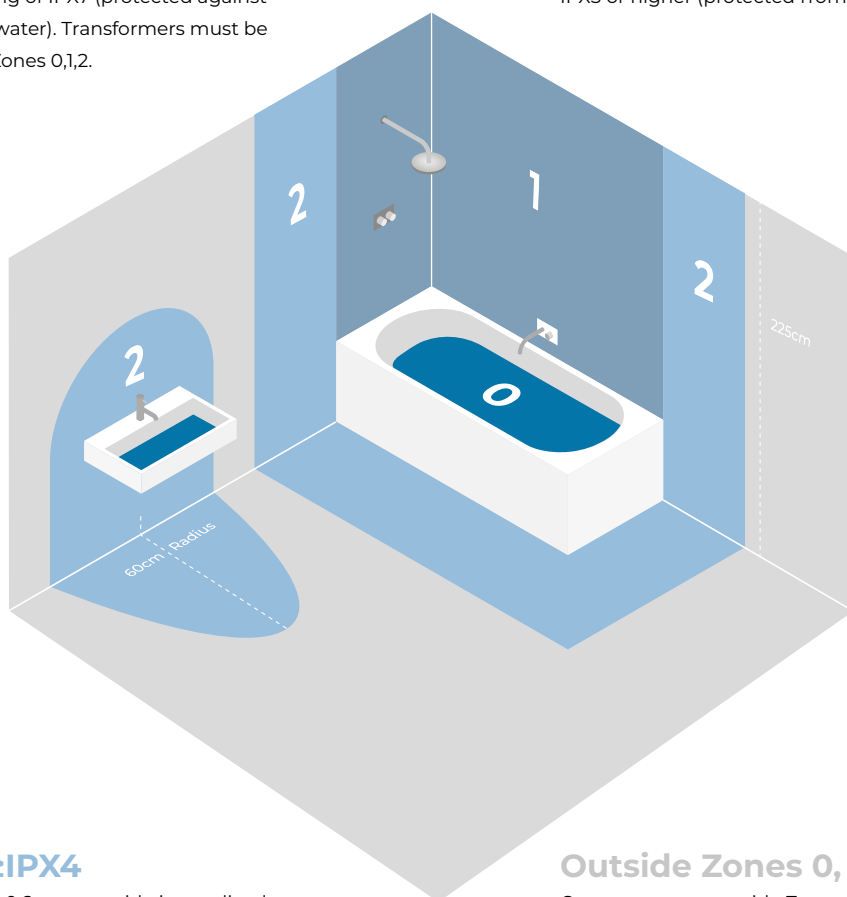

Zone 2 \geq IPX4

Covers an area 0.6 metres wide immediately next to, and all around Zone 1. The 60cm area around washbasins should also be treated as zone 2. The minimum rating is IPX4. If there is a likelihood of water jets being used for cleaning purposes in Zone 2, a minimum of IPX5 is required.

Outside Zones 0, 1 & 2

Covers any area outside Zones 0, 1 and 2. There is no IP requirement in this zone. Bathrooms are allowed to contain a socket outlet, this must be located 3 metres outside Zone 1. Lighting circuits and any socket-outlet circuit in a room containing a bath and/or shower must be provided with 30mA RCD protection.

INDEX.

Any typographical, clerical or other error or omission in any sales literature, quotation, price list, acceptance of offer, invoice or other document or information issued by the Company shall be subject to correction without any liability on the part of the Company. Goods supplied may vary in detail from the illustrations, drawings, measurements and descriptions set out in the Company's sales literature, which are approximate and for guidance only and will not form part of the Contract. Colour finishes will be maintained as accurately as possible but matching cannot be guaranteed. All terminology used in the Company's sales literature is, subject to these Conditions, that as understood by general usage in the trade. For full terms and conditions of sale consult your distributor.

INDEX (ALPHABETICAL)

CUL-21624	311	CUL-26465-WW	337/75	CUL-37787	324
CUL-21625	311	CUL-30698	201/338	CUL-37788	324
CUL-21626	310	CUL-30699	201/338	CUL-37789	324
CUL-21627	311	CUL-30700	201/338	CUL-37790	324
CUL-21637	334	CUL-30701	201/338	CUL-37791	326
CUL-21638	334	CUL-30702	201/338	CUL-37792	326
CUL-21639	334	CUL-30703	201/338	CUL-37793	327
CUL-21643	336	CUL-30704	201/338	CUL-37794	327
CUL-21645	336	CUL-30705	201/338	CUL-37795	323
CUL-21647	336	CUL-30706	201/338	CUL-37796	323
CUL-21649	336	CUL-30707	201/338	CUL-37797	322
CUL-21651	336	CUL-30708	201/338	CUL-37798	322
CUL-21653	336	CUL-30709	201/338	CUL-37800	331
CUL-21656	335	CUL-30710	339/203	CUL-40031	320
CUL-21658	335	CUL-30711	339/203	CUL-40032	320
CUL-21660	334	CUL-33996-BLK	336	CUL-40033	320
CUL-21661	315	CUL-33996-WHT	336	CUL-40034	320
CUL-21662	315	CUL-34223-CCT	316	CUL-40035	320
CUL-21663	315	CUL-34224-CCT	316	CUL-40036	320
CUL-21664	315	CUL-34225-CCT	316	CUL-40037	321
CUL-21665	314	CUL-34226-CCT	316	CUL-40038	321
CUL-21666	314	CUL-35860	313	CUL-40039	321
CUL-25218	311	CUL-35861	313	CUL-40040	321
CUL-25219	310	CUL-35864	312	CZ-20947-BLK	161
CUL-25220	311	CUL-35865	313	CZ-25142-BLK	161
CUL-25317	311	CUL-37386	317	CZ-25143-BLK	171
CUL-25318	311	CUL-37387	317	CZ-25144-BLK	170
CUL-25319	310	CUL-37388	317	CZ-25145-BLK	154
CUL-25320	311	CUL-37389	317	CZ-25148-BLK	152
CUL-25321	315	CUL-37768	328	CZ-25149-BLK	153
CUL-25322	315	CUL-37769	328	CZ-25150-BLK	154
CUL-25323	315	CUL-37770	328	CZ-26743-BLK	155
CUL-25324	315	CUL-37771	328	CZ-29191-ATR	176
CUL-26332	334	CUL-37772	329	CZ-29192-ATR	175
CUL-26333	334	CUL-37773	329	CZ-29193-ATR	175
CUL-26334	334	CUL-37774	329	CZ-29319-ANTH	173
CUL-26335	334	CUL-37775	330	CZ-29319-BLK	173
CUL-26336	336	CUL-37776	330	CZ-29319-SST	173
CUL-26337	336	CUL-37777	330	CZ-29320-ANTH	171
CUL-26338	336	CUL-37778	330	CZ-29320-BLK	171
CUL-26339	336	CUL-37779	330	CZ-29320-SST	171
CUL-26340	336	CUL-37780	330	CZ-29321-ANTH	173
CUL-26341	336	CUL-37781	330	CZ-29321-BLK	173
CUL-26342	336	CUL-37782	330	CZ-29321-SST	173
CUL-26344	335	CUL-37783	329	CZ-31740-BLK	168
CUL-26345	335	CUL-37784	329	CZ-31743-BLK	167
CUL-26346	334	CUL-37785	329	CZ-31744-BLK	170
CUL-26465	337/75	CUL-37786	328	CZ-31745-BLK	167

INDEX (ALPHABETICAL)

CZ-31746-BLK	168	ELA-27467-CHR	213/269	ELA-35745	205
CZ-31747-BLK	177	ELA-27467-MBLK	213/269	ELA-35746	205
CZ-31748-BLK	155	ELA-27467-SATBRS	213/269	ELA-35747	0
CZ-31749-BLK	177	ELA-27467-SCHR	213/269	ELA-35748	0
CZ-31750-BLK	166	ELA-27467-WHT	213/269	ELA-35749	0
CZ-31751-BLK	167	ELA-34280	185	ELA-35750	193
CZ-31752-BLK	177	ELA-34281	185	ELA-35751	193
CZ-31806-BLK	179	ELA-34282	185	ELA-35752	193
CZ-31811-BLK	158	ELA-34283	187	ELA-35753	193
CZ-31812-BLK	158	ELA-34284	187	ELA-36974	195
CZ-33397-BLK	163	ELA-34285	187	ELA-36975	195
CZ-33461-BLK	159	ELA-34286	196	ELA-37801	329
CZ-34014-BLK	165	ELA-34287	196	ELA-37802	329
CZ-34015-BLK	165	ELA-34288	0	ELA-37803	329
CZ-34016-BLK	166	ELA-34289	0	ELA-38872	0
CZ-34017-BLK	166	ELA-34290	188	ELA-38873	0
CZ-34023-BLK	163	ELA-34291	189	ELA-38874	0
CZ-34025-BLK	160	ELA-34292	196	ELA-38875	0
CZ-34026-BLK	160	ELA-34293	196	ELA-38876	0
CZ-34027-BLK	160	ELA-34294	0	ELA-41712	200
CZ-35704-BLK	169	ELA-34295	0	ELA-41713	200
CZ-35705-BLK	169	ELA-34296	191	ELA-41714	200
CZ-35742-BLK	155	ELA-34297	196	ELA-41715	200
CZ-38639-ANTH	157	ELA-34298	0	ELA-41718	199
CZ-38639-BLK	157	ELA-34299	0	ELA-41719	199
CZ-38639-WHT	0	ELA-34300	195	ELA-41720	199
CZ-41087-BLK	180	ELA-34301	195	ELA-41721	199
CZ-41088-BLK	180	ELA-34302	195	ELA-41722	199
CZ-41089-BLK	180	ELA-34303	195	ELA-41723	199
CZ-41090-BLK	180	ELA-34304	195	ELA-41724	199
CZ-41091-BLK	181	ELA-34305	195	ELA-41725	199
CZ-41092-BLK	181	ELA-34306	194	ELA-41726	199
CZ-41093-BLK	181	ELA-34307	194	ELA-41727	199
ELA-21665	200	ELA-34308	194	ELA-41728	199
ELA-21666	200	ELA-34857	185	ELA-41729	199
ELA-27465-BCHR	212/271	ELA-34858	185	INL-23519-BLK	363
ELA-27465-CHR	212/271	ELA-34859	185	INL-23519-GRY	363
ELA-27465-MBLK	212/271	ELA-34860	187	INL-23519-HERR	363
ELA-27465-SATBRS	212/271	ELA-34861	187	INL-23519-RED	363
ELA-27465-SCHR	212/271	ELA-34862	187	INL-27988-ABRS	365
ELA-27465-WHT	212/271	ELA-34871	188	INL-27988-ACOP	365
ELA-27466-BCHR	211/270	ELA-34872	189	INL-27988-BRZ	365
ELA-27466-CHR	211/270	ELA-34873	191	INL-27988-PEW	365
ELA-27466-MBLK	211/270	ELA-34874	0	INL-27988-SNIC	365
ELA-27466-SATBRS	211/270	ELA-34875	0	INL-28201-BCHR	349
ELA-27466-SCHR	211/270	ELA-34876	0	INL-28202-BCHR	349
ELA-27466-WHT	211/270	ELA-35743	205	INL-28203-BCHR	349
ELA-27467-BCHR	213/269	ELA-35744	205	INL-28204-BCHR	350

INDEX (ALPHABETICAL)

INL-28205-BCHR	350	INL-34151-4K	383	INL-38610	346
INL-28573	382	INL-34400	385	INL-38611	346
INL-28574	382	INL-34401	385	INL-38612	347
INL-28575	382	INL-34556-WHT	361	INL-38613	347
INL-28576	382	INL-34557-WHT	360	INL-38617-BLK	356
INL-28577	382	INL-34558-WHT	0	INL-38617-SBRS	356
INL-28578	382	INL-34942-ABRS	373	INL-38617-SNIC	356
INL-29464-CW	384	INL-34942-ACOP	373	INL-38617-WHT	356
INL-29464-WW	384	INL-34942-SNIC	373	INL-38618-BLK	356
INL-29465-CW	384	INL-35728	385	INL-38618-SBRS	356
INL-29465-WW	384	INL-36012	379	INL-38618-SNIC	356
INL-31723-BLK	353	INL-36013	379	INL-38618-WHT	356
INL-31723-SBRS	353	INL-36014	379	INL-38619-BLK	357
INL-31723-SNIC	353	INL-36015	379	INL-38619-SBRS	357
INL-31723-WHT	353	INL-36016	379	INL-38619-SNIC	357
INL-31775-BLK	352	INL-36017	379	INL-38619-WHT	357
INL-31775-SBRS	352	INL-37211	342	INL-41730-BLK	332
INL-31775-SNIC	352	INL-37213	342	INL-41730-WHT	332
INL-31775-WHT	352	INL-37214	342	INL-41731-BLK	333
INL-31776-BLK	352	INL-37215	347	INL-41731-WHT	333
INL-31776-SBRS	352	INL-37216	347	INL-41999	381
INL-31776-SNIC	352	INL-37217	347	INL-42000	381
INL-31776-WHT	352	INL-37218	347	INL-42001	381
INL-31789-ACOP	369	INL-37219	344	INL-42002	381
INL-31790-BCR	350	INL-37220	345	INL-42003	381
INL-33136-SMK	372	INL-37221	344	INL-42004	381
INL-33140-ACOP	372	INL-37222	345	INL-42005	381
INL-33818-ABRS	371	INL-37223	345	INL-42006	381
INL-33818-ACOP	371	INL-37224	344	INL-42264	380
INL-33818-MBLK	371	INL-37225	343	INL-42265	380
INL-33818-MGRY	371	INL-37226	343	INL-42266	380
INL-33818-PNIC	371	INL-37829	367	INL-42267	380
INL-33819-ABRS	371	INL-37839	366	INL-42268	380
INL-33819-ACOP	371	INL-37877	369	INL-42269	380
INL-33819-MBLK	0	INL-37878	369	INL-42270	380
INL-33819-MGRY	371	INL-37894-BCOP	362	INL-42271	380
INL-33819-PNIC	371	INL-37894-BRZ	362	INL-42272	380
INL-34028-AMB	375	INL-37894-PEW	362	INL-42273	380
INL-34028-SMK	375	INL-38119	378	INL-42274	380
INL-34029-AMB	375	INL-38120	378	INL-42275	380
INL-34029-SMK	375	INL-38122	378	INL-42276	380
INL-34030-AMB	375	INL-38123	378	INL-42277	380
INL-34030-SMK	375	INL-38124	378	INL-42278	380
INL-34031-AMB	375	INL-38125	378	INL-42279	380
INL-34031-SMK	375	INL-38239-BRZ	373	INL-42280	380
INL-34150-3K	383	INL-38239-PEW	373	INL-42281	380
INL-34150-4K	383	INL-38239-SNIC	373	INL-42282	380
INL-34151-3K	383	INL-38609	346	INL-42283	380

INDEX (ALPHABETICAL)

INL-42284	380	SPA-24468-CHR	247	SPA-33931-CHR	239
INL-42285	380	SPA-24468-SBRS	247	SPA-33932-CHR	239
INL-42286	380	SPA-24677-CHR	233	SPA-33974-CHR	238
INL-42287	380	SPA-24678-CHR	234	SPA-34008-WHT	265
INL-598310-SNIC	349	SPA-24869-BRS	246	SPA-34009-WHT	267
INL-598410-SNIC	348	SPA-24869-SBRS	246	SPA-34010-SNIC	265
INL-740000-SNIC	348	SPA-24870-CHR	246	SPA-34011-SNIC	267
INL-A60-LED-ES-TNT	377	SPA-24870-SBRS	246	SPA-34012-CHR	265
INL-C35L-LED-SES-CLR	377	SPA-24871-BRS	246	SPA-34013-CHR	267
INL-C35L-LED-SES-TNT	377	SPA-24871-SBRS	246	SPA-34035	283
INL-G80-LED-BC-CLR	376	SPA-27405-BRS	260	SPA-34036	284
INL-G80-LED-BC-TNT	376	SPA-27405-CHR	260	SPA-34037	285
INL-G80-LED-ES-CLR	376	SPA-27405-MBLK	260	SPA-34038	286
INL-G80-LED-ES-TNT	376	SPA-28326-CHR	249	SPA-34039	287
INL-G95-LED-BC-CLR	0	SPA-28327-CHR	249	SPA-34046-BRS	262
INL-G95-LED-BC-TNT	377	SPA-29195-CHR	249	SPA-34046-CHR	262
INL-G95-LED-ES-CLR	377	SPA-30841-BRCOP	279/354	SPA-34046-SBLK	262
INL-G95-LED-ES-TNT	377	SPA-30841-MBLK	279/354	SPA-34046-SNIC	262
INL-ST64-LED-BC-CLR	376	SPA-30841-MWHT	279/354	SPA-34047-BRS	262
INL-ST64-LED-BC-TNT	376	SPA-30842-CHR	279/354	SPA-34047-CHR	262
INL-ST64-LED-ES-CLR	376	SPA-30842-SBRS	279/354	SPA-34047-SBLK	262
INL-ST64-LED-ES-TNT	376	SPA-30842-SCHR	279/354	SPA-34047-SNIC	262
SP-25202-CHR	300	SPA-30993-CHR	280/359	SPA-34049-BRS	263
SP-25203-CHR	301	SPA-30993-MBLK	280/359	SPA-34049-CHR	263
SP-25204-CHR	298	SPA-30993-SBRS	280/359	SPA-34049-SBLK	263
SP-25211-CHR	307	SPA-30993-SNIC	280/359	SPA-34049-SNIC	263
SP-25253-CHR	306	SPA-31292-CHR	0	SPA-34050-BRS	263
SP-25254-CHR	304	SPA-31306-BRS	253	SPA-34050-CHR	263
SP-25255-CHR	305	SPA-31306-CHR	253	SPA-34050-SBLK	263
SP-25256-CHR	303	SPA-31306-MBLK	253	SPA-34050-SNIC	263
SP-31449-CHR	302	SPA-31309-BRS	254	SPA-34864	0
SP-31450-CHR	299	SPA-31309-CHR	254	SPA-34865	295
SPA-19713-CHR	243	SPA-31309-MBLK	254	SPA-35080-CHR	259
SPA-19713-SBRS	243	SPA-31725-CHR	252	SPA-35081-CHR	259
SPA-19714-CHR	241	SPA-31725-SBRS	252	SPA-35706	289
SPA-19714-SBRS	241	SPA-31726-CHR	251	SPA-35707	291
SPA-20182-CHR	244	SPA-31726-SBRS	251	SPA-35708	293
SPA-20182-SBRS	244	SPA-31730-CHR	256	SPA-35709	266
SPA-20829-CHR	254	SPA-31731-CHR	256	SPA-35710	268
SPA-20829-MBLK	254	SPA-31732-CHR	255	SPA-35711	265
SPA-20829-SBRS	254	SPA-31733-CHR	255	SPA-35712	265
SPA-20831-CHR	245	SPA-31734-CHR	255	SPA-35713	266
SPA-20831-SBRS	245	SPA-31735-CHR	257	SPA-35714	266
SPA-22560	261	SPA-31736-CHR	258	SPA-35715	266
SPA-22560-BRS	261	SPA-31737-CHR	258	SPA-35716	266
SPA-22560-MBLK	261	SPA-31780-CHR	257	SPA-35717	267
SPA-24467-CHR	247	SPA-33929-CHR	235	SPA-35718	267
SPA-24467-SBRS	247	SPA-33930-CHR	237	SPA-35719	268

INDEX (ALPHABETICAL)

SPA-35720	268	SPA-36310-CHR	220	SPA-PR-17146	279
SPA-35721	268	SPA-36311-CHR	220	SPA-PR13145	282
SPA-35722	268	SPA-37152	0	SPA-PR13145-MBLK	282
SPA-35723	277/355	SPA-37153	294	SPA-PR13145-SBRS	282
SPA-35724	277/355	SPA-38570-ACOP	274/209	SXLS31324ES	412
SPA-35725	277/355	SPA-38570-BCHR	274/209	SXLS31325ES	416
SPA-35726	277/355	SPA-38570-CHR	274/209	SXLS31326E	415
SPA-35727	277/355	SPA-38570-MWHT	274/209	SXLS31329E	404
SPA-35782-CHR	222	SPA-38570-SBLK	274/209	SXLS31330E	404
SPA-35783-CHR	222	SPA-38570-SBRS	274/209	SXLS31331E	417
SPA-35808-CHR	222	SPA-38570-SNIC	274/209	SXLS31332E	419
SPA-35809-CHAMP	223	SPA-38571-ACOP	274/209	SXLS31333E	423
SPA-35809-CHR	223	SPA-38571-BCHR	274/209	SXLS31334E	421
SPA-35810-CHAMP	223	SPA-38571-CHR	274/209	SXLS31335E	421
SPA-35810-CHR	223	SPA-38571-MWHT	274/209	SXLS31336E	421
SPA-35811-CHAMP	224	SPA-38571-SBLK	274/209	SXLS31337E	421
SPA-35811-CHR	224	SPA-38571-SBRS	274/209	SXLS31338E	421
SPA-35828-CHR	225	SPA-38571-SNIC	274/209	SXLS31339E	421
SPA-35828-SBRS	225	SPA-38572-ACOP	210/275	SXLS31340E	421
SPA-35829-CHR	225	SPA-38572-BCHR	210/275	SXLS31361E	424
SPA-35829-SBRS	225	SPA-38572-CHR	210/275	SXLS31362E	425
SPA-35830-CHR	224	SPA-38572-MWHT	210/275	SXLS31362ES	425
SPA-35830-SBRS	224	SPA-38572-SBLK	210/275	SXLS31540E	0
SPA-35836-CHR	226	SPA-38572-SBRS	210/275	SXLS34624/31333LE	403
SPA-35836-SBRS	226	SPA-38572-SNIC	210/275	SXLS35525E	411
SPA-35837-CHR	226	SPA-38573-CHR	218	SXLS35526E	411
SPA-35837-SBRS	226	SPA-38573-SBRS	218	SXLS35527E	411
SPA-35838-CHR	227	SPA-38573-TBLK	218	SXLS36383E	410
SPA-35838-SBRS	227	SPA-38574-CHR	221	SXLS36384E	410
SPA-35839-CLR	229	SPA-38575-CHR	221	SXLS36385E	410
SPA-35839-SMK	229	SPA-38576-CHR	218	SXLS36986E	414
SPA-35840-CLR	228	SPA-38576-SBRS	218	SXLS37177E	413
SPA-35840-SMK	228	SPA-38576-TBLK	218	SXLS37178E	413
SPA-35841-CLR	228	SPA-38577-BRCOP	277/355	SXLS37179E	413
SPA-35841-SMK	228	SPA-41111-BLK	272/207	SXLS37180E	0
SPA-35842-CLR	0	SPA-41111-CHR	272/207	SXLS37182E	407
SPA-35842-SMK	0	SPA-41111-SBRS	272/207	SXLS37673E	405
SPA-35843-CHR	229	SPA-41111-WHT	272/207	SXLS37951E	409
SPA-35843-SBRS	229	SPA-41112	208/273	SXLS37952E	408
SPA-36128-SBRS	0	SPA-41223-CHR	216	SXLS38687E	388
SPA-36129-CHR	230	SPA-41224-SBRS	216	SXLS38688E	388
SPA-36130-MBLK	231	SPA-41225-SBLK	216	SXLS38689E	388
SPA-36140-CHR	231	SPA-41694-CHR	217	SXLS38690E	388
SPA-36300-CHR	219	SPA-41694-MBLK	217	SXLS38691E	388
SPA-36301-CHR	219	SPA-41694-SNIC	217	SXLS38693E	389
SPA-36302-CHR	221	SPA-6888.014	281	SXLS38694E	389
SPA-36303-CHR	221	SPA-6888.014-SBRS	281	SXLS38695E	389
SPA-36309-CHR	220	SPA-PR-12744	278	SXLS38696E	389

INDEX (ALPHABETICAL)

SXLS38697E	389	ZN-20965-SST	69	ZN-31385	86
SXLS38927E	390	ZN-23454-BLK	83	ZN-31386	86
SXLS38928E	390	ZN-23454-WHT	83	ZN-31757-ANTH	53
SXLS38929E	390	ZN-24507-SST	58	ZN-31757-DOVG	53
SXLS38930E	390	ZN-25151-BLK	115	ZN-31757-IVO	53
SXLS38933E	391	ZN-25151-DGRY	115	ZN-31757-MINT	53
SXLS38934E	391	ZN-25151-WHT	115	ZN-31757-PBLU	53
SXLS38935E	391	ZN-25152-BLK	119	ZN-31758-ANTH	31
SXLS38936E	391	ZN-25152-DGRY	119	ZN-31758-SIL	31
SXLS38937E	392	ZN-25152-WHT	119	ZN-31759-ANTH	31
SXLS38938E	392	ZN-25153-WHT	120	ZN-31759-SIL	31
SXLS38939E	392	ZN-25154-WHT	117	ZN-31765-BLK	39
SXLS38940E	392	ZN-25155-WHT	120	ZN-31767-BLK	27
SXLS38941E	393	ZN-25156-BLK	121	ZN-31768-BLK	27
SXLS38942E	393	ZN-25340-SST	61	ZN-31787-WHT	116
SXLS38943E	393	ZN-25463-BLK	60	ZN-31805-WHT	121
SXLS38944E	393	ZN-25464-BLK	60	ZN-31807-TBLK	58
SXLS50100E	396	ZN-26536-ANTH	19	ZN-31808-POLSST	56
SXLS50101E	397	ZN-26536-BLK	19	ZN-31809-DOVG	56
SXLS50102E	398	ZN-26536-COP	19	ZN-31809-IVO	56
SXLS50103E	399	ZN-26536-SST	19	ZN-31809-MINT	56
SXLS50104E	402	ZN-26536-WHT	19	ZN-31809-PBLU	56
SXLS50105E	400	ZN-28708-BLK	61	ZN-31809-SST	56
SXLS50106E	401	ZN-28708-SST	61	ZN-32069-BLK	42
ZN-20930-BLK	30	ZN-29177-WHT	117	ZN-32070-ANTH	49
ZN-20930-SIL	30	ZN-29179-ANTH	14	ZN-32070-BLK	49
ZN-20941-Anth	13	ZN-29179-BLK	14	ZN-32255-BLK	11
ZN-20941-BLK	13	ZN-29179-COP	14	ZN-33394-BLK	67
ZN-20941-COP	13	ZN-29179-SST	14	ZN-33394-SST	67
ZN-20941-POLSST	13	ZN-29180-BLK	21	ZN-33460-BLK	33
ZN-20941-SST	13	ZN-29180-SST	21	ZN-33460-SST	33
ZN-20941-WHT	13	ZN-29181-BLK	30	ZN-33579-BLK	115
ZN-20944-ANTH	47	ZN-29181-SIL	30	ZN-33579-DGRY	115
ZN-20944-BLK	47	ZN-29184-BLK	69	ZN-33579-WHT	115
ZN-20944-SIL	47	ZN-29185-WHT	121	ZN-33615-BLK	116
ZN-20945-BLK	46	ZN-29186-WHT	123	ZN-33615-WHT	116
ZN-20945-SST	46	ZN-29187-WHT	123	ZN-33994-BLK	61
ZN-20955-BLK	57	ZN-29189-ATR	35	ZN-33995-BLK	61
ZN-20955-DOVG	57	ZN-29190-ATR	35	ZN-34002-SST	41
ZN-20955-IVO	57	ZN-29347-Anth	39	ZN-34003-BLK	41
ZN-20955-MINT	57	ZN-29347-BLK	39	ZN-34018-SBLK	21
ZN-20955-PBLU	57	ZN-29347-POLALU	0	ZN-34018-SST	21
ZN-20957-BLK	55	ZN-29347-SIL	39	ZN-34019-ANTH	38
ZN-20957-DOVG	55	ZN-29992-BLK	32	ZN-34019-BLK	38
ZN-20957-IVO	55	ZN-29993-BLK	26	ZN-34019-WHT	38
ZN-20957-MINT	55	ZN-29995-BLK	24	ZN-34020-ANTH	38
ZN-20957-PBLU	55	ZN-29996-BLK	24	ZN-34020-BLK	38
ZN-20965-BLK	69	ZN-29997-BLK	70	ZN-34020-WHT	38

INDEX (ALPHABETICAL)

ZN-34022-BLK	14	ZN-38600-WHT	122	ZN-38867	113
ZN-34022-SST	14	ZN-38602-BLK	50	ZN-38868	113
ZN-34042-ANTH	35	ZN-38603-BLK	42	ZN-38869	113
ZN-34043-ANTH	35	ZN-38605-BLK	59	ZN-38870	112
ZN-34044-BLK	78	ZN-38605-WHT	59	ZN-38871	113
ZN-34555-BLK	33	ZN-38606-BLK	59	ZN-39171-ANTH	62
ZN-34555-SST	33	ZN-38606-WHT	59	ZN-39171-BLK	62
ZN-34870	87	ZN-38614-BLK	65	ZN-39172-ANTH	62
ZN-35072-BLK	11	ZN-38614-SST	65	ZN-39172-BLK	62
ZN-35593-BLK	37	ZN-38615-BLK	64	ZN-39173-ANTH	63
ZN-35594-BLK	37	ZN-38615-SST	64	ZN-39173-BLK	63
ZN-35685-BLK	37	ZN-38616-BLK	65	ZN-39742-BLK	82
ZN-35686-BLK	37	ZN-38616-SST	65	ZN-39746-BLK	82
ZN-35687-BLK	80	ZN-38620-BLK	51	ZN-39998-BLK	64
ZN-35687-DGRY	80	ZN-38621-ANTH	28	ZN-39998-SST	64
ZN-35687-WHT	80	ZN-38621-BLK	28	ZN-40001-ANTH	7
ZN-35688-BLK	81	ZN-38621-WHT	28	ZN-40001-BLK	7
ZN-35688-DGRY	81	ZN-38622-ANTH	29	ZN-40002-ANTH	48
ZN-35688-WHT	81	ZN-38622-BLK	29	ZN-40002-BLK	48
ZN-35689-BLK	79	ZN-38622-WHT	29	ZN-40002-SIL	48
ZN-35690-WHT	114	ZN-38623-ANTH	27	ZN-40004-BLK/BRS	40
ZN-35691-BLK	114	ZN-38624-ANTH	27	ZN-40004-BLK/SST	40
ZN-35738-BLK	70	ZN-38627-BLK	80	ZN-40063	76
ZN-35739-BLK	22	ZN-38627-DGRY	80	ZN-40064	76
ZN-35740-BLK	22	ZN-38627-WHT	80	ZN-40065	77
ZN-35741-BLK	25	ZN-38628-BLK	81	ZN-40066	77
ZN-37052-BLK	136	ZN-38628-DGRY	81	ZN-41099-CRYSMK	10
ZN-37938-ANTH	16	ZN-38628-WHT	81	ZN-41100-CRYSMK	10
ZN-37938-BLK	16	ZN-38630-BLK	59	ZN-41101-BRNZ	6
ZN-37938-COP	16	ZN-38631-BLK	26	ZN-41101-RBRS	6
ZN-37938-SST	16	ZN-38634-BLK	23	ZN-41102-BRNZ	6
ZN-37938-WHT	16	ZN-38636-ANTH	32	ZN-41102-RBRS	6
ZN-37939-ANTH	15	ZN-38636-WHT	32	ZN-41106	74
ZN-37939-BLK	15	ZN-38637-BLK	23	ZN-41711-CRYSMK	10
ZN-37939-COP	15	ZN-38640-MBLK	43	ZN-41732	72
ZN-37939-SST	0	ZN-38641-MBLK	43	ZN-41733	72
ZN-37939-WHT	15	ZN-38688-BLK	84	ZN-41734	73
ZN-37940-ANTH	17	ZN-38689-BLK	84	ZN-41735	73
ZN-37940-BLK	17	ZN-38690-BLK	84	ZN-41736	71
ZN-37940-COP	17	ZN-38691-BLK	84	ZN-41737	71
ZN-37940-SST	17	ZN-38692-BLK	84	ZN-41738	71/72/73
ZN-37940-WHT	17	ZN-38694-BLK	85	ZN-41739	71/72/73
ZN-38205-ANTH	45	ZN-38695-BLK	85	ZN-42019-COP	9
ZN-38205-BLK	45	ZN-38696-BLK	85	ZN-42019-SST	9
ZN-38205-SIL	45	ZN-38863	112	ZN-42031	127
ZN-38354-BLK	44	ZN-38864	112	ZN-42032	127
ZN-38354-SIL	44	ZN-38865	112	ZN-42033	129
ZN-38599-BLK	122	ZN-38866	113	ZN-42034	129

INDEX (ALPHABETICAL)

ZN-42035	131	ZR-38833-BLK	99
ZN-42037	137	ZR-38834-BLK	99
ZN-42039	132		
ZN-42040	133		
ZN-42041	133		
ZN-42042	138		
ZN-42043	130		
ZN-42044	130		
ZN-42045	134		
ZN-42046	134		
ZN-42047	134		
ZN-42048	135		
ZN-42049	135		
ZN-42050	143		
ZN-42051	141		
ZN-42052	141		
ZN-42053	141		
ZN-42054	140		
ZN-42055	140		
ZN-42056	139		
ZN-42057	145		
ZN-42058	146		
ZN-42059	147		
ZN-42060	148		
ZN-42066-BLK	8		
ZN-42095-BLK	8		
ZN-42097-BLK	68		
ZN-42098-BLK	68		
ZN-42229	149		
ZN-42263	74		
ZR-32297-BLK	95		
ZR-32298-BLK	91		
ZR-32299-BLK	93		
ZR-32300-BLK	107		
ZR-32301-BLK	103		
ZR-32302-BLK	90		
ZR-32328-BLK	104		
ZR-37441-BLK	106		
ZR-37442-GMTL	109		
ZR-37443-BLK	101		
ZR-37444-BLK	105		
ZR-37445-BLK	111		
ZR-37448-BLK	110		
ZR-38155-SIL	89		
ZR-38156-BLK	100		
ZR-38529-SIL	98		
ZR-38532-SIL	97		
ZR-38831-SIL	97		

