

# ROOFLINE

by **timloc**

## Dry Fix Continuous Verge System for Slate and Thin Slate-Effect Roof Tiles

A continuous verge system that presents a clean flush finish and an effective and virtually maintenance-free alternative to wet mortar bedding.



### Use

- Slate and tile thickness between 4 - 13mm slate and slate-effect tiles

### Features and Benefits

- Long lasting, reliable and virtually maintenance free
- Protects against wind uplift, water ingress and general deterioration
- Easy, fast, clean and generally safer mortar free installation
- Allows virtually all weather installation
- Integral internal channel collects and discharges rainwater to the gutter
- Dedicated profiles for the new build and refurbishment applications to ensure secure fitting
- Refurbishment profile design avoids lifting slates and battens
- Concealed eaves closer cap allows for guttering if required
- Secure easy push fit joint unions
- Tough yet flexible allows easy manipulation and secure positioning
- Maintains consistently smart appearance
- Not impacted by building settlement
- Helps prevent entry of large insects, birds and vermin into the roofline
- Meets mechanical fix legislation requirements

### Quality

- Helping to meet BS 5534 Code of practice for slating and tiling
- Complies with all other relevant regulations and standards
- Manufactured to BS EN ISO 9001 and BS EN ISO 14001
- Independently tested and complies with BS8612

### Material and Colour Choice

- UV protected and colour fast PVC verge and polypropylene ridge and eaves closer caps
- Supplied in dark grey only

### Products in the System

- 3m dry fix continuous verge for new build
- 3m dry fix continuous verge for refurbishment
- Angled ridge (apex) piece
- Eaves closer cap pack (right and left handed units)
- Joint union (connects two verge sections together)


### Installation Advice

- Please refer to [www.timloc.co.uk](http://www.timloc.co.uk) for full installation guidance.

### How to Order


- Measure the length of the roof slope in metres and divide by 3 (product length) to identify how many profiles are required
- Ensure that the correct profile type is ordered for the project - new build or refurbishment
- An eaves closer cap must be installed at the beginning of each sloping run of Dry Fix Continuous Verge
- A Dry Fix Continuous Verge angled ridge piece must be installed at the apex of gable roofs
- A joint union is required when joining two Dry Fix Continuous Verge profiles together

### Product Dimensions

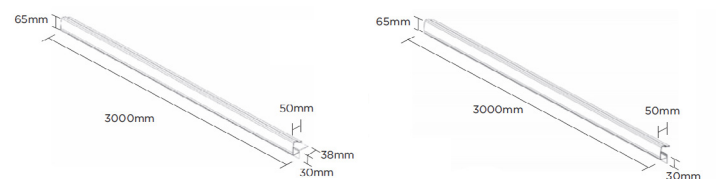


New build dry fix continuous verge


Refurbishment dry fix continuous verge




Angled ridge / apex piece



Joint union



Eaves closer cap pack (left unit)



Eaves closer cap pack (right unit)

# ROOFLINE


by **timloc**

## Dry Fix Continuous Verge System for Slate and Thin Slate-Effect Roof Tiles

A continuous verge system that presents a clean flush finish and an effective and virtually maintenance-free alternative to wet mortar bedding.



### Product Detail

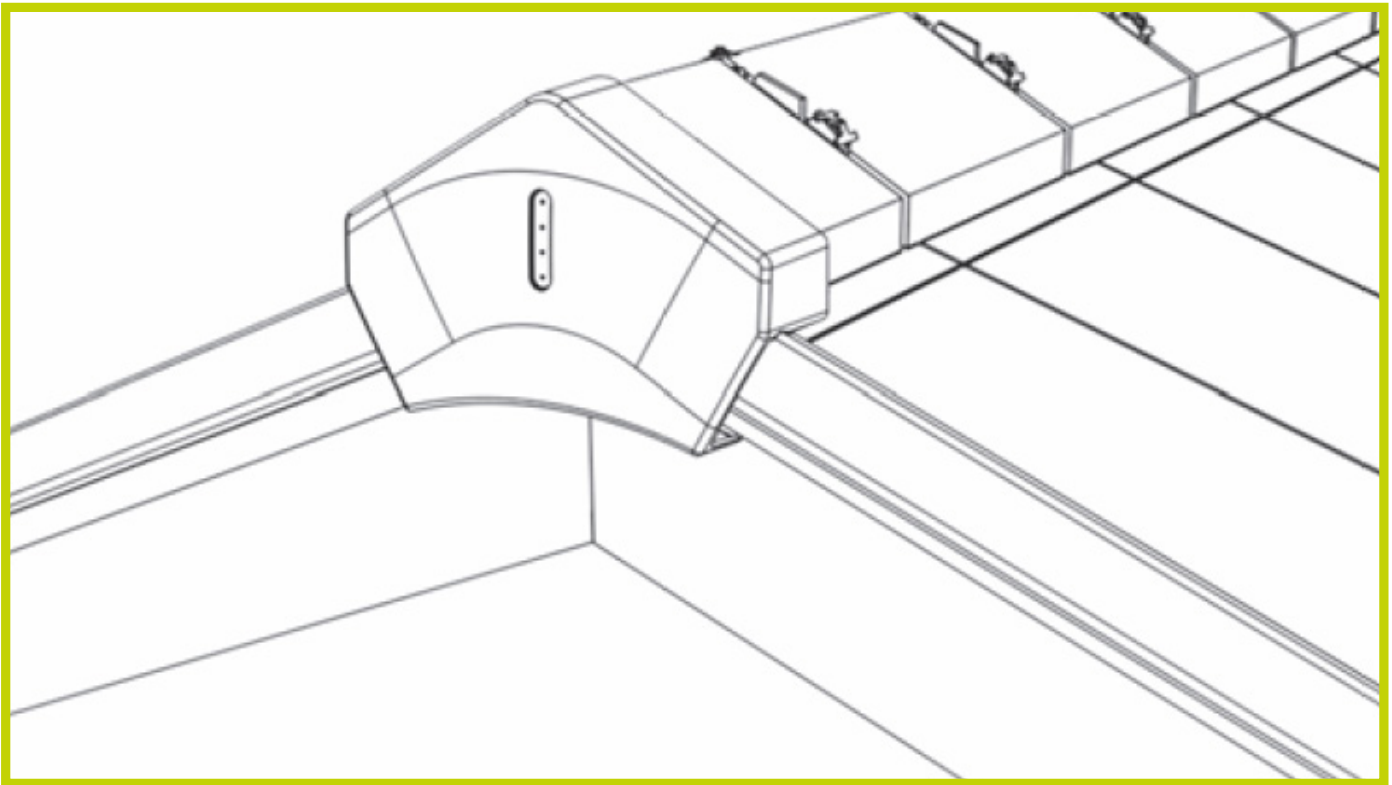

### Product Codes

Description	Pack Qty	Product Codes
3m new build dry fix continuous verge for slate/flat tile	4	66101
3m refurbishment dry fix continuous verge for slate/flat tile	4	66105
Dry fix continuous verge for slate angles ridge/apex piece	1	66120
Dry fix continuous verge for slate/flat tile eaves closer cap pack (left and right units)	1 + 1	66117
Dry fix continuous verge for slate/flat tile joint union	1	66124