

## EXTERIOR LED WALL LIGHT


### Product Features

- Exterior single and twin wall lights with adjustable LED heads
- Die-cast aluminium housing for increased durability
- Suitable for use and ambient, decorative or security lighting
- PIR option available for twin head version



CAT NO.	TYPE	LUMINAIRE LUMENS	WATTAGE
LEXWS4B40	Single Head	360	5W
LEXWT7B40	Twin Head	720	10W
LEXWT7B40P	Twin Head PIR	720	10W

### Product Drawing

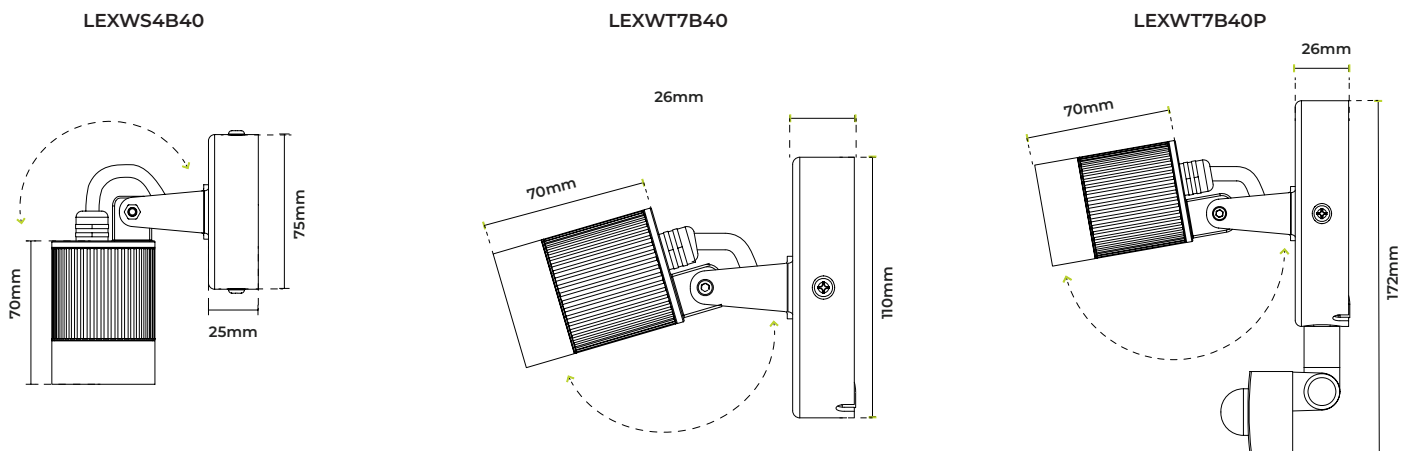

CAT NO.	WEIGHT (kg)	EFFICACY (Lm/cW)	CRI	FREQUENCY (Hz)	IK RATING	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)	L/B RATED LIFE
LEXWS4B40	0.4	72	>80	50-60	IK04	0 to +25	25	L70/B50
LEXWT7B40	0.77	72	>80	50-60	IK04	0 to +25	25	L70/B50
LEXWT7B40P	0.8	72	>80	50-60	IK04	0 to +25	25	L70/B50

STANDARD	DESCRIPTION
EN 60598-1	Luminaire – General requirements
EN 60598-2-1	Luminaire – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current $\leq 16$ A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

**LUCECO**

This luminaire contains built-in LED lamps.

A<sup>++</sup>
A<sup>+</sup>
A
B
C
D
E

}

LED

The lamps cannot be changed in the luminaire.

874/2012

