

Self adhesive foam strip “UNI-Foam” for use in combination with Cedral connection profile and Cedral Click lintel profile.


The foam strip is designed to create a watertight seal with a minimal amount of force. Once in place, the foam will be able to handle normal joint movement due to thermal and hygric expansion and shrinkage or environmental forces.

ARTICLE NUMBER: 4006465

TECHNICAL CHARACTERISTICS

Material	closed cell PVC foam self adhesive
Liner	paper
Dimensions (w x h)	9 x 6 mm
Weight	± 7 g/m
Colour	black
Hardness (ASTM D2240)	14 Shore 00
Tensile strength (DIN 53571)	16 N/cm ²
Elongation (DIN 53571)	200 %

Adequate seal at minimum 30% compression
Service temperature - 30 to + 70 °C
Application temperature + 5 to + 50°C
Apply to clean, dry surfaces only.

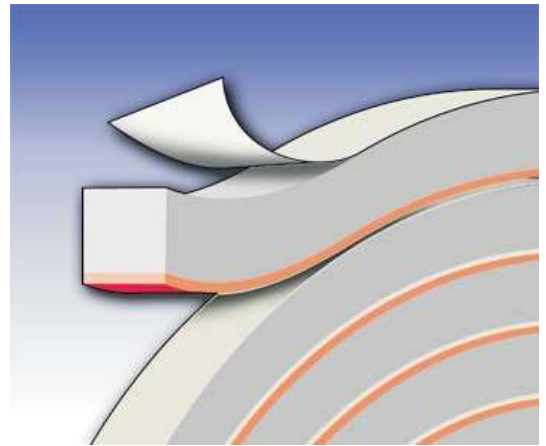

STORAGE

Material should be stored at 21°C, 50% relative humidity

PACKAGING

Packaging: 15m per roll

PROCESSING

Consult the application guidelines for Cedral

Disclaimer

The information in this Material Information Sheet is correct at time issuing. However, due to our committed program of continuous material and system development we reserve the right to amend or alter the information contained therein without prior notice. Please contact your local Etex Facade Sales Organization to ensure you have the most current version.

All information contained in this document is copyrighted ©.

All figures contained in this document are illustrations and should not be used as construction drawings.

This information is supplied in good faith and no liability can be accepted for any loss or damage resulting from its use.

