

Screw for fixing Cedral Lap on a metal supporting structure.

ARTICLE NUMBER: 4043355


TECHNICAL CHARACTERISTICS

Characteristics: - dimensions 4.5 x 32 mm, head diameter ~7 mm
- countersunk head with milling ribs
- drill point
- PH2 recess (Phillips n°2)

Material: stainless steel quality A2 (AISI 304), material number
Drill point in hardened carbon steel

Pull-out value: in 1,25 mm steel: 1,900 kN
in 1,50 mm steel: 2,380 kN
in 2,00 mm steel: 3,770 kN
in 2,00 mm aluminium: 2,500 kN
in 3,00 mm aluminium: 3,800 kN

Shear value: 6.580 kN

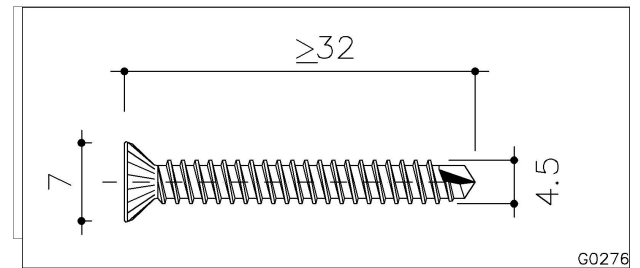

PACKAGING

Packaging: 200 screws per box, 1 bit included

PROCESSING

Consult the application guidelines for Cedral Lap fixed to a metal sub-construction

Disclaimer

The information in this Material Information Sheet is correct at time issuing. However, due to our committed program of continuous material and system development we reserve the right to amend or alter the information contained therein without prior notice. Please contact your local Etex Facade Sales Organization to ensure you have the most current version.

All information contained in this document is copyrighted ©.

All figures contained in this document are illustrations and should not be used as construction drawings.

This information is supplied in good faith and no liability can be accepted for any loss or damage resulting from its use.

