



# Declaration of Performance

**Identification Code: V61-175-STST**

Meeting the requirements of Annex **ZA, EN 845-1:2013+A1:2016**

## Description of Use:


Asymmetrical wall tie classed as a type 6 timber frame tie used to connect a timber frame to masonry outer cladding over a 100mm cavity.

### Testing Body:

Lucideon Ltd  
Queens Road  
Penkull  
Stoke on Trent  
ST4 7QL

### Notification Body No:

1289

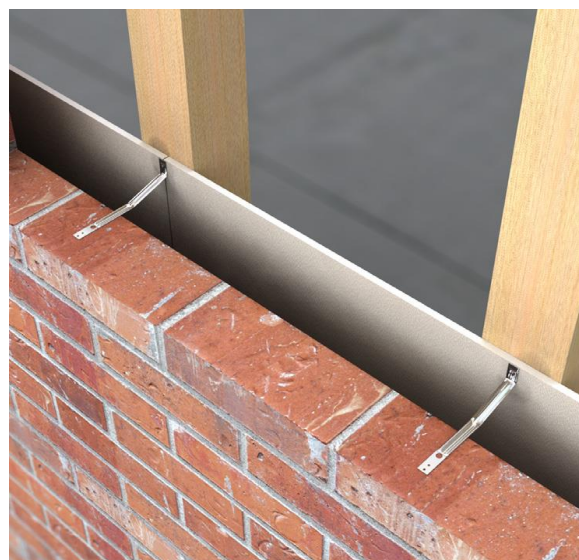

### Performance:

|                            |                                 |
|----------------------------|---------------------------------|
| Compressive Load Capacity: | 579N                            |
| Tensile Load Capacity:     | 660N                            |
| Water Shedding Capacity:   | Resistant                       |
| Durability:                | Material coating<br>reference 3 |
| Dangerous Substance:       | N/A                             |
| Minimum Embedment:         | 62.5mm                          |
| Minimum Mortar Joint:      | 10mm                            |



Authorised Signature

Philip Travis, Managing Director  
1<sup>st</sup> March 2017, Whalley Bridge