



## CD-410 - Linear Drainage


## KEY FEATURES

- All plastic non rusting design
- Lightweight
- Heat resistant (Ideal for tarmac edging)
- Mesh 'snap-lock' grating; easy to remove for cleaning and maintenance
- 'Springlock' channel-to-channel male/female connection allows several metres of channel to be laid at a time
- Provision for locking screws in grating (purchased separately)
- Where water-tight Clark Drain channel is mandatory, a suitable mastic sealant such as Sikaflex (219i, 11FC) or Geocel (945, Marine) should be used when fitting channels together (and accessories)
- Load Class A15



## CD-410 - Specifications

Product Weight (Kg)	1.7
Channel Material	Polypropylene Grade AP9
Channel Length(mm)	1000
Channel Width(mm)	90 Internal 128 External
Channel Height(mm)	70 Internal 80 External
Grating Slot Dimensions(mm)	8 X 23
Waterway Area (cm <sup>2</sup> )	435
Grating Qty and size per channel(mm)	1 X 1000

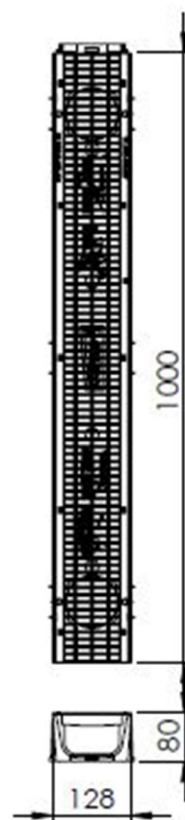

CD410/V0.1/09-05-2023

Due to our continuous product improvement program features and sizes may be subject to change without notice.

CLARK DRAIN, STATION ROAD, YAXLEY, PETERBOROUGH, PE7 3EQ, TEL. +44 (0) 1733 765317