



CD-185-KMD - Ductile Iron Kitemark Gully Grates & Frames


KEY FEATURES

- BSI Kitemark certified to BS EN124 2015
- Captive hinge design to deter thieves
- 3 Sided flange for installation against kerbs
- "Taper lock" Grating design to ensure non rocking
- Reversible grating for use in all road configurations
- Compliant to the design requirements of Highways Agency DMRB CD 534 (low or high risk areas)



CD-185-KMD - Specifications

Product Weight (Kg)	37
Grating Weight (Kgs)	22
Clear Opening	452 x 452
Overall Dimensions	592 (L) x 538 (W) x 100 (D)
Waterway area (cm2)	996
Material	Spheroid Graphite Iron Grade EN-GJS-500-7 to BS EN 1563:2011 Temporary Bitumen based paint coating to BS 3416:1991
Load Rating	D400
Frame Pressure Bearing Area (N/mm2)	4.4
Grating Type	R
Application	Carriageway kerbside areas and commercial/industrial areas

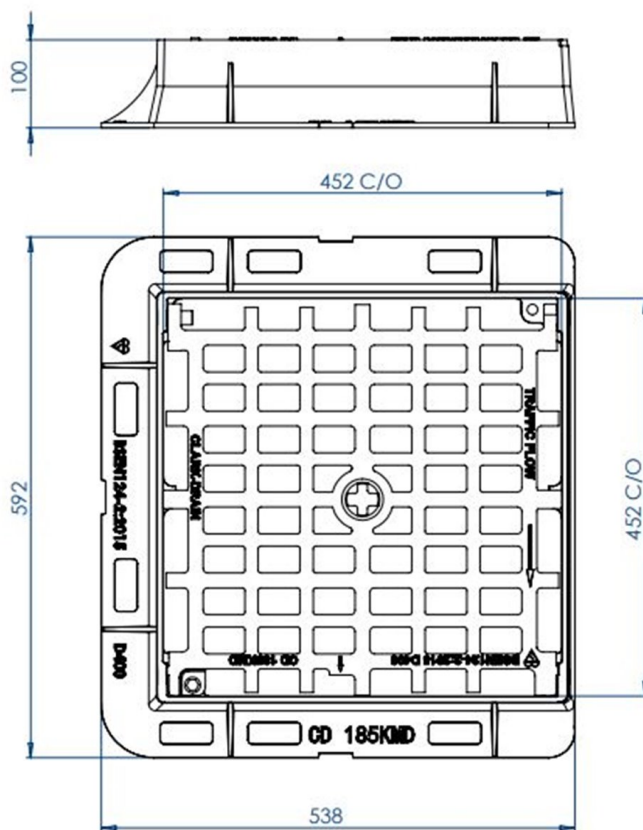

CD185KMD/V0.1/17-05-2023

Due to our continuous product improvement program features and sizes may be subject to change without notice.

CLARK DRAIN, STATION ROAD, YAXLEY, PETERBOROUGH, PE7 3EQ, TEL. +44 (0) 1733 765317