

Neo Plus



Same tile, better benefits

Introducing the Neo Plus, our improved and updated Neo Pantile

The Neo Pantile's popularity is down to its simplicity, with its variable gauge and simple design making it quick and easy to install.

We have taken this classic design and re-engineered it for improved performance and even easier installation.

- Improved 20 degree minimum pitch.
- Design optimisation for easier installation.
- New clay cloaked verge fitting

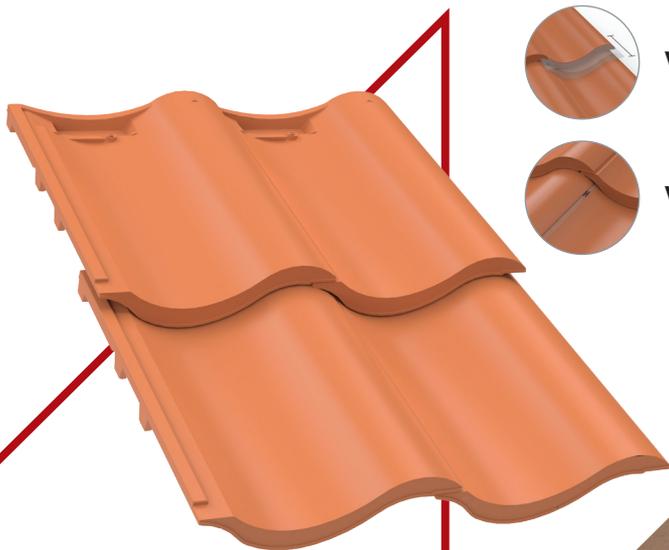

Variable headlap




Variable shunt

Technical Specification

Material	Clay
Minimum roof pitch	20°
Headlap (minimum)	75mm
Headlap (maximum)	120mm
Batten spacing at maximum gauge	309mm
Batten spacing at minimum gauge	264mm
Size of tile	387x246mm
Covering capacity	14.9 tiles per m ² at 75mm headlap
Cover width	218mm
Profile depth	69mm
Hanging length	357mm
Weight as laid	40.3kg per m ²
Weight per 1000 (incl pallet & packaging)	2.809 tonnes
Weight per tile	2.7kg
Weight per pallet (incl pallet & packaging)	0.809 tonnes
Bond	Straight
Quantity per pallet	288
Quantity per row/band	6 per band, 36 per row
Quantity per layer	72
Battens per m²	3.3m at 75mm headlap
Batten size - up to 450mm rafter centres	38 x 25mm
Batten size - up to 600mm rafter centres	50x25mm
Nail size / type for tiles	45 x 3.35mm aluminium ring shank clout head
Nail size/type for metal tile clips	55 x 3.35mm aluminium ring shank clout head

Associated Fittings

- Half Round Ridge 305mm
- Third Round Ridge 305mm
- Tile, Eave & Verge Clip
- In-Line Tile Vent
- Cowl Vent
- Profile Dry Ridge System
- Clay Cloaked Verge

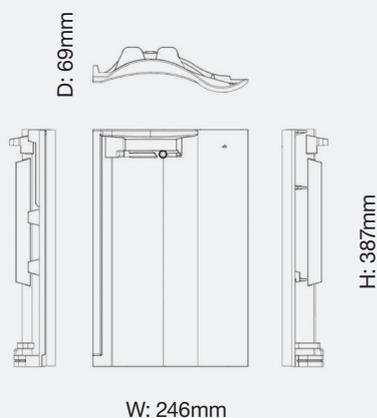

Smoothfaced Colours


Natural Red



Flanders



Antique Slate



Tuscan



01427 871200

sandtoftorders@wienerberger.com

www.wienerberger.co.uk