


GE RING STRIPNAIL GAS & NAIL PACK 2,87X65MM CARBON STEEL STANDARD TENSILE

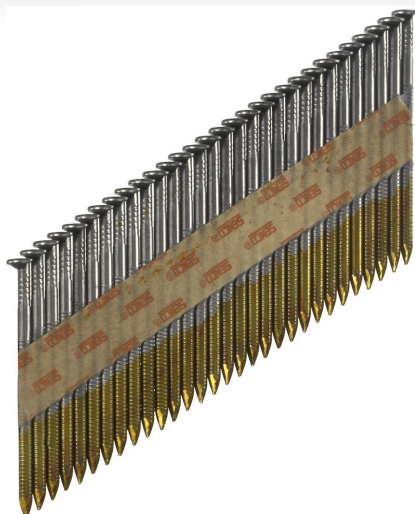

GE55AXBKR-FCB

APPLICATIONS

Framing, sheathing, subfloor, decking, trusses, pallets and crates

TECHNICAL SPECIFICATIONS

Collation angle	34 °
Collation type	Paper collated
Wire material	Carbon steel standard tensile
Finish	Zinc plated 12 micron
Coating	Sencoted
Nail head type	Clipped head
Nail shank type	Ring shank
Point type	Diamond
Pointangle	40 °
Nail length	65 mm
Nail diameter	2.87 mm

LOGISTICAL SPECIFICATIONS

GTIN	8715274248561
Package quantity	3300 pieces
Net weight	10.5 kg

FASTENER SPECIFICATIONS



CE SPECIFICATIONS

CE fastener type	Round cross-section ring shank nail
Service class	2
Coating type	Coating type 3
Head cross sectional area	30 mm
Threaded/profiled length	45 mm
Characteristic yield moment	2525 Nmm
Characteristic head pull through parameter	20.3 N/mm ²
Characteristic tensile strength	695 N/mm ²