

# ROOF TILES

## Tile Range



### Thin Flat Tile

<b>Size</b>	<b>Thickness</b>
420mm x 334mm	21mm
<b>Weight</b>	<b>Minimum Headlap*</b>
4.7kg	75mm (normal exposure)
<b>Minimum Pitch*</b>	<b>Maximum Gauge</b>
100mm headlap - 17.5°	345mm
75mm headlap - 22.5°	<b>Covering Capacity</b>
<b>Cover Width</b>	75mm headlap - 305mm
<b>Weight of Tiling</b>	9.7 tiles/m <sup>2</sup>
75mm headlap - 45kg/m <sup>2</sup>	100mm headlap - 10.5 tiles/m <sup>2</sup>
100mm headlap - 49kg/m <sup>2</sup>	<b>Nail Size</b>
<b>Batten Size</b>	40mm x 3.35mm
50 x 25mm (rafters not exceeding 600mm c/c)	Aluminium Alloy
<b>Tiles per Band</b>	<b>Tiles per Pallet</b>
38	228
<b>Weight of Pallet</b>	
1086kg	

### Duo Thin Flat Tile

<b>Size</b>	<b>Thickness</b>
420mm x 334mm	21mm
<b>Weight</b>	<b>Minimum Headlap*</b>
4.7kg	75mm (normal exposure)
<b>Minimum Pitch*</b>	<b>Maximum Gauge</b>
100mm headlap - 17.5°	345mm
75mm headlap - 22.5°	<b>Covering Capacity</b>
<b>Cover Width</b>	75mm headlap - 305mm
<b>Weight of Tiling</b>	9.7 tiles/m <sup>2</sup>
75mm headlap - 45kg/m <sup>2</sup>	100mm headlap - 10.5 tiles/m <sup>2</sup>
100mm headlap - 49kg/m <sup>2</sup>	<b>Nail Size</b>
<b>Batten Size</b>	40mm x 3.35mm
50 x 25mm (rafters not exceeding 600mm c/c)	Aluminium Alloy
<b>Tiles per Band</b>	<b>Tiles per Pallet</b>
38	228
<b>Weight of Pallet</b>	
1086kg	

### Round Top Tile

<b>Size</b>	<b>Thickness</b>
420mm x 334mm	26mm
<b>Weight</b>	<b>Minimum Headlap</b>
4.5kg	75mm
<b>Minimum Pitch</b>	<b>Maximum Gauge</b>
100mm headlap - 17.5°	345mm
75mm headlap - 15°	<b>Covering Capacity</b>
<b>Cover Width</b>	75mm headlap - 305mm
<b>Weight of Tiling</b>	9.8 tiles/m <sup>2</sup>
75mm headlap - 47kg/m <sup>2</sup>	100mm headlap - 10.6 tiles/m <sup>2</sup>
100mm headlap - 51kg/m <sup>2</sup>	<b>Nail Size</b>
<b>Batten Size</b>	70mm x 3.35mm
50 x 25mm (rafters not exceeding 600mm c/c)	Aluminium Alloy
<b>Tiles per Band</b>	<b>Tiles per Pallet</b>
35	210
<b>Weight of Pallet</b>	
960kg	

### Square Top Tile

<b>Size</b>	<b>Thickness</b>
420mm x 330mm	25mm
<b>Weight</b>	<b>Minimum Headlap</b>
4.6kg	75mm above 25°
<b>Minimum Pitch</b>	<b>Maximum Gauge</b>
100mm headlap - 22.5°	345mm
75mm headlap - 25°	<b>Covering Capacity</b>
<b>Cover Width</b>	75mm headlap - 297mm
<b>Weight of Tiling</b>	9.8 tiles/m <sup>2</sup>
75mm headlap - 45kg/m <sup>2</sup>	100mm headlap - 10.5 tiles/m <sup>2</sup>
100mm headlap - 49kg/m <sup>2</sup>	<b>Nail Size</b>
<b>Batten Size</b>	55mm x 3.35mm
50 x 25mm (rafters not exceeding 600mm c/c)	Aluminium Alloy
<b>Tiles per Band</b>	<b>Tiles per Pallet</b>
36	216
<b>Weight of Pallet</b>	
995kg	


### Double Roman Tile

<b>Size</b>	<b>Thickness</b>
420mm x 330mm	25mm
<b>Weight</b>	<b>Minimum Headlap</b>
4.6kg	75mm above 25°
<b>Minimum Pitch</b>	<b>Maximum Gauge</b>
100mm headlap - 22.5°	345mm
75mm headlap - 25°	<b>Covering Capacity</b>
<b>Cover Width</b>	75mm headlap - 297mm
<b>Weight of Tiling</b>	9.8 tiles/m <sup>2</sup>
75mm headlap - 45kg/m <sup>2</sup>	100mm headlap - 10.5 tiles/m <sup>2</sup>
100mm headlap - 49kg/m <sup>2</sup>	<b>Nail Size</b>
<b>Batten Size</b>	55mm x 3.35mm
50 x 25mm (rafters not exceeding 600mm c/c)	Aluminium Alloy
<b>Tiles per Band</b>	<b>Tiles per Pallet</b>
35	210
<b>Weight of Pallet</b>	
970kg	

# ROOF ACCESSORIES

## Multi Ridge Tiles

<b>Length x Width</b>	<b>Maximum Roof Pitch</b>
457mm x 250mm	45°
<b>Weight</b>	<b>Tiles per pallet</b>
5kg	140




## Hip End Tile

<b>Length</b>	510mm
<b>Width</b>	260mm
<b>Height</b>	130mm
<b>Thickness</b>	25mm
<b>Weight</b>	6.4kg
<b>Colours Available</b>	Anthracite & Terracotta



# COLOURS

## Available in 5 Colours

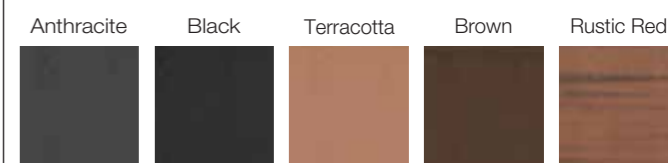

EMAIL PLANS TO  
**ROOFING@FPMCCANN.CO.UK**



- ✓ 48 Hour lead time on all estimates
- ✓ All size enquiries welcome, no matter the size

# VENTILATION PRODUCTS

## Underlay



### FP McCann 150gsm Vapour Permeable Membrane

High performance breather membrane  
3 layer membrane  
Suited for all wind zones  
Tested to BS5534:2014 +A2:2018  
wind loading  
Supplied via partnership with Permavent

## Eaves Vent System 6m



**Roll Out Rafter Eave Vent**  
300mm x 6m

**Over Fascia Ventilator**  
10mm or 25mm x6

**Felt Support Tray**  
x10

The Eaves Vent System 6m is available as either a 2 or 3 part system providing a 10mm or 25mm ventilation gap.

# DRY FIX SYSTEMS

## McCannFast Ridge & Hip Kit 6m



**McCannFast Ridge Roll 6m Ventilated or Unventilated**  
100mm x M5 S/S Screw x10  
**McCannFast Ridge Union x10**  
**McCannFast Union Clip x10**  
**Ridge Batten Connector x10**

## Dry Fix Valley System



**Eaves Closure Piece** **Top Closure Piece 90°** **GRP Dry Fix Valley Trough 3m**

Minimum Pitch: As per tile profile Maximum Pitch: 60° All components available with a 70mm or 110mm upstand


## Dry Verges System



**Dry Verges Unit** **Multi Ridge End Cap**

# FIXINGS AND CLIPS

## Tile Fixings

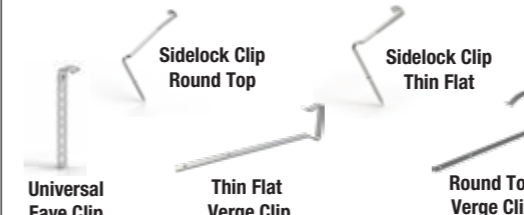

## McCannVent

**Recommended Tile Spacing**  
5mm gap - 2m centres  
10mm gap - 1m centres

**Profiles Available**  
Thin Flat and Round Top

**Free ventilation area**  
10,000mm<sup>2</sup>

**Minimum Pitch**  
22.5°  
**Colours Available**  
Anthracite, Grey, Terracotta, Brown

