


LEADPRO

LOW MOD HYBRID ROOFING & FLASHING SEALANT

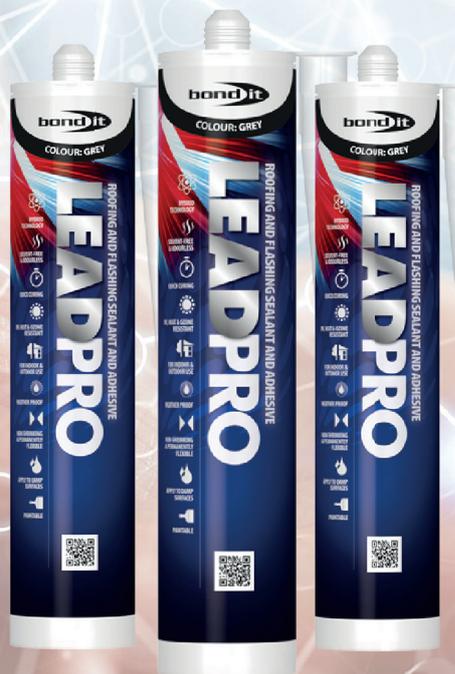

PART OF THE HYBRID RANGE OF SELANTS & ADHESIVES

A one part, high quality, low modulus sealing material based on advanced hybrid roofing sealant and adhesive that reduces weather ingress, tile lift and noise.

Uses: For use on all types of roof, flashing, soffits and guttering. Suitable with lead, aluminium, copper, uPVC, steel, timber, industrial roofing panels, slate, tiles, bitumen (if primed), acrylic, glass, GRP and polycarbonate glazing. For internal use for sub-roof ducting and for sealing roof lights, mechanical fasteners and cladding, as well as with solar energy systems.

Suitable for indoor and outdoor use.

Benefits:

- Solvent-free & odourless.
- Easy to tool and finish.
- Can be overpainted with waterbased paints.
- UV resistant.
- Quick curing.
- Contains no isocyanates, solvents, silicone and phthalates.
- Excellent adhesion to most surfaces (even moist surfaces).
- For sealing and bonding interior and exterior applications.
- Very low omissions, EC1+ certified.
- Suitable for indoor and outdoor use
- CE Approved. Conforms to EN 15651-1.



SPECIFICATION SUMMARY

Density	1.40+0.02 g/cm ³
Hardness Shore A	25+/-5
Skinning Time Min	22 minutes +/-5
Curing after 24 hours	ca. 2
Movement Capability	25%
Modulus 100%	0.95 M/mm ²
Elongation At Break	500%
Tensile Strength	0.95 N/mm ²
Volume Shrinkage	>70%
Elastic Recovery	<5%
Long Term Temperature Resistance	-40°C to +90°C
Application Temperature	+0°C to +40°C

Code	Colour	Box	Size	Barcode
BDLPROGY	Grey	12	EU3	5056437401533

