

Wiring Accessories

Issue 16





Welcome to Click[®]

The Home of Wiring Accessories

Scolmore[®] Group is one of the UK's leading manufacturers of electrical accessories. The company is proud to be a British-based, family-run business with an international reputation for quality, innovation and exemplary customer service.



The Complete Range of Electrical Accessories.

ClickSmart⁺

deco⁺
PLUS

deco⁺

define⁺

definity⁺
COMPLETE

definity⁺

MODE⁺

polar⁺

Part M⁺

GRIDPRO⁺

MINIGRID⁺

new
media⁺

curva⁺

essentials⁺

flow⁺

From our Head Office in the Midlands, we design, develop and manufacture an ever expanding product range for distribution throughout the UK and worldwide.

The Click[®] Wiring Accessories range remains the number one choice of electricians and contractors who value the flexibility of the modular based range, as well as the one-stop solution that the comprehensive offer allows.

Our online ordering service is supported by automated order picking and processing procedures which enables us to offer service levels we believe are unprecedented in the industry.

The company is committed to harnessing the very latest technologies and developing superior-performing, competitively-priced products which allow installation projects to be completed quickly and easily.

Scan to view the **Click[®] Wiring Accessories Pricelist**



Product Warranties


Feel at ease with our new and improved warranties

All electronics have a 2 year warranty

ClickSmart⁺



deco⁺
PLUS



deco

GRIDPRO



MINIGRID[®]



definity[™]
COMPLETE



definity

define



new
media[™]



Aquip⁶⁶



METAL CLAD

MODE



Part M[™]


polar



curva



flow





ECOVADIS BRONZE SUSTAINABILITY MEDAL

AWARDED TO SCOLMORE GROUP

Scolmore® Group's sustainability efforts have been recognised with a bronze medal awarded by EcoVadis, the world's most trusted provider of business sustainability ratings, intelligence, and collaborative performance improvement tools for global supply chains.

With a powerful technology platform and expert team, EcoVadis offers easy-to-use sustainability scorecards covering 190 purchasing categories across 150 countries. Bronze medals are awarded to the top 50% of participating companies worldwide.

Over 90,000 companies have undergone EcoVadis assessment. Scolmore's ranking in the top 50% of all participants is based on the company's scores in Environment, Labour and Human Rights, Ethics and Sustainable Procurement. This earns Scolmore® the EcoVadis Bronze Medal, with EcoVadis planting a tree on their behalf through One Tree Planted to mark the achievement.

"To have earned this status in our first-ever submission is testimony to the commitment and efforts of our teams to embed corporate sustainability into the culture, strategy and day-to-day operation across the Scolmore® Group of companies. This achievement also signals to our customers that we are the right partner to support their own sustainability drive." - Manuela Rubino Courtney, Group Legal and Compliance Manager.

EcoVadis' Corporate Social Responsibility (CSR) rating methodology aims to evaluate a company's CSR management system based on policies, actions, and results. It operates on seven principles:

- 1. Evidence Based** - Companies must provide evidence for their CSR claims.
- 2. Consideration of Industry, Location and Size** - Evaluation of industry issues, presence in risk countries, and the size and geographical span of the company.
- 3. Diversification of Sources** - Ratings based on standpoints published by NGOs, trade unions, international organizations, local authorities, or other 3rd party organisations.
- 4. Technology Integration** - Reliable ratings rely on technology for industrialisation, which enables fast learning, growth and scalability.
- 5. Assessment by International CSR Experts** - CSR experts globally analyse supporting documents.
- 6. Traceability and Transparency** - All documents are securely stored. Companies assessed have access, if needed, to the most detailed results and to each scoring decision.
- 7. Continuous Improvement** - The methodology is open to quality controls and feedback, with a focus on ongoing improvement.

ISO14001 CERTIFICATION FOR SCOLMORE GROUP COMPANIES

Scolmore® Group has earned ISO14001 certification for group companies Scolmore® International, ESP®, Ovia® and Unicrimp®.

ISO14001 is the internationally recognised standard for Environmental Management Systems (EMS), aiding organisations in enhancing environmental performance. Scolmore® Group's attainment of this certification reflects its dedication to integrating sustainability into its culture, strategy and day-to-day operation across the Scolmore® Group of companies.

Scolmore® Group's adherence to ISO14001 showcases its proactive approach to reducing environmental impact, meeting legal requirements, and fulfilling environmental goals. This framework addresses resource usage, waste management, environmental performance monitoring and involving stakeholders in environmental commitments.

ISO14001 offers a structured approach for businesses to address global challenges and environmental concerns. As well as signalling a commitment to compliance and ongoing environmental improvement, the adoption of this standard also serves to enhance an organisation's reputation, demonstrating a commitment to a sustainable future.


ISO 9001:2015 ACCREDITATION

ISO 9001:2015, awarded by certification body NQA, is a globally recognized standard for Quality Management Systems (QMS), with over 1.1 million certificates issued worldwide. It ensures a common-sense approach to the management of an organisation to consistently satisfy customers and other stakeholders.



"We will continue to maintain and improve our environmental management systems in order to continue meeting the rigorous ISO14001 criteria for years to come."

- Manuela Rubino Courtney, Group Legal and Compliance Manager with Scolmore® Group.

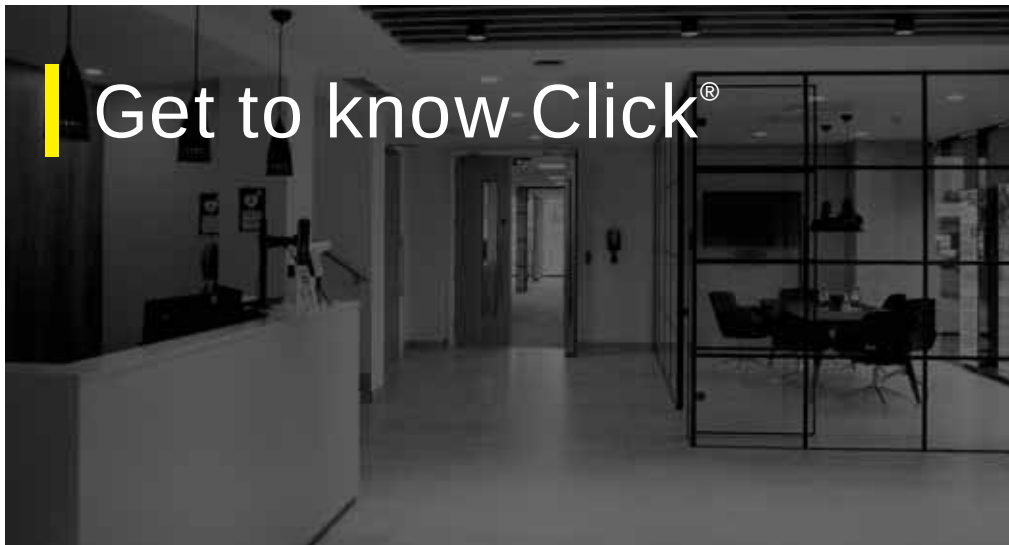

Get to know Click®



Sales Structure

The external sales team is being continually developed to enable Click® to meet the ever changing needs of the market. As a result, the sales force is now able to offer dedicated team members for distributors and contractors at local and national account level as well as providing specification contacts to generate demand with specific customers. This gives us the ability to have a focused approach in line with our business development plans.

"At Scolmore® Group the whole business is focused on the customer. Our forward thinking and investment for the future together with our dedicated employees enable a dynamic working environment that provides the platform for continued growth. It is our aim to provide the best possible package of products and service for our distributors and the installers who purchase and fit our products, ensuring that everyone gains maximum benefit when choosing Scolmore® Group."

Gary Mordue | CEO Scolmore® Group

Sales Office

Located alongside our distribution facility, this busy sales office provides a central point of contact for all customer service requirements. The professionalism, skills and knowledge of our internal sales team enables us to provide the high standard of service that we know our customers expect. Our on-line ordering facility is also managed within this office.

Product Development

Click® products are designed with our customer and the installer very much in mind. Our purpose built facilities and dedicated product development team, based in the UK allow us the flexibility to design and develop these products based on customer feedback and market research, ensuring we are producing a relevant, reliable and quality range of products.

Distributor Network

Click® has over 2000 trading accounts providing a comprehensive network of wholesale outlets covering the whole of the UK. These are a combination of Independent Wholesalers, National Wholesale Groups and Buying Consortium. The company sales strategy is to ensure that all Click® products are available local to the requirements of the installer and specifier.

Stock & Warehouse

Over 16,000 Click® product lines with a stock value in excess of £18 million are held at our Central Distribution Centre in the West Midlands at any one time. This means we are able to offer 97% availability on stock at any given time. Our centrally located 150,000 sq ft Warehouse and Distribution Centre allows us to deliver our products on time, every time.

In-House Studio

All marketing support including product literature and point of sale material is designed by our dedicated in-house design studio. This facility enables us to offer bespoke marketing support to our customers. The availability of an on-line Marketing Hub provides stockists of Click® products with a range of tools to enhance their own marketing activities.

Complete the look



with the **Definity™ Complete** range.
Cover plates & Inserts are now supplied complete as one code.
Now includes **Matt Bronze**.

definity™
COMPLETE



Definity™ Complete provides the installer with a complete all in one solution.

Offering push-fit cover plates in 9 assorted finishes and comprehensive range of electrical inserts, with both compatible cover plate and insert supplied within a single package.

The flexibility of Definity™ Complete is further enhanced with the range of cover plates and electrical inserts also being available independently of each other.

Introducing Matt Bronze

This new refined Matt Bronze finish adds a touch of timeless sophistication to any interior.



Matt Bronze Modules


A selection of GridPro® and MiniGrid® modules are available in Matt Bronze finish to complete your Click® installation.

MINIGRID®

GRIDPRO®


Unswitched Sockets

2 Gang Unswitched Decorative Sockets

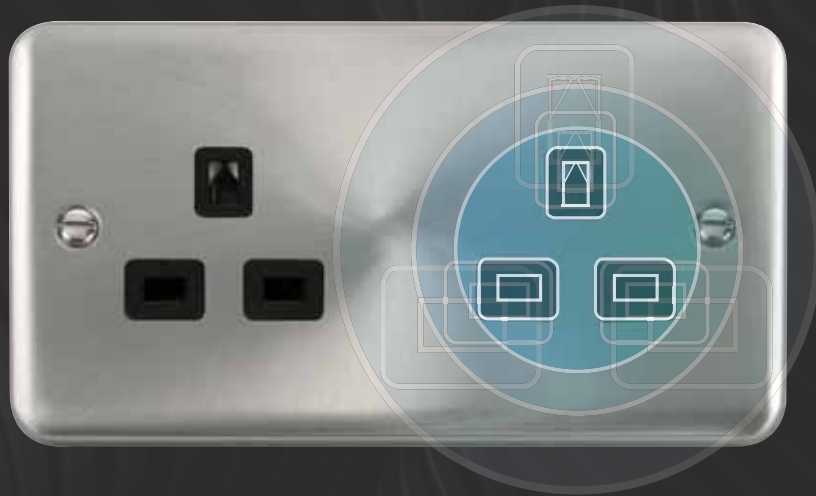

deco
PLUS

deco

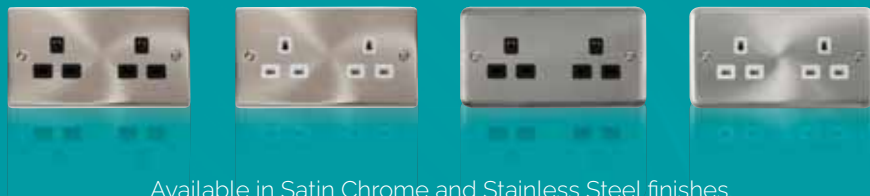

Available in Satin Chrome and Stainless Steel finishes.

MODE®

In-Wall Toothbrush Charger

Mode® In-wall charger compatible* with most Oral-B electric toothbrushes with a spare toothbrush head holder.



CMA101

CMA102

*Designed to work with toothbrush chargers that fit a 3757 base.
Electric toothbrush & spare toothbrush head not included.



Type A & C USB Sockets

Explore our range of 1 & 2 Gang Type A & C USB Sockets.
Available throughout our Click® Wiring Accessory ranges.



Type A & C New Media™ Modules

This cutting-edge module combines the best of both worlds, featuring a harmonious fusion of USB Type A and Type C ports to cater to all your device connectivity needs.



GridPro® Type A & C Modules Now Available

Available in Black & Polar White finishes.



GRIDPRO

Fan Isolation Switch Modules

A new range of GridPro® 10A 3 Pole
Fan Isolation Switch Modules.



Available in 13 distinctive quality
finishes in a mixture of Polar White,
Black & Grey inserts.



AQUIP⁶⁶



OA2652AG
Anthracite Grey lid



OA2652T
Semi-Transparent Lid

13A Switched Fused Connection Unit with LED

More from Scolmore Group®

 **elucian®**

Keeping you in Charge...

Elucian® by Click® brings to market
a comprehensive Consumer Unit &
Circuit Protection range.

ovia®
ScolmoreGROUP

LIGHTING SOLUTIONS

An extensive range of powerful and efficient lighting products



▲ DOMESTIC ▲ COMMERCIAL ▲ INDUSTRIAL ▲ CONTROL
▲ AMENITY ▲ FLOODLIGHTING ▲ UTILITY ▲ EMERGENCY

FIRE, SECURITY & EMERGENCY PRODUCTS

ESP[®] (Elite Security Products) Ltd is a market-leading supplier of a wide range of electronic security and fire protection products.



WE'VE GOT YOU COVERED.

Look no further! Unicrimp[®] have a comprehensive range of electrical cable accessories. Why go anywhere else?





BIM

Building Information Modelling (BIM) is changing how buildings, infrastructure and utilities are planned, designed and built. Having started life as a three-dimensional modelling system in the 1980s, BIM was originally used by architects and concentrated solely on construction elements. Today the latest generation of BIM software includes all the components of a building, including MEP (mechanical, electrical, plumbing) services and it provides contractors with the ability to deliver a quality service, reduce waste and minimise inefficiencies.

Since 4 April 2016, all centrally-procured public sector construction projects require the implementation of BIM at Level 2. As the industry continues to collaborate to implement BIM, Scolmore has been working behind the scenes and has now developed and provided direct access to a newly created BIM library. The company has also developed Technical Specification Brochures to cover all products across the entire wiring accessories and lighting ranges. All the information is in downloadable format from the website www.scolmore.com.



CPD Training




Maintaining a competitive edge is vital to stay ahead in the fast moving professional electrical industry. Scolmore Group has a wealth of CPD accredited training modules available to keep you up to date with the latest regulations, technologies, and product innovations.

Online Ordering

www.scolmoreonline.com

Our updated site now incorporates a number of improved features that allow users to access new information directly and easily:

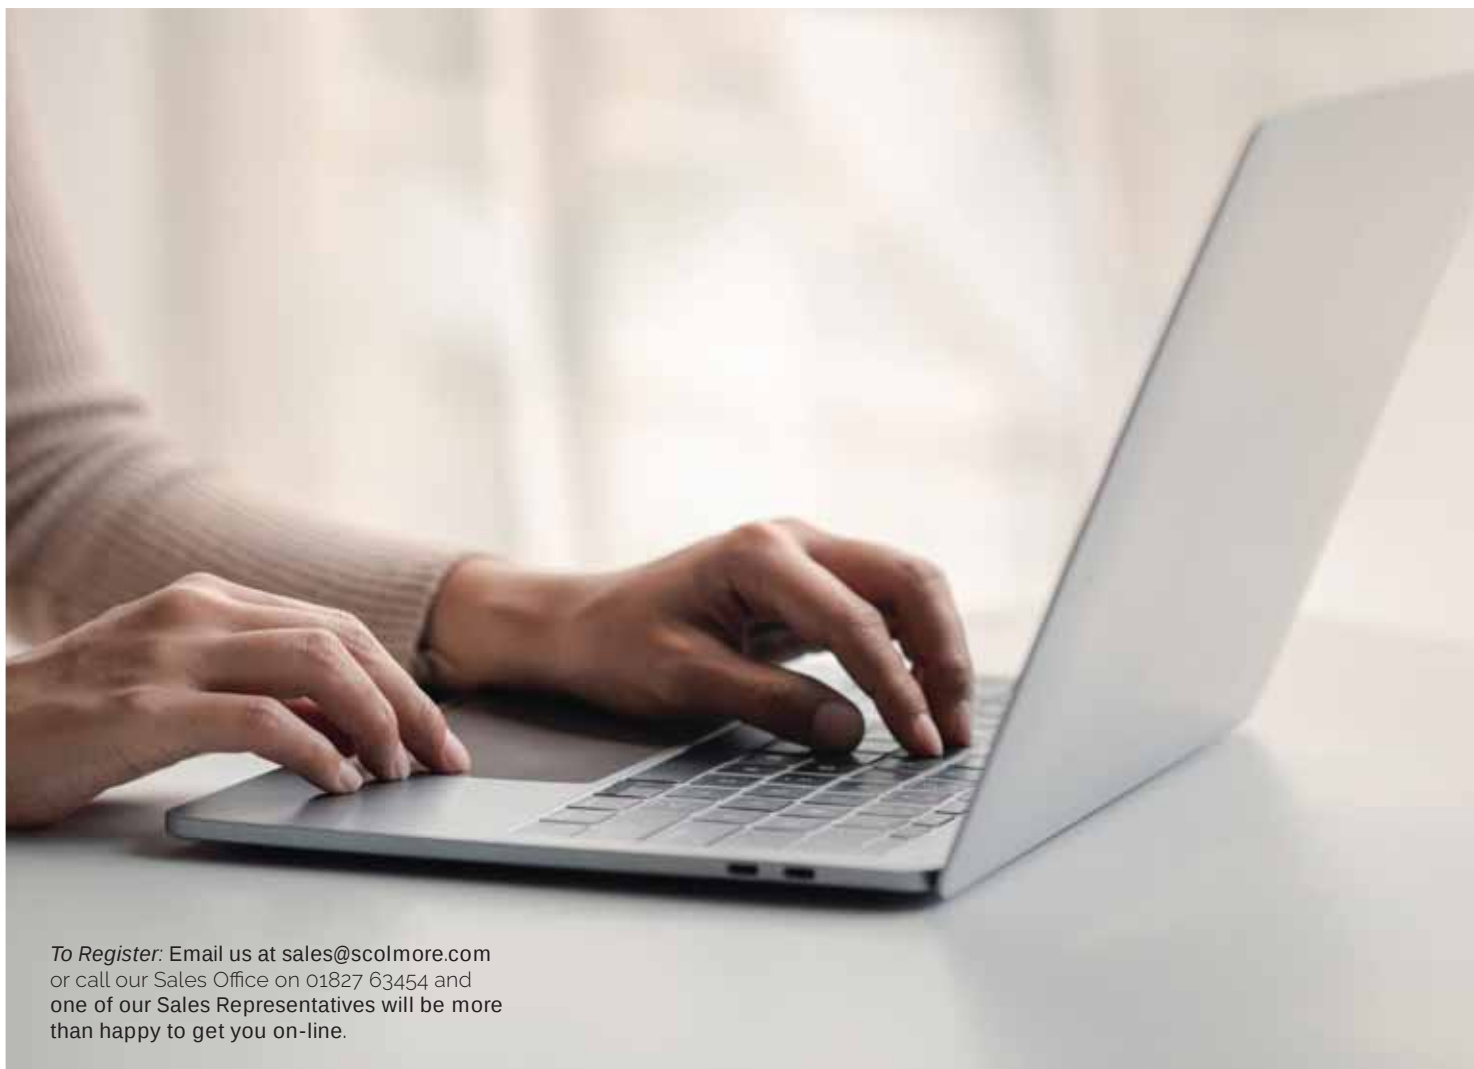

- Our PDF upload feature eliminates the need for time consuming manual data entry, simply upload your purchase order PDF and we will extract the information for you so you can add the products straight to your basket within seconds
- Ordering 24 hours a day 7 days a week with the ability to check current stock levels as required, meaning you are not restricted to ordering during normal office hours
- Access to on-line catalogues will keep you fully updated with the complete product range and provide information on new products as and when they become available
- The order tracking service keeps you up to date with the progress of your shipment
- Managing your administration paper work is now even easier with instant access to reports and essential documents at the click of a button
- A 'quick buy tab' and the ability to store the most common orders for repeated use, adds to the versatility and flexibility of the revised system.

To Register: Email us at sales@scolmore.com or call our Sales Office on 01827 63454 and one of our Sales Representatives will be more than happy to get you on-line.

Scolmore® App

Need to set up an account?

Call: 01827 63454 or Email: sales@scolmore.com

The Click® Scolmore app allows you to use your smart phone to browse our complete range of products, add products to your Favourites or to the Quote Basket.

The app then allows you to email the contents of the basket back to yourself providing all the information you need to obtain any quotations.

With over 6000 products currently available you can use the search facility to easily locate the products required and if you require further information there's an option to email us or find us on the map straight from the app.


An added bonus is the app being 100% native means you don't have to be connected to the internet to use it.



Marketing Hub

Are you a Click® stockist?

If so, you automatically have access to the Marketing Hub. Download all our latest literature, flyers to personalise and our full range of images for use on your website or artwork. Follow the links from scolmore.com for more information.

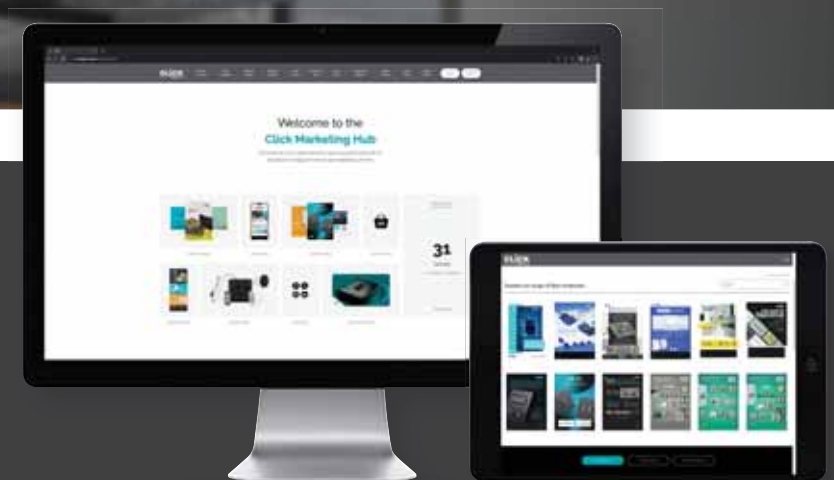


Need to set up an account?
Call: 01827 63454 or Email: sales@scolmore.com

Have you
CLiCK[®]ed yet?



www.scolmore.com

Visit www.scolmore.com to see our new website,
packed with new features and easier navigation.

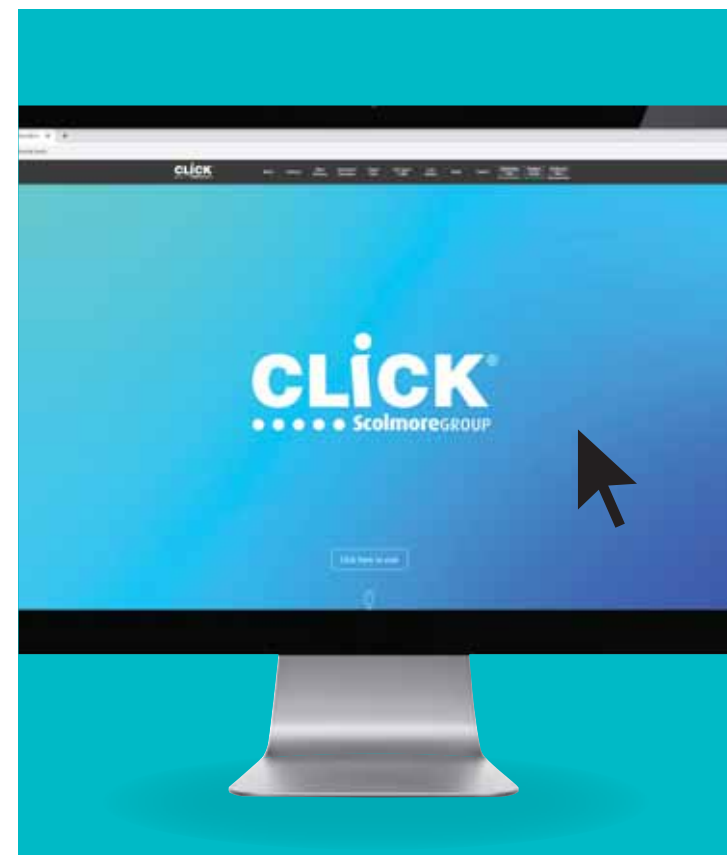

CONTENTS

A1

CLICKSMART+

Smart Hub	A11
Smart Controller	A13
Smart GridPro® Modules	A16
Smart Camera	A17
Smart Sensors	A18
Smart Switching Receivers	A21
Smart Dimming Receivers	A22
Smart Sockets	A23
Smart Socket Kits	A29
Smart Fused Connection Unit	A30
Back Boxes	A32
Plug-in Socket	A34

D1

DEFINE®

Switches	D4
Power Sockets	D10
Fused Connection Units	D13
Control Switches	D14
Shaver Socket & Blank Plates	D17
TV, Telephone & Satellite	D18
New Media™ Plates	D22
Back Boxes & Fixing Screws	D23

B1

DECO® PLUS

Switches	B8
Yokes & Back Boxes	B19
Power Sockets	B20
Shaver Socket & Blank Plates	B24
Fused Connection Units	B25
Control Switches	B26
Key Lockable Switch & Socket	B28
TV, Telephone & Satellite	B29
New Media™ Plates	B32
Back Boxes	B34

E1

DEFINITY COMPLETE™

Switches	E4
Power Sockets	E11
Fused Connection Units	E18
50A Switches	E22
Control Switches	E24
Shaver Socket & Blank Plates	E27
TV, Telephone & Satellite	E28

C1

DECO®

Switches	C4
Unfurnished Plates	C7
Yokes & Back Boxes	C9
Dimmer Switches	C10
Toggle Switches	C12
Power Sockets	C13
Fused Connection Units	C18
Control Switches	C20
Shaver Socket & Blank Plates	C25
TV, Telephone & Satellite	C26
New Media™ Plates	C29
Back Boxes & Fixing Screws	C31

E33

DEFINITY™

Switches	E36
Socket Outlets	E50
Fused Connection Units	E56
45A/50A Switches	E60
Blank Plates & RJ11 Outlet	E64
Telephone Outlets	E65
Coaxial & Satellite Outlets	E66
New Media™ Plates	E68
Back Boxes & Fixing Screws	E69

F1

MODE®

Switches	F4
Unfurnished Plates	F7
Back Boxes	F9
Power Sockets	F12
Fused Connection Units	F20
Control Switches	F22
Ceiling Accessories	F28
Connection & Flex Outlet Plates	F29
In-Wall Toothbrush Charger	F30
TV, Telephone & Satellite	F31
New Media™ Plates	F34
Pattress Boxes	F35
Back Boxes	F36

H1

PART M RANGE™

Design Considerations	H4
Switches	H6
Unfurnished Plates	H8
Yokes & Back Boxes	H10
Power Sockets	H11
Control Switches	H15
Fused Connection Units	H16
Ceiling Accessories	H18
New Media™ Plates	H19
Design Provisions	H20
Back Boxes	H22

G1

POLAR™

Switches	G4
Unfurnished Plates	G7
Back Boxes	G9
Power Sockets	G12
Fused Connection Units	G16
Control Switches	G17
Ceiling Accessories	G20
Connection & Flex Outlet Plates	G21
Shaver Socket & Blank Plates	G22
TV, Telephone & Satellite	G23
New Media™ Plates	G26
Pattress Boxes	G27
Back Boxes	G28

I1

GRIDPRO®

Clip Feature Assembly Guide	I20
Screw Feature Assembly Guide	I22
Modules	I26
Dimmer Mounting Kits	I86
Dimmer Modules	I90
Deco Plus® Frontplates	I92
Definity™ Frontplates	I100
Define® Frontplates	I109
Deco® Frontplates	I119
Mode® Frontplates	I127
Part M™ Frontplates	I133
Polar™ Frontplates	I139
Metal Clad Frontplates	I145
Yokes & Back Boxes	I151

J1

MINIGRID®

MiniGrid® Unfurnished Plates	J5
Yokes & Back Boxes	J7
Deco Plus® Unfurnished Plates	J8
Deco® Unfurnished Plates	J10
Define® Unfurnished Plates	J11
Definity™ Unfurnished Plates	J12
Mode® & Part M™ Unfurnished Plates	J13
Polar™ Unfurnished Plates	J14
Metal Clad Unfurnished Plates	J15
Red Unfurnished Plates	J16
1 & 2 Way Switch Modules	J18
Intermediate Switch Modules	J19
2 Way Paddle Switch Modules	J20
2 Way Retractive Switch Modules	J21
DP Resistive Switch Modules	J22
2 Way Key Modules	J23
DP 'Emergency Test' Key Modules	J24
DP Resistive Key Modules	J25
Indicator & Blank Modules	J26
Fused Connection Unit Modules	J27
20A Flex Outlet Modules	J28
1 Way Retractive 'Bell' Switch Module	J29
10A 3 Position Switch Modules	J30
Fan Isolation Switch Modules	J32
2 Way Switch Modules	J33
20A DP Switch Modules	J34
Dimmer Module Mounting Kits	J36
Dimmer Modules	J37
Toggle Switch Modules	J38



K1

NEW MEDIA™

New Media™ Plates	K4
Yoke & Back Boxes	K12
Deco Plus® Unfurnished Plates	K13
Deco® Unfurnished Plates	K14
Define® Unfurnished Plates	K15
Definity™ Unfurnished Plates	K16
Mode® Unfurnished Plates	K17
Part M™ Unfurnished Plates	K17
Polar™ Unfurnished Plates	K17
Metal Clad Unfurnished Plates	K18
New Media™ Modules	K19
Typical Sky+ Installation	K28
Typical Sky+ HD Installation	K29
Technical Details	K30

L1

CURVA®

Switches	L4
Power Sockets	L7
Fused Connection Units	L9
Control Switches	L10
Shaver Socket & Blank Plates	L12
TV, Telephone & Satellite	L13
Pattress Boxes	L16
Back Boxes	L17

M1

ESSENTIALS™

Galvanised Boxes	M4
Dry Lining Boxes	M7
Longer Fixing Screws	M9
IP66 Weatherproof Accessories	M10
Metal Clad Accessories	M19
Red Accessories	M34
Floor Accessories	M36
Ceiling Accessories	M37
Adaptors & Extension Sockets	M41
Junction & Link Boxes	M42
Connection & Flex Outlet Plates	M44
Fused Main Switch	M45
Rewirable Plug Tops	M46
Plug Top Fuses	M47
Equipotential Bonding Busbar	M48

N1

FLOW™

Lighting Management Boxes	N4
Switch Adaptors, Splitters & Hub	N5
Flow™ Connectors	N6
Flow™ Extension Cables	N9
Ceiling Accessories	N10

Making Your Home Smarter



ClickSmart⁺

Making Your Home Smarter

Can you imagine how your home could integrate itself into your daily life? Click Smart+, Scolmore's leading smart home brand, has been created to simplify and streamline your home life via the use of integrated technology.

Click Smart+ boasts an elite range of smart home products. Utilising Zigbee technology & WIFI to offer smart home solutions to new and existing wiring installations.

The possibilities of Click Smart+ are endless, but the set up, whether with WIFI or with Zigbee, is simple when using our Click Smart+ app.

Click Smart+ app
for ios & android



Contents

Smart Hub	A11
Smart Controller	A13
Smart GridPro® Modules	A16
Smart Camera	A17
Smart Sensors	A18
Smart Switching Receivers	A21
Smart Dimming Receivers	A22
Smart Sockets	A23
Smart Socket Kits	A29
Smart Fused Connection Unit	A30
Back Boxes	A32
Plug-in Socket	A34



Antiviral & Antibacterial Certified

Our Mode® products within the Click Smart+ range are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases.

These products have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses.

After a contact period of 4 hours, Mode® products within Click Smart+ were shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.



3 Year Warranty

All Click Smart+ products are covered by our 3 year warranty against any fault in materials or manufacture experienced at any time within 3 years of the date of supply.

Get to know us



With Click Smart+ we create simple, beautiful smart solutions for a safer and more comfortable home. We have many products to meet all of your household needs.

Discover a whole range of smart home products. From smart sockets, cameras, sensors and receivers, all working together to make your home smarter.

The installation of Click Smart+ is simple & flexible, no additional cables or wall cutting is needed making it ideal for installation within existing or newly constructed buildings.

Each smart product comes with easy to follow installation guides which are also accessible through the new Click Smart+ app.

Make your home smarter, more comfortable and safer with any of our smart products. Why not get creative and take control of your home?

 Look out for the Click Smart+ icon...

Products with this icon are compatible across the whole Click Smart+ range.


Get smart with Zigbee

Zigbee devices can send and receive data between other Zigbee devices and the Hub. This means you can daisy chain smart devices and link them to a central hub, even when some of these devices are out of (direct) range of that hub.*

Zigbee increases flexibility for users and developers, delivering the confidence that products and services will work together through standardisation and testing.

A mesh network/daisy chain is when a network connection is spread out among wireless devices that can communicate with each other and share a network across a large area.

Zigbee's ability to support mesh networking means it can boost data transmission range and provide greater stability (even when a single connected device fails and doesn't work).

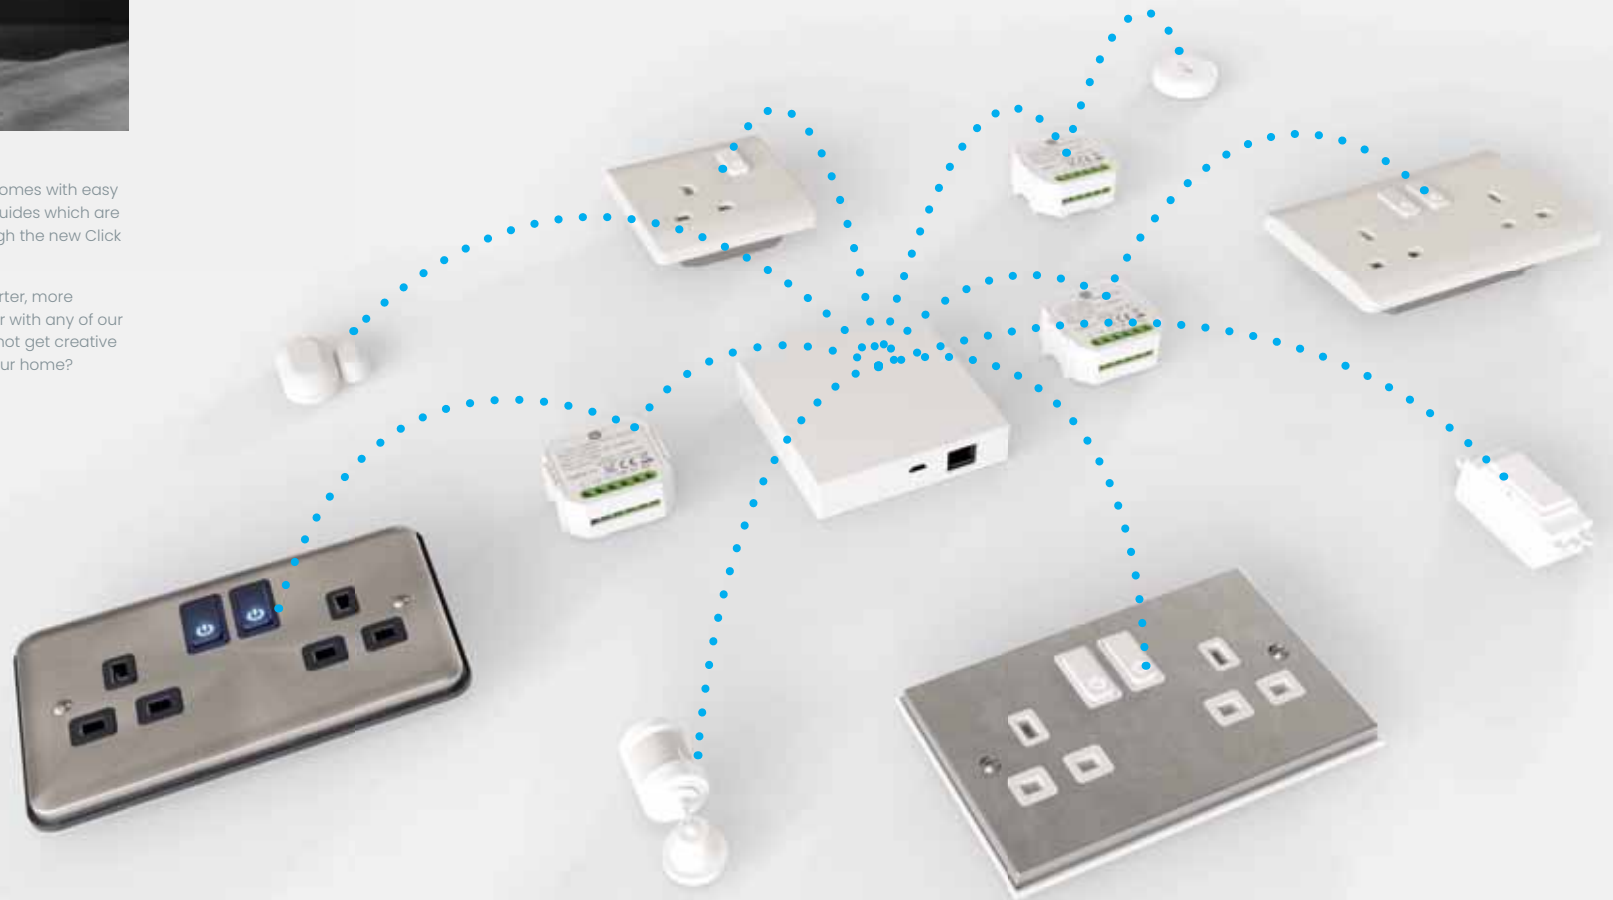

*Click Smart Plus works on a Tree-based Wireless Mesh Network. Battery operated devices cannot boost the data transmission range.

Get Creative

Automate your home with the Click Smart+ app.

'Tap to Run' Smart Scenes

Tap-to-run also known as 'Scenes' enables you to run multiple devices with a single tap of a button (within the Click Smart+ app). Think of this as one switch for a group of products.

For example you can create a Tap-to-run called 'Good Evening' which turns all your smart products on at once, instead of manually tapping each product within the app. Tap-to-runs can also control delay timings.

To control your Click Smart+ products through voice control you must have an Amazon Alexa speaker or a Google Home Speaker set up in your home and connected to the Click Smart+ app.



'Automation' Smart Scenes

Automations control your devices automatically when a condition is changed.

For example, you could programme a PIR detector with a switching receiver. When the PIR detector senses movement the automation (set up in the Click Smart+ app) can tell the switching receiver to turn 'ON' automatically.

Automations also allow you to set up timing Schedules for a group or singular smart products.

To control your Click Smart+ products through voice control you must have an Amazon Alexa speaker or a Google Home Speaker set up in your home and connected to the Click Smart+ app.



Stay Connected

Access your smart devices wherever you are and control them with Google or Alexa.

Control wherever you are

Peace of mind away from home. Easily check and change the status of your Click Smart+ devices wherever you are.



Hey Google!

Connect Click Smart+ to your existing Google Home devices. Just search for Click Smart+ in the Google Home app.



Alexa...

Have an Amazon smart speaker? Link your Click Smart+ devices in the Alexa app.




Start smart

Click Smart+ Hub – Set up Guide.




Click Smart+ App

Search and download the Click Smart+ app on ios or android devices. You will need the app to add, control and link all of your Click Smart+ devices.



Adding the Hub

Once you are in the Click Smart+ app press the '+' icon and choose the Smart Hub, or use the auto scan feature to automatically detect your device.



Complete Set Up

Once the app has found the Smart Hub simply follow the on screen instructions.

See your home, away from home

Click Smart+ Camera – Set up Guide.




Power Up!

After finding your perfect location, simply plug in your camera to a standard UK socket outlet.



Pairing Mode

You should now see a solid red LED light, after 10 seconds you should hear a chime & see a flashing LED light. You are now in pairing mode.




Complete Set Up

Open the Click Smart+ app and press the '+' icon and choose the Smart Camera. Then simply follow the on screen instructions.

Your home, your way

Click Smart+ Zigbee Products – Set up Guide.




Click Smart+ Hub

Before setting up any Click Smart+ Zigbee supported products, please make sure you have set up your Smart Hub.



Installing

Once you have finished your installation, your Click Smart+ Zigbee supported product will automatically enter pairing mode.




Complete Set Up

Open the Click Smart+ app press the '+' icon and choose the correct product, or use the auto scan feature to automatically detect your device.

A smarter switch

Switching & Dimming Receivers – Set up Guide.




Dimming Receiver

Install the receiver as per the provided instructions. With the light switch off, press the retractive switch down and hold for 10 seconds. The LED light on the receiver will flash. You are now in pairing mode.



Switching Receiver

Once wired up, flick the switch on & off 5 times until the light no longer turns on or off. You will also be able to see a flashing LED on the receiver. You are now in pairing mode.



Complete Set Up

Open the Click Smart+ app press the '+' icon and choose the correct receiver, or use the auto scan feature to automatically detect your device.



Fort Smart Security Products

From smart alarm kits, smart cameras, smart sensors and smart door bells, all working together to make your home smarter and safer.

Compatible with the **ClickSmart⁺** app.

Visit espuk.com for more information.



Smart Hub

ClickSmart⁺

A11



CSP010

Rated Voltage (V) (Ue)

1.8 - 3.3

Working Humidity

10%-90%RH (Non-condensing)

Protocol

Zigbee

Wireless Technology

WIFI 80111 b/g/n

Signal Transmission Frequency

400MHz

Operational Temperature (°C)

-10 to +55

Ingress Protection

IP20

Indicator Colour

Green

Smart Hub

CSP010 Smart Gateway Hub

Supplied with plug in adaptor, USB cable and ethernet cable
256 paired devices max. (Depending on products connected)

Finish: White

Warranty (Years): 3


Dimensions (mm): 90 (L) x 90 (W) x 23 (D)

Standards: BS EN 60950-1 BS EN 55035 BS EN 61000-3-2 BS EN 61000-3-3 BS EN 62311

CLICK[®]

sales@scolmore.com | Call: 01827 63454 | scolmore.com

Get creative and choose between 3 modes, White, RBG and Music Mode!

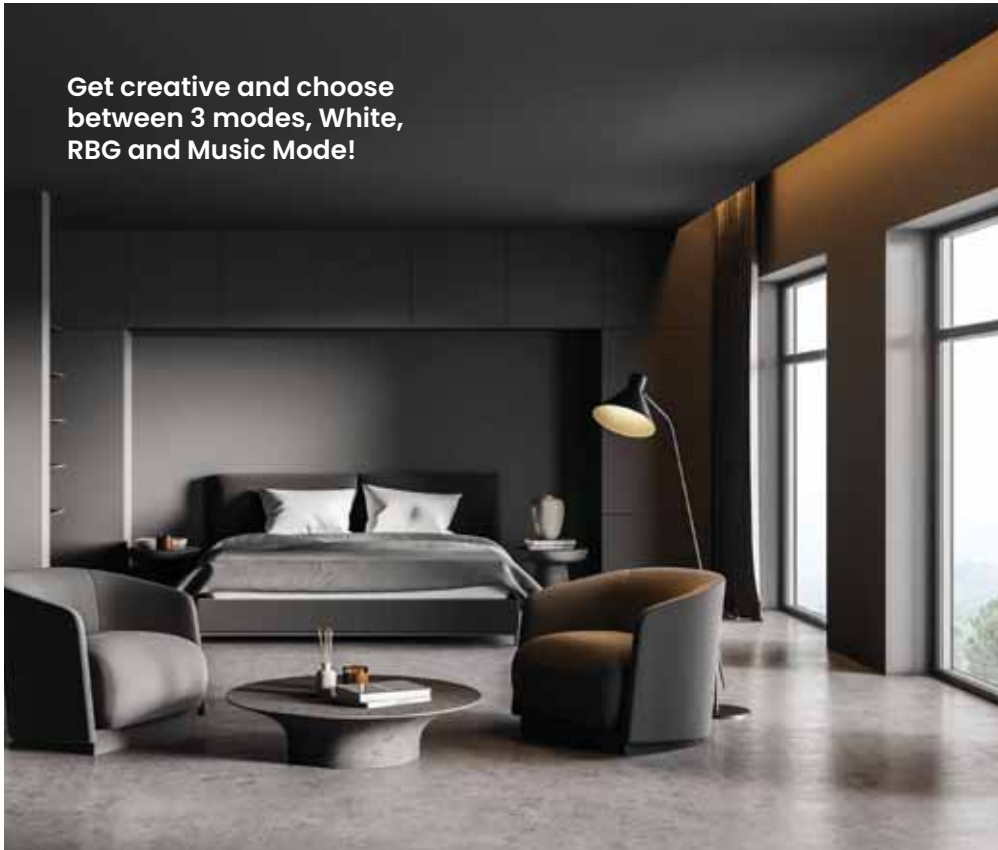

Smart Controller

ClickSmart⁺



A13



CSP071

Load Rating (A)

8

Rated Voltage (V~) (Ue)

12 to 24

Standby Current (mA)

50

Protocol

Zigbee

Wireless Range

Up to 50 metre detection range (open air)

Signal Transmission Frequency

2.400 to 2.483GHz

Terminal Size (mm)

Screw

Terminal Capacity (mm)

1.5

Operational Temperature

-20 to +45

Ingress Protection

IP20

Indicator Colour

LED Strip Connected

LED Tape Controller

CSP071 Smart RGBW LED Tape Controller

Wireless Zigbee smart control
Control white or RGBW LED strip
LED driver provides the input power

Warranty (Years): 3

Dimensions (mm): 46 (W) x 18 (H) x 115 (L)

Standards: BS EN 62368-1 BS EN 62479 BS EN 50663 ETSI EN 301 489-1 ETSI EN 301 489-17 & EN 300 328 V2.2.2

Smart Switching

Click Smart+ GridPro® Modules

The Smart GridPro Scenario Switch is a wireless switching solution. It can work in conjunction with other ClickSmart+ devices to design and implement smart application scenarios.

Remote Switching

Configurable within the ClickSmart+ App for remote switching.

Wireless

Battery powered modules.

GridPro Module Design

Install via clip in method with yoke assembly or screw directly into the frontplate.



Wireless pairing to ClickSmart+ Switching and Dimming receivers

From simply turning on lights with a ClickSmart+ switching receiver (CSP041/CSP042), to turning on appliances with the ClickSmart+ smart sockets.



Available in white and black finishes

A16



CSPGM2075PW CSPGM2075BK

GRIDPRO

For more information on the GridPro® range see from page I1

Requires the CSP010 Smart Gateway Hub

- Smart GridPro® Modules**
- CSPGM2075PW Smart GridPro® Scenario Switch - Polar White
 - CSPGM2075BK Smart GridPro® Scenario Switch - Black

Activate or Deactivate multiple smart products through the switch or app.
Create different scenarios based on number and length of presses
Pair smart devices together,

Warranty (Years): 3
Dimensions (mm): 24.5 (W) x 50 (H) x 22.5 (D)
Standards: BS EN 62368-1 BS EN 62479 BS EN 50663 ETSI EN 301 489-1 ETSI EN 301 489-17 & EN 300 328 V2.2.2

Rated Voltage (DC)	3
Working Humidity	0%-90% RH
Protocol	Zigbee
Battery Type	CR 2032 (Supplied)
Wireless Range	Up To 50 metres (Open Air)
Signal Transmission Frequency	2.4GHz
Operational Temperature (°C)	-5 to +40
Ingress Protection	IP20
Indicator Colour	Blue

A17



CSP020

- Smart Camera**
- CSP020 Smart Camera

Motion detection available
7 metre night vision
Microphone & speaker (2 way push-to-talk)
Indoor use only
Plug-in adaptor supplied

Finish: White
W (Years): 3
Dimensions (mm): 34 (W) x 58 (D) x 116 (H)
Standards: BS EN 60950-1 BS EN 55035 BS EN 61000-3-2 BS EN 61000-3-3 BS EN 62311

Load Rating (A)	1
Rated Voltage (DC)	5
Working Humidity	≤95%
Resolution	1080p
Field Angle (°)	114 (Diagonal)
Aperture	F2.0 (Fixed)
Lens Zoom	2.8
Storage	128GB Max. (Micro SD Card - Not Supplied)
Protocol	WiFi
Signal Transmission Frequency	2.412 to 2.4835GHz
Operational Temperature (°C)	-10 to +45
Ingress Protection	IP20
Indicator Colour	Red / Green





CSP032

Requires the CSP010 Smart Gateway Hub

Smart Sensors

CSP032 Smart PIR

Sticky pads supplied and fitted

Finish: White
Warranty (Years): 3
Dimensions (mm): 33 (W) x 33 (D) x 39.5 (H)
Standards: BS EN 60950-1 BS EN 55035 BS EN 61000-3-2 BS EN 61000-3-3 BS EN 62311

Rated Voltage (DC)	3
Working Humidity	10%-90% RH
Battery Type	CR 2450 (Supplied)
Battery Lifetime	1 Year (Dependent On Use)
Sensor	Infrared
Detection Range (M)	7
Detection Angle	170
Protocol	Zigbee
Signal Transmission Frequency	2.4GHz
Operational Temperature (°C)	-10 to +50
Ingress Protection	IP20
Indicator Colour	Blue





CSP033


Requires the CSP010 Smart Gateway Hub

Smart Sensors

CSP033 Smart Temperature & Humidity Sensor

Finish: White
Warranty (Years): 3
Dimensions (mm): 37 (Dia.) x 11.6 (D)
Standards: BS EN 60950-1 BS EN 55035 BS EN 61000-3-2 BS EN 61000-3-3 BS EN 62311

Rated Voltage (DC)	3
Working Humidity	0%-100% RH (Non-condensing)
Protocol	Zigbee
Battery Type	CR 2032 (Supplied)
Battery Lifetime	1 Year (Dependent On Use)
Measuring Accuracy (%)	±3
Signal Transmission Frequency	2.4GHz
Operational Temperature (°C)	-10 to +50
Ingress Protection	IP20
Indicator Colour	Blue

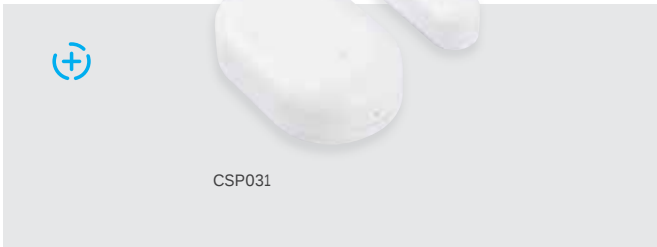

CSP031

Smart Sensors

CSP031 Smart Window & Door Sensor

Activate or deactivate lighting or devices when triggered using the app

Finish: White
Warranty (Years): 3
Dimensions (mm): Transmitter: 40 (L) x 25 (W) x 14.5 (D) Magnet: 26 (L) x 10 (W) x 9 (D)
Standards: BS EN 60950-1 BS EN 55035 BS EN 61000-3-2 BS EN 61000-3-3 BS EN 62311

Smart Sensors

Rated Voltage (DC)

3

Working Humidity

0%-95% RH (Non-condensing)

Protocol

Zigbee

Battery Type

CR 2032 (Supplied)

Battery Lifetime

1 Year (Dependent On Use)

Activation Distance

10 - 20 (Between Sensor & Magnet)

Signal Transmission Frequency

2.4GHz

Operational Temperature (°C)

-10 to +50


Ingress Protection

IP20

Indicator Colour

Blue

Smart Switching Receivers

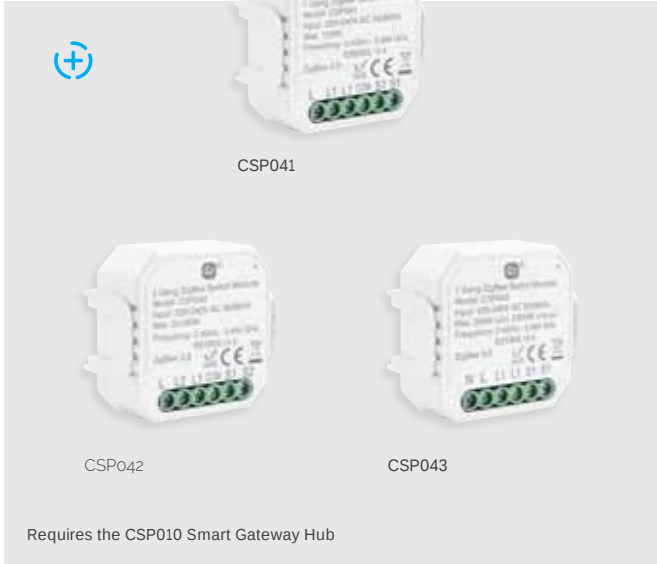

CSP041

CSP042

CSP043

Requires the CSP010 Smart Gateway Hub

Smart Receivers

CSP041 100W 1 Gang Smart Switching Receiver
No neutral connection required

CSP043 10A 1 Gang Smart Switching Receiver

CSP042 2 x 100W 2 Gang Smart Switching Receiver
No neutral connection required

Utilises standard on/off switches
Bracket supplied enabling DIN rail or screw fixing

Finish: White
Warranty (Years): 3
Back Box Depth (mm): 35 (47 Flat Plate)
Terminal Torque (Nm): 0.2 **Terminal Type:** Screw
Terminal Size (mm): 3 x 2 **Terminal Capacity Solid (mm²):** 3 x 1.5
Dimensions (mm): 46 (W) x 46 (H) x 18 (D)
Standards: BS EN 60669-2-1 BS EN 55035 BS EN 61000-3-2 BS EN 61000-3-3 BS EN 62311

Load Rating (W)

041 100

042 100 (x2)

043 250 (2300 incandescent)

Rated Voltage (V) (Ue)

220-240

Working Current (mA)

10

Standby Current (mA)

1

Working Humidity

10%-90%RH

Protocol

Zigbee

Wireless Range

Up To 100 metres (Open Air)

Signal Transmission Frequency

2.400 to 2.484GHz

Operational Temperature (°C)

-10 to +40

Ingress Protection

IP20

Indicator Colour

041 042 Blue

043 Green



CSP051



CSP052

Requires the CSP010 Smart Gateway Hub

Smart Receivers

CSP051 150W 1 Gang Smart Dimming Receiver

CSP052 2 x 100W 2 Gang Smart Dimming Receiver

No neutral connection required

Utilises retractive switches

Bracket supplied enabling DIN rail or screw fixing

Finish: White
Warranty (Years): 3
Back Box Depth (mm): 35 (47 Flat Plate)
Terminal Torque (Nm): 0.2 **Terminal Type:** Screw
Terminal Size (mm): 3 x 2 **Terminal Capacity Solid (mm²):** 3 x 1.5
Dimensions (mm): 46 (W) x 46 (H) x 18 (D)
Standards: BS EN 60669-2-1 BS EN 55035 BS EN 61000-3-2 BS EN 61000-3-3 BS EN 62311

Load Rating (W)
051 150
052 100 (x2)
Rated Voltage (V) (Ue)
220-240
Working Current (mA)
20
Standby Current (mA)
3
Working Humidity
10%-90% RH
Protocol
Zigbee
Wireless Range
Up To 100 metres (Open Air)
Signal Transmission Frequency
2.400 to 2.4835GHz
Operational Temperature (°C)
-10 to +40
Ingress Protection
IP20
Indicator Colour
Blue

Smart Sockets

With the smart socket you can plug in home appliances like lamps, TVs, heaters, fans etc. Simply turn them on or off with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.





30535



30536

Requires the CSP010 Smart Gateway Hub



WORKS WITH alexa

WORKS WITH Hey Google

Load Rating (A)
13

Rated Voltage (V~) (Ue)
250

Standby Current (mA)
1

Protocol
Zigbee

Wireless Range
Up To 160 metres (Open Air)

Signal Transmission Frequency
2.4GHz

Single Pole
Yes

Operational Temperature (°C)
-5 to +40

Ingress Protection
IP20

Indicator Colour
White & Orange

- Smart Socket Outlets - DECO PLUS**
- 30535** 13A Ingot 1 Gang Zigbee Smart Switched Socket Outlet
- 30536** 13A Ingot 2 Gang Zigbee Smart Switched Socket Outlet

Control manually, via the app or voice control

The power to the socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

Understanding the code: **DP** - Plate Style **BN** - Plate Finish **30536** - Product No. **BK** - Insert Colour

Finish Options: **AB** Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **MB** Matt Black. (AB, BN & MB are only available with Black inserts).

Insert Options: **BK** Black **WH** White **GY** Grey (SC & SS Ingot are available with Grey Inserts).

Warranty (Years): 3

Terminal Size (mm): 5.7 x 4.8 **Terminal Capacity Solid (mm²):** 3 x 2.5 or 2 x 4

Dimensions (mm): **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D)

Standards: BS 1363-2 BS EN 61000-6-1 BS EN 61000-6-3 BS EN 60669-2-1 in conjunction with BS EN 60669-1



30535



30536

Requires the CSP010 Smart Gateway Hub



WORKS WITH alexa

WORKS WITH Hey Google

Load Rating (A)
13

Rated Voltage (V) (Ue)
250

Standby Current (mA)
1

Protocol
Zigbee

Wireless Range
Up To 160 metres (Open Air)

Signal Transmission Frequency
2.4GHz

Single Pole
Yes

Operational Temperature (°C)
-5 to +40

Ingress Protection
IP20

Indicator Colour
White & Orange

- Smart Socket Outlets - DECO**
- 30535** 13A Ingot 1 Gang Zigbee Smart Switched Socket Outlet
- 30536** 13A Ingot 2 Gang Zigbee Smart Switched Socket Outlet

Control manually, via the app or voice control

The power to the socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

Understanding the code: **VP** - Plate Style **BN** - Plate Finish **30535** - Product No. **BK** - Insert Colour

Finish Options: **AB** Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **MB** Matt Black. (AB, BN & MB are only available with Black inserts).

Insert Options: **BK** Black **WH** White **GY** Grey (SC & SS Ingot are available with Grey Inserts).

Warranty (Years): 3

Terminal Size (mm): 5.7 x 4.8 **Terminal Capacity Solid (mm²):** 3 x 2.5 or 2 x 4

Dimensions (mm): **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D)

Standards: BS 1363-2 BS EN 61000-6-1 BS EN 61000-6-3 BS EN 60669-2-1 in conjunction with BS EN 60669-1



30035



30036

Requires the CSP010 Smart Gateway Hub

definity



Load Rating (A)	13
Rated Voltage (V~) (Ue)	250
Standby Current (mA)	1
Protocol	Zigbee
Wireless Range	Up To 160 metres (Open Air)
Signal Transmission Frequency	2.4GHz
Single Pole	Yes
Operational Temperature (°C)	-5 to +40
Ingress Protection	IP20
Indicator Colour	White & Orange

- Smart Socket Outlets - Definity**
- 30035 13A 1 Gang Zigbee Smart Switched Socket Outlet
 - 30036 13A 2 Gang Zigbee Smart Switched Socket Outlet

Control manually, via the app or voice control

The power to the socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

All Definity[™] Smart Sockets have both insert and cover plate supplied

Understanding the code:

SF - Insert Prefix SS - Plate Colour. 30036 - Product No BK - Insert Colour.

Finish Options: BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, PW White, BK Matt Black, MB Metal Black

Insert Options: PW Polar White, BK Black, GY Grey (BS & SS Ingot are available with Grey Inserts)

Warranty (Years): 3

Terminal Size (mm): 5.7 x 4.8 **Terminal Capacity Solid (mm²):** 3 x 2.5 or 2 x 4

Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 2 Gang: 146 (W) x 86 (H) x 4 (D)

Standards: BS 1363-2 BS EN 61000-6-1 BS EN 61000-6-3 BS EN 60669-2-1 in conjunction with BS EN 60669-1



CMA30035



CMA30036

Requires the CSP010 Smart Gateway Hub

MODE[®]



Load Rating (A)	13
Rated Voltage (V~) (Ue)	1 Gang & 30651: 250 2 Gang: 250
Standby Current (mA)	1
Protocol	Zigbee
Wireless Range	Up To 160 metres (Open Air)
Signal Transmission Frequency	2.4GHz
Single Pole	Yes
Operational Temperature (°C)	-5 to +40
Ingress Protection	IP20
Indicator Colour	White & Orange

- Smart Socket Outlets - Mode**
- CMA30035 13A 1 Gang Zigbee Smart Switched Socket Outlet
 - CMA30036 13A 2 Gang Zigbee Smart Switched Socket Outlet

Control manually, via the app or voice control

The power to the socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

Finish: Polar White

Warranty (Years): 3

Terminal Size (mm): 5.7 x 4.8 **Terminal Capacity Solid (mm²):** 3 x 2.5 or 2 x 4

Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 9.5 (D) 2 Gang: 146 (W) x 86 (H) x 9.5 (D)

Standards: BS 1363-2 BS EN 61000-6-1 BS EN 61000-6-3 BS EN 60669-2-1 in conjunction with BS EN 60669-1



Smart Socket Outlets - Kits

ClickSmart⁺

A29



CSK002

CSK003
IP66 Weatherproof Enclosure Supplied

Load Rating (A)
13
Rated Voltage (V~) (Ue)
1 Gang & 30651: 250 2 Gang: 250
Standby Current (mA)
1
Protocol
Zigbee
Wireless Range
Up To 160 metres (Open Air)
Signal Transmission Frequency
2.4GHz
Single Pole
Yes
Operational Temperature (°C)
-5 to +40
Ingress Protection
IP20
Indicator Colour
White & Orange

Smart Socket Outlets Kits - Mode
CSK002 13A 2 Gang Zigbee Smart Socket Kit (1 x Smart Hub & 4 x Mode® 13A 2 Gang Zigbee Smart Socket)

Smart Weatherproof Socket Outlets
CSK003 13A 2 Gang Zigbee Smart Weatherproof Socket Kit (1 x Smart Hub, 1 x Mode® 13A 2 Gang Zigbee Smart Socket, 1 x 2 Gang Waterproof Enclosure)

Control manually, via the app or voice control
 The power to the socket can be locked On or Off using the app, preventing manual switching
 3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

Finish: Polar White
Warranty (Years): 3 **003:** 3
Terminal Size (mm): 5.7 x 4.8 **Terminal Capacity Solid (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D)
Standards: BS 1363-2 BS EN 61000-6-1 BS EN 61000-6-3 BS EN 60669-2-1 in conjunction with BS EN 60669-1



Lock and unlock using
the Click Smart+ app.



FCU Gasket

The gasket comes supplied with the
Fused Connection Unit, which features
an optional cable outlet.



CMA30651

Requires the CSP010 Smart Gateway Hub

MODE®

Smart Fused Connection Units - Mode
CMA30651 13A Zigbee Smart Switched Fused Connection Unit

Control manually, via the app or voice control
The power to the FCU can be locked On or Off using the app, preventing manual switching
Gasket supplied features cable outlet with restraint

Finish: Polar White
Warranty (Years): 3
Terminal Size (mm): 5.7 x 4.8 **Terminal Capacity Solid (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 86 (W) x 86 (H) x 9 (D)
Standards: BS 1363-4 & BS 1362 BS EN 61000-6-1 BS EN 61000-6-3 BS EN 60669-2-1 in conjunction with BS EN 60669-1




Load Rating (A)
13
Rated Voltage (V~) (Ue)
250
Standby Current (mA)
1
Protocol
Zigbee
Wireless Range
Up To 160 metres (Open Air)
Signal Transmission Frequency
2.4GHz
Single Pole
Yes
Operational Temperature (°C)
-5 to +40
Ingress Protection
IP20
Indicator Colour
White & Orange



WA095



WA106PBK



WA107P

essentials™

For the complete range of back boxes see Essentials™ page M4.

Galvanised Steel Back Boxes

- WA092** 1 Gang 16mm Deep Galvanised Steel K.O. Box
WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box
WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box
WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box
WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box
WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box
WA098 2 Gang 47mm Deep Galvanised Steel K.O. Box
WA099 1 + 1 35mm Deep Dual Accessory Box
WA102 1 + 2 35mm Deep Dual Accessory Box

Dry Lining Boxes (Sprung Fixing Lugs)

- WA087SF** 1 Gang 35mm Deep Dry Lining Box
WA088SF 2 Gang 35mm Deep Dry Lining Box
WA106SF 1 Gang 47mm Deep Dry Lining Box
WA107SF 2 Gang 47mm Deep Dry Lining Box

Dry Lining Boxes

- WA087P** 1 Gang 35mm Deep Dry Lining Box
WA087PBK 1 Gang 35mm Deep Dry Lining Box - Black
WA088P 2 Gang 35mm Deep Dry Lining Box
WA088PBK 2 Gang 35mm Deep Dry Lining Box - Black
WA106P 1 Gang 47mm Deep Dry Lining Box
WA106PBK 1 Gang 47mm Deep Dry Lining Box - Black
WA107P 2 Gang 47mm Deep Dry Lining Box
WA107PBK 2 Gang 47mm Deep Dry Lining Box - Black
WA108P Round Ceiling 34mm Deep Dry Lining Box

**Spacer Gaskets**

- VP095BK** 1 Gang 10mm Spacer Gasket - Black
VP095GY 1 Gang 10mm Spacer Gasket - Grey
VP095WH 1 Gang 10mm Spacer Gasket - White
VP096BK 2 Gang 10mm Spacer Gasket - Black
VP096GY 2 Gang 10mm Spacer Gasket - Grey
VP096WH 2 Gang 10mm Spacer Gasket - White

**Spacer Gaskets**

- DP095BK** 1 Gang 10mm Spacer Gasket - Black
DP095GY 1 Gang 10mm Spacer Gasket - Grey
DP095WH 1 Gang 10mm Spacer Gasket - White
DP096BK 2 Gang 10mm Spacer Gasket - Black
DP096GY 2 Gang 10mm Spacer Gasket - Grey
DP096WH 2 Gang 10mm Spacer Gasket - White

MODE®**Spacer Gaskets**

- CMA095** 1 Gang 10mm Spacer Gasket
CMA096 2 Gang 10mm Spacer Gasket



WA4135



WA4147



WA4235



WA4247



For the complete range of FlameGuard® back boxes see Essentials™ page M8.

FlameGuard® Dry Lining Boxes

- WA4135** 1 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4235 2 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4147 1 Gang 47mm Deep FlameGuard® Dry Lining Box
WA4247 2 Gang 47mm Deep FlameGuard® Dry Lining Box

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards. Fire: BS EN 1364-1 Acoustic: BS EN ISO 140-2. Complies with Building Regulations Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.

A34



CSP060

CSK001

Load Rating (A)
13
Rated Voltage (V) (Ue)
230
Standby Current (mA)
<100
Protocol
WiFi
Signal Transmission Frequency
2.4GHz
Operational Temperature (°C)
-20 to +40
Ingress Protection
IP20
Indicator Colour
Blue

Smart Socket

CSP060 13A Smart Plug-in WiFi Socket

Smart Plug-In Sockets

CSK001 13A Smart Plug-in WiFi Socket Kit (4 x 13A Plug in WiFi Smart Sockets)

Utilise standard UK sockets installed
Control manually, via the app or voice control

Finish: White
Warranty (Years): 3
Dimensions (mm): 57 (W) x 57 (H) x 65 (D)
Standards: BS1363-3 BS EN 55035 BS EN 61000-3-2 & BS EN 61000-3-3 BS EN 301489-1 & BS EN 301489-17 BS EN 62311

Premium

Decorative Wiring Accessories





Premium Decorative Wiring Accessories

A comprehensive range of premium decorative metal wiring accessories is now available under the Deco Plus® brand. A brand that is synonymous with high specification, exceptional quality and unprecedented value.

The smooth contemporary curves of the Deco Plus® range are available in 8 finishes to complement any room.

Each product is supplied individually packaged in its own distinctive printed box complete with full fitting instructions.

Deco Plus® switches feature the same modular switch design as our moulded ranges. All of the switch modules featured in our MiniGrid® brochure can therefore be used in any combination on Deco Plus® accessories.

All Deco Plus® 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety.



20 Year Warranty

All Deco® Plus products are covered by our 20 year warranty against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.



Antique Brass*
(AB)



Satin Brass*
(SB)



Satin Chrome*
(SC)

All Deco Plus® products featured in the pages of this brochure are available in 8 distinctive quality finishes.



Black Nickel
(BN)



Stainless Steel
(SS)



Polished Chrome
(CH)

All Deco Plus® products are available with Black or White Inserts.

(Excluding Antique Brass, Black Nickel & Matt Black finishes, which are supplied with Black Insert and Gasket only).

A selection of Stainless Steel and Satin Chrome finishes are now available with Grey Inserts.



Polished Brass
(BR)



Matt Black
(MB)

Deco® Plus unique product codes

When ordering any Deco® Plus products, please specify the required finish by following the simple code structure as demonstrated here.

DP

BN

536

BK

Plate Style Product Finish Product Number Insert Colour

Contents

Switches	B8
Yokes & Back Boxes	B19
Power Sockets	B20
Shaver Socket & Blank Plates	B24
Fused Connection Units	B25
Control Switches	B26
Key Lockable Switch & Socket	B28
TV, Telephone & Satellite	B29
New Media™ Plates	B32
Back Boxes	B34

AHEAD OF THE
CURVE



New Features

...plus so much more

Attention to detail has been at the forefront of the design process for our newest range of wiring accessories. All aspects, no matter how small, have been taken into account and collectively create the elegant style that characterises Deco Plus®.



Every accessory within the range which contains a neon now has an insert surrounding the lens of the neon.



An attractive feature added to the Deco Plus® range is the profile of the cooker sockets. Instead of the traditional T-bar shape, our new range matches the profile of our ingot sockets.

Switches

Please see page J18 for a selection of MiniGrid® modules.



All Deco Plus® switches are supplied complete with requisite switch module(s). However, should local conditions dictate, the installer may customise a switch arrangement by substituting switch modules by means of a simple, single fixing screw.

A comprehensive range of available modules is illustrated in our dedicated MiniGrid® brochure.

Unfurnished mounting plates can be ordered separately and furnished with whatever selection of switch modules may be required.

All Deco Plus® switch plates are modular as standard, allowing you to create virtually any switch plate you require.



MINIGRID® Switch modules interchangeable with MiniGrid® Modules.
For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

Ingot Plates Switches - MiniGrid®

- 411** 10AX Ingot 1 Gang 2 Way Plate Switch
- 412** 10AX Ingot 2 Gang 2 Way Plate Switch
- 413** 10AX Ingot 3 Gang 2 Way Plate Switch
- 414** 10AX Ingot 4 Gang 2 Way Plate Switch
- 416** 10AX Ingot 6 Gang 2 Way Plate Switch
- 425** 10AX Ingot 1 Gang Intermediate Plate Switch

Standards: BS EN 60669-1

Back Box Depth (mm): 1 Gang: 16 2 Gang: 25

Cable Size (mm²): 4 x 1.5 or 2 x 2.5

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts

DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour

AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **MB** Matt Black.



MINIGRID® For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

Unfurnished Plates - MiniGrid®

- 401** 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- 402** 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- 403** 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- 404** 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- 406** 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
- 426** 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures

Architrave Unfurnished Plates - MiniGrid®

- 471** 1 Gang MiniGrid® Unfurnished Architrave Plate - 1 Aperture
 - 472** 2 Gang MiniGrid® Unfurnished Architrave Plate - 2 Apertures
- These plates must be used with the architrave back boxes WA671 / WA672 and can only be flush mounted.
Not compatible with MD070 & MD075 Switch modules.

Standards: BS 5733

Back Box Depth (mm): Dependent On Module Fitted

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Single architrave: 35 (W) x 88 (H) x 8 (D) **Twin architrave:** 35 (W) x 150 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts

DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour

AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **MB** Matt Black.

Toggle Switches & Dimming

A wide selection of toggle switches
and dimmers for your home.

Switches



421



422



MD9125



423



424

MD9125 Intermediate module available.

Satin Chrome & Stainless Steel plate finishes require the use of a Pearl Nickel (PN) Toggle Switch Module.
Not interchangeable with dimmers or other MiniGrid® modules.

Toggle Switches

- 421 10AX 1 Gang 2 Way Toggle Switch
- 422 10AX 2 Gang 2 Way Toggle Switch
- 423 10AX 3 Gang 2 Way Toggle Switch
- 424 10AX 4 Gang 2 Way Toggle Switch

10AX Intermediate Toggle Switch Modules

- MD9125AB Intermediate Toggle Switch Module - Antique Brass
- MD9125BN Intermediate Toggle Switch Module - Black Nickel
- MD9125BR Intermediate Toggle Switch Module - Polished Brass
- MD9125CH Intermediate Toggle Switch Module - Polished Chrome
- MD9125PN Intermediate Toggle Switch Module - Pearl Nickel
- MD9125MB Intermediate Toggle Switch Module - Matt Black

Toggle Modules only fit in existing toggle plates

Standards: BS EN 60669-1

Back Box Depth (mm): 25 Cable Size (mm²): 4 x 1.5 or 2 x 2.5

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) Modules: 25 (W) x 62 (H) x 22 (D)

Understanding the code:

DP - Plate Style BN - Plate Finish 536 - Product No.

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, MB Matt Black.



Dimmer Switches (Trailing Edge)

- 161** 1 Gang 2 Way 100W Dimmer Switch
- 162** 2 Gang 2 Way 100W Dimmer Switch
- 163** 3 Gang 2 Way 100W Dimmer Switch
- 164** 4 Gang 2 Way 100W Dimmer Switch

Standards: BS EN 60669-1 BS EN 60669-2-1 BS EN 55015 BS EN 61000-3-2
Type: Trailing Edge
Back Box Depth (mm): 25 **Cable Size (mm²):** 2 x 1.5
Dimensions (mm): **1 & 2 Gang:** 88 (W) x 88 (H) x 8 (D) **3 & 4 Gang:** 146 (W) x 88 (H) x 8 (D)

Understanding the code:

DP - Plate Style **BN** - Plate Finish **536** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **MB** Matt Black.

Dimmer Modules

- MD9001** 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
- MD9010** 1-10V Analogue Dimmer Module (25 x 62mm)
- MD9014** 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

Dimmer M10 Nut Runner

- SP900** Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate



Dimmer Mounting Unfurnished Plates

- 140PL** 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
- 152PL** 2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
- 153PL** 3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
- 154PL** 4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures
- 185** 2 Gang Dimmer Plate & Knob (1000W Max) - 1 Aperture
- 186** 2 Gang Dimmer Plate & Knobs (1630W Max) - 2 Apertures

Standards: BS 5733
Back Box Depth (mm): 25
Dimensions (mm): **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D)

Understanding the code:

DP - Plate Style **BN** - Plate Finish **536** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **MB** Matt Black.

Interchangeable Plates & Modules

MiniGrid® modules are interchangeable with pre-assembled plate switches or can be mounted into the unfurnished switch plates throughout the Deco Plus® range.

Standard MiniGrid® modules offer simple, single screw fixing to the yoke which greatly facilitates the assembly of up to 18 different switching functions on a single plate.



MiniGrid® modules are available in the same decorative finishes as the Deco Plus® range as well as white and black, so there are plenty of options available to suit your application.



The furnished plate shown here contains a selection of both single and twin width MiniGrid® modules. For the full range please see the MiniGrid® section.



512

2 Tier Unfurnished Plates c / w Gaskets - MiniGrid®

512 2 Tier MiniGrid® Unfurnished Plate - 12 Apertures
2 x GR100 Yokes required, see page B19



518

3 Tier Unfurnished Plates c / w Gaskets - MiniGrid®

518 3 Tier MiniGrid® Unfurnished Plate - 18 Apertures
3 x GR100 Yokes required, see page B19

MINIGRID®

If dimmer modules are to be mounted directly above each other, the MD9014 (page J37) or similar height dimmer modules must be installed. Alternatively, retractive switch modules MD004 (page J21) can be used in conjunction with Click Smart+ dimming receivers (page A22).

Standards: BS 5733

Back Box Depth (mm): 47

Dimensions (mm): **512:** 146 (W) x 146 (H) x 8 (D) **518:** 146 (W) x 227 (H) x 8 (D)

Understanding the code:

DP - Plate Style **BN** - Plate Finish **536** - Product No.

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, MB Matt Black.

Example of yoke furnished with modules



MINIGRID®

Galvanised steel back boxes supplied for flush mounting of the large MiniGrid® plates. Mounting Yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.



GR100

WA512

WA518

Yokes

GR100BK MiniGrid® Module Yoke - 6 Apertures - Black
GR100PW MiniGrid® Module Yoke - 6 Apertures - White
GR100GY MiniGrid® Module Yoke - 6 Apertures - Grey


2 or 3 yokes are required based on the backbox selected.

Galvanised Steel Back Boxes

WA512 2 Tier 47mm Deep K.O. Box
WA518 3 Tier 47mm Deep K.O. Box

Standards: **512 518:** BS 4662

Dimensions (mm): **512:** 137 (W) x 137 (H) x 47 (D) **518:** 137 (W) x 197 (H) x 47 (D) **100:** 129 (W) x 55 (H) x 14 (D)

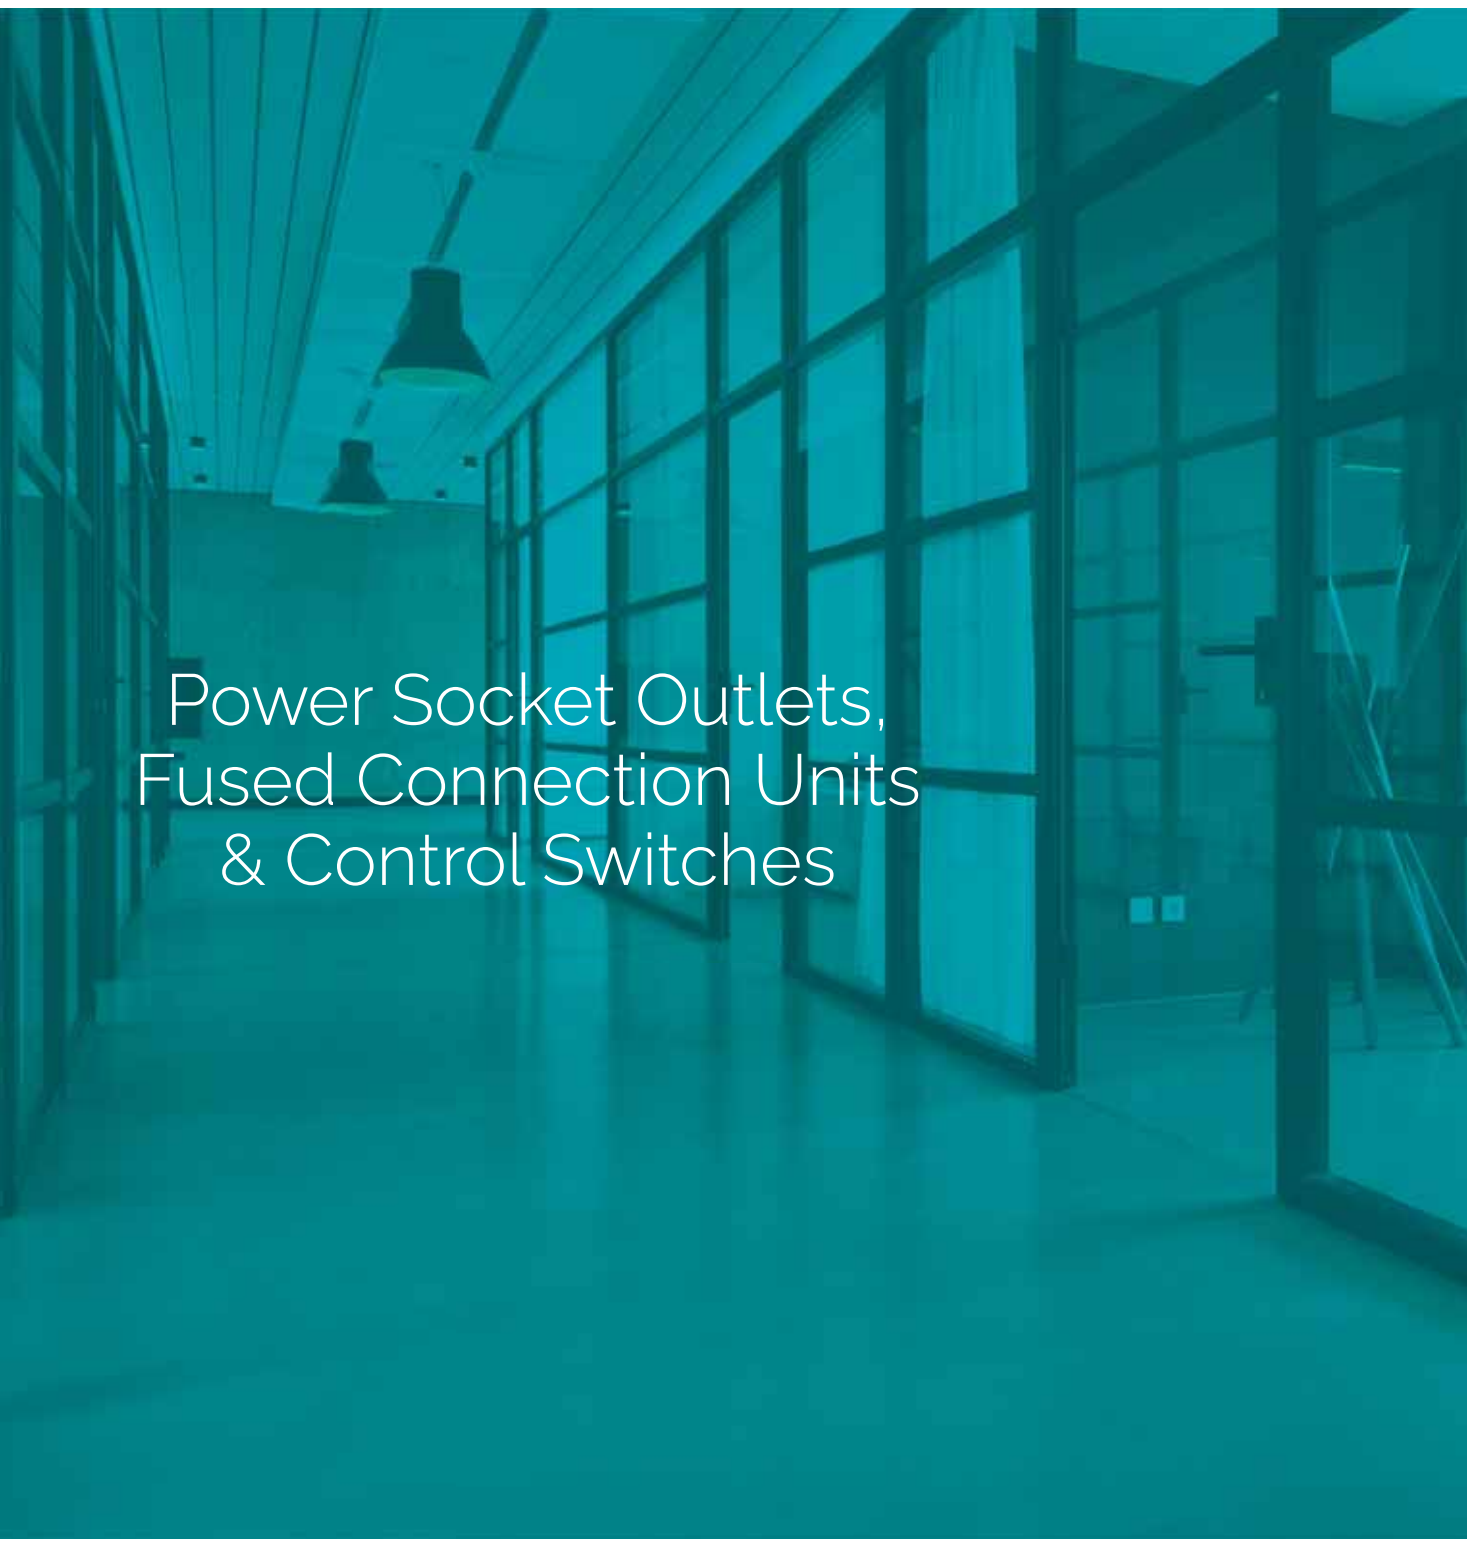


Power Socket Outlets, Fused Connection Units & Control Switches

With the ever increasing demand for power supplies in all areas of the home, comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted.

The eight different Deco Plus® plate finishes offer a solution for almost every possible design need and will enhance the décor of any area, whether in a kitchen, bedroom, lounge or study etc.



535

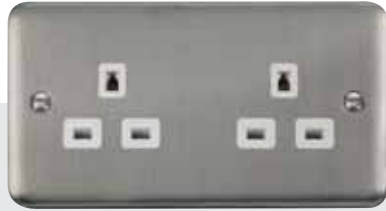

532

Ingot Switched Socket Outlets

- 535** 13A Ingot 1 Gang DP Switched Socket
536 13A Ingot 2 Gang DP Switched Socket (Twin Earth)
836 13A Ingot 2 Gang DP Switched Socket With Outboard Rockers (Twin Earth)

Unswitched Socket Outlets

- 530** 13A 1 Gang Unswitched Socket Outlet (Twin Earth)
532 13A 2 Gang Unswitched Socket Outlet (Twin Earth)
 Only SC & SS finishes are available.



1535



836

Ingot Switched Safety Shutter Socket Outlets

- 1535** 13A Ingot 1 Gang DP Switched Socket Outlet
1536 13A Ingot 2 Gang DP Switched Socket Outlet (Twin Earth)
1836 13A Ingot 2 Gang DP Outboard Switched Socket Outlet (Twin Earth)



1836

Safety Shutterd Socket listed are only available for sale in the Republic of Ireland.

Standards: BS 1363-2
Back Box Depth (mm): 25
Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **MB** Matt Black.



571U



580



586

Ingot Switched Sockets With USB Outlet

- 571U** 13A Ingot 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)

Ingot Switched Sockets With Twin USB Outlets

- 580** 13A Ingot 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)
585 13A Ingot 1 Gang Switched Socket Outlet With Type A & C USB (4A) Outlets (Twin Earth)
586 13A Ingot 2 Gang Switched Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)



038



039

Round Pin Socket Outlets


- 038** 5A Round Pin Socket
039 2A Round Pin Socket

Standards: BS 1363-2: 2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1 **038 039:** BS 546
Back Box Depth (mm): 25 **Cable Size (mm²):** 3 x 2.5 or 2 x 4 **038:** 4 x 1.5 or 3 x 2.5 **039:** 3 x 1.5
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **MB** Matt Black.



Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010 making it safe for use in bathrooms. This outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

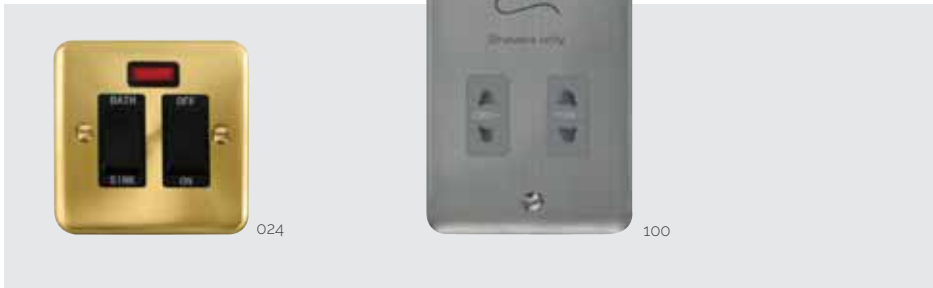

20A DP Sink / Bath Switch

024 20A DP Sink/Bath Switch With Neon

Dual Voltage Shaver Socket Outlet

100 115/230V Dual Voltage Shaver Socket



Blank Plates

060 1 Gang Blank Plate

061 2 Gang Blank Plate

Standards: 024: BS EN 60669-1 060, 601: BS 5733 100: BS EN IEC 61558-1 BS EN 61558-2-5

Back Box Depth (mm): 024, 060: 16 061: 25 100: 47 **Cable Size (mm²):** 024: 3 x 2.5 100: 2 x 1.5 or 1 x 2.5

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) 100: 88 (W) x 146 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts

DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, MB Matt Black.



Ingot Fused Connection Units With Optional Flex Outlet

550 13A Ingot Fused Connection Unit

551 13A Ingot DP Switched Fused Connection Unit

552 13A Ingot DP Switched Fused Connection Unit With Neon

553 13A Ingot Fused Connection Unit With Neon



Ingot Fused Connection Units Without Flex Outlet

750 13A Ingot Fused Connection Unit

751 13A Ingot DP Switched Fused Connection Unit

752 13A Ingot DP Switched Fused Connection Unit With Neon

753 13A Ingot Fused Connection Unit With Neon

Standards: BS 1363-4 BS 1362

Back Box Depth (mm): 25 **Cable Size (mm²):** 3 x 2.5 or 2 x 4

Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts

DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, MB Matt Black.



520

Ingot Fan Isolation Switch

520 10A Ingot 3 Pole Fan Isolation Plate Switch

This product is not modular.



522

523

722

723

Ingot 20A Control Switches With Optional Flex Outlet

522 20A Ingot DP Switch

523 20A Ingot DP Switch With Neon

Ingot 20A Control Switches Without Flex Outlet

722 20A Ingot DP Switch

723 20A Ingot DP Switch With Neon

Standards: BS EN 60669-1 BS EN 60669-2-4

Back Box Depth (mm): 10A: 16 20A: 25 **Cable Size (mm²):** 10A: 4 x 1.5 or 2 x 2.5 20A: 3 x 2.5

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts

DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, MB Matt Black.



500

501

504



502

503

505

Ingot 50A Switches And Socket Outlets

500 50A Ingot 1 Gang DP Switch

501 50A Ingot 1 Gang DP Switch With Neon

502 50A Ingot 2 Gang DP Switch

503 50A Ingot 2 Gang DP Switch With Neon

504 50A Ingot 2 Gang DP Switch With 13A DP Switched Socket

505 50A Ingot 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: 500 501 502 503: BS EN 60669-1 504 505: BS 4177

Back Box Depth (mm): 35 **Cable Size (mm²):** 1 x 16

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) 502 503: 88 (W) x 146 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts

DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, MB Matt Black.



Lockable Switches


660 20A Double Pole Key Lockable Switch

Ingot Lockable Socket Outlets

655 13A Ingot 1 Gang DP Key Lockable Socket With Neon

Standards: BS EN 60669-1 **655:** BS 1363-2
Back Box Depth (mm): 35 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **MB** Matt Black.

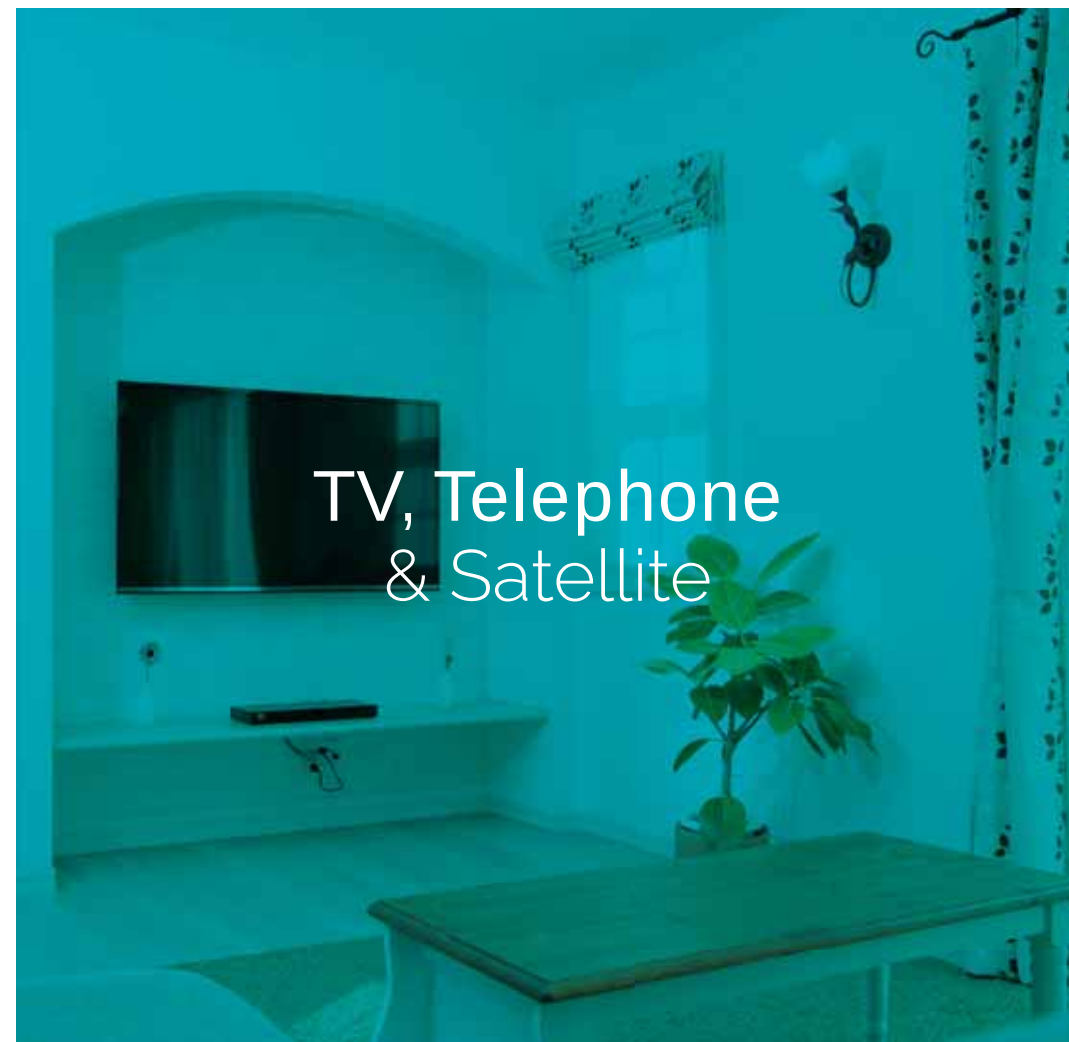

TV, Telephone
& Satellite

The following pages contain details of Deco Plus® products designed to deal with handling data and media transfer through telephone, computer, television or radio.

B30



RJ11 Telephone Outlets

115 Single RJ11 (Irish/US) Outlet

Telephone Outlets

120 Single Telephone Outlet - Master **125** Single Telephone Outlet - Secondary
121 Twin Telephone Outlet - Master **126** Twin Telephone Outlet - Secondary

Back Box Depth (mm): 16 **115:** 35
Termination Type: IDC **115:** Screw
Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **MB** Matt Black.

Products on this page are not available with grey inserts.



Back Box Depth (mm): 16
Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts.
DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **MB** Matt Black.

B31



Non-isolated Coaxial Outlets (Unshielded)

065 Single Coaxial Outlet
066 Twin Coaxial Outlet

Isolated Coaxial Outlets (Unshielded)

158 Single Isolated Coaxial Outlet
159 Twin Isolated Coaxial Outlet

Satellite Outlets (Unshielded)

156 Non-isolated Single Satellite Outlet
157 Isolated Satellite & Isolated Coaxial Outlet
170 Non-isolated Satellite & Non-isolated Coaxial Outlet

Isolated outlets will filter out any interference.
 If a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Solutions for Media Cabling

new
media™

Unfurnished Plates

deco
PLUS

B33

The furnished plate shown here contains a selection of both single and twin width New Media™ modules.

The New Media™ range provides the installer with ultimate flexibility, allowing you to mix and match the connections you have on your wall plate.

All modules are available in white or black finishes to complement any installation.



310



311



312

new
media™

All plates supplied with black and white gaskets where applicable.
Above are some examples of New Media™ modules we offer, please see our dedicated New Media™ section for more information on the range of modules available.

Unfurnished Plates - New Media™

- 310 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- 311 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- 312 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Selecting from a range of module inserts covering all manner of media transfer, installers will now be able to configure their own arrangement of television, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates and fitted onto standard switch and socket boxes.

Standards: BS 5733
Back Box Depth (mm): Dependent On Modules Fitted
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code:

DP - Plate Style BN - Plate Finish 536 - Product No.
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, MB Matt Black.

CLICK®

sales@scolmore.com | Call: 01827 63454 | scolmore.com



WA375



WA370



MCP086

MCP085



WA671



WA672

For the complete range of back boxes see Essentials™ page M4.

Galvanised Boxes

WA370 1 + 1 35mm Deep Dual Accessory Box (Deco® Range Only)

WA375 1 + 2 35mm Deep Dual Accessory Box (Deco® Range Only)

WA671 1 Gang 25mm Deep Architrave Box With 60.3mm Hole Centres

WA672 2 Gang 25mm Deep Architrave Box With 120.6mm Hole Centres

Surface Mounting Boxes - Metal Clad Grey

MCP085 1 Gang 40mm Deep Mounting Box (Deco Plus® Only)

MCP086 2 Gang 40mm Deep Mounting Box (Deco Plus® Only)

Spacer Gaskets

DP095BK 1 Gang 10mm Spacer Gasket - Black

DP095GY 1 Gang 10mm Spacer Gasket - Grey

DP095WH 1 Gang 10mm Spacer Gasket - White

DP096BK 2 Gang 10mm Spacer Gasket - Black

DP096GY 2 Gang 10mm Spacer Gasket - Grey

DP096WH 2 Gang 10mm Spacer Gasket - White

Deco Plus® Gaskets

SP015 1 Gang Deco Plus® Gasket - Black

SP016 2 Gang Deco Plus® Gasket - Black

SP017 1 Gang Deco Plus® Gasket - White

SP018 2 Gang Deco Plus® Gasket - White

SP023 1 Gang Deco Plus® Gasket - Grey

SP024 2 Gang Deco Plus® Gasket - Grey

Standards: BS 4662

Dimensions (mm): **085:** 88 (W) x 88 (H) x 40 (D) **086:** 146 (W) x 88 (H) x 40 (D)

370: 168 (W) x 74 (H) x 35 (D) **375:** 228 (W) x 74 (H) x 35 (D) **671:** 30 (W) x 73 (H) x 25 (D)

672: 30 (W) x 135 (H) x 25 (D) **095:** 94.3 (W) x 94.3 (H) x 11 (D) **096:** 154.3 (W) x 94.3 (H) x 11 (D)

Decorative Metal Wiring Accessories





Decorative Metal Wiring Accessories in Assorted Plate Finishes

A comprehensive range of decorative metal wiring accessories now available under the single Deco® brand. A brand that is synonymous with high specification, high quality, long life and unprecedented value for money.

Each product is supplied individually packaged in its own distinctive printed box complete with comprehensive fitting instructions.

Deco® switches feature the same modular switch design as our moulded ranges. All of the switch modules featured in our dedicated modules brochure can therefore be used in any combination on Deco® accessories.

Deco® plates are manufactured from stainless steel. All Deco® 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety.



20 Year Warranty

All Deco® products are covered by our 20 year warranty against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.

Every Deco® product featured in the pages of this brochure are available in 9 distinctive quality finishes.

All Deco® products are available with black or white inserts.

(Excluding antique brass, black nickel & matt black finishes which are supplied with black insert and gasket only).

A selection of Stainless Steel and Satin Chrome finishes are now available with grey inserts.



Antique Brass*
(AB)



Black Nickel
(BN)



Polished Chrome
(CH)



Stainless Steel
(SS)



Satin Brass*
(SB)



Pearl Nickel
(PN)



Polished Brass
(BR)



Satin Chrome*
(SC)



Matt Black (Ingot Only)
(MB)

Deco® unique product codes

When ordering any Deco® products, please specify the required finish by following the simple code structure as demonstrated here.




Plate Style Product Finish Product Number Insert Colour

Contents

Switches	C4
Unfurnished Plates	C7
Yokes & Back Boxes	C9
Dimmer Switches	C10
Toggle Switches	C12
Power Sockets	C13
Fused Connection Units	C18
Control Switches	C20
Shaver Socket & Blank Plates	C25
TV, Telephone & Satellite	C26
New Media™ Plates	C29
Back Boxes & Fixing Screws	C31

Switches

Please see page J18 for a selection of MiniGrid® modules.

MINIGRID®

Switches

deco®

C5




011 | 025



012



013

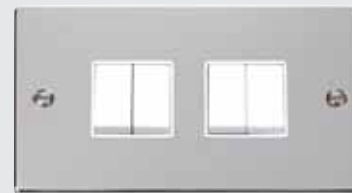

019



105

MINIGRID®

Switch modules interchangeable with MiniGrid® Modules

For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

Plates Switches - MiniGrid®

- 011 10AX 1 Gang 2 Way Plate Switch
- 012 10AX 2 Gang 2 Way Plate Switch
- 013 10AX 3 Gang 2 Way Plate Switch
- 019 10AX 4 Gang 2 Way Plate Switch
- 105 10AX 6 Gang 2 Way Plate Switch
- 025 10AX 1 Gang Intermediate Plate Switch

Standards: BS EN 60669-1

Back Box Depth (mm): 011 012 013 025: 16 105 019: 25 **Cable Size (mm²):** 4 x 1.5 or 2 x 2.5

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts

VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour

AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,

BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel.

CLICK®

sales@scolmore.com | Call: 01827 63454 | scolmore.com

411 | 425 412 413

414 416

MINIGRID® Switch modules interchangeable with MiniGrid® Modules
For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

Ingot Plates Switches - MiniGrid®

- 411 10AX Ingot 1 Gang 2 Way Plate Switch
- 412 10AX Ingot 2 Gang 2 Way Plate Switch
- 413 10AX Ingot 3 Gang 2 Way Plate Switch
- 414 10AX Ingot 4 Gang 2 Way Plate Switch
- 416 10AX Ingot 6 Gang 2 Way Plate Switch
- 425 10AX Ingot 1 Gang Intermediate Plate Switch

Standards: BS EN 60669-1

Back Box Depth (mm): 411 412 413 425: 16 414 416: 25

Cable Size (mm²): 4 x 1.5 or 2 x 2.5

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts

VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, MB Matt Black (Ingot Only),

BN Black Nickel, SS Stainless Steel, PN Pearl Nickel.

401 426 471

402 404

403 432 472

MINIGRID® For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

These plates must be used with the dedicated architrave back boxes WA571 / WA572 and can only be flush mounted.
See page C31.
Not compatible with MD070 & MD075 Switch modules.

Unfurnished Plates - MiniGrid®

- 401 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
 - 402 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
 - 403 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
 - 404 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
 - 406 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
 - 426 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures
 - 432 2 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- Please note 432 is not available in BN, BR, PN or SB. See range of MiniGrid® Modules in the MiniGrid® section

Architrave Switch Plates (Unfurnished)

- 471 1 Gang MiniGrid® Unfurnished Architrave Plate - 1 Aperture
- 472 2 Gang MiniGrid® Unfurnished Architrave Plate - 2 Apertures

Standards: BS 5733

Back Box Depth (mm): Dependent On Modules Fitted 471 472: 25

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) 471: 35 (W) x 89 (H) x 8 (D) 472: 35 (W) x 149 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts

VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, MB Matt Black (Ingot Only),

BN Black Nickel, SS Stainless Steel, PN Pearl Nickel.

The furnished plate shown here contains a selection of both single and twin width MiniGrid® modules. GR100 yokes are required to mount the MiniGrid® modules into prior to assembling the frontplate.



512

2 Tier Unfurnished Plates c/ w Gaskets - MiniGrid®

512 2 Tier MiniGrid® Unfurnished Plate - 12 Apertures
2 x GR100 Yokes required, see page C9



518

3 Tier Unfurnished Plates c/ w Gaskets - MiniGrid®

518 3 Tier MiniGrid® Unfurnished Plate - 18 Apertures
3 x GR100 Yokes required, see page C9

MINIGRID®

If dimmer modules are to be mounted directly above each other, the MD9014 (page J37) or similar height dimmer modules must be installed. Alternatively, retractive switch modules MD004 (page J21) can be used in conjunction with Click Smart+ dimming receivers (page A22).

Standards: BS 5733
Back Box Depth (mm): 47
Dimensions (mm): 512: 146 (W) x 146 (H) x 8 (D) 518: 146 (W) x 227 (H) x 8 (D)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **Please note:** Supplied with both black & white gaskets (**AB, BN & MB** supplied with black gaskets only)
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **MB** Matt Black (Ingot Only),
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel.

Example of yoke furnished with modules



MINIGRID®

Galvanised steel back boxes supplied for flush mounting of the large MiniGrid® plates. Mounting Yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.



GR100

WA512

WA518

Yokes

GR100BK MiniGrid® Module Yoke - 6 Apertures - Black
GR100PW MiniGrid® Module Yoke - 6 Apertures - White
GR100GY MiniGrid® Module Yoke - 6 Apertures - Grey

2 or 3 yokes are required based on the backbox selected.

Galvanised Steel Back Boxes

WA512 2 Tier 47mm Deep K.O. Box
WA518 3 Tier 47mm Deep K.O. Box

Standards: 512 518: BS 4662
Dimensions (mm): GR100: 129 (W) x 55 (H) x 14 (D) 512: 137 (W) x 137 (H) x 47 (D) 518: 137 (W) x 197 (H) x 47 (D)



161



163



164



Dimmer Switches (Trailing Edge)

- 161** 1 Gang 2 Way 100W Dimmer Switch
- 162** 2 Gang 2 Way 100W Dimmer Switch
- 163** 3 Gang 2 Way 100W Dimmer Switch
- 164** 4 Gang 2 Way 100W Dimmer Switch

Standards: BS EN 60669-1 BS EN 60669-2-1 BS EN 55015 BS EN 61000-3-2
Type: Trailing Edge
Back Box Depth (mm): 25 **Cable Size (mm²):** 2 x 1.5
Dimensions (mm): **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **Please note:** Supplied with both black & white gaskets (**AB, BN & MB** supplied with black gaskets only)
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **MB** Matt Black (Ingot Only),
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel.

Dimmer Modules

- MD9001** 6A 2 Way Push On / Off (Non-Dimming) Module (25 x 62mm)
- MD9010** 1-10V Analogue Dimmer Module (25 x 62mm)
- MD9014** 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

Dimmer M10 Nut Runner

- SP900** Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate



140PL



152PL



153PL



185



186

Dimmer Modules supplied separately


Dimmer Mounting Unfurnished Plates

- 140PL** 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
- 152PL** 2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
- 153PL** 2 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
- 154PL** 2 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures
- 185** 2 Gang Dimmer Plate & Knob (1000W Max) - 1 Aperture
- 186** 2 Gang Dimmer Plate & Knobs (1630W Max) - 2 Apertures

Standards: BS 5733
Back Box Depth (mm): 25 (35 Flat Plate)
Dimensions (mm): **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. **Please note:** Supplied with both black & white gaskets (**AB, BN & MB** supplied with black gaskets only)
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **MB** Matt Black (Ingot Only),
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel.

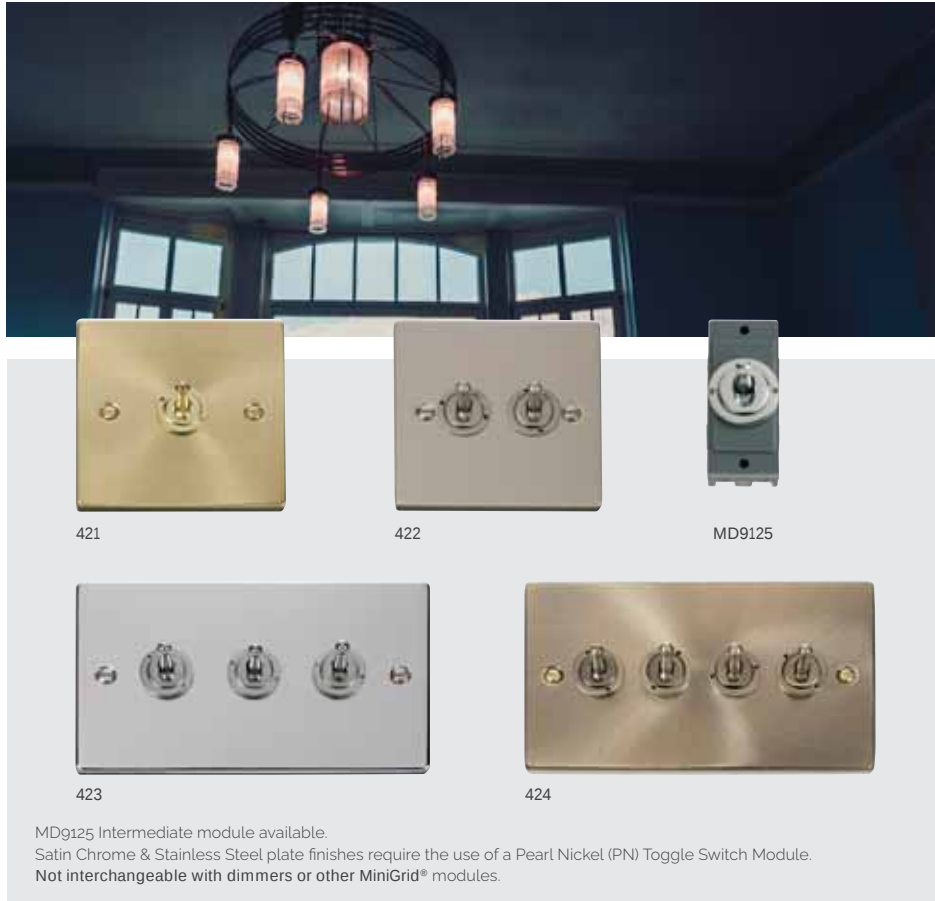

421

422

MD9125

423

424

MD9125 Intermediate module available.

Satin Chrome & Stainless Steel plate finishes require the use of a Pearl Nickel (PN) Toggle Switch Module.
Not interchangeable with dimmers or other MiniGrid® modules.

Toggle Switches

- 421 10AX 1 Gang 2 Way Toggle Switch
- 422 10AX 2 Gang 2 Way Toggle Switch
- 423 10AX 3 Gang 2 Way Toggle Switch
- 424 10AX 4 Gang 2 Way Toggle Switch

10AX Intermediate Toggle Switch Modules

- MD9125AB Intermediate Toggle Switch Module - Antique Brass
- MD9125BN Intermediate Toggle Switch Module - Black Nickel
- MD9125BR Intermediate Toggle Switch Module - Polished Brass
- MD9125CH Intermediate Toggle Switch Module - Polished Chrome
- MD9125PN Intermediate Toggle Switch Module - Pearl Nickel
- MD9125MB Intermediate Toggle Switch Module - Matt Black

Standards: BS EN 60669-1

Back Box Depth (mm): 25 Cable Size (mm²): 4 x 1.5 or 2 x 2.5

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code:

VP - Plate Style BN - Plate Finish 011 - Product No. Please note: Supplied with both black & white gaskets (AB, BN & MB supplied with black gaskets only)

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, MB Matt Black (Ingot Only),

BN Black Nickel, SS Stainless Steel, PN Pearl Nickel.

Power Socket Outlets, Fused Connection Units & Control Switches

With the ever increasing demand for power supplies in all areas of the home comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted.

The 9 different Deco® plate finishes offer a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...

C14



Switched Sockets With USB Outlet

771U 13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)



771U



571U

Ingot Switched Sockets With USB Outlet

571U 13A Ingot 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)

Standards: BS 1363-2: 2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1
Back Box Depth (mm): 25 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **MB** Matt Black (Ingot Only),
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel.

C15



785



786

Switched Sockets With Twin USB Outlets

780 13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)
785 13A 1 Gang Switched Socket Outlet With Type A & C USB (4A) Outlets (Twin Earth)
786 13A 2 Gang Switched Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)



585



586

Ingot Switched Sockets With Twin USB Outlets

580 13A Ingot 2 Gang Switched Sockets With Twin 2.1A USB Outlets (4.2A) (Twin Earth)
585 13A Ingot 1 Gang Switched Socket Outlet With Type A & C USB (4A) Outlets (Twin Earth)
586 13A Ingot 2 Gang Switched Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)

Standards: BS 1363-2: 2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1
Back Box Depth (mm): 25 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **MB** Matt Black (Ingot Only),
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel.

C16



Switched Socket Outlets

- 035 13A 1 Gang DP Switched Socket Outlet
036 13A 2 Gang DP Switched Socket (Twin Earth)

Ingot Switched Socket Outlets

- 535 13A Ingot 1 Gang DP Switched Socket Outlet
536 13A Ingot 2 Gang DP Switched Socket (Twin Earth)



Unswitched Safety Shutter Socket Outlets

- 530 13A 1 Gang Unswitched Socket Outlet (Twin Earth)
532 13A 2 Gang Unswitched Socket Outlet (Twin Earth)

Only SC finishes available.

Standards: BS 1363-2

Back Box Depth (mm): 25 Cable Size (mm²): 3 x 2.5 or 2 x 4

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts

VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, MB Matt Black (Ingot Only),

BN Black Nickel, SS Stainless Steel, PN Pearl Nickel.

C17



Round Pin Socket Outlets

- 038 5A Round Pin Socket
039 2A Round Pin Socket



Safety Shuttered Sockets listed below are only available for sale in the Republic of Ireland.

Ingot Switched Safety Shutter Socket Outlets

- 1535 13A Ingot 1 Gang DP Switched Socket Outlet
1536 13A Ingot 2 Gang DP Switched Socket Outlet (Twin Earth)
1836 13A Ingot 2 Gang DP Outboard Switched Socket Outlet (Twin Earth)

Standards: BS 1363-2 038 039: BS 546

Back Box Depth (mm): 25 Cable Size (mm²): 3 x 2.5 or 2 x 4 038: 3 x 1.5 039: 4 x 1.5 or 3 x 2.5

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts

VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, MB Matt Black (Ingot Only),

BN Black Nickel, SS Stainless Steel, PN Pearl Nickel.



Fused Connection Units With Optional Flex Outlet

- 050 13A Fused Connection Unit
051 13A DP Switched Fused Connection Unit
052 13A DP Switched Fused Connection Unit With Neon
053 13A Fused Connection Unit With Neon



Fused Connection Units Without Flex Outlet

- 650 13A Fused Connection Unit
651 13A DP Switched Fused Connection Unit
652 13A DP Switched Fused Connection Unit With Neon
653 13A Fused Connection Unit With Neon


Standards: BS 1363-4 BS 1362
Back Box Depth (mm): 25 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel.



Ingot Fused Connection Units With Optional Flex Outlet

- 550 13A Ingot Fused Connection Unit
551 13A Ingot DP Switched Fused Connection Unit
552 13A Ingot DP Switched Fused Connection Unit With Neon
553 13A Ingot Fused Connection Unit With Neon

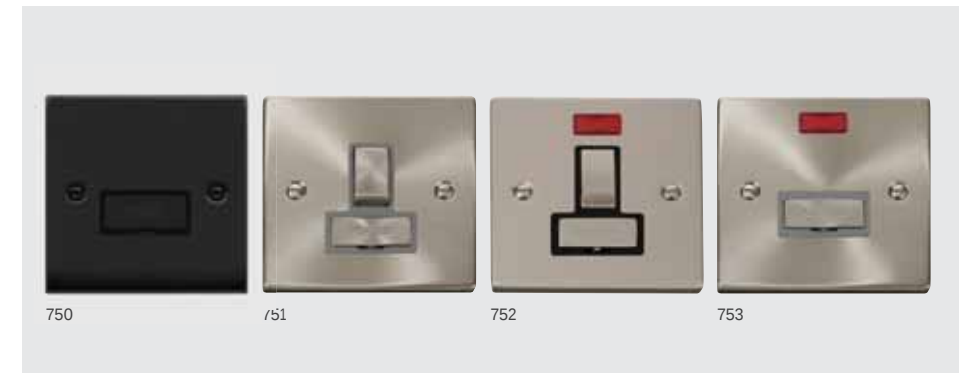

Ingot Fused Connection Units Without Flex Outlet

- 750 13A Ingot Fused Connection Unit
751 13A Ingot DP Switched Fused Connection Unit
752 13A Ingot DP Switched Fused Connection Unit With Neon
753 13A Ingot Fused Connection Unit With Neon

Standards: BS 1362
Back Box Depth (mm): 25 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **MB** Matt Black (Ingot Only), **BN** Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel.

3 Pole and 20A DP Switches are Non-Modular.



022



023

20A Control Switches With Optional Flex Outlet

- 022 20A DP Switch
- 023 20A DP Switch With Neon



622



623

20A Control Switches Without Flex Outlet

- 622 20A DP Switch
- 623 20A DP Switch With Neon



020

Fan Isolation Switch

- 020 10A 3 Pole Fan Isolation Switch

Standards: BS EN 60669-1 **020:** BS EN 60669-2-4
Back Box Depth (mm): 25 **020:** 16 **Cable Size (mm²):** 3 x 2.5 **020:** 4 x 1.5 or 2 x 2.5
Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel.

3 Pole and 20A DP Switches are Non-Modular.



522



523

Ingot 20A Control Switches With Optional Flex Outlet

- 522 20A Ingot DP Switch
- 523 20A Ingot DP Switch With Neon



722



723

Ingot 20A Control Switches Without Flex Outlet

- 722 20A Ingot DP Switch
- 723 20A Ingot DP Switch With Neon



520

Ingot Fan Isolation Switch

- 520 10A Ingot 3 Pole Fan Isolation Plate Switch

Standards: BS EN 60669-1 **520:** BS EN 60669-2-4
Back Box Depth (mm): 25 **520:** 16 **Cable Size (mm²):** 3 x 2.5 **520:** 4 x 1.5 or 2 x 2.5
Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **MB** Matt Black (Ingot Only),
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel.



50A Switches And Socket Outlets

- 200** 50A 1 Gang DP Switch
- 201** 50A 1 Gang DP Switch With Neon

- 202** 50A 2 Gang DP Switch
- 203** 50A 2 Gang DP Switch With Neon

- 204** 50A 2 Gang DP Switch With 13A DP Switched Socket
- 205** 50A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669-1 **204 205:** BS 4177
Back Box Depth (mm): 35 **Cable Size (mm²):** 1 x 16
Dimensions (mm): **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D) **202 203:** 88 (W) x 146 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel.



Ingot 50A Switches And Socket Outlets

- 500** 50A Ingot 1 Gang DP Switch
- 501** 50A Ingot 1 Gang DP Switch With Neon

- 502** 50A Ingot 2 Gang DP Switch
- 503** 50A Ingot 2 Gang DP Switch With Neon

- 504** 50A Ingot 2 Gang DP Switch With 13A DP Switched Socket
- 505** 50A Ingot 2 Gang DP Switch With 13A DP Switched Socket & Neons
Only available in selected finishes: CH, SC, AB, BN, PN, SS & MB

Standards: BS EN 60669-1 **504 505:** BS 4177
Back Box Depth (mm): 35 **Cable Size (mm²):** 1 x 16
Dimensions (mm): **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D) **502 503:** 88 (W) x 146 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **MB** Matt Black (Ingot Only).



660

Lockable Switches

660 20A Double Pole Key Lockable Switch



655

Ingot Lockable Socket Outlets

655 13A Ingot 1 Gang DP Key Lockable Socket With Neon



675

Lockable Socket Outlets

675 13A 1 Gang DP Key Lockable Socket With Neon

Two keys provided (Spare keys available: SP660).

Standards: **655 675:** BS EN 60669-1 BS 1363-2 **660:** BS EN 60669-1
Back Box Depth (mm): 35 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D)

Understanding the code: **Please note:** AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **MB** Matt Black (Ingot Only),
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel.



024

20A DP Sink / Bath Switch

024 20A DP Sink / Bath Switch With Neon



100

Dual Voltage Shaver Socket Outlet

100 115/230V Dual Voltage Shaver Socket

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010, making it safe for use in bathrooms. This outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.



060

Blank Plates

060 1 Gang Blank Plate

061 2 Gang Blank Plate



061

Standards: **024:** BS EN 60669-1 **100:** BS EN IEC 61558-1 BS EN 61558-2-5
Back Box Depth (mm): 25 **100:** 47 **Cable Size (mm²):** **024:** 3 x 2.5 **100:** 2 x 1.5 or 1 x 2.5
Dimensions (mm): **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D) **100:** 88 (W) x 146 (H) x 8 (D)

Understanding the code: **Please note:** AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **MB** Matt Black (Ingot Only),
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel.

TV, Telephone & Satellite

The following pages contain details of Deco® products designed to deal with handling media transfer through telephone, computer, TV or radio.

As well as the finished products please also find details of unfurnished mounting plates designed to accept custom selections of New Media™ modules from the New Media™ section of this catalogue.

Telephone Outlets



RJ11 Telephone Outlet

115 Single RJ11 (Irish/US) Outlet

Telephone Outlets

120 Single Telephone Outlet - Master

121 Twin Telephone Outlet - Master

125 Single Telephone Outlet - Secondary

126 Twin Telephone Outlet - Secondary



120 | 125



121 | 126

Twin outlets are 2 separate sockets and not internally linked together.

Back Box Depth (mm): 16 115: 35
Termination Type: IDC 115: Screw
Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **MB** Matt Black (Ingot Only),
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel.



065 | 158



066 | 159



156



157 | 170



Non-isolated Coaxial Outlets (Unshielded)

- 065 Single Coaxial Outlet
- 066 Twin Coaxial Outlet

Isolated Coaxial Outlets (Unshielded)

- 158 Single Isolated Coaxial Outlet
- 159 Twin Isolated Coaxial Outlet

Satellite Outlets (Unshielded)

- 156 Non-isolated Single Satellite Outlet
- 157 Isolated Satellite & Isolated Coaxial Outlet
- 170 Non-isolated Satellite & Non-isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Back Box Depth (mm): 16
Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, MB Matt Black (Ingot Only),
BN Black Nickel, SS Stainless Steel, PN Pearl Nickel.



MP603



MP606

Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of TV, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.

Half New Media Semi-Modular Part Furnished Plate

MP603 Half New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 3 Apertures

Available in Chrome (CH), Satin Chrome (SC), Satin Brass (SB), Polar White (PW) and Matt Black (MB). Requires MP520 flush back box.

2 Tier Semi-Modular Unfurnished Plates

MP606 Large New Media™ Part Furnished Front Plate - 4 x 13A DP Switched Sockets & 2 x 3 Apertures


Available in Chrome (CH), Satin Chrome (SC), Polar White (PW) and Matt Black (MB). Requires MP525 or MP535 flush back box.



310



311

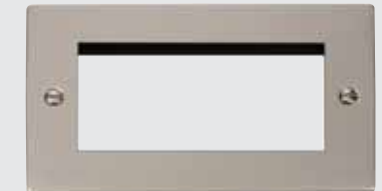

312

new media™

See our dedicated New Media™ section for more information on the range of New Media™ modules available. For the complete range of semi-modular unfurnished plates see page K7.

Unfurnished Plates - New Media™

- 310 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- 311 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- 312 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Standards: BS 5733 603 606: BS 1363-2

Back Box Depth (mm): Dependent On Modules Fitted Cable Size (mm²): 603 606: 3 x 2.5 or 2 x 4

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) 603: 250 (W) x 86 (H) x 8 (D) 606: 250 (W) x 216 (H) x 8 (D)

Understanding the code:

VP - Plate Style BN - Plate Finish 011 - Product No.

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, MB Matt Black (Ingot Only),
BN Black Nickel, SS Stainless Steel, PN Pearl Nickel.



VPSC604BK



VPCH684WH

Product is supplied with 2 x 13A DP switched sockets. Back box WA512 required.

New Media Semi-Modular Part Furnished Plates

VPSC604BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
VPSC604WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
VPCH604BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
VPCH604WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
VPSS604BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
VPSS604WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
VPSC684BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
VPSC684WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
VPCH684BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
VPCH684WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
VPSS684BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
VPSS684WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures

Standards: 604: BS 1363-2 684: BS 1363-2 EN IEC 62368-1 EN IEC 62368-3 EN IEC 62680-1-3
Back Box Depth (mm): WA512 (47) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 148 (W) x 148 (H) x 8 (D)

Understanding the code:
VP - Plate Style **SC** - Plate Finish **604** - Product No. **BK** - Insert Finish.
CH Polished Chrome, **SC** Satin Chrome, **SS** Stainless Steel.



WA093

WA095




WA370



WA571

WA572



SP650

SP675

Galvanised Steel Back Boxes

WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box

WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box

WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box

WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box

WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box

WA370 1 + 1 35mm Deep Dual Accessory Box (Deco® Range Only)

WA375 1 + 2 35mm Deep Dual Accessory Box (Deco® Range Only)

WA571 1 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco® Range Only)

WA572 2 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco® Range Only)

Longer Fixing Screws

SP650 Standard M3.5 Dia. 50mm Long Screws (Bag 100)

SP675 Standard M3.5 Dia. 75mm Long Screws (Bag 100)

SP625 Standard M3.5 Security Screw 25mm Long (Bag 100) Require 2mm security allen key / driver.

essentials™

For the complete range of back boxes see Essentials™ page M4.
For the complete range of longer fixing screws see Essentials™ page Mg.


Understanding the code:
Screws available in **BR** Brass, **CH** Chrome, **MB** Matt Black and **BN** Black Nickel finishes.
Suffix code with preferred finish. Chrome finish may be used with white plate accessories



WA4247



WA106PBK



WA107P

FlameGuard® Dry Lining Boxes

WA4135	1 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4147	1 Gang 47mm Deep FlameGuard® Dry Lining Box
WA4235	2 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4247	2 Gang 47mm Deep FlameGuard® Dry Lining Box

Dry Lining Boxes (Sprung Fixing Lugs)

WA087SF	1 Gang 35mm Deep Dry Lining Box
WA088SF	2 Gang 35mm Deep Dry Lining Box
WA106SF	1 Gang 47mm Deep Dry Lining Box
WA107SF	2 Gang 47mm Deep Dry Lining Box

Dry Lining Boxes

WA087P	1 Gang 35mm Deep Dry Lining Box
WA087PBK	1 Gang 35mm Deep Dry Lining Box
WA088P	2 Gang 35mm Deep Dry Lining Box
WA088PBK	2 Gang 35mm Deep Dry Lining Box
WA106P	1 Gang 47mm Deep Dry Lining Box
WA106PBK	1 Gang 47mm Deep Dry Lining Box
WA107P	2 Gang 47mm Deep Dry Lining Box
WA107PBK	2 Gang 47mm Deep Dry Lining Box
WA108P	Round Ceiling 34mm Deep Dry Lining Box

Spacer Gaskets

VP095BK	1 Gang 10mm Spacer Gasket - Black
VP095GY	1 Gang 10mm Spacer Gasket - Grey
VP095WH	1 Gang 10mm Spacer Gasket - White
VP096BK	2 Gang 10mm Spacer Gasket - Black
VP096GY	2 Gang 10mm Spacer Gasket - Grey
VP096WH	2 Gang 10mm Spacer Gasket - White

Deco® Gaskets

SP011	1 Gang Deco® Gasket - Black
SP012	2 Gang Deco® Gasket - Black
SP013	1 Gang Deco® Gasket - White
SP014	2 Gang Deco® Gasket - White
SP021	1 Gang Deco® Gasket - Grey
SP022	2 Gang Deco® Gasket - Grey

essentials™

For the complete range of back boxes see Essentials™ page M4.

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards. Fire: BS EN 1364-1 Acoustic: BS EN ISO 140-2. Complies with Building Regulations Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.

define®

Decorative Flat Plate Accessories



define®

Decorative Flat Plate Electrical Accessories in Various Plate Finishes

Conventional plate accessory design with a standard 6mm return on the plate depth, limits the design opportunities in many installations by virtue of the fact that the plate becomes the feature instead of complementing the features of the decoration in a room.

The Define® flat plate range of accessories offers up a host of new design opportunities with a comprehensive range of electrical accessory products available in 5 different decorative plate finishes. Define® plates are coated stainless steel.

The comprehensive range of products includes plate switches of different construction, including traditional 'dolly' style, contemporary self coloured Ingot switches and, of course, rotary dimmer switches. The modular construction of the standard moulded Click® range of switches has been incorporated into the Define® range.

When used in conjunction with the MiniGrid® range of blank mounting plates, customised switching solutions can easily be created with a wide selection of module options.

Amongst the socket range can be found standard switched 13A sockets plus 2A and 5A round pin sockets for dedicated lighting circuits etc...

Different configurations of fused connection units and control switches, with 50A switches and assorted data and media accessories all contribute to an exciting and aesthetically pleasing wiring solution offered by the high quality Define® product group.



20 Year Warranty

All Define® products are covered by our 20 year warranty against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.



Black Nickel
(BN)

Brushed Stainless*
(BS)

Pearl Nickel
(PN)



Polished Chrome
(CH)



Stainless Steel
(SS)

All Define® products are available with Black or White Inserts, excluding Black Nickel finishes which are supplied with Black Insert.

Every Define® product featured in the pages of this catalogue is available in 5 distinctive quality finishes: Polished Chrome, Stainless Steel, Brushed Stainless*, Pearl Nickel and Black Nickel

Define® unique product codes

When ordering any Define® products, please specify the required finish by following the simple code structure as demonstrated here.

FP

BN

411

BK

Plate Style Product Product Insert
Finish Number Colour

Contents

Switches	D4
Power Sockets	D10
Fused Connection Units	D13
Control Switches	D14
Shaver Socket & Blank Plates	D17
TV, Telephone & Satellite	D18
New Media™ Plates	D22
Back Boxes & Fixing Screws	D23

Switches

MINIGRID®

Please see page J18 for a selection of MiniGrid® modules.

The standard switch modules used in the Define® product are self coloured Ingot style switches which feature single screw fixing to the face plate.


Design flexibility is enhanced by availability of multi-function and fully interchangeable modules from the MiniGrid® range.

These non-furnished 1 & 2 gang plates offer the installer unprecedented flexibility in creating customised switch arrangements. A simple single screw fixing secures the required modules in position. A host of switching options can be achieved by selecting from our range of interchangeable modules.

Switches

define®

D5

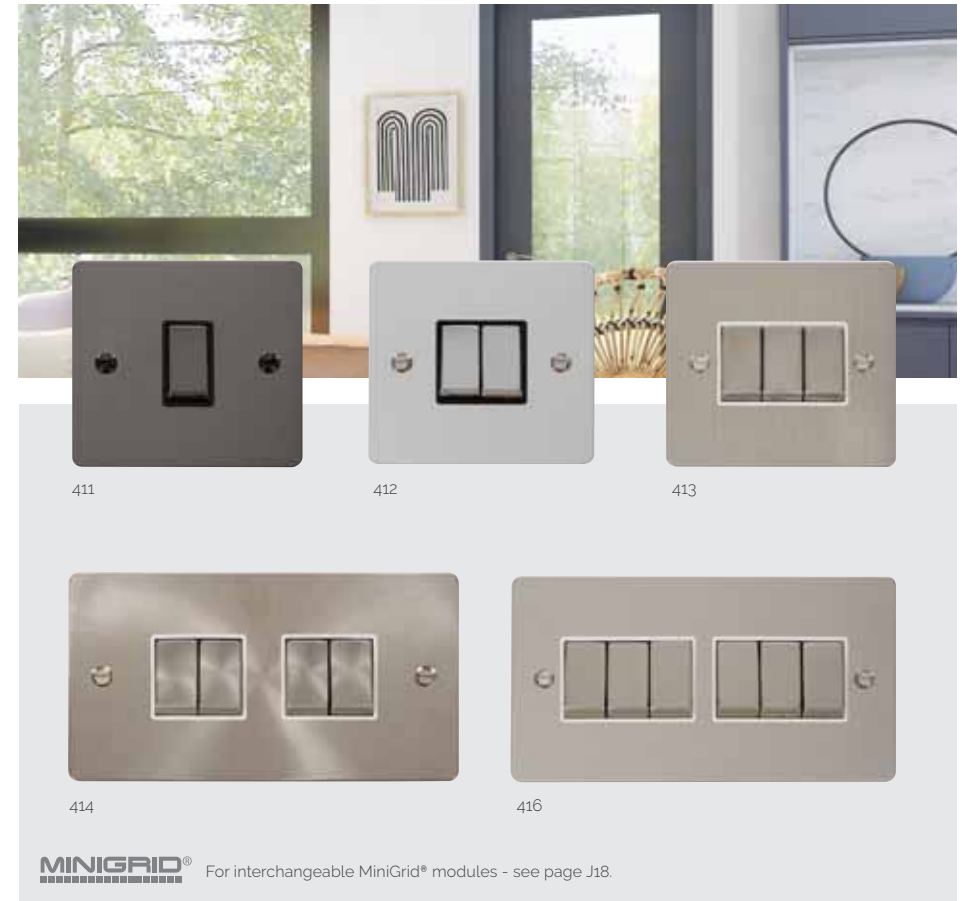

MINIGRID®

For interchangeable MiniGrid® modules - see page J18.

Ingot Plates Switches - MiniGrid®

- 411 10AX Ingot 1 Gang 2 Way Plate Switch
- 412 10AX Ingot 2 Gang 2 Way Plate Switch
- 413 10AX Ingot 3 Gang 2 Way Plate Switch
- 414 10AX Ingot 4 Gang 2 Way Plate Switch
- 416 10AX Ingot 6 Gang 2 Way Plate Switch
- 425 10AX Ingot 1 Gang Intermediate Plate Switch

Standards: BS EN 60669-1

Back Box Depth (mm): 25 Cable Size (mm²): 4 x 1.5 or 2 x 2.5

Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 1.3 (D) **2 Gang:** 146 (W) x 88 (H) x 1.3 (D)

Understanding the code:

FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.

BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel

CLICK®

sales@scolmore.com | Call: 01827 63454 | scolmore.com

D6


MINIGRID®

For MiniGrid® modules - see page J18.

Unfurnished Plates - MiniGrid®

401	1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
402	1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
403	1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
404	2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
406	2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
426	2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures

Standards: BS 5733

Back Box Depth (mm): Dependent On Modules Fitted


Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 1.3 (D) **2 Gang:** 146 (W) x 88 (H) x 1.3 (D)

Understanding the code:

FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour

BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel

D7

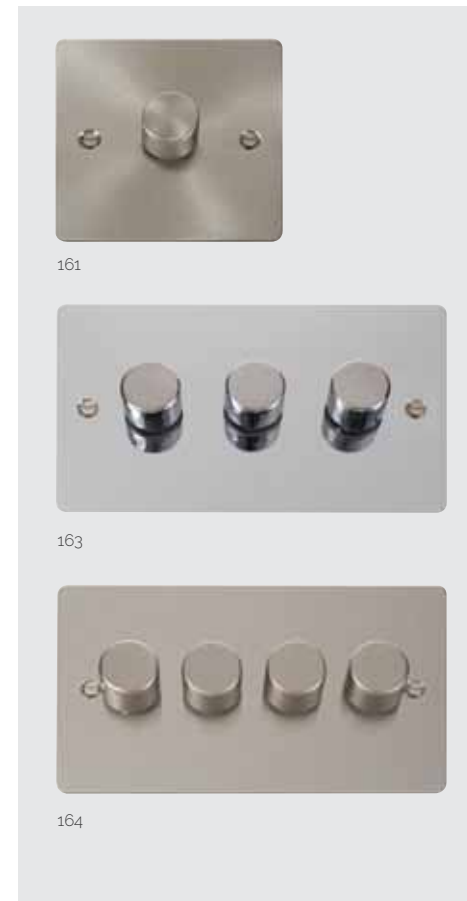

Dimmer Switches (Trailing Edge)

161	1 Gang 2 Way 100W Dimmer Switch
162	2 Gang 2 Way 100W Dimmer Switch
163	3 Gang 2 Way 100W Dimmer Switch
164	4 Gang 2 Way 100W Dimmer Switch

Standards: BS EN 60669-1 BS EN 60669-2-1 BS EN 55015 BS EN 61000-3-2

Type: Trailing Edge

Back Box Depth (mm): 35 Cable Size (mm²): 2 x 1.5

Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 1.3 (D) **2 Gang:** 146 (W) x 88 (H) x 1.3 (D)

Understanding the code:

FP - Plate Style BN - Plate Finish 411 - Product No. Please note: Supplied with both black & white gaskets (BN supplied with black gaskets only).

BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



D8

Dimmer Modules

- MD9001 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
 MD9010 1-10V Analogue Dimmer Module (25 x 62mm)
 MD9014 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

Dimmer M10 Nut Runner

SP900 Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate



SP900

MD9014



140PL



152PL



153PL



185



186

Dimmer Modules supplied separately

Dimmer Mounting Unfurnished Plates

- 140PL 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
 152PL 2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
 153PL 3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
 154PL 4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures
 185 2 Gang Dimmer Plate & Knob (1000W Max) - 1 Aperture
 186 2 Gang Dimmer Plate & Knobs (1630W Max) - 2 Apertures

Standards: BS 5733

Back Box Depth (mm): 35

Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 1.3 (D) **2 Gang:** 146 (W) x 88 (H) x 1.3 (D)

Understanding the code:

FP - Plate Style **BN** - Plate Finish **411** - Product No. **Please note:** Supplied with both black & white gaskets (**BN** supplied with black gaskets only).

BS Brushed Stainless, **BN** Black Nickel, **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel

D9



421



422



MD9125



423



424

Brushed Stainless & Stainless Steel plate finishes require the use of a Pearl Nickel (PN) Toggle Switch Module.

Toggle Switches

- 421 10AX 1 Gang 2 Way Toggle Switch
 422 10AX 2 Gang 2 Way Toggle Switch
 423 10AX 3 Gang 2 Way Toggle Switch
 424 10AX 4 Gang 2 Way Toggle Switch

10AX Intermediate Toggle Switch Modules

- MD9125BN Intermediate Toggle Switch Module - Black Nickel
 MD9125CH Intermediate Toggle Switch Module - Polished Chrome
 MD9125PN Intermediate Toggle Switch Module - Pearl Nickel
 Not interchangeable with dimmers or other MiniGrid® modules.

Standards: BS EN 60669-1

Back Box Depth (mm): 35 Cable Size (mm²): 4 x 1.5 or 2 x 2.5

Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 1.3 (D) **2 Gang:** 146 (W) x 88 (H) x 1.3 (D)

Understanding the code:

FP - Plate Style **BN** - Plate Finish **411** - Product No. **Please note:** Supplied with both black & white gaskets (**BN** supplied with black gaskets only).

BS Brushed Stainless, **BN** Black Nickel, **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



Power Socket Outlets, Fused Connection Units & Control Switches

With the ever increasing demand for power supplies in all areas of the home comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted.

The 5 different Define® plate finishes offer a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...

Power Socket Outlets

define®



535

536

Ingot Switched Socket Outlets

- 535 13A Ingot 1 Gang DP Switched Socket
- 536 13A Ingot 2 Gang DP Switched Socket (Twin Earth)



1535

1536

1836

Safety Shuttered Sockets listed below are only available for sale in the Republic of Ireland.

Ingot Switched Safety Shutter Socket Outlets

- 1535 13A Ingot 1 Gang DP Switched Socket Outlet
- 1536 13A Ingot 2 Gang DP Switched Socket Outlet (Twin Earth)
- 1836 13A Ingot 2 Gang DP Outboard Switched Socket Outlet (Twin Earth)

Standards: BS 1363-2
Cable Size (mm²): 3 x 2.5 or 2 x 4 **Back Box Depth (mm):** 35
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 1.3 (D) **2 Gang:** 146 (W) x 88 (H) x 1.3 (D)

Understanding the code:
FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour
BS Brushed Stainless, **BN** Black Nickel, **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel

Round Pin Socket Outlets

- 038 5A Round Pin Socket
039 2A Round Pin Socket



Ingot Lockable Socket Outlets

- 655 13A Ingot 1 Gang DP Key Lockable Socket With Neon

Two keys provided (Spare keys available: SP660)



Ingot Switched Sockets With USB Outlet

- 571U 13A Ingot 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
580 13A Ingot 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)
585 13A Ingot 1 Gang Switched Socket Outlet With Type A & C USB (4A) Outlets (Twin Earth)
586 13A Ingot 2 Gang Switched Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)

Standards: **038 039:** BS 546 **655:** BS EN 60669-1 BS 1363-2
570 571U 580 585 586: BS 1363-2: 2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1
Cable Size (mm²): **038:** 4 x 1.5 or 3 x 2.5 **039:** 3 x 1.5 **571U 580 585 586 655:** 3 x 2.5 or 2 x 4
Back Box Depth (mm): **038 039:** 25 **571U 580 585 586:** 35 **655:** 47
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 1.3 (D) **2 Gang:** 146 (W) x 88 (H) x 1.3 (D)

Understanding the code:

FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour
BS Brushed Stainless, **BN** Black Nickel, **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



Ingot Fused Connection Units With Optional Flex Outlet

- 550 13A Ingot Fused Connection Unit
551 13A Ingot DP Switched Fused Connection Unit
552 13A Ingot DP Switched Fused Connection Unit With Neon
553 13A Ingot Fused Connection Unit With Neon



Ingot Fused Connection Units Without Flex Outlet


- 750 13A Ingot Fused Connection Unit
751 13A Ingot DP Switched Fused Connection Unit
752 13A Ingot DP Switched Fused Connection Unit With Neon
753 13A Ingot Fused Connection Unit With Neon

Standards: BS 1363-4 BS 1362
Cable Size (mm²): 3 x 2.5 or 2 x 4
Back Box Depth (mm): 35
Dimensions (mm): 86 (W) x 86 (H) x 1.3 (D)

Understanding the code:

FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour
BS Brushed Stainless, **BN** Black Nickel, **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel

D14

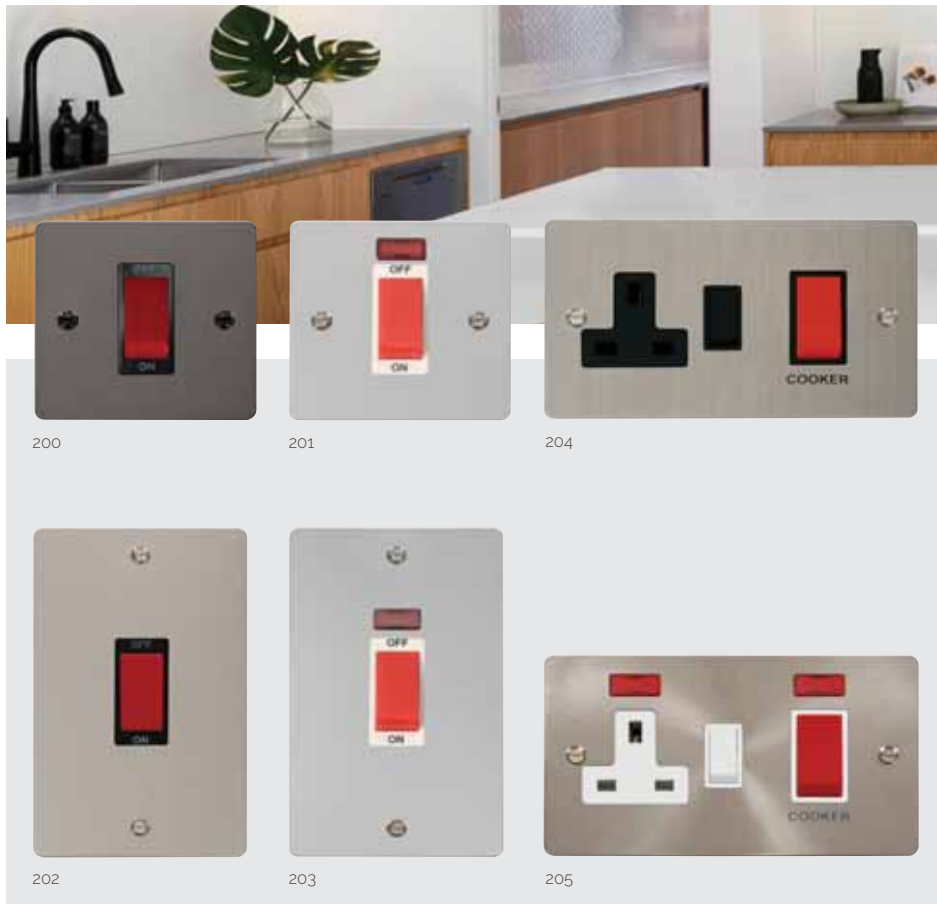

50A Switches And Socket Outlets

- 200 50A 1 Gang DP Switch
 201 50A 1 Gang DP Switch With Neon
- 202 50A 2 Gang DP Switch
 203 50A 2 Gang DP Switch With Neon
- 204 50A 2 Gang DP Switch With 13A DP Switched Socket
 205 50A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: **200 201 202 203:** BS EN 60669-1 **204 205:** BS 4177Back Box Depth (mm): 47 Cable Size (mm²): 1 x 16Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 1.3 (D) **2 Gang:** 146 (W) x 88 (H) x 1.3 (D) **202 203:** 88 (W) x 146 (H) x 1.3 (D)

Understanding the code:

FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour

BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel

D15



Ingot 50A Switches And Socket Outlets

- 500 50A Ingot 1 Gang DP Switch
 501 50A Ingot 1 Gang DP Switch With Neon
- 502 50A Ingot 2 Gang DP Switch
 503 50A Ingot 2 Gang DP Switch With Neon
- 504 50A Ingot 2 Gang DP Switch With 13A DP Switched Socket
 505 50A Ingot 2 Gang DP Switch With 13A DP Switched Socket & Neons


Standards: **500 501 502 503:** BS EN 60669-1 **504 505:** BS 4177Back Box Depth (mm): 47 Cable Size (mm²): 1 x 16Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 1.3 (D) **2 Gang:** 146 (W) x 88 (H) x 1.3 (D) **502 503:** 88 (W) x 146 (H) x 1.3 (D)

Understanding the code:

FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour

BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel


D16

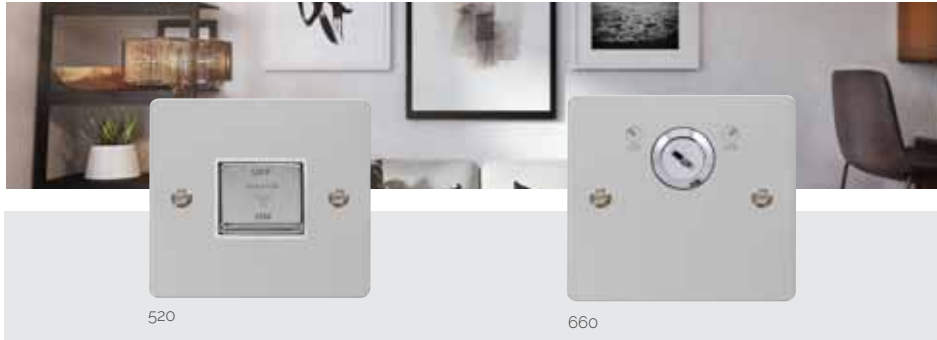**Ingot Fan Isolation Switch**

520 10A Ingot 3 Pole Fan Isolation Plate Switch
This product is not modular

Lockable Switches

660 20A Double Pole Key Lockable Switch
Two keys provided (Spare keys available: SP660)

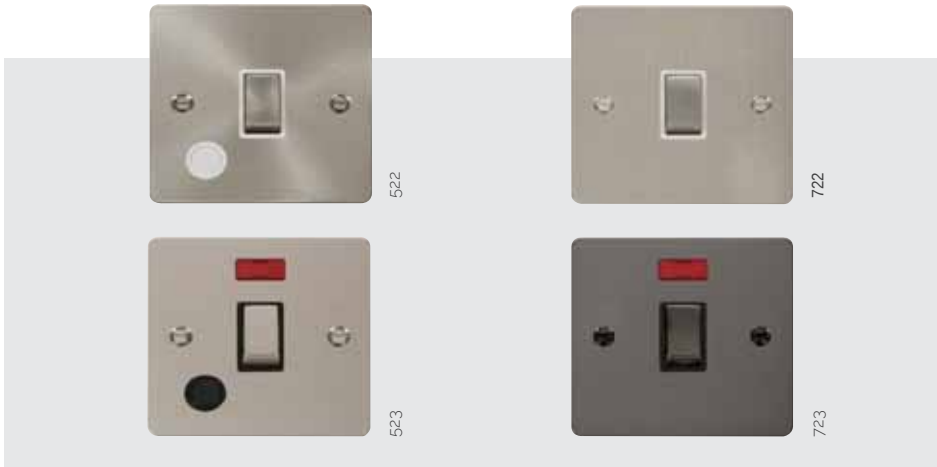**Ingot 20A Control Switches With Optional Flex Outlet**

522 20A Ingot DP Switch
523 20A Ingot DP Switch With Neon

Ingot 20A Control Switches Without Flex Outlet

722 20A Ingot DP Switch
723 20A Ingot DP Switch With Neon
3 pole and 20A DP switches are non-modular

Standards: BS EN 60669-1 **520: BS EN 60669-2-4** Back Box Depth (mm): 35 **520: 25 660: 47**
Cable Size (mm²): **520: 4 x 1.5 or 2 x 2.5 522 523 722 723: 3 x 2.5 660: 3 x 2.5 or 2 x 4**
Dimensions (mm): 86 (W) x 86 (H) x 1.3 (D)

Understanding the code:

FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour
BS Brushed Stainless, **BN** Black Nickel, **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel

D17

**Dual Voltage Shaver Socket Outlet**

100 115/230V Dual Voltage Shaver Socket

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010 making it safe for use in bathrooms. This outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

**Blank Plates**

060 1 Gang Blank Plate
061 2 Gang Blank Plate

Standards: **060 061: BS 5733 100: BS EN IEC 61558-1 BS EN 61558-2-5**
Back Box Depth (mm): **060: 16 061: 25 100: 47** Cable Size (mm²): **100: 2 x 1.5 or 1 x 2.5**
Dimensions (mm): **1 Gang: 86 (W) x 86 (H) x 1.3 (D) 2 Gang: 146 (W) x 88 (H) x 1.3 (D) 100: 88 (W) x 146 (H) x 1.3 (D)**

Understanding the code:

FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour
BS Brushed Stainless, **BN** Black Nickel, **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



TV, Telephone & Satellite


The following pages contain details of Define® products designed to deal with handling data and media transfer through telephone, computer, TV or radio.

As well as the finished products please also find details of unfurnished mounting plates designed to accept custom selections of New Media™ modules from the New Media™ section of this catalogue.



RJ11 Telephone Outlet

115 Single RJ11 (Irish/US) Outlet

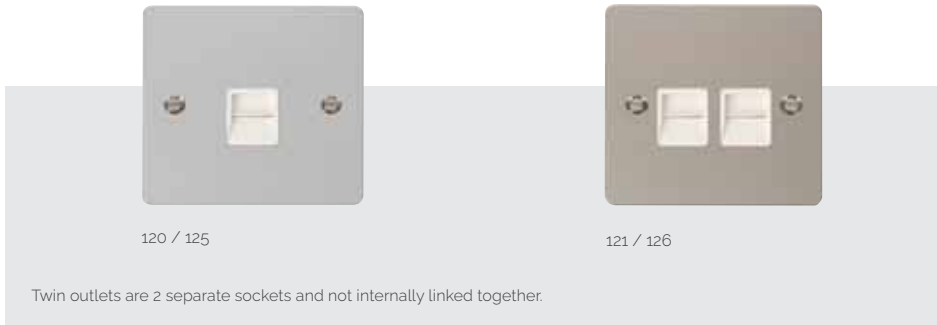

120 / 125

121 / 126

Twin outlets are 2 separate sockets and not internally linked together.


Telephone Outlets

120	Single Telephone Outlet - Master	125	Single Telephone Outlet - Secondary
121	Twin Telephone Outlet - Master	126	Twin Telephone Outlet - Secondary

Back Box Depth (mm): 25 **115:** 47
Termination Type: IDC **115:** Screw
Dimensions (mm): 86 (W) x 86 (H) x 1.3 (D)

Understanding the code:

FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour
BS Brushed Stainless, **BN** Black Nickel, **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel

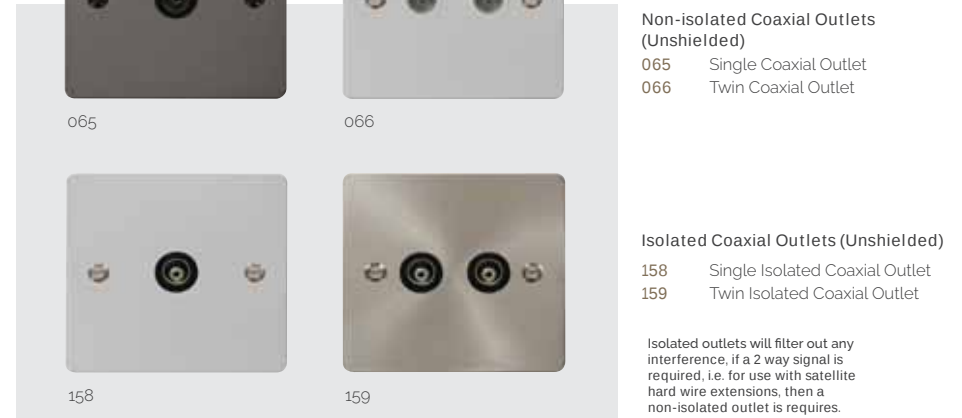

Non-isolated Coaxial Outlets (Unshielded)

065 Single Coaxial Outlet
 066 Twin Coaxial Outlet

Isolated Coaxial Outlets (Unshielded)

158 Single Isolated Coaxial Outlet
 159 Twin Isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.



156

157

Satellite Outlets (Unshielded)

156 Non-isolated Single Satellite Outlet 157 Isolated Satellite & Isolated Coaxial Outlet

Back Box Depth (mm): 25 **065 066:** 16
Dimensions (mm): 86 (W) x 86 (H) x 1.3 (D)

Understanding the code:


FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour
BS Brushed Stainless, **BN** Black Nickel, **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



310



311

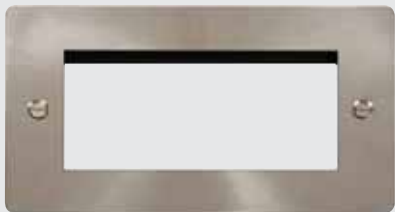

312



Unfurnished Plates - New Media™

- 310 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- 311 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- 312 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Standards: BS 5733

Back Box Depth (mm): Dependent On Modules Fitted

Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 1.3 (D) **2 Gang:** 146 (W) x 88 (H) x 1.3 (D)

Understanding the code:

FP - Plate Style BS - Plate Finish 310 - Product No.

BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



WA093

WA095



WA094



WA370



SP640

SP622

Galvanised Steel Back Boxes

- WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box
- WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box
- WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box
- WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box
- WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box
- WA370 1 + 1 35mm Deep Dual Accessory Box (Deco® Range Only)
- WA375 1 + 2 35mm Deep Dual Accessory Box (Deco® Range Only)

Security Screws

- SP622 Define® M3.5 Security Screw 22mm Long (Bag 100)

Screws - 40mm Long

- SP640BN Define® M3.5 Dia. 40mm Long Screws (Bag 100)
- SP640CH Define® M3.5 Dia. 40mm Long Screws (Bag 100)

essentials™

For the complete range of back boxes see Essentials™ page M4.

Understanding the code:

Screws available in **BR** Brass, **CH** Chrome and **BN** Black Nickel finishes. Suffix code with preferred finish



WA4247

WA106P

WA107PBK

GA100

FlameGuard® Dry Lining Boxes

WA4135	1 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4147	1 Gang 47mm Deep FlameGuard® Dry Lining Box
WA4235	2 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4247	2 Gang 47mm Deep FlameGuard® Dry Lining Box

Dry Lining Boxes (Sprung Fixing Lugs)

WA087SF	1 Gang 35mm Deep Dry Lining Box
WA088SF	2 Gang 35mm Deep Dry Lining Box
WA106SF	1 Gang 47mm Deep Dry Lining Box
WA107SF	2 Gang 47mm Deep Dry Lining Box

Dry Lining Boxes

WA087P	1 Gang 35mm Deep Dry Lining Box
WA087PBK	1 Gang 35mm Deep Dry Lining Box
WA088P	2 Gang 35mm Deep Dry Lining Box
WA088PBK	2 Gang 35mm Deep Dry Lining Box
WA106P	1 Gang 47mm Deep Dry Lining Box
WA106PBK	1 Gang 47mm Deep Dry Lining Box
WA107P	2 Gang 47mm Deep Dry Lining Box
WA107PBK	2 Gang 47mm Deep Dry Lining Box
WA108P	Round Ceiling 34mm Deep Dry Lining Box

Ezylink® Dry Lining Boxes

GA100	'Ezylink' Dry Lining Box Connector
GA100BK	'Ezylink' Dry Lining Box Connector

Suitable for use with WA087P, WA088P, WA106P & WA107P.

essentials™

For the complete range of back boxes see Essentials™ page M4.

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards. Fire: BS EN 1364-1 Acoustic: BS EN ISO 140-2. Complies with Building Regulations Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.

Complete

Screwless Wiring Accessories





The Screwless Range

The smooth, clean lines of Definity™ Complete products provide the ultimate finishing touch to a feature packed range of decorative domestic electrical accessories.

Definity™ Complete has evolved from our well established Define® flat plate accessory range and features all of the same attributes including modular switching but without the visible fixing screws.

Definity™ Complete provides the installer with a complete all in one solution.

Offering push-fit cover plates in 9 assorted finishes and comprehensive range of electrical inserts, with both compatible cover plate and insert supplied within a single package.

The flexibility of Definity™ Complete is further enhanced with the range of cover plates and electrical inserts also being available independently of each other.



20 Year Warranty

All Definity™ Complete products are covered by our 20 year warranty against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.



Each Definity™ Complete product comprises of an insert and a decorative cover plate.

Inserts are available in Black, White and Grey, (Grey is available in BS & SS Ingot only).

Plates are available in 9 different finishes.

PW & BK finishes are produced from polycarbonate. All other finishes are coated stainless steel

Definity™ Complete unique product codes

When ordering from this catalogue, please specify a unique product code as shown.

For example, if you wish to order a 2 gang 13A switched socket in stainless steel with a black switch and insert, the unique product code for the insert will be SFSS536BK.

For additional cover plate and insert options see the Definity™ Components section from page E33

Prefix	Product Finish	Product Number	Insert Colour
SF	SS	536	BK

Contents

Switches	E4
Power Sockets	E11
Fused Connection Units	E18
50A Switches	E22
Control Switches	E24
Shaver Socket & Blank Plates	E27
TV, Telephone & Satellite	E28

Switches

Please see page J18 for a selection of MiniGrid® modules.



The range of Definity™ Complete modular switches comprises of both moulded black or white switches as well as metallic finished 'Ingot' switches, which features a simple single screw fixing to the insert.

The modular MiniGrid® format is fitted as standard and is enhanced by the availability of multi-functional and fully interchangeable modules which also includes 'Ingot' finishes through the range.

The unfurnished single and double plates offer the installer unprecedented flexibility in creating customised wiring solutions.



The rotary dimmer switches are interchangeable with the use of our M10 nut runner tool. There are a host of alternative dimmer modules and plates available, see page J37.



Traditional toggle switches are also listed with an intermediate single switch plate option. The 2 way toggle switch is interchangeable with the intermediate toggle module.



Simple, single screw or snap fit installation of the modules on the mounting plates has encouraged contractors to devise and install customised switching solutions on-site.

Definity™ Complete plates are coated stainless steel, available in the following finishes: Matt Bronze (**BZ**), Antique Brass (**AB**), Brushed Stainless (**BS**), Polished Chrome (**CH**), Stainless Steel (**SS**), Metal White (**MW**) & Metal Black (**MB**).

White (**PW**) & Matt Black (**BK**) are also available, produced from polycarbonate.


UNDERSTANDING THE CODE:

SF - Prefix **SS** - Plate Finish **425** - Product No **BK** - Insert Colour

Plate Finishes: **PW** White, **MW** Metal White, **BK** Matt Black, **MB** Metal Black.
Ingot Plate Finishes: **BZ** Matt Bronze, **AB** Antique Brass, **BS** Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel.

Insert Colour: **PW** White, **BK** Black, **GY** Grey.
*non ingot only available with matching insert colour (ie MB finish has BK insert).
 Grey inserts not available with Chrome finishes.*

Matt Black and Metal Black plates are supplied with black inserts and moulded black (BK) switches.

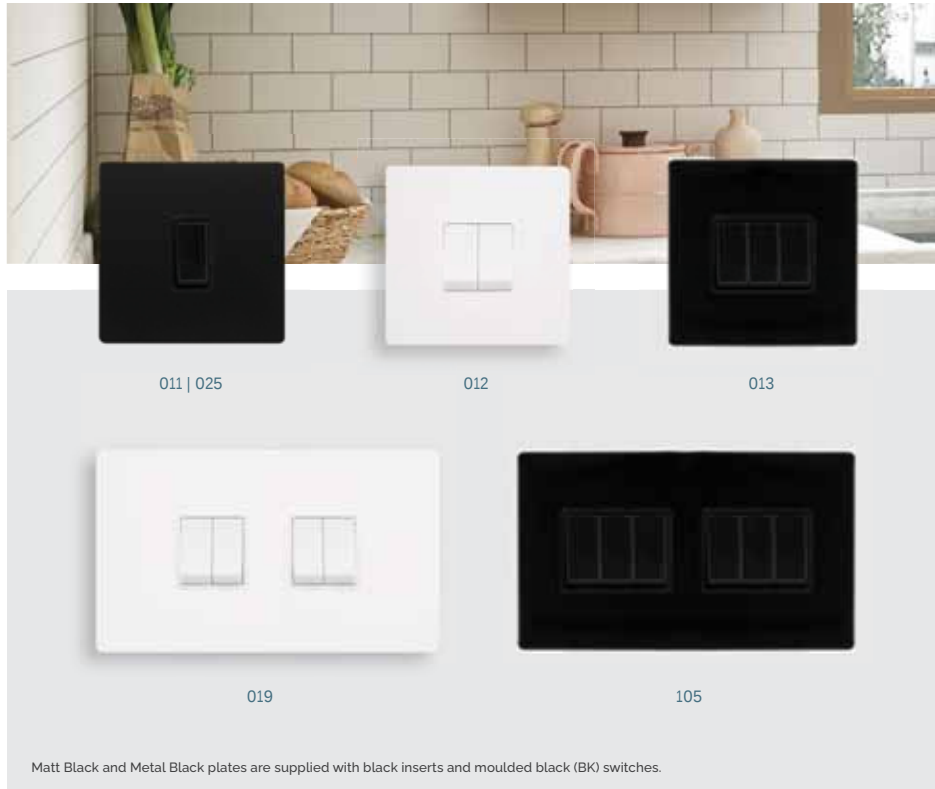

Matt Black and Metal Black plates are supplied with black inserts and moulded black (BK) switches.

Plates Switches - MiniGrid®

025 10AX 1 Gang Intermediate Plate Switch

2 Way Switches

011 10AX 1 Gang 2 Way Plate Switch
012 10AX 2 Gang 2 Way Plate Switch
013 10AX 3 Gang 2 Way Plate Switch
019 10AX 4 Gang 2 Way Plate Switch
105 10AX 6 Gang 2 Way Plate Switch

Standards: BS EN 60669-1


Back Box Depth (mm): 25 Cable Size (mm²): 4 x 1.5 or 2 x 2.5

Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 2 Gang: 146 (W) x 86 (H) x 4 (D)

Understanding the code: SF - Prefix BK - Plate Finish 025 - Product No BK - Insert Colour

Plate Finishes: PW White, MW Metal White, BK Matt Black, MB Metal Black.

Insert Colour: PW White, BK Black. *non ingot only available with matching insert colour (ie MB finish has BK insert).*

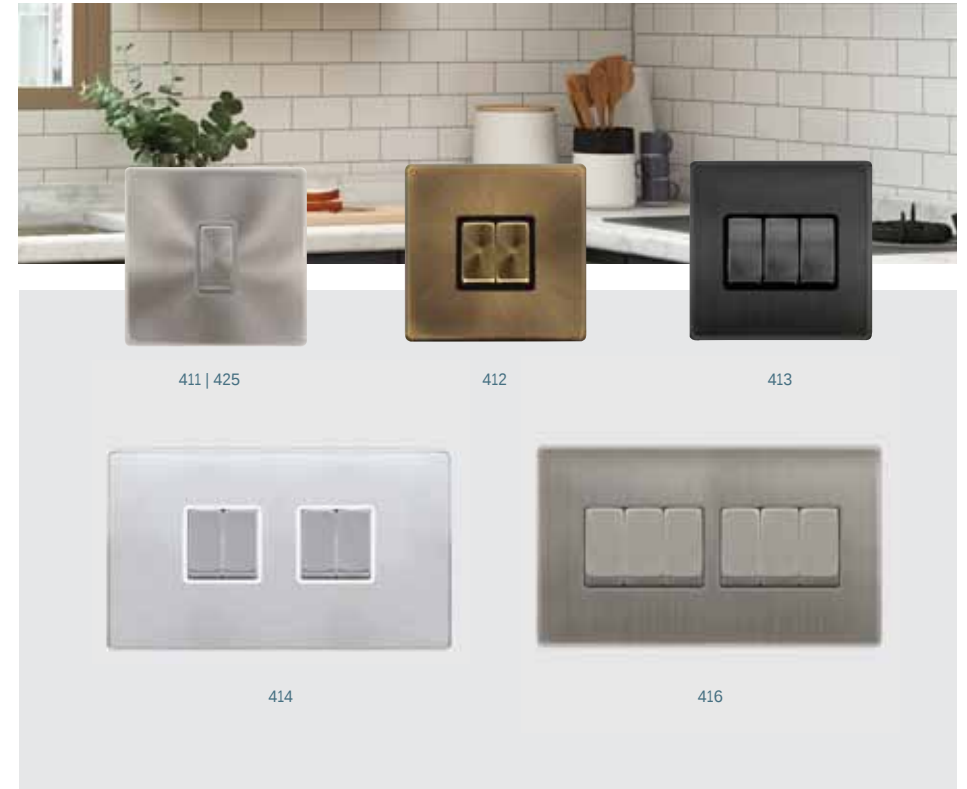

Ingot Plates Switches - MiniGrid®

425 10AX Ingot 1 Gang Intermediate Plate Switch

2 Way Switches

411 10AX Ingot 1 Gang 2 Way Plate Switch
412 10AX Ingot 2 Gang 2 Way Plate Switch
413 10AX Ingot 3 Gang 2 Way Plate Switch
414 10AX Ingot 4 Gang 2 Way Plate Switch
416 10AX Ingot 6 Gang 2 Way Plate Switch

Standards: BS EN 60669-1 Back Box Depth (mm): 25 Cable Size (mm²): 4 x 1.5 or 2 x 2.5

Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 2 Gang: 146 (W) x 86 (H) x 4 (D)

Understanding the code: SF - Prefix SS - Plate Finish 425 - Product No BK - Insert Colour

Ingot Plate Finishes: AB Antique Brass, BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, BZ Matt Bronze.

Insert Colour: White (PW) Black (BK) Grey (GY) *Grey is available in BS & SS Ingot only.*

Dimmer Modules

- MD9001** 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
MD9010 1-10V Analogue Dimmer Module (25 x 62mm)
MD9014 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

Dimmer M10 Nut Runner


SP900 Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate



SP900

MD9014

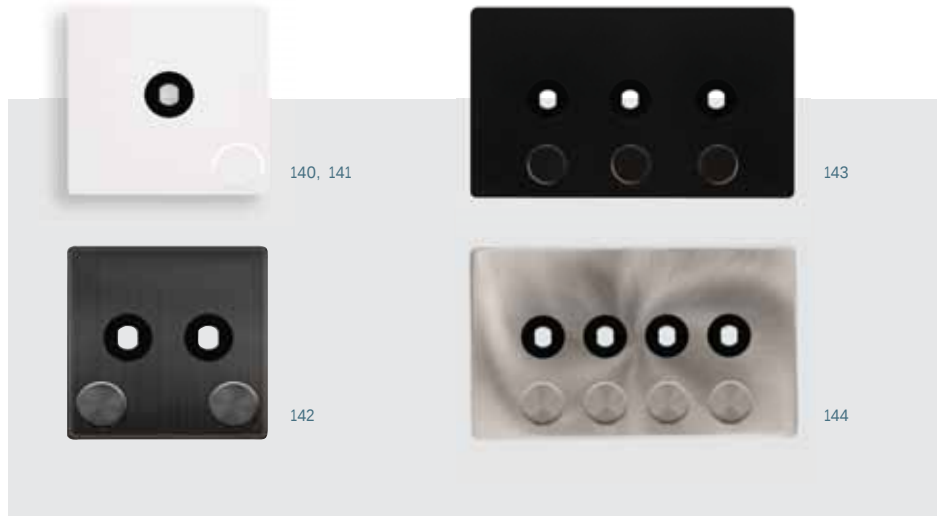

140, 141

143

142

144

Rotary Dimmer Mounting Plates

- 141PL** 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
142PL 2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
143PL 2 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
144PL 2 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures

The dimmer modules are supplied separately to the plates listed above.

Standards: BS 5733
Back Box Depth (mm): 35
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 4 (D) **2 Gang:** 146 (W) x 86 (H) x 4 (D)

Understanding the code: **SF** - Prefix **BK** - Plate Finish **141** - Product No **PL** - Plate
 Plate Finishes: **AB** Antique Brass, **PW** White, **MW** Metal White, **BK** Matt Black, **MB** Metal Black, **BS** Brushed Stainless, **CH** Polished Chrome,
SS Stainless Steel, **BZ** Matt Bronze.

Dimmer Modules

- MD9001** 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
MD9010 1-10V Analogue Dimmer Module (25 x 62mm)
MD9014 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

Dimmer M10 Nut Runner


SP900 Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate



SP900

MD9014

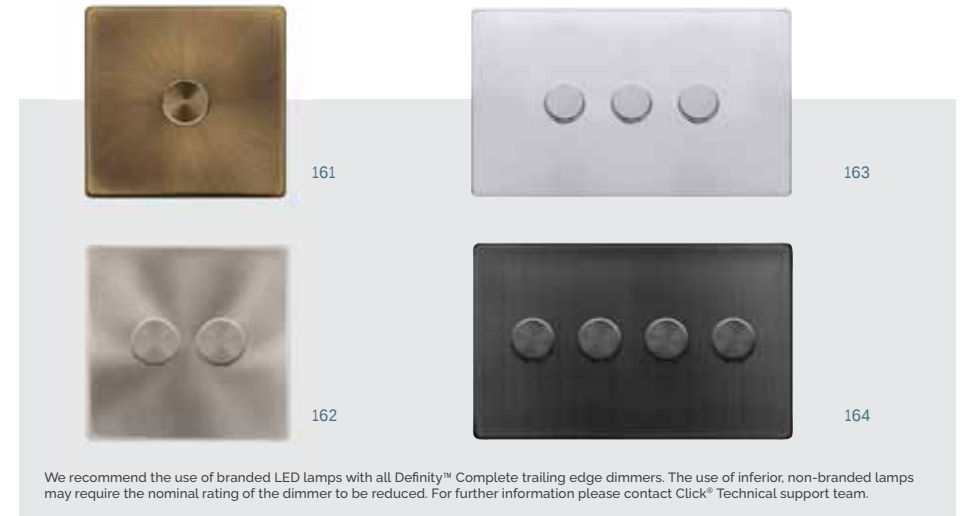

161

163

162

164

Dimmer Switches (Trailing Edge)

- 161** 1 Gang 2 Way 100W Dimmer Switch
162 2 Gang 2 Way 100W Dimmer Switch
163 3 Gang 2 Way 100W Dimmer Switch
164 4 Gang 2 Way 100W Dimmer Switch

Standards: BS EN 60669-1 BS EN 60669-2-1 BS EN 55015 BS EN 61000-3-2
Back Box Depth (mm): 35 **Cable Size (mm²):** 2 x 1.5 **Type:** Trailing Edge
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 4 (D) **2 Gang:** 146 (W) x 86 (H) x 4 (D)

Understanding the code: **SF** - Prefix **BK** - Plate Finish **161** - Product No
 Plate Finishes: **AB** Antique Brass, **PW** White, **MW** Metal White, **BK** Matt Black, **MB** Metal Black, **BS** Brushed Stainless, **CH** Polished Chrome,
SS Stainless Steel, **BZ** Matt Bronze.

10AX Intermediate Toggle Switch Modules

MD9125 Intermediate Toggle Switch Module

Plate Finish	Module Finish
Chrome	CH - Chrome
Stainless Steel & Brushed Stainless	PN - Pearl Nickel
Antique Brass	AB - Antique Brass
Matt Bronze	BZ - Matt Bronze



2 Way Toggle Switches

- 421 10AX 1 Gang 2 Way Toggle Switch
- 422 10AX 2 Gang 2 Way Toggle Switch
- 423 10AX 3 Gang 2 Way Toggle Switch
- 424 10AX 4 Gang 2 Way Toggle Switch

Standards: BS EN 60669-1 **Back Box Depth (mm):** 35 **Cable Size (mm²):** 4 x 1.5 or 2 x 2.5
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 4 (D) **2 Gang:** 146 (W) x 86 (H) x 4 (D)

Understanding the code:

SF - Prefix SS - Plate Finish 421 - Product No

Plate Finishes: AB Antique Brass, BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, BZ Matt Bronze.

Power Socket Outlets, Fused Connection Units & Control Switches

With the ever increasing demand for power supplies in all areas of the home comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted.

The Definity™ Complete plate finishes offer a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...

definity™
COMPLETE





Socket Outlets

- 630** 13A 1 Gang Unswitched Socket Outlet (Twin Earth)
035 13A 1 Gang DP Switched Socket Outlet
036 13A 2 Gang DP Switched Socket (Twin Earth)




Ingot Socket Outlets

- 535** 13A Ingot 1 Gang DP Switched Socket Outlet
536 13A Ingot 2 Gang DP Switched Socket (Twin Earth)

Standards: BS 1363-2
Back Box Depth (mm): 35 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 4 (D) **2 Gang:** 146 (W) x 86 (H) x 4 (D)


Understanding the code: **SF** - Prefix **SS** - Plate Finish **535** - Product No **BK** - Insert Colour
 Plate Finishes: **PW** White, **MW** Metal White, **BK** Matt Black, **MB** Metal Black.
 Ingot Plate Finishes: **AB** Antique Brass, **BS** Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **BZ** Matt Bronze.
 Insert Colour: White (**PW**) Black (**BK**) Grey (**GY**)
 non ingot only available with matching insert colour (ie MB finish has BK insert). Grey inserts not available with Chrome finishes

Sockets on this page are only available for sale in the Republic of Ireland.

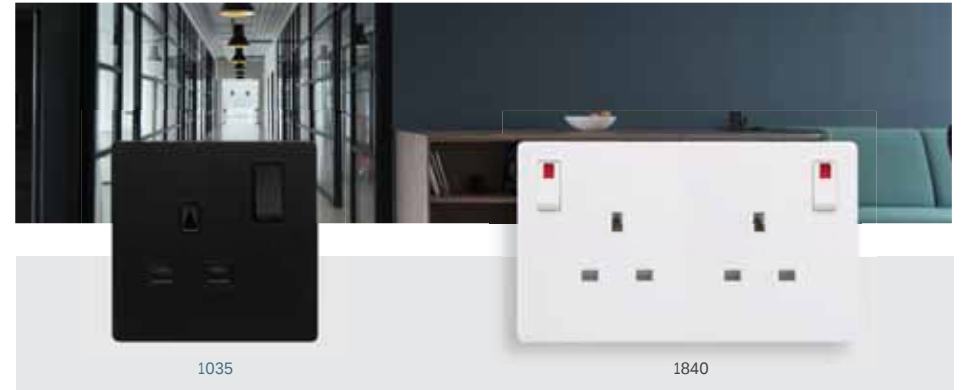

Safety Shutter Socket Outlets

- 1035** 13A 1 Gang DP Switched Socket Outlet
1036 13A 2 Gang DP Switched Socket Outlet (Twin Earth)
1836 13A 2 Gang DP Switched Socket Outlet With Outboard Rockers (Twin Earth)
1840 13A 2 Gang DP Switched Socket Outlet With Outboard Rockers & Neons (Twin Earth)

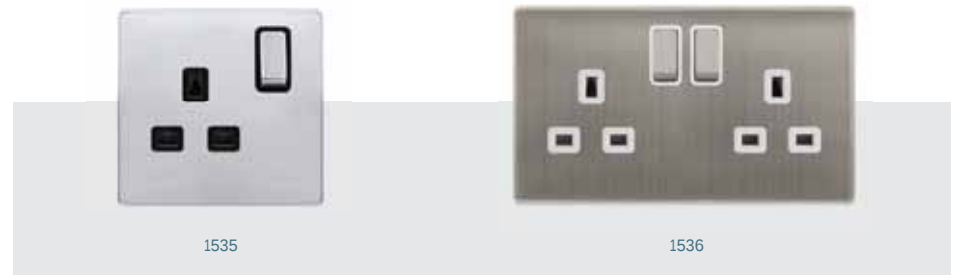

Ingot Safety Shutter Socket Outlets

- 1535** 13A Ingot 1 Gang DP Switched Socket Outlet
1536 13A Ingot 2 Gang DP Switched Socket Outlet (Twin Earth)
1836 13A Ingot 2 Gang DP Switched Socket Outlet With Outboard Rockers (Twin Earth)

Standards: BS 1363-2
Back Box Depth (mm): 35 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 4 (D) **2 Gang:** 146 (W) x 86 (H) x 4 (D)

Understanding the code: **SF** - Prefix **SS** - Plate Finish **1535** - Product No **BK** - Insert Colour
 Plate Finishes: **PW** White, **MW** Metal White, **BK** Matt Black, **MB** Metal Black.
 Ingot Plate Finishes: **AB** Antique Brass, **BS** Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **BZ** Matt Bronze.
 Insert Colour: White (**PW**) Black (**BK**) non ingot only available with matching insert colour (ie MB finish has BK insert).



Socket Outlets with USB Outlets

- 771U** 13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
780 13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)



Ingot Socket Outlets with USB Outlets

- 571U** 13A Ingot 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
580 13A Ingot 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

Standards: BS 1363-2: 2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1
Back Box Depth (mm): 35 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 2 Gang: 146 (W) x 86 (H) x 4 (D)

Understanding the code: SF - Prefix SS - Plate Finish 571 - Product No BK - Insert Colour
 Plate Finishes: PW White, MW Metal White, BK Matt Black, MB Metal Black.
 Ingot Plate Finishes: AB Antique Brass, BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, BZ Matt Bronze.
 Insert Colour: White (PW) Black (BK) Grey (GY)
 non ingot only available with matching insert colour (ie MB finish has BK insert). Grey inserts not available with Chrome finishes



Socket Outlets with USB Outlets

- 785** 13A 1 Gang Switched Socket Outlet With Type A & C USB (4A) Outlets (Twin Earth)
786 13A 2 Gang Switched Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)

Ingot Switched Socket Outlet With Twin USB Outlets

- 585** 13A Ingot 1 Gang Switched Socket Outlet With Type A & C USB (4A) Outlets (Twin Earth)
586 13A Ingot 2 Gang Switched Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)



Lockable Switches

- 660** 20A Double Pole Key Lockable Switch

Lockable Socket Outlets

- 655** 13A 1 Gang DP Key Lockable Socket With Neon

Standards: BS 1363-2: 2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1 **655:** BS EN 60669-1 BS 1363-2 **660:** BS EN 60669-1
Back Box Depth (mm): 35 **655 660:** 47 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 2 Gang: 146 (W) x 86 (H) x 4 (D)

Understanding the code: SF - Prefix SS - Plate Finish 586 - Product No BK - Insert Colour
 Plate Finishes: PW White, MW Metal White, BK Matt Black, MB Metal Black.
 Ingot Plate Finishes: AB Antique Brass, BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, BZ Matt Bronze.
 Insert Colour: White (PW) Black (BK) Grey (GY)
 non ingot only available with matching insert colour (ie MB finish has BK insert). Grey inserts not available with Chrome finishes



Fused Connection Units With Optional Flex Outlet

- 050 13A Fused Connection Unit
- 051 13A Switched Fused Connection Unit
- 052 13A Switched Fused Connection Unit With Neon
- 053 13A Fused Connection Unit With Neon



Fused Connection Units Without Flex Outlet

- 650 13A Fused Connection Unit
- 651 13A Switched Fused Connection Unit
- 652 13A Switched Fused Connection Unit With Neon
- 653 13A Fused Connection Unit With Neon

Standards: BS 1363-4 BS 1362
Back Box Depth (mm): 35 Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 86 (W) x 86 (H) x 4 (D)

Understanding the code: SF - Prefix BK - Plate Finish 053 - Product No BK - Insert Colour
Plate Finishes: PW White, MW Metal White, BK Matt Black, MB Metal Black.
Insert Colour: PW White, BK Black. *non ingot only available with matching insert colour (ie MB finish has BK insert).*



Ingot Fused Connection Units With Optional Flex Outlet

- 550 13A Ingot Fused Connection Unit
- 551 13A Ingot Switched Fused Connection Unit
- 552 13A Ingot Switched Fused Connection Unit With Neon
- 553 13A Ingot Fused Connection Unit With Neon



Ingot Fused Connection Units Without Flex Outlet

- 750 13A Ingot Fused Connection Unit
- 751 13A Ingot Switched Fused Connection Unit
- 752 13A Ingot Switched Fused Connection Unit With Neon
- 753 13A Ingot Fused Connection Unit With Neon


Standards: BS 1363-4 BS 1362
Back Box Depth (mm): 35 Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 86 (W) x 86 (H) x 4 (D)

Understanding the code: SF - Prefix SS - Plate Finish 750 - Product No BK - Insert Colour
Plate Finishes: PW White, MW Metal White, BK Matt Black, MB Metal Black.
Ingot Plate Finishes: AB Antique Brass, BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, BZ Matt Bronze.
Insert Colour: White (PW) Black (BK) Grey (GY) *Grey inserts not available with Chrome finishes*



Lockable Fused Connection Units With Optional Flex Outlet

- 250 13A Lockable Fused Connection Unit
253 13A Lockable Fused Connection Unit With Neon

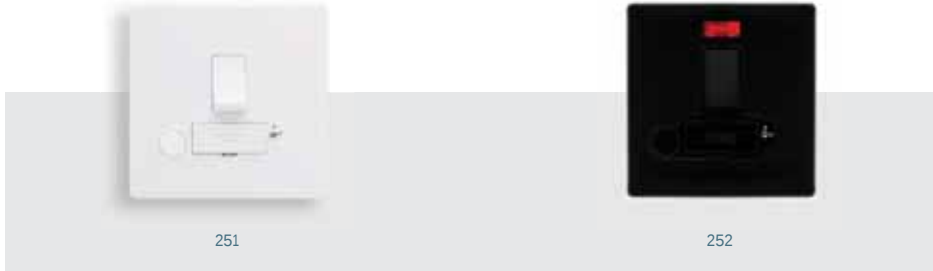

Lockable Fused Connection Units With Optional Flex Outlet

- 251 13A Lockable Switched Fused Connection Unit
252 13A Lockable Switched Fused Connection Unit With Neon

Standards: BS 1363-4 BS 1362
Back Box Depth (mm): 35 Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 86 (W) x 86 (H) x 4 (D)

Understanding the code: SF - Prefix BK - Plate Finish 250 - Product No BK - Insert Colour
Plate Finishes: PW White, MW Metal White, BK Matt Black, MB Metal Black.
Insert Colour: PW White, BK Black. *non ingot only available with matching insert colour (ie MB finish has BK insert).*




Lockable Fused Connection Units Without Flex Outlet

- 850 13A Lockable Fused Connection Unit
851 13A Lockable Switched Fused Connection Unit
852 13A Lockable Switched Fused Connection Unit With Neon
853 13A Lockable Fused Connection Unit With Neon

Standards: BS 1363-4
Back Box Depth (mm): 35 Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 86 (W) x 86 (H) x 4 (D)

Understanding the code: SF - Prefix BK - Plate Finish 850 - Product No BK - Insert Colour
Plate Finishes: PW White, MW Metal White, BK Matt Black, MB Metal Black.
Insert Colour: PW White, BK Black. *non ingot only available with matching insert colour (ie MB finish has BK insert).*

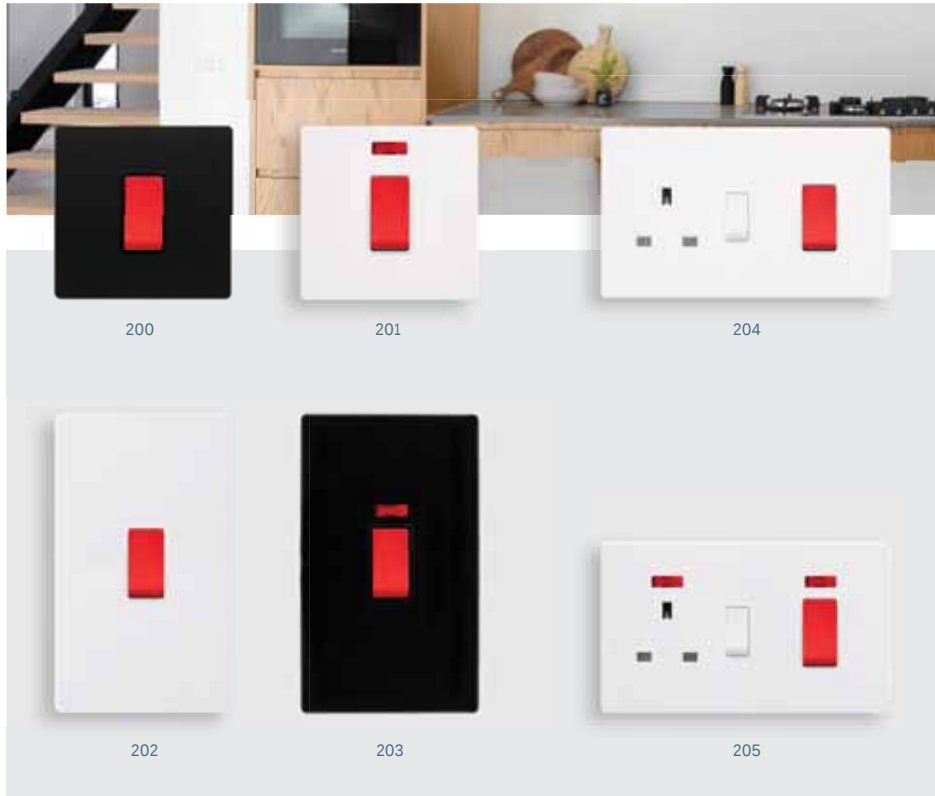


50A DP Switches & Socket Outlets

200	50A 1 Gang DP Switch
201	50A 1 Gang DP Switch With Neon
202	50A 2 Gang DP Switch
203	50A 2 Gang DP Switch With Neon
204	50A DP Switch With 13A DP Switched Socket
205	50A DP Switch With 13A DP Switched Socket & Neons

Standards: 200 201 202 203: BS EN 60669-1 204 205: BS 4177
Back Box Depth (mm): 47 **Cable Size (mm²):** 1 x 16
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 2 Gang: 146 (W) x 86 (H) x 4 (D)

Understanding the code: SF - Prefix BK - Plate Finish 200 - Product No BK - Insert Colour
 Plate Finishes: PW White, MW Metal White, BK Matt Black, MB Metal Black.
 Insert Colour: PW White, BK Black. *non ingot only available with matching insert colour (ie MB finish has BK insert).*

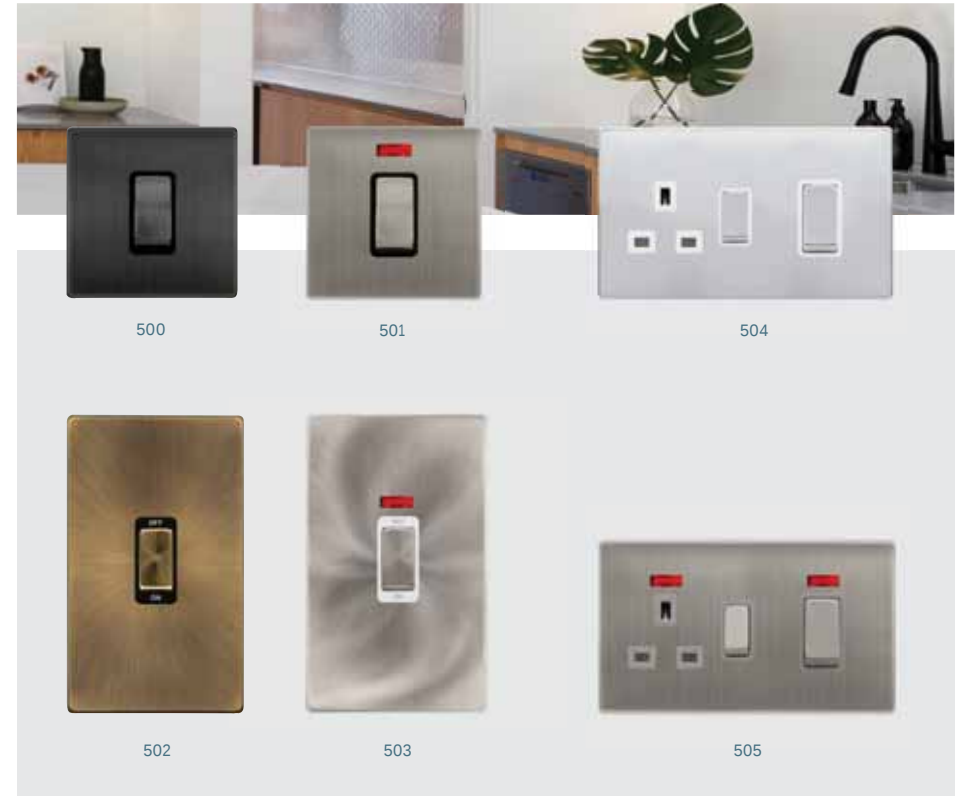

Ingot 50A Switches & Socket Outlets

500	50A Ingot 1 Gang DP Switch
501	50A Ingot 1 Gang DP Switch With Neon
502	50A Ingot 2 Gang DP Switch
503	50A Ingot 2 Gang DP Switch With Neon
504	50A Ingot DP Switch With 13A DP Switched Socket
505	50A Ingot DP Switch With 13A DP Switched Socket & Neons

Standards: 500 501 502 503: BS EN 60669-1 504 505: BS 4177
Back Box Depth (mm): 47 **Cable Size (mm²):** 1 x 16
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 2 Gang: 146 (W) x 86 (H) x 4 (D)

Understanding the code: SF - Prefix SS - Plate Finish 500 - Product No BK - Insert Colour
 Ingot Plate Finishes: AB Antique Brass, BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, BZ Matt Bronze.
 Insert Colour: White (PW) Black (BK) Grey (GY) *Grey inserts not available with Chrome finishes.*



Fan Isolation Switch

020 10A 3 Pole Fan Isolation Switch

20A DP Switches With Optional Flex Outlet


022 20A DP Switch
023 20A DP Switch With Neon

20A DP Switches Without Flex Outlet

622 20A DP Switch
623 20A DP Switch With Neon

Standards: BS EN 60669-1 **020**: BS EN 60669-2-4
Back Box Depth (mm): 35 **020**: 25 Cable Size (mm²): 3 x 2.5 **020**: 4 x 1.5 or 2 x 2.5
Dimensions (mm): 82.5 (W) x 82.5 (H) x 2.5 (D)

Understanding the code: **SF** - Prefix **BK** - Plate Finish **622** - Product No **BK** - Insert Colour
Plate Finishes: **PW** White, **MW** Metal White, **BK** Matt Black, **MB** Metal Black.
Insert Colour: **PW** White, **BK** Black. *non ingot only available with matching insert colour (ie MB finish has BK insert).*

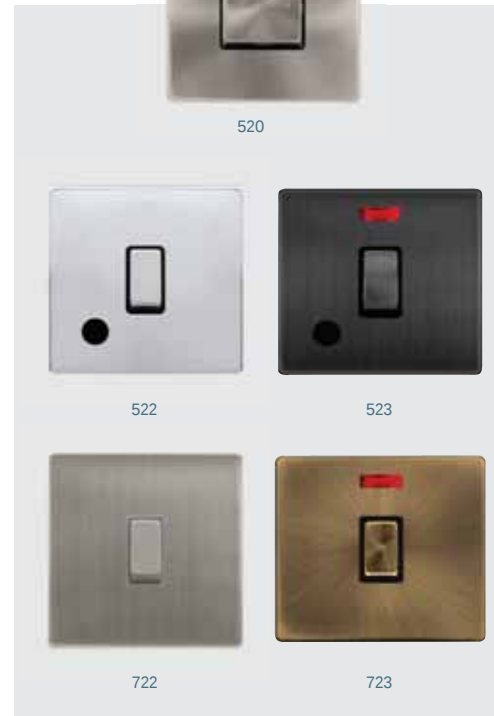

Ingot Fan Isolation Switch

520 10A Ingot 3 Pole Fan Isolation Plate Switch

Ingot 20A DP Switches With Optional Flex Outlet

522 20A Ingot DP Switch
523 20A Ingot DP Switch With Neon

Ingot 20A DP Switches Without Flex Outlet

722 20A Ingot DP Switch
723 20A Ingot DP Switch With Neon

Standards: BS EN 60669-1 **520**: BS EN 60669-2-4
Back Box Depth (mm): 35 Cable Size (mm²): **20A DP**: 3 x 2.5 **520**: 4 x 1.5 or 2 x 2.5
Dimensions (mm): 82.5 (W) x 82.5 (H) x 2.5 (D)

Understanding the code: **SF** - Prefix **SS** - Plate Finish **722** - Product No **BK** - Insert Colour
Ingot Plate Finishes: **AB** Antique Brass, **BS** Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **BZ** Matt Bronze.
Insert Colour: White (**PW**) Black (**BK**) Grey (**GY**) *Grey inserts not available with Chrome finishes.*



039

Round Pin Socket Outlets

039 2A Round Pin Socket



034

038

Round Pin Socket Outlets

034 15A Round Pin Switched Socket
038 5A Round Pin Socket

Standards: BS 546

Back Box Depth (mm): 35 **Cable Size (mm²):** 034: 3 x 2.5 038: 4 x 1.5 or 3 x 2.5 039: 3 x 1.5

Dimensions (mm): 86 (W) x 86 (H) x 4 (D)

Understanding the code: SF - Prefix SS - Plate Finish 038 - Product No BK - Insert Colour
Plate Finishes: PW White, MW Metal White, BK Matt Black, MB Metal Black.

Ingot Plate Finishes: AB Antique Brass, BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, BZ Matt Bronze.
Insert Colour: White (PW) Black (BK) Grey (GY)

non ingot only available with matching insert colour (ie MB finish has BK insert). Grey inserts not available with Chrome finishes



100

20A DP Sink / Bath Switch

024 20A Sink/Bath Switch With Neon

Dual Voltage Shaver Socket Outlets

100 115/230V Dual Voltage Shaver Socket

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010 making it safe for use in bathrooms. This outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.



060

061

Blank Plates

060 1 Gang Blank Plate
061 2 Gang Blank Plate

Standards: 024: BS EN 60669-1100: BS EN IEC 61558-1 BS EN 61558-2-5 060 061: BS 5733

Back Box Depth (mm): 060: 16 061: 25 024: 35 100: 47 **Cable Size (mm²):** 024: 3 x 2.5 100: 2 x 1.5 or 1 x 2.5

Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 2 Gang: 146 (W) x 86 (H) x 4 (D)

Understanding the code: SF - Prefix SS - Plate Finish 100 - Product No BK - Insert Colour
Plate Finishes: PW White, MW Metal White, BK Matt Black, MB Metal Black.

Ingot Plate Finishes: AB Antique Brass, BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, BZ Matt Bronze.
Insert Colour: White (PW) Black (BK) Grey (GY)

non ingot only available with matching insert colour (ie MB finish has BK insert). Grey inserts not available with Chrome finishes.

TV, Telephone & Satellite

The following pages contain details of Definity™ Complete products designed to deal with handling data and media transfer through telephone, television or radio.

Satellite & Coaxial Outlets

definity™
COMPLETE

E29



Non-isolated Coaxial Outlets

- 065 Single Coaxial Outlet
- 066 Twin Coaxial Outlet

Isolated Coaxial Outlets

- 158 Single Isolated Coaxial Outlet
- 159 Twin Isolated Coaxial Outlet

Coaxial & Satellite Socket

- 156 Non-isolated Single Satellite Outlet
- 157 Isolated Satellite & Isolated Coaxial Outlet
- 170 Non-isolated Satellite & Non-isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Back Box Depth (mm): 25
Dimensions (mm): 86 (W) x 86 (H) x 4 (D)

Understanding the code: SF - Prefix SS - Plate Finish 170 - Product No BK - Insert Colour
Plate Finishes: PW White, MW Metal White, BK Matt Black, MB Metal Black.
Ingot Plate Finishes: AB Antique Brass, BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, BZ Matt Bronze.
Insert Colour: White (PW) Black (BK) non ingot only available with matching insert colour (ie MB finish has BK insert).

CLICK®

sales@scolmore.com | Call: 01827 63454 | scolmore.com



RJ11 Telephone Outlet

115 Single RJ11 (Irish/US) Outlet

Telephone Outlets

- 120** Single Telephone Outlet - Master
- 125** Single Telephone Outlet - Secondary
- 121** Twin Telephone Outlet - Master
- 126** Twin Telephone Outlet - Secondary

Termination Type: IDC **115:** Screw **Back Box Depth (mm):** 25 **115:** 47
Dimensions (mm): 86 (W) x 86 (H) x 4 (D)

Understanding the code: **SF** - Prefix **SS** - Plate Finish **115** - Product No **BK** - Insert Colour
Plate Finishes: **PW** White, **MW** Metal White, **BK** Matt Black, **MB** Metal Black.
Ingot Plate Finishes: **AB** Antique Brass, **BS** Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **BZ** Matt Bronze.
Insert Colour: White (**PW**) Black (**BK**) *non ingot only available with matching insert colour (ie MB finish has BK insert).*



E32

Components

Screwless Wiring Accessories




definity™

The Screwless Range

Definity™ incorporates screwless, push-fit face plates in 10 assorted finishes. The face plates are supplied independently of the electrical inserts which means that the initial installation of the product can be carried out and any subsequent maintenance or decoration completed before the final selection and fixing of the face plate.

For the installer, this means a greater degree of flexibility in the timing of the installation of the insert and the distributor need not carry excessive levels of costly finished product. Furthermore should subsequent interior design change or re-decoration dictate that a different colour accessory be required to complement the new scheme, replacement plates can be sourced individually and fitted without the need for any special tools or electrical skills. Definity™ gives the flexibility to mix and match insert colours to cover plate finishes giving infinite combinations.

With a wide selection of standard and 'ingot' metallic inserts, simply select your design and colour of insert. After selecting your choice of insert choose your preferred cover plate and simply clip it onto the insert to finalise the installation.

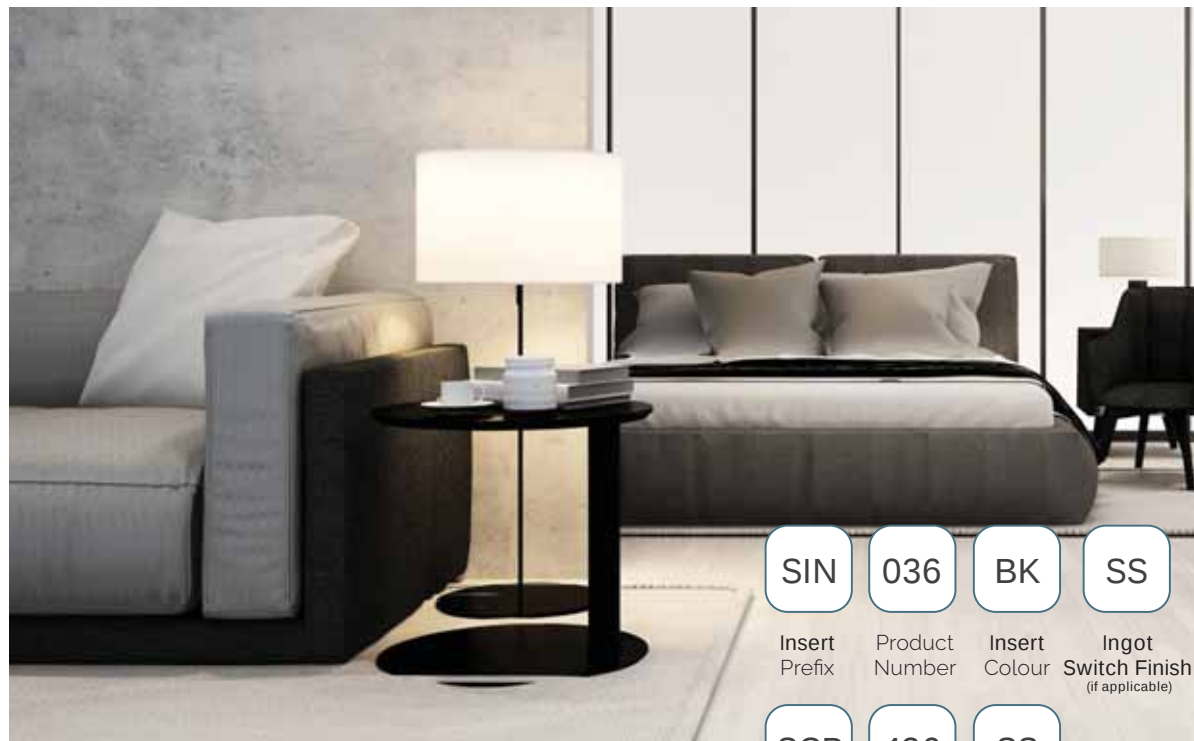

Matt Bronze
(BZ)

Antique Brass
(AB)

Red
(RD)

White
(PW)



Stainless Steel
(SS)

*Brushed Stainless
(BS)

Polished Chrome
(CH)

Metal White
(MW)



Matt Black
(BK)

Metal Black
(MB)

Each Definity™ product comprises of an insert and a decorative cover plate.

Inserts are available in Black, White and Grey.
(Grey is available in BS & SS Ingot only).

Plates are available in 10 different finishes.
(BZ, AB & RD are only available with a selection of plates).

PW, BK & RD finishes are produced from polycarbonate.
All other finishes are coated stainless steel.

Simply select the required insert and choice of cover plate finish.

Contents

Switches	E36
Socket Outlets	E50
Fused Connection Units	E56
45A/50A Switches	E60
Blank Plates & RJ11 Outlet	E64
Telephone Outlets	E65
Coaxial & Satellite Outlets	E66
New Media™ Plates	E68
Back Boxes & Fixing Screws	E69

SIN	036	BK	SS
Insert Prefix	Product Number	Insert Colour	Ingot Switch Finish (if applicable)
SCP	436	SS	
Cover Plate Prefix	Product Number	Product Colour	

Definity™ unique product codes

When ordering either an insert or cover plate from this catalogue, please specify a unique product code as shown.

For example if you wish to order a 2 gang 13A switched socket in stainless steel with a black switch and insert, the unique product code for the insert will be SIN036BK and for the cover plate will be SCP436SS.

If a 2 gang 13A switched socket in stainless steel with a stainless steel ingot switch and black insert is preferred, the unique product code for the insert will be 536BKSS and for the cover plate will be SCP436SS.

Insert Design



10AX 1 Gang
2 Way Switch



10AX 1 Gang
Intermediate Switch



10AX 2 Gang
2 Way Switch



10AX 3 Gang
2 Way Switch

Select either a Standard or Ingot Insert

Standard Insert

SIN011BK - Black
SIN011PW - White

Ingot Switch Insert

SIN411BKBS
Black & Brushed Stainless
SIN411BKCH
Black & Chrome
SIN411BKSS
Black & Stainless Steel
SIN411PWBS
White & Brushed Stainless
SIN411PWCH
White & Chrome
SIN411PWSS
White & Stainless Steel
SIN411GYBS
Grey & Brushed Stainless
SIN411GYSS
Grey & Stainless Steel

Standard Insert

SIN025BK - Black
SIN025PW - White

Ingot Switch Insert

SIN425BKBS
Black & Brushed Stainless
SIN425BKCH
Black & Chrome
SIN425BKSS
Black & Stainless Steel
SIN425PWBS
White & Brushed Stainless
SIN425PWCH
White & Chrome
SIN425PWSS
White & Stainless Steel
SIN425GYBS
Grey & Brushed Stainless
SIN425GYSS
Grey & Stainless Steel

Standard Insert

SIN012BK - Black
SIN012PW - White

Ingot Switch Insert

SIN412BKBS
Black & Brushed Stainless
SIN412BKCH
Black & Chrome
SIN412BKSS
Black & Stainless Steel
SIN412PWBS
White & Brushed Stainless
SIN412PWCH
White & Chrome
SIN412PWSS
White & Stainless Steel
SIN412GYBS
Grey & Brushed Stainless
SIN412GYSS
Grey & Stainless Steel

Standard Insert

SIN013BK - Black
SIN013PW - White

Ingot Switch Insert

SIN413BKBS
Black & Brushed Stainless
SIN413BKCH
Black & Chrome
SIN413BKSS
Black & Stainless Steel
SIN413PWBS
White & Brushed Stainless
SIN413PWCH
White & Chrome
SIN413PWSS
White & Stainless Steel
SIN413GYBS
Grey & Brushed Stainless
SIN413GYSS
Grey & Stainless Steel

Cover Plate

Single Cover Plate Single Aperture

SCP401



Single Cover Plate Twin Aperture

SCP402



Single Cover Plate Triple Aperture

SCP403



These cover plates are available in Red (RD), Antique Brass (AB) & Matt Bronze (BZ).

Standards: BS EN 60669-1 **Back Box Depth (mm):** 25
Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 4 (D) **2 Gang:** 146 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'Ingot' Switch Finish (if applicable).

PW White, **BK** Black, **GY** Grey (Grey is available in BS & SS Ingot only)

SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour.

BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **MW** Metal White, **MB** Metal Black, **PW** White, **BK** Matt Black

Insert Design



10AX 4 Gang 2 Way Switch



10AX 6 Gang 2 Way Switch

Select either a Standard or Ingot Insert

Standard Insert

SIN019BK - Black
SIN019PW - White

Ingot Switch Insert

SIN414BKBS
Black & Brushed Stainless
SIN414BKCH
Black & Chrome
SIN414BKSS
Black & Stainless Steel
SIN414PWBS
White & Brushed Stainless
SIN414PWCH
White & Chrome
SIN414PWSS
White & Stainless Steel
SIN414GYBS
Grey & Brushed Stainless
SIN414GYSS
Grey & Stainless Steel

Standard Insert

SIN105BK - Black
SIN105PW - White

Ingot Switch Insert

SIN416BKBS
Black & Brushed Stainless
SIN416BKCH
Black & Chrome
SIN416BKSS
Black & Stainless Steel
SIN416PWBS
White & Brushed Stainless
SIN416PWCH
White & Chrome
SIN416PWSS
White & Stainless Steel
SIN416GYBS
Grey & Brushed Stainless
SIN416GYSS
Grey & Stainless Steel

Cover Plate

Double Cover Plate (2 x 2) Aperture

SCP404



Double Cover Plate (2 x 3) Aperture

SCP406



These cover plates are available Antique Brass (AB) & Matt Bronze (BZ).

Standards: BS EN 60669-1 **Back Box Depth (mm):** 25
Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 4 (D) **2 Gang:** 146 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'Ingot' Switch Finish (if applicable).

PW White, **BK** Black, **GY** Grey (Grey is available in BS & SS Ingot only)

SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour.

BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **MW** Metal White, **MB** Metal Black, **PW** White, **BK** Matt Black

Insert Design

The Definity™ GridPro® frontplates on this page require the designated 1 and 2 module insert shown below.



1 & 2 GridPro® Module Insert
SIN20200

Select a Cover Plate Finish

Definity™ 1 Gang GridPro® Frontplates SCP20401



SCP20401BZ - Matt Bronze
SCP20401BK - Matt Black
SCP20401AB - Antique Brass
SCP20401BS - Brushed Stainless
SCP20401CH - Polished Chrome
SCP20401PW - White
SCP20401SS - Stainless Steel
SCP20401MW - Metal White
SCP20401MB - Metal Black

Definity™ 2 Gang GridPro® Frontplates SCP20402



SCP20402BZ - Matt Bronze
SCP20402BK - Matt Black
SCP20402AB - Antique Brass
SCP20402BS - Brushed Stainless
SCP20402CH - Polished Chrome
SCP20402PW - White
SCP20402SS - Stainless Steel
SCP20402MW - Metal White
SCP20402MB - Metal Black

Select GridPro® Modules



Modules available with black or white inserts, AB, BN, MB & BZ are black inserts only. BS, SC & SS have grey insert option, RD is white insert only.

GM2002 - 20AX 2 Way Switch
GM2018 - 20AX Double Pole Switch
available with laser etched legends, see page I34
GM2028 - 20AX Intermediate Switch
GM2046ET - 20AX Double Pole Keyswitch 'Emergency Test'
GM2047 - 13A Fused
GM9010 - 1-10V Analogue Dimmer

Modules are available in the following finishes, simply add the finish suffix to the end of the code.

Insert: BK Black **PW** White **GY** Grey
Finishes: BK Black **PW** White **RD** Red **AB** Antique Brass
BN Black Nickel **PB** Polished Brass **BS** Brushed Stainless
CH Polished Chrome **PN** Pearl Nickel **SB** Satin Brass
SC Satin Chrome **SS** Stainless Steel **MB** Matt Black
BZ Matt Bronze



We have selected our most popular modules here, for our extensive range please see the GridPro® section on page I24.

Standards: Plates: BS 5733 **Modules:** BS EN 60669-1
Back Box Depth (mm): Dependent on Modules Fitted **Modules:** 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 86 (W) x 86 (H) x 4 (D) **20200:** 82 (W) x 60 (H) x 8 (D) **Modules:** 24.5 (W) x 50 (H) x 22.5 (D)

Insert Design

The Definity™ GridPro® frontplates on this page require the designated 3 and 4 module insert shown below.



Definity™ Insert
SIN20400

Select a Cover Plate Finish

Definity™ 3 Gang GridPro® Frontplates SCP20403



SCP20403BZ - Matt Bronze
SCP20403BK - Matt Black
SCP20403AB - Antique Brass
SCP20403BS - Brushed Stainless
SCP20403CH - Polished Chrome
SCP20403PW - White
SCP20403SS - Stainless Steel
SCP20403MW - Metal White
SCP20403MB - Metal Black

Definity™ 4 Gang GridPro® Frontplates SCP20404



SCP20404BZ - Matt Bronze
SCP20404BK - Matt Black
SCP20404AB - Antique Brass
SCP20404BS - Brushed Stainless
SCP20404CH - Polished Chrome
SCP20404PW - White
SCP20404SS - Stainless Steel
SCP20404MW - Metal White
SCP20404MB - Metal Black

Select GridPro® Modules



Modules available with black or white inserts, AB, BN, MB & BZ are black inserts only. BS, SC & SS have grey insert option, RD is white insert only.

GM2002 - 20AX 2 Way Switch
GM2018 - 20AX Double Pole Switch
available with laser etched legends, see page I34
GM2028 - 20AX Intermediate Switch
GM2046ET - 20AX Double Pole Keyswitch 'Emergency Test'
GM2047 - 13A Fused
GM9010 - 1-10V Analogue Dimmer

Modules are available in the following finishes, simply add the finish suffix to the end of the code.

Insert: BK Black **PW** White **GY** Grey
Finishes: BK Black **PW** White **RD** Red **AB** Antique Brass
BN Black Nickel **PB** Polished Brass **BS** Brushed Stainless
CH Polished Chrome **PN** Pearl Nickel **SB** Satin Brass
SC Satin Chrome **SS** Stainless Steel **MB** Matt Black
BZ Matt Bronze



We have selected our most popular modules here, for our extensive range please see the GridPro® section on page I24.

Standards: BS 5733 **Modules:** BS EN 60669-1
Back Box Depth (mm): Dependent on Modules Fitted **Modules:** 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 146 (W) x 86 (H) x 4 (D) **20400:** 142 (W) x 60 (H) x 8 (D) **Modules:** 24.5 (W) x 50 (H) x 22.5 (D)

Insert Design

The Definity™ GridPro® frontplates on this page require the designated Hotel Accessory module insert shown below.



Definity™ Hotel Accessory GridPro® Insert
SIN31102BK

Select a Cover Plate Finish

Definity™ Hotel Accessory GridPro® Frontplates
SCP31102



SCP31102BZ - Matt Bronze
SCP31102BK - Matt Black
SCP31102AB - Antique Brass
SCP31102BS - Brushed Stainless
SCP31102CH - Polished Chrome
SCP31102PW - White
SCP31102SS - Stainless Steel
SCP31102MW - Metal White
SCP31102MB - Metal Black

Select GridPro® Modules



Modules available with black or white inserts, AB, BN, MB & BZ are black inserts only. BS, SC & SS have grey insert option, RD is white insert only.

GM2002 - 20AX 2 Way Switch
GM2018 - 20AX Double Pole Switch
available with laser etched legends, see page I34
GM2028 - 20AX Intermediate Switch
GM2046ET - 20AX Double Pole Keyswitch "Emergency Test"
GM2047 - 13A Fused
GM9010 - 1-10V Analogue Dimmer

Modules are available in the following finishes, simply add the finish suffix to the end of the code.

Insert: BK Black **PW** White **GY** Grey
Finishes: BK Black **PW** White **RD** Red **AB** Antique Brass
BN Black Nickel **PB** Polished Brass **BS** Brushed Stainless
CH Polished Chrome **PN** Pearl Nickel **SB** Satin Brass
SC Satin Chrome **SS** Stainless Steel **MB** Matt Black
BZ Matt Bronze



We have selected our most popular modules here, for our extensive range please see the GridPro® section on page I24.

Standards: Plates: BS 5733 **Modules:** BS EN 60669-1
Back Box Depth (mm): Dependent on Modules Fitted **Modules:** 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 146 (W) x 86 (H) x 4 (D) **31102:** 142.5 (W) x 82.5 (H) x 2.5 (D) **Modules:** 24.5 (W) x 50 (H) x 22.5 (D)

Insert Design

The Definity™ GridPro® frontplates on this page require the designated 3 and 4 module insert shown here.



Definity™ Insert
SIN20400


Select a Cover Plate Finish

Definity™ 6 Gang GridPro® Frontplates
SCP20506



SCP20506BZ - Matt Bronze
SCP20506BK - Matt Black
SCP20506AB - Antique Brass
SCP20506BS - Brushed Stainless
SCP20506CH - Polished Chrome
SCP20506PW - White
SCP20506SS - Stainless Steel
SCP20506MW - Metal White
SCP20506MB - Metal Black

Definity™ 8 Gang GridPro® Frontplates
SCP20508



SCP20508BZ - Matt Bronze
SCP20508BK - Matt Black
SCP20508AB - Antique Brass
SCP20508BS - Brushed Stainless
SCP20508CH - Polished Chrome
SCP20508PW - White
SCP20508SS - Stainless Steel
SCP20508MW - Metal White
SCP20508MB - Metal Black

Select GridPro® Modules



Modules available with black or white inserts, AB, BN, MB & BZ are black inserts only. BS, SC & SS have grey insert option, RD is white insert only.

GM2002 - 20AX 2 Way Switch
GM2018 - 20AX Double Pole Switch
available with laser etched legends, see page I34
GM2028 - 20AX Intermediate Switch
GM2046ET - 20AX Double Pole Keyswitch "Emergency Test"
GM2047 - 13A Fused
GM9010 - 1-10V Analogue Dimmer

Modules are available in the following finishes, simply add the finish suffix to the end of the code.

Insert: BK Black **PW** White **GY** Grey
Finishes: BK Black **PW** White **RD** Red **AB** Antique Brass
BN Black Nickel **PB** Polished Brass **BS** Brushed Stainless
CH Polished Chrome **PN** Pearl Nickel **SB** Satin Brass
SC Satin Chrome **SS** Stainless Steel **MB** Matt Black
BZ Matt Bronze



We have selected our most popular modules here, for our extensive range please see the GridPro® section on page I24.

Standards: BS 5733 **Modules:** BS EN 60669-1
Back Box Depth (mm): Dependent on Modules Fitted **Modules:** 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 146 (W) x 86 (H) x 4 (D) **20400:** 142 (W) x 60 (H) x 8 (D) **Modules:** 24.5 (W) x 50 (H) x 22.5 (D)

Insert Design



Single Plate
Single Aperture 'Unfurnished'



Single Plate
Twin Aperture 'Unfurnished'



Single Plate Triple
Aperture 'Unfurnished'

Select an Insert

Insert Frame Only

SIN401BK - Black
SIN401PW - White
SIN401GY - Grey
SIN401RD - Red

Insert Frame Only

SIN402BK - Black
SIN402PW - White
SIN402GY - Grey
SIN402RD - Red

Insert Frame Only

SIN403BK - Black
SIN403PW - White
SIN403GY - Grey
SIN403RD - Red

Select a Cover Plate

Understanding the code:

SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.

BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

Single Cover Plate Single Aperture

SCP401



Single Cover Plate Twin Aperture

SCP402



Single Cover Plate Triple Aperture

SCP403



These cover plates are available in Red (RD), Antique Brass (AB) & Matt Bronze (BZ).

Select MiniGrid® Modules



Modules are all easily and quickly exchanged or mounted onto unfurnished plates by means of a simple single screw fixing.

MD047 - FCU

MD002 - 2 Way Switch

MD028 - Intermediate Switch

MD029 - DP Keyswitch 'Emergency Test'

MD018 - DP Switch

available with laser etched legends, see page J22



Modules are available in the following finishes, simply add the finish suffix to the end of the code.

BK Black PW Polar White WH White
AB Antique Brass BN Black Nickel PB Polished Brass
BS Brushed Stainless CH Polished Chrome
PN Pearl Nickel SB Satin Brass SC Satin Chrome
SS Stainless Steel MB Matt Black BZ Matt Bronze

We have selected our most popular modules here, for our extensive range please see the MiniGrid® section on page J18.

Standards: BS EN 60669-1 BS 5733

Back Box Depth (mm): Dependent On Modules Fitted Cable Size (mm²): 4 x 1.5 or 2 x 2.5

Dimensions (mm): 86 (W) x 86 (H) x 4 (D)

Insert Design



Double Plate (2 x 2)
Aperture 'Unfurnished'



Double Plate
(2 x 3) Aperture 'Unfurnished'



Double Plate
(6 In-line) Aperture 'Unfurnished'

Select an Insert

Insert Frame Only

SIN404BK - Black
SIN404PW - White
SIN404GY - Grey

Insert Frame Only

SIN406BK - Black
SIN406PW - White
SIN406GY - Grey

Insert Frame Only

SIN426BK - Black
SIN426PW - White
SIN426GY - Grey

Select a Cover Plate

Understanding the code:

SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.

BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

Double Cover Plate (2 x 2) Aperture

SCP404



Double Cover Plate (2 x 3) Aperture

SCP406



Double Cover Plate (6 In-line) Aperture

SCP426



These cover plates are available Antique Brass (AB) & Matt Bronze (BZ).

Select MiniGrid® Modules



The MiniGrid® modules are all easily and quickly exchanged or mounted onto unfurnished plates by means of a simple single screw fixing.

MD047 - FCU

MD002 - 2 Way Switch

MD028 - Intermediate Switch

MD029 - DP Keyswitch 'Emergency Test'

MD018 - DP Switch

available with laser etched legends, see page J22



Modules are available in the following finishes, simply add the finish suffix to the end of the code.

BK Black PW Polar White WH White
AB Antique Brass BN Black Nickel PB Polished Brass
BS Brushed Stainless CH Polished Chrome
PN Pearl Nickel SB Satin Brass SC Satin Chrome
SS Stainless Steel MB Matt Black BZ Matt Bronze

We have selected our most popular modules here, for our extensive range please see the MiniGrid® section on page J18.

Standards: BS EN 60669-1 BS 5733

Back Box Depth (mm): Dependent On Modules Fitted Cable Size (mm²): 4 x 1.5 or 2 x 2.5

Dimensions (mm): 146 (W) x 86 (H) x 4 (D)

Insert Design



10AX 1 Gang 2 Way
Toggle Switch



10AX 1 Gang Intermediate
Toggle Switch

Select a Standard Insert

Toggle Switch

SIN421CH - Chrome
SIN421PN - Pearl Nickel

Toggle Switch

SIN420CH - Chrome
SIN420PN - Pearl Nickel

Recommended Cover Plate
and Toggle Switch

Chrome Toggle:
Chrome
Pearl Nickel Toggle:
Brushed Stainless & Stainless Steel

Recommended Cover Plate
and Toggle Switch

Chrome Toggle:
Chrome
Pearl Nickel Toggle:
Brushed Stainless & Stainless Steel

Cover Plate

1 Gang Toggle Switch
Cover Plate

SCP221



Standards: BS EN 60669-1
Back Box Depth (mm): 35 Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 2 Gang: 146 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).

BK Black.

SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.

BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

Insert Design



10AX 2 Gang 2 Way
Toggle Switch



10AX 3 Gang 2 Way
Toggle Switch



10AX 4 Gang 2 Way
Toggle Switch

Select a Standard Insert

Toggle Switch

SIN422CH - Chrome
SIN422PN - Pearl Nickel

Toggle Switch

SIN423CH - Chrome
SIN423PN - Pearl Nickel

Toggle Switch

SIN424CH - Chrome
SIN424PN - Pearl Nickel

Recommended Cover Plate
and Toggle Switch

Chrome Toggle:
Chrome
Pearl Nickel Toggle:
Brushed Stainless & Stainless Steel

Recommended Cover Plate
and Toggle Switch

Chrome Toggle:
Chrome
Pearl Nickel Toggle:
Brushed Stainless & Stainless Steel

Recommended Cover Plate
and Toggle Switch

Chrome Toggle:
Chrome
Pearl Nickel Toggle:
Brushed Stainless & Stainless Steel

Cover Plate

2 Gang Toggle
Switch Cover Plate

SCP222




3 Gang Toggle Switch
Cover Plate

SCP223



4 Gang Toggle Switch
Cover Plate

SCP224



Standards: BS EN 60669-1
Back Box Depth (mm): 35 Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 2 Gang: 146 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).

BK Black.

SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.

BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

Insert Design



20A Double Pole Switch with Flex Outlet



20A Double Pole Switch with Flex Outlet & Neon



20A Double Pole Switch



20A Double Pole Switch with Neon

Select either a Standard or Ingot Insert

Standard Insert

SIN022BK - Black
SIN022PW - White

Ingot Switch Insert

SIN522BKBS
Black & Brushed Stainless
SIN522BKCH
Black & Chrome
SIN522BKSS
Black & Stainless Steel
SIN522PWBS
White & Brushed Stainless
SIN522PWCH
White & Chrome
SIN522PWSS
White & Stainless Steel
SIN522GYBS
Grey & Brushed Stainless
SIN522GYSS
Grey & Stainless Steel

Standard Insert

SIN023BK - Black
SIN023PW - White

Ingot Switch Insert

SIN523BKBS
Black & Brushed Stainless
SIN523BKCH
Black & Chrome
SIN523BKSS
Black & Stainless Steel
SIN523PWBS
White & Brushed Stainless
SIN523PWCH
White & Chrome
SIN523PWSS
White & Stainless Steel
SIN523GYBS
Grey & Brushed Stainless
SIN523GYSS
Grey & Stainless Steel

Standard Insert

SIN622BK - Black
SIN622PW - White

Ingot Switch Insert

SIN722BKBS
Black & Brushed Stainless
SIN722BKCH
Black & Chrome
SIN722BKSS
Black & Stainless Steel
SIN722PWBS
White & Brushed Stainless
SIN722PWCH
White & Chrome
SIN722PWSS
White & Stainless Steel
SIN722GYBS
Grey & Brushed Stainless
SIN722GYSS
Grey & Stainless Steel

Standard Insert

SIN623BK - Black
SIN623PW - White

Ingot Switch Insert

SIN723BKBS
Black & Brushed Stainless
SIN723BKCH
Black & Chrome
SIN723BKSS
Black & Stainless Steel
SIN723PWBS
White & Brushed Stainless
SIN723PWCH
White & Chrome
SIN723PWSS
White & Stainless Steel
SIN723GYBS
Grey & Brushed Stainless
SIN723GYSS
Grey & Stainless Steel

Cover Plate

20A DP Switch with Flex Outlet Cover Plate

SCP322



20A DP Switch with Flex Outlet & Neon Cover Plate

SCP323



20A DP Switch Cover Plate

SCP422



20A DP Switch with Neon Cover Plate

SCP423



Standards: BS EN 60669-1
Back Box Depth (mm): 35 Cable Size (mm²): 3 x 2.5
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).

PW White, BK Black, GY Grey (Grey is Ingot only)

SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.

BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

Insert Design



20A Sink & Bath Switch with Neon



10A 3 Pole Fan Isolation Switch



Lockable Switch

Select either a Standard or Ingot Insert

Standard Insert

SIN024BK - Black
SIN024PW - White

Standard Insert

SIN020BK - Black
SIN020PW - White

Standard Insert

SIN660BK - Black

Ingot Switch Insert

SIN520BKBS
Black & Brushed Stainless
SIN520BKCH
Black & Chrome
SIN520BKSS
Black & Stainless Steel
SIN520PWBS
White & Brushed Stainless
SIN520PWCH
White & Chrome
SIN520PWSS
White & Stainless Steel
SIN520GYBS
Grey & Brushed Stainless
SIN520GYSS
Grey & Stainless Steel

Cover Plate

20A Sink & Bath Switch with Neon Cover Plate

SCP324



10A Fan Isolation Switch Cover Plate

SCP402



Lockable Switch Cover Plate

SCP660



Available in Red (RD), Antique Brass (AB) & Matt Bronze (BZ)

Standards: BS EN 60669-2-4 020 660: BS EN 60669-1
Back Box Depth (mm): 520: 25 024: 35 660: 47
Cable Size (mm²): 020 520: 4 x 1.5 or 2 x 2.5 024: 3 x 2.5 660: 3 x 2.5 or 2 x 4
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).

PW White, BK Black, GY Grey (Grey is Ingot only)

SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.

BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

Insert Design		
 Lockable Socket	 UK 13A 1 Gang Socket Outlet	 115 / 230V Dual Voltage Shaver Socket Outlet
Select a Standard Insert		
Standard Insert SIN655BK - Black SIN655PW - White SIN655GY - Grey	Standard Insert SIN630BK - Black SIN630PW - White	Standard Insert SIN100BK - Black SIN100PW - White SIN100GY - Grey Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010 making it safe for use in bathrooms. Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.
Cover Plate		
Lockable Socket Cover Plate SCP655 	UK 13A 1 Gang Socket Outlet Cover Plate SCP430 	Dual Voltage Shaver Socket Outlet Cover Plate SCP100 
Standards: 100: BS EN IEC 61558-1 BS EN 61558-2-5 630: BS 1363-2 655: BS EN 60669-1 BS 1363-2 Cable Size (mm²): 3 x 2.5 or 2 x 4 100: 2 x 1.5 or 1 x 2.5 Back Box Depth (mm): 47 630: 35 Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 2 Gang: 146 (W) x 86 (H) x 4 (D) 100: 86 (W) x 146 (H) x 4 (D)		

Understanding the code:
 SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).
 PW White, BK Black, GY Grey (Grey is Ingot only)
 SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.
 BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

Insert Design		
 2A 1 Gang Round Pin Socket Outlet	 5A 1 Gang Round Pin Socket Outlet	 15A 1 Gang Round Pin Switched Socket Outlet
Select a Standard Insert		
Standard Insert SIN039BK - Black SIN039PW - White	Standard Insert SIN038BK - Black SIN038PW - White SIN038GY - Grey	Standard Insert SIN034BK - Black SIN034PW - White
Cover Plate		
2A 1 Gang Round Pin Socket Outlet Cover Plate SCP239 	5A 1 Gang Round Pin Socket Outlet Cover Plate SCP238 	15A 1 Gang Round Pin Switched Socket Outlet Cover Plate SCP234 
Standards: BS 546 Back Box Depth (mm): 35 Cable Size (mm²): 034: 3 x 2.5 038: 4 x 1.5 or 3 x 2.5 039: 3 x 1.5 660: 3 x 2.5 or 2 x 4 Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D)		

Understanding the code:
 SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).
 PW White, BK Black, GY Grey (Grey is Ingot only)
 SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.
 BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

Insert Design



UK 13A 1 Gang Double Pole Switched Socket Outlet



UK 13A 2 Gang Double Pole Switched Socket Outlet

Select either a Standard or Ingot Insert

Standard Insert
SIN035BK - Black
SIN035PW - White

Ingot Switch Insert
SIN535BKBS
Black & Brushed Stainless
SIN535BKCH
Black & Chrome
SIN535BKSS
Black & Stainless Steel
SIN535GYBS
White & Brushed Stainless
SIN535PWCH
White & Chrome
SIN535PWSS
White & Stainless Steel
SIN535PWBS
Grey & Brushed Stainless
SIN535GYSS
Grey & Stainless Steel

Standard Insert
SIN036BK - Black
SIN036PW - White
SIN036RD - Red

Ingot Switch Insert
SIN536BKBS
Black & Brushed Stainless
SIN536BKCH
Black & Chrome
SIN536BKSS
Black & Stainless Steel
SIN536PWBS
White & Brushed Stainless
SIN536PWCH
White & Chrome
SIN536PWSS
White & Stainless Steel
SIN536GYBS
Grey & Brushed Stainless
SIN536GYSS
Grey & Stainless Steel

Cover Plate

UK 13A 1 Gang Switched Socket Outlet Cover Plate

SCP435



UK 13A 2 Gang Switched Socket Outlet Cover Plate

SCP436



Available in Red (RD)

Standards: BS 1363-2
Back Box Depth (mm): 35 Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 2 Gang: 146 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).
PW White, BK Black, GY Grey (Grey is Ingot only)
SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.
BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

Insert Design



13A 1 Gang DP Switched Safety Shutter Socket Outlet With Neon Insert



13A 1 Gang DP Switched Safety Shutter Socket Outlet Insert



13A 2 Gang DP Switched Safety Shutter Socket Outlet (Twin Earth) Insert

Select either a Standard or Ingot Insert

Standard Insert
SIN1835BK - Black
SIN1835PW - White

Only available for sale in the Republic of Ireland.

Standard Insert
SIN1035BK - Black
SIN1035PW - White

Ingot Switch Insert
SIN1535BKBS
Black & Brushed Stainless
SIN1535BKCH
Black & Chrome
SIN1535BKSS
Black & Stainless Steel
SIN1535PWBS
White & Brushed Stainless
SIN1535PWCH
White & Chrome
SIN1535PWSS
White & Stainless Steel

Only available for sale in the Republic of Ireland.

Standard Insert
SIN1036BK - Black
SIN1036PW - White

Ingot Switch Insert
SIN1536BKBS
Black & Brushed Stainless
SIN1536BKCH
Black & Chrome
SIN1536BKSS
Black & Stainless Steel
SIN1536PWBS
White & Brushed Stainless
SIN1536PWCH
White & Chrome
SIN1536PWSS
White & Stainless Steel

Only available for sale in the Republic of Ireland.

Cover Plate

13A 1 Gang Switched Safety Shutter Socket Cover Plate

SCP835



13A 2 Gang Switched Socket Cover Plate

SCP436



Available in Red (RD)

Standards: BS 1363-2
Back Box Depth (mm): 35 Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 2 Gang: 146 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).
PW White, BK Black.
SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.
BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

Insert Design



13A 2 Gang DP Switched Safety Shutter Socket Outlet With Outboard Rockers (Twin Earth) Insert



13A 2 Gang DP Switched Safety Shutter Socket Outlet With Outboard Rockers & Neons (Twin Earth) Insert



UK 13A 1 Gang Switched Socket Outlet with 2.1A USB Outlet

Select either a Standard or Ingot Insert

Standard Insert
SIN1836BK - Black
SIN1836PW - White

Ingot Switch Insert
SIN1836BKBS
Black & Brushed Stainless
SIN1836BKCH
Black & Chrome
SIN1836BKSS
Black & Stainless Steel
SIN1836PWBS
White & Brushed Stainless
SIN1836PWCH
White & Chrome
SIN1836PWSS
White & Stainless Steel

Only available for sale in the Republic of Ireland.

Standard Insert
SIN1840BK - Black
SIN1840PW - White

Only available for sale in the Republic of Ireland.

Standard Insert
SIN771UBK - Black
SIN771UPW - White

Ingot Switch Insert
SIN571UBKBS
Black & Brushed Stainless
SIN571UBKCH
Black & Chrome
SIN571UBKSS
Black & Stainless Steel
SIN571UPWBS
White & Brushed Stainless
SIN571UPWCH
White & Chrome
SIN571UPWSS
White & Stainless Steel
SIN571UGYBS
Grey & Brushed Stainless
SIN571UGYSS
Grey & Stainless Steel

Cover Plate

13A 2 Gang Outboard Switched Safety Shutter Socket Cover Plate



SCP840

UK 13A 1 Gang Switched Socket Outlet with 2.1A USB Outlet Cover Plate



SCP471U

Standards: BS 1363-2:2016 +A1:2018 BS EN IEC 62368-1 BS EN 62680-1-1
Back Box Depth (mm): 35 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 2 Gang: 146 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'Ingot' Switch Finish (if applicable).
PW White, **BK** Black, **GY** Grey (Grey is Ingot only)

SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour.

BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **MW** Metal White, **MB** Metal Black, **PW** White, **BK** Matt Black

Safety Shutter Sockets (Excluding USB options) are only available for sale in the Republic of Ireland.

Insert Design



UK 13A 2 Gang Switched Socket Outlet with Twin 2.1A USB Outlets



13A 2 Gang Switched Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth) Insert

Select either a Standard or Ingot Insert

Standard Insert
SIN780BK - Black
SIN780PW - White

Ingot Switch Insert
SIN580BKBS
Black & Brushed Stainless
SIN580BKCH
Black & Chrome
SIN580BKSS
Black & Stainless Steel
SIN580PWBS
White & Brushed Stainless
SIN580PWCH
White & Chrome
SIN580PWSS
White & Stainless Steel
SIN580GYBS
Grey & Brushed Stainless
SIN580GYSS
Grey & Stainless Steel

Standard Insert
SIN786BK - Black
SIN786PW - White

Ingot Switch Insert
SIN586BKBS
Black & Brushed Stainless
SIN586BKCH
Black & Chrome
SIN586BKSS
Black & Stainless Steel
SIN586PWBS
White & Brushed Stainless
SIN586PWCH
White & Chrome
SIN586PWSS
White & Stainless Steel
SIN586GYBS
Grey & Brushed Stainless
SIN586GYSS
Grey & Stainless Steel

Cover Plate

UK 13A 2 Gang Switched Socket Outlet with Twin 2.1A USB Outlet Cover Plate



SCP480

UK 13A 2 Gang Switched Safety Shutter Socket Outlet With Type A & C USB (4.2A) Cover Plate



SCP486

Standards: BS 1363-2:2016 +A1:2018 BS EN IEC 62368-1 BS EN 62680-1-1
Back Box Depth (mm): 35 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 2 Gang: 146 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'Ingot' Switch Finish (if applicable).

PW White, **BK** Black, **GY** Grey (Grey is Ingot only)

SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour.

BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **MW** Metal White, **MB** Metal Black, **PW** White, **BK** Matt Black

Insert Design



13A Fused Connection Unit with Flex Outlet



13A Fused Connection Unit Double Pole Switched with Flex Outlet



13A Fused Connection Unit Double Pole Switched with Flex Outlet & Neon



13A Fused Connection Unit with Flex Outlet & Neon

Select either a Standard or Ingot Insert

Standard Insert

SIN050BK - Black
SIN050PW - White

Ingot Switch Insert

SIN550BKBS
Black & Brushed Stainless
SIN550BKCH
Black & Chrome
SIN550BKSS
Black & Stainless Steel
SIN550PWBS
White & Brushed Stainless
SIN550PWCH
White & Chrome
SIN550PWSS
White & Stainless Steel
SIN550GYBS
Grey & Brushed Stainless
SIN550GYSS
Grey & Stainless Steel

Standard Insert

SIN051BK - Black
SIN051PW - White

Ingot Switch Insert

SIN551BKBS
Black & Brushed Stainless
SIN551BKCH
Black & Chrome
SIN551BKSS
Black & Stainless Steel
SIN551PWBS
White & Brushed Stainless
SIN551PWCH
White & Chrome
SIN551PWSS
White & Stainless Steel
SIN551GYBS
Grey & Brushed Stainless
SIN551GYSS
Grey & Stainless Steel

Standard Insert

SIN052BK - Black
SIN052PW - White

Ingot Switch Insert

SIN552BKBS
Black & Brushed Stainless
SIN552BKCH
Black & Chrome
SIN552BKSS
Black & Stainless Steel
SIN552PWBS
White & Brushed Stainless
SIN552PWCH
White & Chrome
SIN552PWSS
White & Stainless Steel
SIN552GYBS
Grey & Brushed Stainless
SIN552GYSS
Grey & Stainless Steel

Standard Insert

SIN053BK - Black
SIN053PW - White

Ingot Switch Insert

SIN553BKBS
Black & Brushed Stainless
SIN553BKCH
Black & Chrome
SIN553BKSS
Black & Stainless Steel
SIN553PWBS
White & Brushed Stainless
SIN553PWCH
White & Chrome
SIN553PWSS
White & Stainless Steel
SIN553GYBS
Grey & Brushed Stainless
SIN553GYSS
Grey & Stainless Steel

Cover Plate

13A FCU with Flex Outlet Cover Plate

SCP150



13A FCU Switched with Flex Outlet Cover Plate

SCP151



13A FCU Switched with Flex Outlet & Neon Cover Plate

SCP152



13A FCU with Flex Outlet & Neon Cover Plate

SCP153



Standards: BS 1363-4 BS 1362

Back Box Depth (mm): 35 Cable Size (mm²): 3 x 2.5 or 2 x 4

Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).

PW White, BK Black, GY Grey (Grey is Ingot only)

SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.

BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

Insert Design



13A Fused Connection Unit



13A Fused Connection Unit, Double Pole Switched



13A Fused Connection Unit, Double Pole Switched with Neon



13A Fused Connection Unit with Neon

Select either a Standard or Ingot Insert

Standard Insert

SIN650BK - Black
SIN650PW - White

Ingot Switch Insert

SIN750BKBS
Black & Brushed Stainless
SIN750BKCH
Black & Chrome
SIN750BKSS
Black & Stainless Steel
SIN750PWBS
White & Brushed Stainless
SIN750PWCH
White & Chrome
SIN750PWSS
White & Stainless Steel
SIN750GYBS
Grey & Brushed Stainless
SIN750GYSS
Grey & Stainless Steel

Standard Insert

SIN651BK - Black
SIN651PW - White

Ingot Switch Insert

SIN751BKBS
Black & Brushed Stainless
SIN751BKCH
Black & Chrome
SIN751BKSS
Black & Stainless Steel
SIN751PWBS
White & Brushed Stainless
SIN751PWCH
White & Chrome
SIN751PWSS
White & Stainless Steel
SIN751GYBS
Grey & Brushed Stainless
SIN751GYSS
Grey & Stainless Steel

Standard Insert

SIN652BK - Black
SIN652PW - White

Ingot Switch Insert

SIN752BKBS
Black & Brushed Stainless
SIN752BKCH
Black & Chrome
SIN752BKSS
Black & Stainless Steel
SIN752PWBS
White & Brushed Stainless
SIN752PWCH
White & Chrome
SIN752PWSS
White & Stainless Steel
SIN752GYBS
Grey & Brushed Stainless
SIN752GYSS
Grey & Stainless Steel

Standard Insert

SIN653BK - Black
SIN653PW - White

Ingot Switch Insert

SIN753BKBS
Black & Brushed Stainless
SIN753BKCH
Black & Chrome
SIN753BKSS
Black & Stainless Steel
SIN753PWBS
White & Brushed Stainless
SIN753PWCH
White & Chrome
SIN753PWSS
White & Stainless Steel
SIN753GYBS
Grey & Brushed Stainless
SIN753GYSS
Grey & Stainless Steel

Cover Plate

13A FCU Cover Plate

SCP250



13A FCU Switched Cover Plate

SCP251



13A FCU Switched with Neon Cover Plate

SCP252



13A FCU with Neon Cover Plate

SCP253



Standards: BS 1363-4 BS 1362

Back Box Depth (mm): 35 Cable Size (mm²): 3 x 2.5 or 2 x 4

Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).

PW White, BK Black, GY Grey (Grey is Ingot only)

SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.

BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

Insert Design



13A Fused Connection Unit with Flex Outlet



13A Fused Connection Unit, Double Pole Switched with Flex Outlet



13A Fused Connection Unit, Double Pole Switched with Flex Outlet & Neon



13A Fused Connection Unit with Flex Outlet & Neon

Select a Standard Insert

Lockable

Standard Insert
SIN250BK - Black
SIN250PW - White

Lockable

Standard Insert
SIN251BK - Black
SIN251PW - White

Lockable

Standard Insert
SIN252BK - Black
SIN252PW - White

Lockable

Standard Insert
SIN253BK - Black
SIN253PW - White

Cover Plate

13A FCU with Flex Outlet Cover Plate

SCP350



Available in Red (RD)

13A FCU Switched with Flex Outlet Cover Plate

SCP351



Available in Red (RD)

13A FCU Switched with Flex Outlet & Neon Cover Plate

SCP352



13A FCU with Flex Outlet & Neon Cover Plate

SCP353



Standards: BS 1363-4 BS 1362
Back Box Depth (mm): 35 Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).

PW White, BK Black.

SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.

BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

Insert Design



13A Fused Connection Unit



13A Fused Connection Unit, Double Pole Switched



13A Fused Connection Unit, Double Pole Switched with Neon



13A Fused Connection Unit with Neon

Select a Standard Insert

Lockable

Standard Insert
SIN850BK - Black
SIN850PW - White

Lockable

Standard Insert
SIN851BK - Black
SIN851PW - White

Lockable

Standard Insert
SIN852BK - Black
SIN852PW - White

Lockable

Standard Insert
SIN853BK - Black
SIN853PW - White

Cover Plate

13A FCU Cover Plate

SCP450



13A FCU Switched Cover Plate

SCP451



13A FCU Switched with Neon Cover Plate

SCP452



13A FCU with Neon Cover Plate

SCP453



Standards: BS 1363-4 BS 1362
Back Box Depth (mm): 35 Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).

PW White, BK Black.

SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.

BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

E60

Insert Design			
			
3A Fused Connection Unit with Flex Outlet	3A Fused Connection Unit Double Pole Switched with Flex Outlet	45A Double Pole Switch (Single Plate)	45A Double Pole Switch with Neon (Single Plate)
Select a Standard Insert			
Lockable	Lockable	Standard Insert	Standard Insert
Standard Insert SIN249RD - Red	Standard Insert SIN256RD - Red	Red Rocker Switch SIN200BK - Black SIN200PW - White Black or White Rocker Switch SIN500BK - Black SIN500PW - White	Red Rocker Switch SIN201BK - Black SIN201PW - White Black or White Rocker Switch SIN501BK - Black SIN501PW - White
Cover Plate			
			
13A FCU with Flex Outlet Cover Plate SCP350	13A FCU Switched with Flex Outlet Cover Plate SCP351	45A Switch Cover Plate SCP200	45A Switch with Neon Cover Plate SCP201

Available in Red (RD)

Available in Red (RD)

Standards: BS EN 60669-1 249 256: BS 1363-4 BS 1362
 Back Box Depth (mm): 47 249 256: 35 Cable Size (mm²): 1 x 16 249 256: 3 x 2.5 or 2 x 4
 Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).

PW White, BK Black.

SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.

BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

E61

Insert Design			
			
45A Double Pole Switch (Vertical Double Plate)	45A Double Pole Switch with Neon (Vertical Double Plate)	45A Double Pole Switch with 13A Double Pole Switched Socket Outlet	45A Double Pole Switch with 13A Double Pole Switched Socket Outlet & Neons
Select a Standard Insert			
Standard Insert	Standard Insert	Standard Insert	Standard Insert
Red Rocker Switch SIN202BK - Black SIN202PW - White Black or White Rocker Switch SIN502BK - Black SIN502PW - White	Red Rocker Switch SIN203BK - Black SIN203PW - White Black or White Rocker Switch SIN503BK - Black SIN503PW - White	Red Rocker Switch SIN204BK - Black SIN204PW - White Black or White Rocker Switch SIN504BK - Black SIN504PW - White	Red Rocker Switch SIN205BK - Black SIN205PW - White Black or White Rocker Switch SIN505BK - Black SIN505PW - White
Cover Plate			
			
45A Switch Vertical Double Cover Plate SCP202	45A Switch Vertical Double Cover Plate with Neon SCP203	45A Switch with Switch Socket Outlet Cover Plate SCP204	45A Switch with Switch Socket Outlet with Neons Cover Plate SCP205

Standards: BS EN 60669-1 204 205 504 505: BS 4177
 Back Box Depth (mm): 47 Cable Size (mm²): 1 x 16
 Dimensions (mm): 2 Gang: 146 (W) x 86 (H) x 4 (D) 202 203: 86 (W) x 146 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).

PW White, BK Black.

SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.

BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

Insert Design



50A 1 Gang DP
Switch Insert



50A 1 Gang DP Switch with
Neon Insert



50A 2 Gang DP
Switch Insert



50A 2 Gang DP Switch with
Neon Insert

Select an Ingot Insert

Ingot Switch Insert

SIN500BKBS
Black & Brushed Stainless
SIN500BKCH
Black & Chrome
SIN500BKSS
Black & Stainless Steel
SIN500PWBS
White & Brushed Stainless
SIN500PWCH
White & Chrome
SIN500PWSS
White & Stainless Steel
SIN500GYBS
Grey & Brushed Stainless
SIN500GYSS
Grey & Stainless Steel

Ingot Switch Insert

SIN501BKBS
Black & Brushed Stainless
SIN501BKCH
Black & Chrome
SIN501BKSS
Black & Stainless Steel
SIN501PWBS
White & Brushed Stainless
SIN501PWCH
White & Chrome
SIN501PWSS
White & Stainless Steel
SIN501GYBS
Grey & Brushed Stainless
SIN501GYSS
Grey & Stainless Steel

Ingot Switch Insert

SIN502BKBS
Black & Brushed Stainless
SIN502BKCH
Black & Chrome
SIN502BKSS
Black & Stainless Steel
SIN502PWBS
White & Brushed Stainless
SIN502PWCH
White & Chrome
SIN502PWSS
White & Stainless Steel
SIN502GYBS
Grey & Brushed Stainless
SIN502GYSS
Grey & Stainless Steel

Ingot Switch Insert

SIN503BKBS
Black & Brushed Stainless
SIN503BKCH
Black & Chrome
SIN503BKSS
Black & Stainless Steel
SIN503PWBS
White & Brushed Stainless
SIN503PWCH
White & Chrome
SIN503PWSS
White & Stainless Steel
SIN503GYBS
Grey & Brushed Stainless
SIN503GYSS
Grey & Stainless Steel

Cover Plate

50A Switch
Cover Plate
SCP200



50A Switch with Neon
Cover Plate
SCP201



50A Switch Vertical
Double Cover Plate
SCP202



50A Switch Vertical Double
Cover Plate with Neon
SCP203



Standards: BS EN 60669-1
Back Box Depth (mm): 47 Cable Size (mm²): 1 x 16
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 502 503: 86 (W) x 146 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'Ingot' Switch Finish (if applicable).

PW White, **BK** Black, **GY** Grey (Grey is Ingot only)

SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour.

BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **MW** Metal White, **MB** Metal Black, **PW** White, **BK** Matt Black

Insert Design



50A DP Switch with
13A DP Switched
Socket Insert



50A DP Switch with 13A
DP Switched Socket &
Neons Insert

Select an Ingot Insert

Ingot Switch Insert

SIN504BKBS
Black & Brushed Stainless
SIN504BKCH
Black & Chrome
SIN504BKSS
Black & Stainless Steel
SIN504PWBS
White & Brushed Stainless
SIN504PWCH
White & Chrome
SIN504PWSS
White & Stainless Steel
SIN504GYBS
Grey & Brushed Stainless
SIN504GYSS
Grey & Stainless Steel

Ingot Switch Insert

SIN505BKBS
Black & Brushed Stainless
SIN505BKCH
Black & Chrome
SIN505BKSS
Black & Stainless Steel
SIN505PWBS
White & Brushed Stainless
SIN505PWCH
White & Chrome
SIN505PWSS
White & Stainless Steel
SIN505GYBS
Grey & Brushed Stainless
SIN505GYSS
Grey & Stainless Steel

Cover Plate

50A Switch with Switch Socket
Outlet Cover Plate
SCP204



50A Switch with Switch Socket Outlet
with Neons Cover Plate
SCP205



Standards: BS 4177
Back Box Depth (mm): 47 Cable Size (mm²): 1 x 16
Dimensions (mm): 2 Gang: 146 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'Ingot' Switch Finish (if applicable).

PW White, **BK** Black, **GY** Grey (Grey is Ingot only)

SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour.

BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **MW** Metal White, **MB** Metal Black, **PW** White, **BK** Matt Black

E64

Insert Design		
		
1 Gang Blank Plate	2 Gang Blank Plate	Single RJ11 Telephone Outlet (US / Irish)
Select a Standard Insert		
Standard Insert SIN060BK - Black SIN060PW - White	Standard Insert SIN061BK - Black SIN061PW - White	Standard Insert SIN115BK - Black SIN115PW - White
Cover Plate		
1 Gang Blank Cover Plate SCP060	2 Gang Blank Cover Plate SCP061	Single RJ11 Socket Outlet Cover Plate SCP115
		

Standards: 060 061: BS 5733
Back Box Depth (mm): 060: 16 061: 25 115: 47 **Termination Type:** 115: Screw
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 2 Gang: 146 (W) x 86 (H) x 4 (D)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'Ingot' Switch Finish (if applicable).
PW White, **BK** Black.
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **MW** Metal White, **MB** Metal Black, **PW** White, **BK** Matt Black

E65

Insert Design			
			
Single Telephone Master	Single Telephone Secondary	Twin Telephone Master	Twin Telephone Secondary
Select a Standard Insert			
Standard Insert SIN120BK - Black SIN120PW - White	Standard Insert SIN125BK - Black SIN125PW - White	Standard Insert SIN121BK - Black SIN121PW - White	Standard Insert SIN126BK - Black SIN126PW - White
Cover Plate			
Single Telephone Outlet Cover Plate SCP120		Twin Telephone Outlet Cover Plate SCP121	
			

Back Box Depth (mm): 25 **Termination Type:** IDC
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'Ingot' Switch Finish (if applicable).
PW White, **BK** Black.
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **MW** Metal White, **MB** Metal Black, **PW** White, **BK** Matt Black

E66

Insert Design

Single Coaxial Socket Outlet (Unshielded)

Single 'Isolated' Coaxial Socket Outlet (Unshielded)

Single Satellite 'F' Outlet (Unshielded)

Select a Standard Insert

Standard Insert

SIN065BK - Black
SIN065PW - White

Standard Insert

SIN158BK - Black
SIN158PW - White

Standard Insert

SIN156BK - Black
SIN156PW - White

Cover Plate

Single Coaxial / Satellite Outlet Cover Plate

SCP231

Back Box Depth (mm): 25

Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D)

Understanding the code:
SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).
PW White, BK Black.
SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.
BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

E67

Insert Design

Twin Coaxial Socket Outlet (Unshielded)

Twin 'Isolated' Coaxial Socket Outlet (Unshielded)

'Isolated' Coaxial & Satellite 'F' Socket Outlet (Unshielded)

'Non-Isolated' Coaxial & Satellite 'F' Socket Outlet (Unshielded)

Select a Standard Insert

Standard Insert

SIN066BK - Black
SIN066PW - White

Standard Insert

SIN159BK - Black
SIN159PW - White

Standard Insert

SIN157BK - Black
SIN157PW - White

Standard Insert

SIN170BK - Black
SIN170PW - White

Cover Plate

Twin Coaxial / Satellite Outlet Cover Plate

SCP232

Back Box Depth (mm): 25

Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D)

Understanding the code:
SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).
PW White, BK Black.
SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.
BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black

Insert Design



Single Plate
Single New Media™
Module Aperture



Single Plate
Twin New Media™
Module Aperture



Double Plate
Quad New Media™
Module Aperture

Select a Standard Insert

Standard Insert
SIN310BK

Standard Insert
SIN311BK

Standard Insert
SIN312BK

Cover Plate

Single Plate Single
New Media™ Module
Aperture Cover Plate

SCP310



Single Plate Twin
New Media™ Module
Aperture Cover Plate

SCP311



Double Plate Quad
New Media™ Module
Aperture Cover Plate

SCP312



These cover plates are available in Red (RD), Antique Brass (AB) & Matt Bronze (BZ)

Back Box Depth (mm): Dependent On Modules Fitted
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 2 Gang: 146 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).
BK Black.

SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.

BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black



WA092



WA094




WA095



SP640



WA099

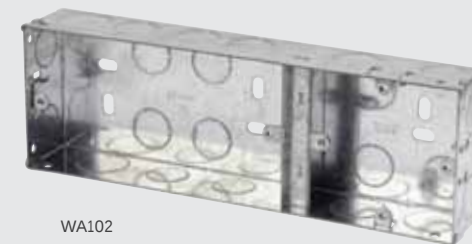

WA102

For the complete range of back boxes see Essentials™ page M4.

essentials™

Galvanised Steel Back Boxes

WA092 1 Gang 16mm Deep Galvanised Steel K.O. Box
WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box
WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box
WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box
WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box

WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box
WA098 2 Gang 47mm Deep Galvanised Steel K.O. Box
WA099 1 + 1 35mm Deep Dual Accessory Box
WA102 1 + 2 35mm Deep Dual Accessory Box

Longer Fixing Screws

SP640BN Define® M3.5 Dia. 40mm Long Screws (Bag 100)
SP640CH Define® M3.5 Dia. 40mm Long Screws (Bag 100)

Standards: BS 4662 640: ISO 2010

Dimensions (mm): 092: 70 (W) x 70 (H) x 16 (D) 093: 70 (W) x 70 (H) x 25 (D) 094: 135 (W) x 70 (H) x 25 (D)
095: 70 (W) x 70 (H) x 35 (D) 096: 135 (W) x 70 (H) x 35 (D) 097: 70 (W) x 70 (H) x 47 (D) 098: 135 (W) x 70 (H) x 47 (D)
099: 158 (W) x 74 (H) x 35 (D) 102: 220 (W) x 74 (H) x 35 (D)

E70



WA4247



WA106P



WA107PBK



GA100

FlameGuard® Dry Lining Boxes

WA4135	1 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4147	1 Gang 47mm Deep FlameGuard® Dry Lining Box
WA4235	2 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4247	2 Gang 47mm Deep FlameGuard® Dry Lining Box

Dry Lining Boxes (Sprung Fixing Lugs)

WA087SF	1 Gang 35mm Deep Dry Lining Box
WA088SF	2 Gang 35mm Deep Dry Lining Box
WA106SF	1 Gang 47mm Deep Dry Lining Box
WA107SF	2 Gang 47mm Deep Dry Lining Box

Dry Lining Boxes

WA087P	1 Gang 35mm Deep Dry Lining Box
WA087PBK	1 Gang 35mm Deep Dry Lining Box
WA088P	2 Gang 35mm Deep Dry Lining Box
WA088PBK	2 Gang 35mm Deep Dry Lining Box
WA106P	1 Gang 47mm Deep Dry Lining Box
WA106PBK	1 Gang 47mm Deep Dry Lining Box
WA107P	2 Gang 47mm Deep Dry Lining Box
WA107PBK	2 Gang 47mm Deep Dry Lining Box
WA108P	Round Ceiling 34mm Deep Dry Lining Box

Ezylink' Dry Lining Boxes

GA100	'Ezylink' Dry Lining Box Connector
GA100BK	'Ezylink' Dry Lining Box Connector

Suitable for use with WA087P, WA088P, WA106P & WA107P.

essentials™

For the complete range of back boxes see Essentials™ page M4.
For the complete range of longer fixing screws see Essentials™ page M9.

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards. Fire: BS EN 1364-1 Acoustic: BS EN ISO 140-2.
Complies with Building Regulations Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.

Ergonomic Electrical Accessories



MODE®


A Stylish, Contemporary & Flexible Range of Smooth Profile Accessories

There are many crucial elements of any interior design – the more obvious ones are décor and furnishings. Less obvious but no less important are electrical accessories; particularly wall accessories which, by their very nature need to be located in prominent line of sight positions.

When selecting wiring accessories designers have often compromised their schemes as they have been unable to identify a suitably flexible solution to satisfy their ideas.

Mode® accessories can now provide that flexibility with a comprehensive selection of products ranging from the humble light switch and socket outlet through to more specialised products dealing with the very latest developments in telephone and satellite products.

Mode® accessories have been conceived and developed as a high quality, flexible and modern solution to virtually any domestic wiring requirement. The smooth, modern lines of the Mode® accessory plate will fit easily into traditional and contemporary designs alike. The modular design of Mode® allows designers and installers unprecedented flexibility in creating dedicated wiring solutions to deal specifically with actual wiring needs. In other words, there is now no need to compromise Mode® accessories provide the complete solution to modern wiring needs.

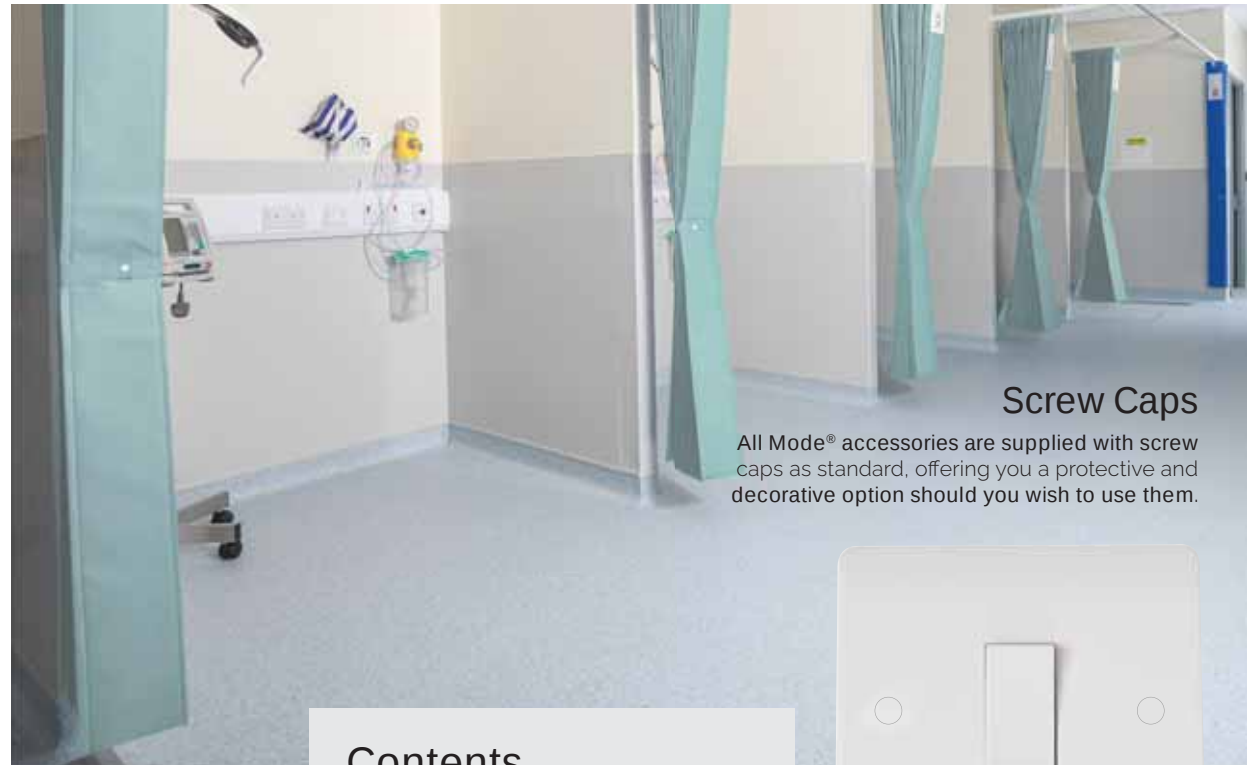

Screw Caps

All Mode® accessories are supplied with screw caps as standard, offering you a protective and decorative option should you wish to use them.

Contents

Switches	F4
Unfurnished Plates	F7
Back Boxes	F9
Power Sockets	F12
Fused Connection Units	F20
Control Switches	F22
Ceiling Accessories	F28
Connection & Flex Outlet Plates	F29
In-Wall Toothbrush Charger	F30
TV, Telephone & Satellite	F31
New Media™ Plates	F34
Pattress Boxes	F35
Back Boxes	F36



Antiviral & Antibacterial Certified

Mode® plates are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases.

Mode® plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses.

After a contact period of 4 hours, Mode® was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.



25 Year Warranty

All Mode® products are covered by our 25 year warranty against any fault in materials or manufacture experienced at any time within 25 years of the date of supply.

Switches

MINIGRID®

The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates.

For information on the full range of modules available please refer to the MiniGrid® section of this catalogue.

The Mode® range of switches has been developed largely as a modular range based on the large selection of Polar White coloured switch modules available in the MiniGrid® range.

These same modules are interchangeable in other Click® accessory ranges. Simple, single screw fixing of modules offers the simplest possible means of installing and replacing modules.

Media transfer plates and modules can be found in the New Media™ section of this catalogue.


Switches

MODE®


F5



811 | 825 | 828



812



813

Wide Rocker Switches - Non Modular

- CMA811 10AX 1 Gang 2 Way Wide Rocker Switch
- CMA812 10AX 2 Gang 2 Way Wide Rocker Switch
- CMA813 10AX 3 Gang 2 Way Wide Rocker Switch

- CMA825 10AX 1 Gang Wide Rocker Intermediate Switch
- CMA828 10AX 1 Gang 2 Way Wide Rocker Retractive Switch



010 | 011



012




105



013



9014



019

MINIGRID®

For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

Plates Switches - MiniGrid®

- CMA010 10AX 1 Gang 1 Way Plate Switch
- CMA011 10AX 1 Gang 2 Way Plate Switch
- CMA012 10AX 2 Gang 2 Way Plate Switch
- CMA013 10AX 3 Gang 2 Way Plate Switch
- CMA019 10AX 4 Gang 2 Way Plate Switch
- CMA105 10AX 6 Gang 2 Way Plate Switch

Plates Switches - Non Modular

- CMA9014 10AX 4 Gang 2 Way Single Plate Switch

Standards: BS EN 60669-1
Back Box Depth (mm): 16
Cable Size (mm²): 4 x 1.5 or 2 x 2.5 **Non Modular:** 2 x 1.5
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D)

CLICK®

sales@scolmore.com | Call: 01827 63454 | scolmore.com

F6



171

172

Architrave Switches - MiniGrid®**CMA171** 10AX 1 Gang 2 Way Architrave Switch**CMA172** 10AX 2 Gang 2 Way Architrave Switch

Architrave plates can be used with the dedicated architrave pattress boxes CMA175 & CMA176 or standard architrave flush boxes WA671 & WA672. They will also not accept MD070 & MD075 Switch modules.

Plates Switches - MiniGrid®**CMA025** 10AX 1 Gang Intermediate Plate Switch**CMA026** 10AX 1 Gang 2 Way Key Switch**CMA027** 10AX 1 Gang 1 Way Retractive 'Bell' Switch**CMA028** 10AX 1 Gang 1 Way Retractive 'Push' Switch**CMA110** 10AX 1 Gang DP 'Emergency Test' Key Switch

Switch modules interchangeable with MiniGrid® modules in Polar white (PW) finish.

Standards: BS EN 60669-1

Back Box Depth (mm): 16 **171 172:** 25Cable Size (mm²): 4 x 1.5 or 2 x 2.5 **171 172:** 2 x 1.5Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **171:** 32 (W) x 86 (H) x 9.5 (D) **172:** 32 (W) x 146 (W) x 9.5 (D)

F7



401

402

403



404

406



426

432

Unfurnished Plates - MiniGrid®**CMA401** 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture**CMA402** 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures**CMA403** 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures**CMA404** 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures**CMA406** 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures**CMA426** 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures**CMA432** 2 Gang MiniGrid® Unfurnished Plate - 3 Apertures**MINIGRID®**

Switch modules interchangeable with MiniGrid® Modules in Polar White (PW) finish. For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.


Standards: BS 5733

Back Box Depth (mm): Dependent On Module Fitted

Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D)

F8

The furnished plate shown here contains a selection of both single and twin width MiniGrid® modules. The yoke 'GR100' is required to mount the MiniGrid® modules into prior to assembling the frontplate.



612

2 Tier Unfurnished Plates - MiniGrid®

CMA612 2 Tier MiniGrid® Unfurnished Plate & Yokes - 12 Apertures - Mode®



618

3 Tier Unfurnished Plates - MiniGrid®

CMA618 3 Tier MiniGrid® Unfurnished Plate & Yokes - 18 Apertures - Mode®

Switch modules interchangeable with MiniGrid® Modules in Polar White (PW) finish. For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

MINIGRID®

If dimmer modules are to be mounted directly above each other, the MD9014 (page J37) or similar height dimmer modules must be installed. Alternatively, retractive switch modules MD004 (page J21) can be used in conjunction with Click Smart+ dimming receivers (page A22).

Standards: BS 5733
Back Box Depth (mm): 47
Dimensions (mm): **612:** 146 (W) x 153 (H) x 9.5 (D) **618:** 146 (W) x 214 (H) x 9.5 (D)

F9



MINIGRID®

Galvanised steel back boxes supplied for flush mounting of the large MiniGrid® plates. Mounting Yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.



WA512


WA518

Galvanised Steel Back Boxes

WA512 2 Tier 47mm Deep K.O. Box
WA518 3 Tier 47mm Deep K.O. Box

Standards: BS 4662
Dimensions (mm): **WA512:** 137 (W) x 137 (H) x 47 (D) **WA518:** 137 (W) x 197 (H) x 47 (D)

F10

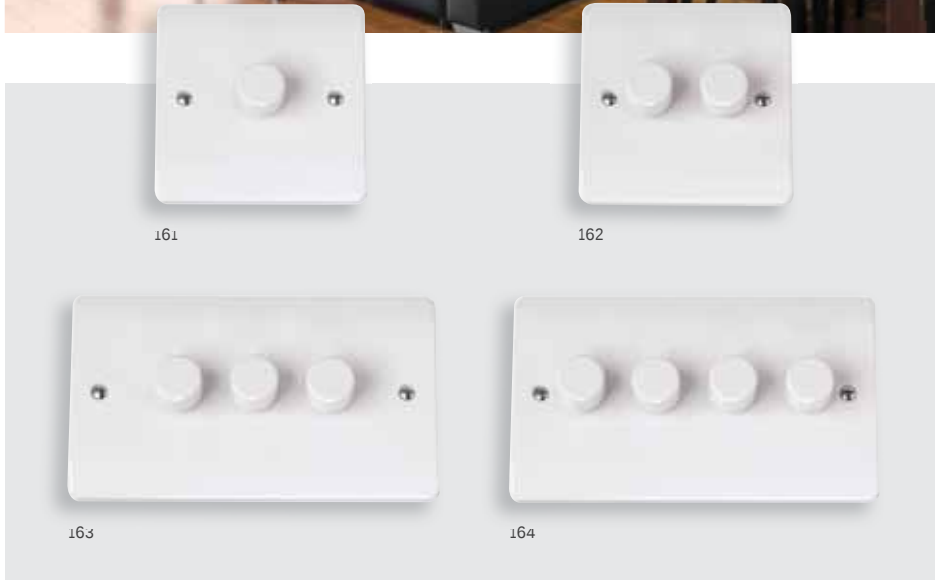

MINIGRID®

Interchangeable modules available on page J37.

Dimmer Switches (Trailing Edge)

- CMA161** 1 Gang 2 Way 100W Dimmer Switch
CMA162 2 Gang 2 Way 100W Dimmer Switch
CMA163 3 Gang 2 Way 100W Dimmer Switch
CMA164 4 Gang 2 Way 100W Dimmer Switch

We recommend the use of branded LED lamps with all Mode® trailing edge dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. For further information please contact Click® Technical support team.

Standards: BS EN 60669-1 BS EN 60669-2-1 BS EN 55015 BS EN 61000-3-2
Back Box Depth (mm): 25 **Cable Size (mm²):** 2 x 1.5 **Type:** Trailing Edge
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D)


F11

Dimmer Modules

- MD9001** 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
MD9010 1-10V Analogue Dimmer Module (25 x 62mm)
MD9014 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

Dimmer M10 Nut Runner

- SP900** Dimmer M10 Nut Runner Tool
 Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate

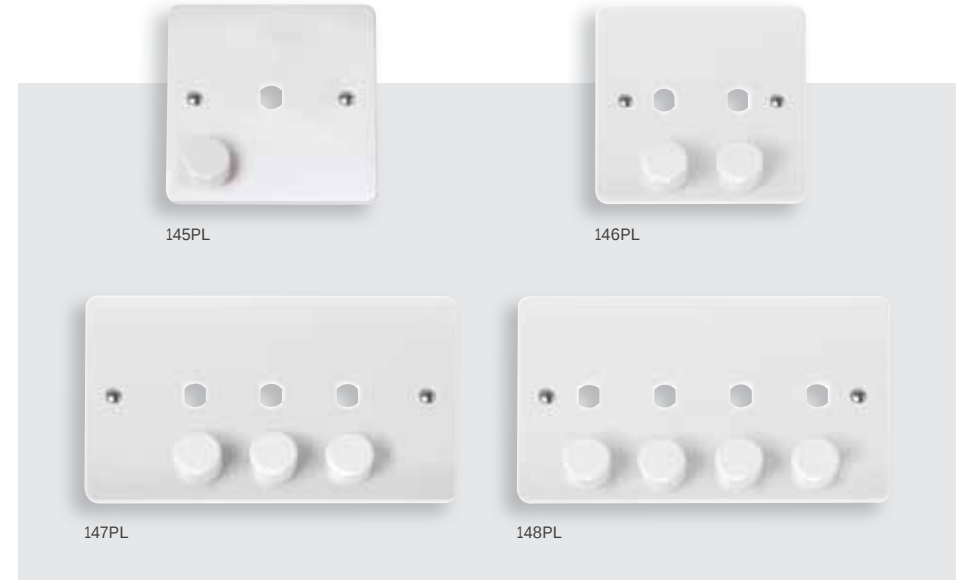

Dimmer Mounting Unfurnished Plates

- CMA145PL** 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
CMA146PL 2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
CMA147PL 3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
CMA148PL 4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures

The dimmer modules are supplied separately to the plates listed above.

Standards: BS 5733
Back Box Depth (mm): 25
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D)



Power Socket Outlets, Fused Connection Units & Control Switches

All Mode® 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety.

The provision of large twin earth terminals on our Two Gang sockets and fused connection units greatly facilitates wiring and installation.

The Mode® range offers a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...

F14



035 | 635

035PWRD

1835

Switched Socket Outlets

- CMA0035** 13A 1 Gang DP Switched Socket
- CMA630** 13A 1 Gang Unswitched Socket (Twin Earth)
- CMA635** 13A 1 Gang DP Switched Socket (Twin Earth)
- CMA035PWRD** 13A 1 Gang DP Switched Socket With Red Rocker

Switched Safety Shutter Socket Outlets

- CMA1035** 13A 1 Gang DP Switched Socket
- CMA1635** 13A 1 Gang DP Switched Socket (Twin Earth)
- CMA1036** 13A 2 Gang DP Switched Socket (Twin Earth)
- CMA1037** 13A 2 Gang DP Switched Clean Earth Socket
- CMA1835** 13A 1 Gang DP Switched Socket With Neon
- CMA1836** 13A 2 Gang DP Switched Socket With Outboard Rockers (Twin Earth)
- CMA1840** 13A 2 Gang DP Switched Socket With Outboard Rockers & Neons (Twin Earth)



036 | 037



836



840

Switched Socket Outlets

- CMA0036** 13A 2 Gang DP Switched Socket (Twin Earth)
- CMA0037** 13A 2 Gang DP Switched Clean Earth Socket
- CMA836** 13A 2 Gang DP Switched Socket With Outboard Rockers (Twin Earth)
- CMA840** 13A 2 Gang DP Switched Socket With Outboard Rockers & Neons (Twin Earth)

Standards: BS 1363-2
 Back Box Depth (mm): 25 Cable Size (mm²): 3 x 2.5 or 2 x 4
 Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D)

F15



030

032

Unswitched Socket Outlets

- CMA0030** 13A 1 Gang Unswitched Socket
- CMA0032** 13A 2 Gang Unswitched Socket (Twin Earth)

Switched Socket Outlets

- CMARCDP036** 13A 2 Gang RCD Switched Socket Outlet (Twin Earth)

Unswitched Safety Socket Outlets

- CMA1030** 13A 1 Gang Unswitched Socket Outlet (Twin Earth)
- CMA1032** 13A 2 Gang Unswitched Socket Outlet (Twin Earth)

Safety Shuttered Sockets listed here are only available for sale in the Republic of Ireland.



RCDP036

Safety Shuttered Sockets listed below are only available for sale in the Republic of Ireland.



1035RD



1836RDPW

Switched Safety Shutter Socket Outlets

- CMA1035RD** 13A 1 Gang DP Switched Socket
- CMA1035RDPW** 13A 1 Gang DP Switched Socket
- CMA1836RDPW** 13A 2 Gang DP Switched Socket With Outboard Rockers (Twin Earth)

Standards: BS 1363-2 **RCDP036:** IEC 62640 BS 7288 SASO 2203 IEC 61000-6-1 & IEC 61000-6-3
 Back Box Depth (mm): 25 Cable Size (mm²): 3 x 2.5 or 2 x 4
 Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D)

F16

Specialised Sockets

Introducing our new range of specialised sockets including Blue Medical Socket Outlets, Red & Green Outboard Rocker Sockets.



836



836

Specialised Socket Outlets (Coloured Rockers)

CMA836PWRD 13A 2 Gang DP Switched Socket With Outboard Red Rockers (Twin Earth)

CMA836PWGR 13A 2 Gang DP Switched Socket With Outboard Green Rockers (Twin Earth)



ECP1



ECP2

Supplementary Equipotential Bonding Connection Point Plates

CMAECP1 1 Gang SEBCP Plate

CMAECP2 2 Gang SEBCP Plate

Standards: BS 1363-2 **ECP1:** Designed to meet IEC/BS EN 60601-1 Clause 8.6.7
Back Box Depth (mm): 25 **ECP1:** 35 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D)

F17

Equipotential Bonding Busbar

Available on page M48



630



632



635



637

Blue Medical Socket Outlets (Medical Equipment Only)

CMA630BL 13A 1 Gang Socket (Twin Earth)

CMA635BL 13A 1 Gang DP Switched Socket (Twin Earth)

CMA632BL 13A 2 Gang Unswitched Socket (Twin Earth)

CMA637BL 13A 2 Gang DP Switched Clean Earth Socket

Standards: BS 1363-2
Back Box Depth (mm): 25 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D)

F18



Lockable Socket Outlets

CMA2675 13A 1G DP Key Lockable Socket With Red LED (Twin Earth)

CMA675 13A 1G DP Key Lockable Socket With Neon (Twin Earth)

Two keys provided (Spare keys available: SP660).




2675



034



038



039

Round Pin Socket Outlets

CMA034 15A Switched Round Pin Socket

CMA038 5A Round Pin Socket

CMA039 2A Round Pin Socket



935
Non-standard socket



936
Non-standard socket



PA380WH
Non-standard plug

Non-Standard Socket Outlets

CMA935 13A 1 Gang DP Switched Non-Standard Socket

CMA936 13A 2 Gang DP Switched Non-Standard Socket (Twin Earth)

Non-Standard Resilient Plug Tops (BS1363 / A)

PA380WH 13A Fused Non-Standard Plug - White

PA380RD 13A Fused Non-Standard Plug - Red

For use with non-standard Click® Mode sockets CMA935 and CMA936

Standards: Round Pin: BS 546 Non Standard: BS 1363-2 **2675 675:** BS EN 60669-1 BS 1363-2 **380:** BS 1363/A BS 1362

Back Box Depth (mm): 25 **2675 675:** 35

Cable Size (mm²): **034:** 3 x 2.5 **038:** 4 x 1.5 or 3 x 2.5 **039:** 3 x 1.5 **2675 675 935 936:** 3 x 2.5 or 2 x 4 **380:** 1.5

Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D) **380:** 49.5 (W) x 21 (D) x 49.5 (H)

F19



735

736

Locating Plug Socket Outlets

CMA735 13A 1 Gang DP Switched Locating Plug Socket

CMA736 13A 2 Gang DP Switched Locating Plug Socket With Outboard Rockers (Twin Earth)



711U



780



785



786

Switched Sockets With USB Outlets

CMA771U 13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)

CMA780 13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

CMA785 13A 1 Gang Switched Socket Outlet With Type A & C USB (4A) Outlets (Twin Earth)

CMA786 13A 2 Gang Switched Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)

Standards: BS 1363-2 **780 771U 785 786:** BS EN IEC 62368-1 BS EN 62680-1-1

Back Box Depth (mm): 25

Cable Size (mm²): 3 x 2.5 or 2 x 4

Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D)



049 | 050

052



051

053

Fused Connection Units With Optional Flex Outlet Through The Bottom

- CMA049 3A Fused Connection Unit
- CMA050 13A Fused Connection Unit
- CMA051 13A Switched Fused Connection Unit
- CMA052 13A Switched Fused Connection Unit With Neon
- CMA053 13A Fused Connection Unit With Neon



649 | 650

652



651

653

Fused Connection Units Without Flex Outlet

- CMA649 3A Fused Connection Unit
- CMA650 13A Fused Connection Unit
- CMA651 13A Switched Fused Connection Unit
- CMA652 13A Switched Fused Connection Unit With Neon
- CMA653 13A Fused Connection Unit With Neon

Standards: BS 1363-4 BS 1362
Back Box Depth (mm): 25
Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 86 (W) x 86 (H) x 9.5 (D)



2051

2052

2053

Lockable Fused Connection Units With Optional Flex Outlet Through The Bottom

- CMA2051 13A Switched Fused Connection Unit
- CMA2052 13A Switched Fused Connection Unit With Red LED

Fused Connection Units With Optional Flex Outlet Through The Bottom

- CMA2053 13A Fused Connection Unit With Red LED



2651

2652

2653

Lockable Fused Connection Units Without Flex Outlet


- CMA2651 13A Switched Fused Connection Unit
- CMA2652 13A Switched Fused Connection Unit With Red LED

Fused Connection Units Without Flex Outlet

- CMA2653 13A Fused Connection Unit With Red LED

Standards: BS 1363-4 BS 1362
Back Box Depth (mm): 25
Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 86 (W) x 86 (H) x 9.5 (D)

F22

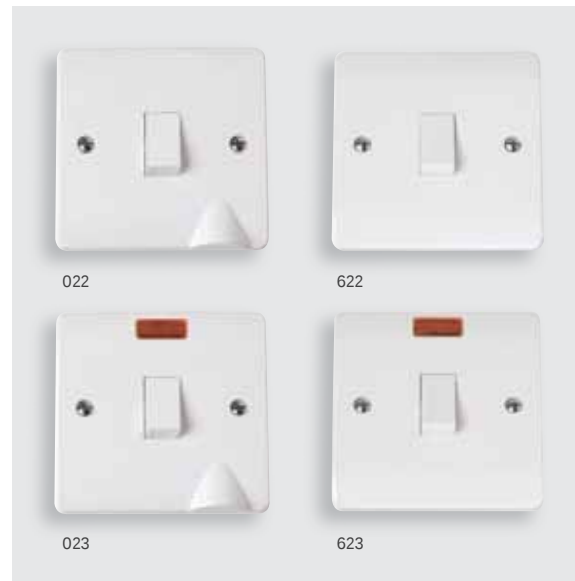

Lockable Switch

CMA660 20A Double Pole Key Lockable Switch

Two keys provided (Spare keys available: SP660).

20A Control Switches With Optional Flex Outlet Through The Bottom

- CMA022** 20A DP Switch
- CMA023** 20A DP Switch With Neon
- CMA044** 20A DP 'Water Heater' Switch With Flex Outlet
- CMA046** 20A DP 'Water Heater' Switch With Flex Outlet & Neon

20A Control Switch Without Flex Outlet

- CMA622** 20A DP Switch
- CMA623** 20A DP Switch With Neon

20A Control Switches

- CMA040** 20A DP 'Water Heater' Switch
- CMA042** 20A DP 'Water Heater' Switch With Neon

Standards: BS EN 60669-1
Back Box Depth (mm): 25 **660**: 35
Cable Size (mm²): 3 x 2.5 **660**: 3 x 2.5 or 2 x 4
Dimensions (mm): 86 (W) x 86 (H) x 9.5 (D)

F23



20A Control Switches With Optional Flex Outlet Through The Bottom

- CMA2023** 20A DP Switch With Red LED
- CMA2046** 20A DP 'Water Heater' Switch With Flex Outlet & Red LED

20A Control Switches Without Flex Outlet

- CMA2623** 20A DP Switch With Red LED

20A Control Switches

- CMA2042** 20A DP 'Water Heater' Switch With Red LED

Standards: BS EN 60669-1
Back Box Depth (mm): 25
Cable Size (mm²): 3 x 2.5
Dimensions (mm): 86 (W) x 86 (H) x 9.5 (D)



Fan Isolation Switch

- CMA020 10A 3 Pole Fan Isolation Switch
CMA021 10A 3 Pole Isolation Switch

Fan Isolation Switch With Fuse


- CMA3020 3A Fused 3 Pole Control Switch



20A DP Sink / Bath Switch

- CMA024 20A DP Sink/Bath Switch With Neon
CMA2024 20A DP Sink/Bath Switch With Red LED
3 pole and 20A DP switches are non-modular

Standards: BS EN 60669-1 **020 021:** BS EN 60669-2-4 BS EN 60669-1 **3020:** BS EN 60669-1 BS EN 60669-2-4 BS 5733 BS 1362
Back Box Depth (mm): 25 **020 021:** 16
Cable Size (mm²): 4 x 1.5 or 2 x 2.5 **024:** 3 x 2.5
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D)

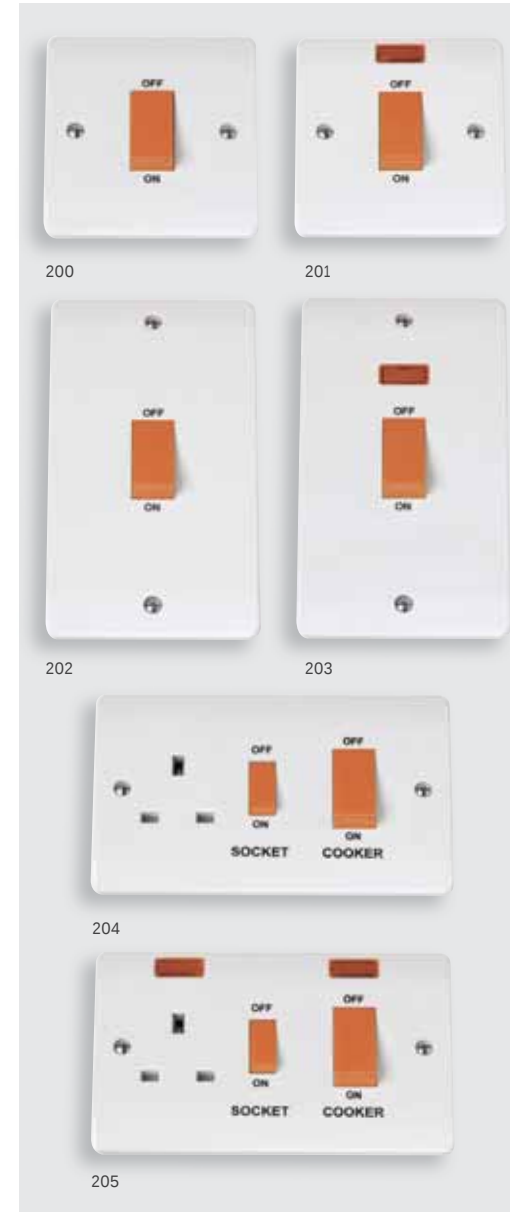


45A Switches

- CMA200 45A 1 Gang DP Switch
CMA201 45A 1 Gang DP Switch With Neon
CMA202 45A 2 Gang DP Switch
CMA203 45A 2 Gang DP Switch With Neon

Cooker Control Units

- CMA204 45A 2 Gang DP Switch With 13A DP Switched Socket
CMA205 45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669-1 **204 205:** BS 4177
Back Box Depth (mm): 35
Cable Size (mm²): 1 x 16
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D) **202, 203:** 86 (W) x 146 (H) x 9.5 (D)

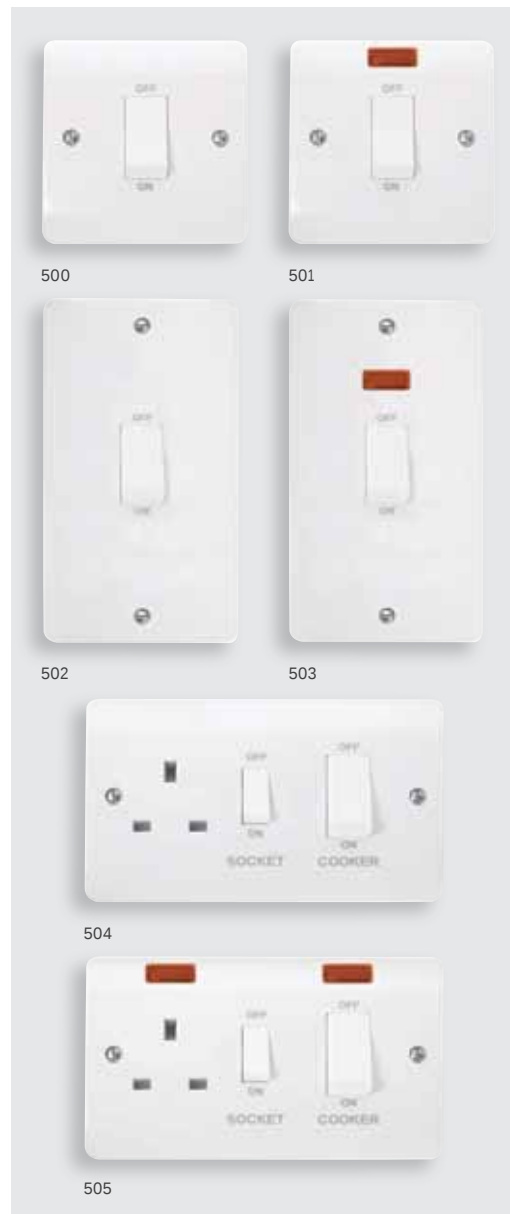


45A Switches - White Rockers

- CMA500** 45A 1 Gang DP Switch With White Rocker
CMA501 45A 1 Gang DP Switch With White Rocker & Neon
CMA502 45A 2 Gang DP Switch With White Rocker
CMA503 45A 2 Gang DP Switch With White Rocker & Neon

Cooker Control Units - White Rockers

- CMA504** 45A 2 Gang DP Switch With 13A DP Switched Socket & White Rockers
CMA505 45A 2 Gang DP Switch With 13A DP Switched Socket, White Rockers & Neons

Standards: BS EN 60669-1 **504 505:** BS 4177
Back Box Depth (mm): 35
Cable Size (mm²): 1 x 16
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D) **502, 503:** 86 (W) x 146 (H) x 9.5 (D)

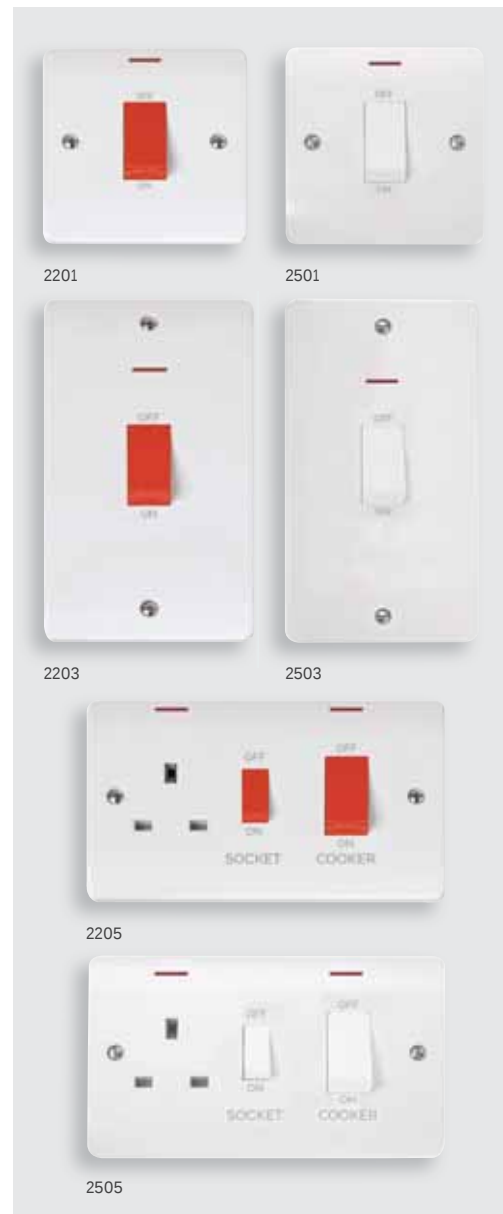

50A Switches - Red Rockers

- CMA2201** 50A 1 Gang DP Switch With Red LED
CMA2203 50A 2 Gang DP Switch With Red LED

50A Switches - White Rockers

- CMA2501** 50A 1 Gang DP Switch With White Rocker & Red LED
CMA2503 50A 2 Gang DP Switch With White Rocker & Red LED

Cooker Control Units - White Rockers

- CMA2505** 50A 2 Gang DP Switch With 13A DP Switched Socket, White Rockers & Red LEDs

Cooker Control Units - Red Rockers

- CMA2205** 50A 2 Gang DP Switch With 13A DP Switched Socket & Red LEDs


Standards: **50A Switches:** BS EN 60669-1 **Control Units:** BS 4177
Back Box Depth (mm): 35
Cable Size (mm²): 1 x 16
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D) **2203 2503:** 86 (W) x 146 (H) x 9.5 (D)



Pull Cord Switches

- PRW208** 10A 3 Pole Fan Isolation Pull Cord Switch
PRW210 45A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
PRW211 50A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
PRW213 50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon & Pattress
- CMA213** 50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon & Pattress
- PRC009** 10AX 2 Way Ceiling Pull Cord Switch
PRC210 10AX 2 Way Pull Cord Switch
PRC216 16A DP Pull Cord Switch With Neon

Standards: BS EN 60669-1
Back Box Depth (mm): Pattress Supplied **208:** 25 **PRW210:** 35 **211:** 47
Cable Size (mm²): **009 208 PRC210 216:** 2 x 1.5 or 1 x 2.5 **211 213:** 1 x 2.5 **PRW210:** 1 x 6
Dimensions (mm): **009:** 76 (Dia) x 51.5 **208 PRW210 211:** 86 (W) x 86 (H) x 43 (D) **PRC210 216:** 70 (Dia) x 42 (D) **CMA213:** 100 (Dia) x 77 (D)

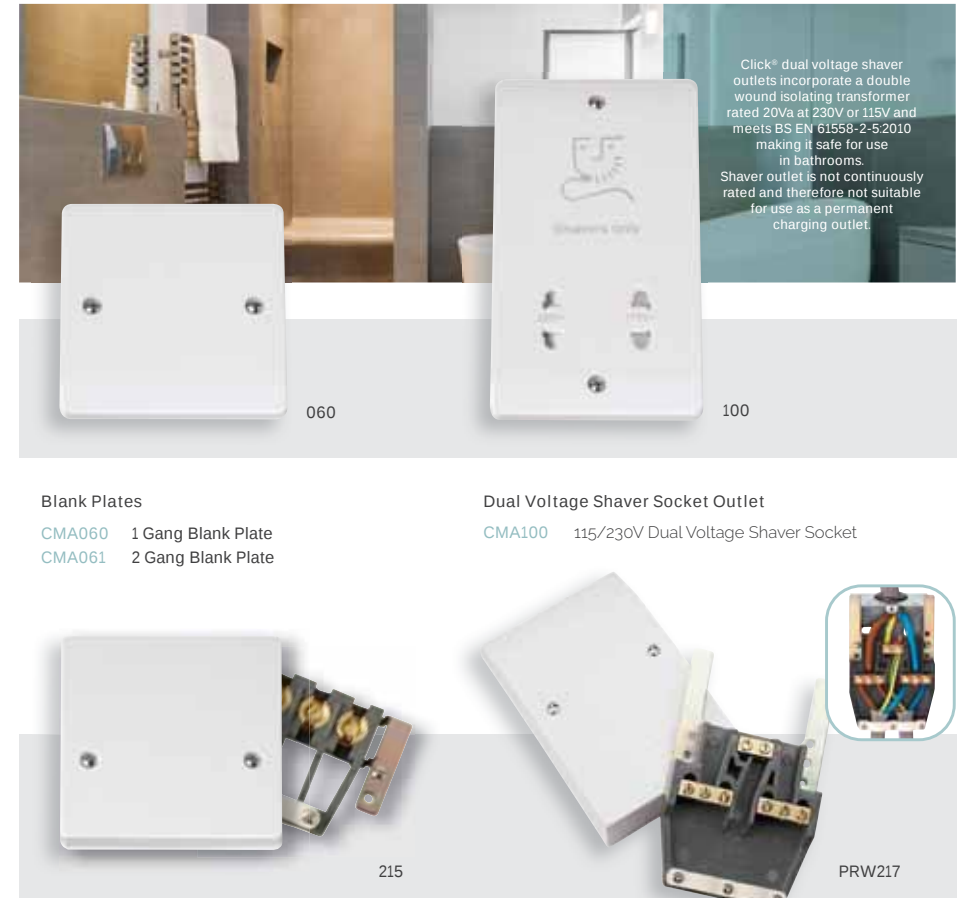

Flex Outlet Plates

- CMA017** 20A Flex Outlet Plate
 UK Design Registration No. 3015175

45A Cooker Connection Plates

- CMA215** 45A 1 Gang Cooker Connection Plate
 UK Design Registration No. 3015175

45A Cooker Outlet Plates

- PRW217** 45A Easyfit Dual Appliance Outlet Plate

Pattress Box for PRW217 - Urea

- PRW218** 35mm Deep Pattress Box For Use With PRW217

Standards: BS 5733 **100:** BS EN IEC 61558-1 BS EN 61558-2-5
Back Box Depth (mm): **017 060:** 16 **100:** 47 **215:** 35 **061 217:** 25
Cable Size (mm²): **100:** 2 x 1.5 or 1 x 2.5 **017:** 3 x 2.5 or 2 x 4 **215:** 2 x 10 **217:** 1 x 10
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D) **215:** 86 (W) x 86 (H) x 22.5 (D) **217:** 85 (W) x 130 (H) x 27 (D) **218:** 85 (W) x 130 (H) x 37.5 (D) **100:** 86 (W) x 146 (H) x 9.5 (D)



101



102

**Toothbrush Charger**

- CMA101** 1 Gang In-wall Electric Toothbrush Charger
CMA102 2 Gang In-wall Electric Toothbrush Charger


Standards: BS EN 60335-1, BS EN 60335-2
 Back Box Depth (mm): 25
 Cable Size (mm²): 3 x 2.5 or 2 x 4
 Dimensions (mm): **101:** 86 (W) x 86 (H) x 9.5 (D) **102:** 86 (W) x 146 (H) x 9.5 (D)

TV, Telephone & Satellite

Providing the means to facilitate the connection of modern communications equipment is as important today as it is to provide the electrical power to operate them.

This section is devoted to the New Media™ range of plate accessories which includes products for connecting telephone, computer, television and satellite devices.

F32

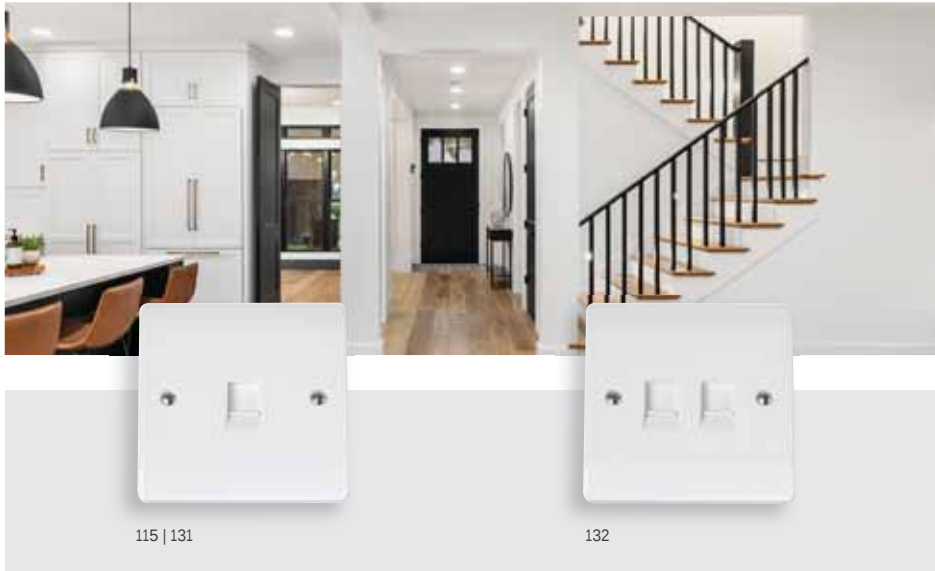**RJ11 Telephone Outlet**


CMA115 Single RJ11 (Irish/US) Outlet

RJ45 Data OutletsCMA131 Single RJ45 Cat-5e Outlet
CMA132 Twin RJ45 Cat-5e Outlet**Telephone Outlets**CMA119 Single Telephone Outlet - Master
CMA122 Twin Telephone Outlet - MasterCMA124 Single Telephone Outlet - Secondary
CMA127 Twin Telephone Outlet - Secondary

Twin outlets are 2 separate sockets and not internally linked together.

Back Box Depth (mm): 16 **115**: 35
Termination Type: IDC **115**: Screw
Dimensions (mm): 86 (W) x 86 (H) x 9.5 (D)

F33

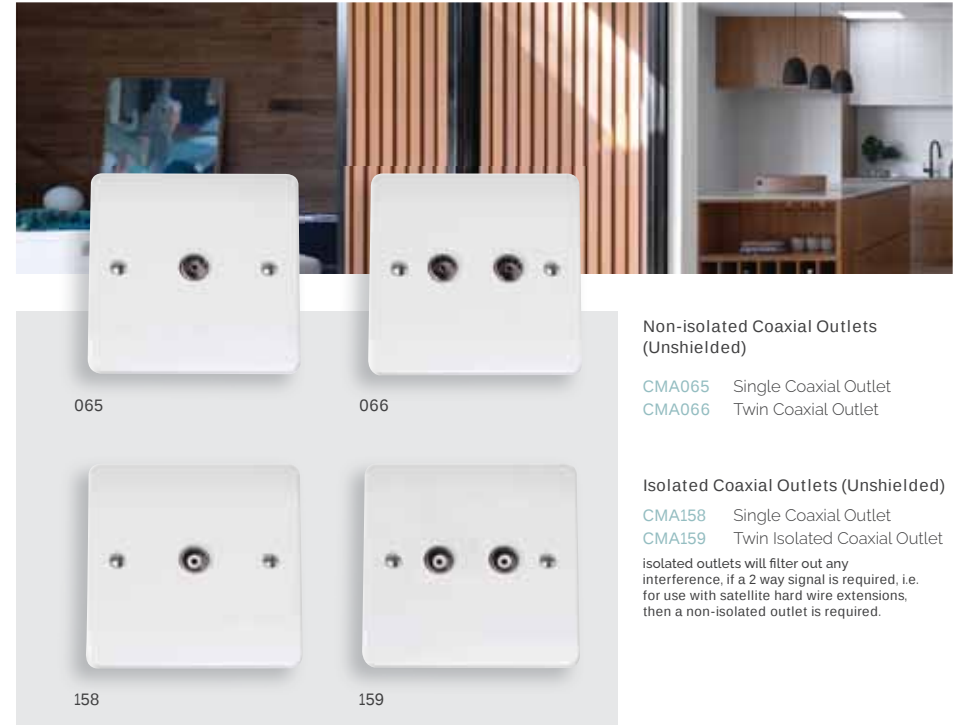**Non-isolated Coaxial Outlets (Unshielded)**CMA065 Single Coaxial Outlet
CMA066 Twin Coaxial Outlet**Isolated Coaxial Outlets (Unshielded)**CMA158 Single Coaxial Outlet
CMA159 Twin Isolated Coaxial Outlet

isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.


**Satellite Outlets (Unshielded)**CMA156 Non-isolated Single Satellite Outlet
CMA157 Isolated Satellite & Isolated Coaxial Outlet
CMA170 Non-isolated Satellite & Non-isolated Coaxial OutletBack Box Depth (mm): 16
Dimensions (mm): 86 (W) x 86 (H) x 9.5 (D)



310



311

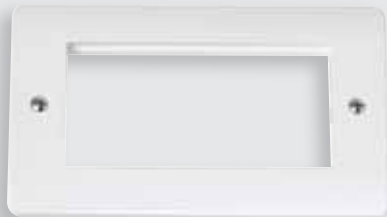


312



Unfurnished Plates - New Media™

- CMA310** 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- CMA311** 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- CMA312** 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Standards: BS 5733
 Back Box Depth (mm): Dependent On Modules Fitted
 Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D)

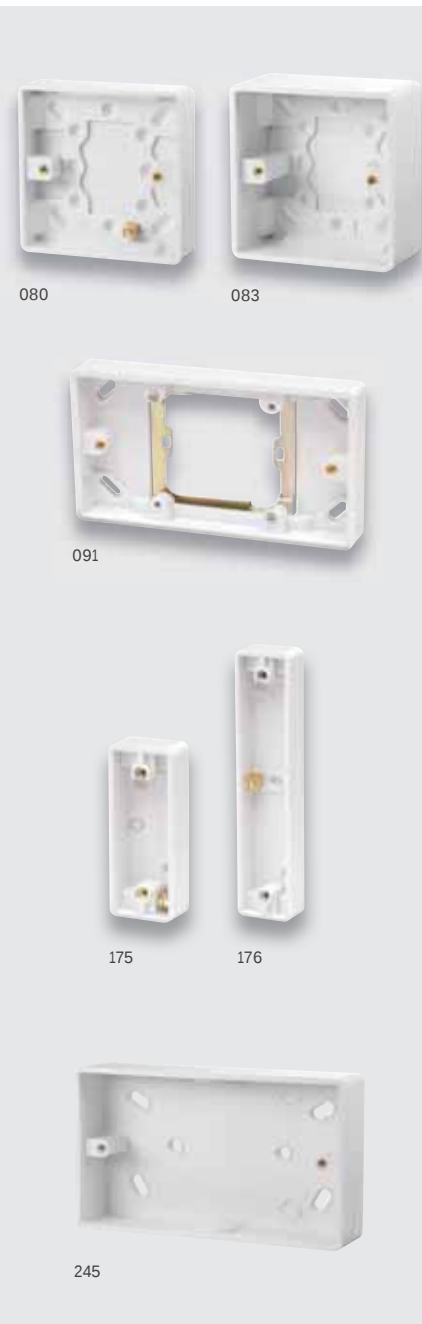

Moulded Pattress Boxes

- CMA080** 1 Gang 16mm Deep Pattress Box With Earth Terminal
- CMA081** 1 Gang 25mm Deep Pattress Box
- CMA082** 2 Gang 25mm Deep Pattress Box
- CMA083** 1 Gang 35mm Deep Pattress Box
- CMA084** 2 Gang 35mm Deep Pattress Box
- CMA085** 1 Gang 47mm Deep Pattress Box With Earth Terminal
- CMA086** 2 Gang 47mm Deep Pattress Box Fitted With Cable Restraint & Earth Terminal
- CMA089** Dual Accessory 29mm Deep Pattress Box

Converter Pattress Box

- CMA091** 1 Gang To 2 Gang 16mm Deep Converter Pattress
- CMA092** 1 Gang To 2 Gang 25mm Deep Converter Pattress

Architrave Pattress Boxes

- CMA175** 1 Gang 19mm Deep Architrave Pattress Box with Earth Terminal
- CMA176** 2 Gang 19mm Deep Architrave Pattress Box with Earth Terminal
- For Mode® products only

PVC Pattress Boxes

- CMA230** 1 Gang 29mm Deep PVC Pattress Box - Trunking
- CMA235** 2 Gang 29mm Deep PVC Pattress Box - Trunking
- CMA240** 1 Gang 29mm Deep PVC Pattress Box - Conduit
- CMA245** 2 Gang 29mm Deep PVC Pattress Box - Conduit

essentials™ For the complete range of back boxes see Essentials™ page M4.



WA095



WA106P



WA107PBK



GA100

Galvanised Steel Back Boxes

WA092	1 Gang 16mm Deep Galvanised Steel K.O. Box
WA093	1 Gang 25mm Deep Galvanised Steel K.O. Box
WA094	2 Gang 25mm Deep Galvanised Steel K.O. Box
WA095	1 Gang 35mm Deep Galvanised Steel K.O. Box
WA096	2 Gang 35mm Deep Galvanised Steel K.O. Box
WA097	1 Gang 47mm Deep Galvanised Steel K.O. Box
WA098	2 Gang 47mm Deep Galvanised Steel K.O. Box
WA099	1 + 1 35mm Deep Dual Accessory Box
WA102	1 + 2 35mm Deep Dual Accessory Box

Dry Lining Boxes (Sprung Fixing Lugs)

WA087SF	1 Gang 35mm Deep Dry Lining Box
WA088SF	2 Gang 35mm Deep Dry Lining Box
WA106SF	1 Gang 47mm Deep Dry Lining Box
WA107SF	2 Gang 47mm Deep Dry Lining Box

Dry Lining Boxes

WA087P	1 Gang 35mm Deep Dry Lining Box
WA087PBK	1 Gang 35mm Deep Dry Lining Box
WA088P	2 Gang 35mm Deep Dry Lining Box
WA088PBK	2 Gang 35mm Deep Dry Lining Box
WA106P	1 Gang 47mm Deep Dry Lining Box
WA106PBK	1 Gang 47mm Deep Dry Lining Box
WA107P	2 Gang 47mm Deep Dry Lining Box
WA107PBK	2 Gang 47mm Deep Dry Lining Box
WA108P	Round Ceiling 34mm Deep Dry Lining Box

Ezylink® Dry Lining Boxes

GA100	'Ezylink' Dry Lining Box Connector
GA100BK	'Ezylink' Dry Lining Box Connector

Suitable for use with WA087P, WA088P, WA106P & WA107P.

essentials™

For the complete range of back boxes see Essentials™ page M4.



WA4135



WA4147



WA4235



WA4247



For the complete range of FlameGuard® back boxes see Essentials™ page M8.

FlameGuard® Dry Lining Boxes

WA4135	1 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4235	2 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4147	1 Gang 47mm Deep FlameGuard® Dry Lining Box
WA4247	2 Gang 47mm Deep FlameGuard® Dry Lining Box

Spacer Gaskets


CMA095	1 Gang 10mm Spacer Gasket
CMA096	2 Gang 10mm Spacer Gasket

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards. Fire: BS EN 1364-1 Acoustic: BS EN ISO 140-2. Complies with Building Regulations Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.

F38

Premium

Bright White Accessories

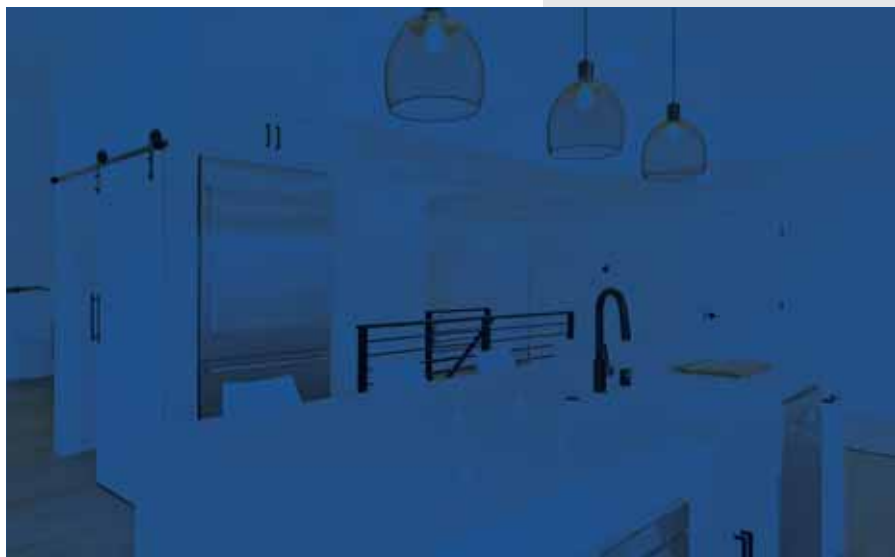




A Premium Range of Bright White Accessories

The Polar™ range was born out of a desire to offer a bright white, distinctly different, accessory product. Colour choice with accessories is no different to colour choice of wallpaper, paints or other internal decorations. Installers have very definite views on just which tone or shade of white is right for a particular installation.

Given the demand for a different accessory colour we took the opportunity to review all other aspects of the new range including technical features, materials used and the aesthetic appeal of the individual products. The net result is a product quite different in a number of ways to the established Click® product but still offering the same levels of high quality and competitive pricing. So confident are we of the durability and reliability of the Polar™ product that we guarantee these products against any fault in materials or manufacture for no less than 25 years.

Polar™ accessories offer added value over the basic versions of similar products offered by our competitors and include the following:

- X rated modular plate switches – Polar™ **light switches are all full 10AX rated** switches of modular construction. The modular design allows installers infinite flexibility in devising customised switching arrangements. In fact the diversity of the types of modules available within the Polar™ range make this a true domestic grid system.
- Full certification on all 13A socket outlets and fused connection units. These products also feature twin earth terminals as standard.
- 45A DP shower switches are upgraded to 50A as standard to accommodate the growing demand for higher rated power showers.
- The sharp, crisp lines of the Polar™ plates are complemented by gently curved rockers on all switches plus modern grey backs and matching print to switches and plates alike. The modern feel of **the Polar™ range is further enhanced** by amber coloured neons throughout and matching amber switchgear on the 45A accessories. All neons are flush mounted.

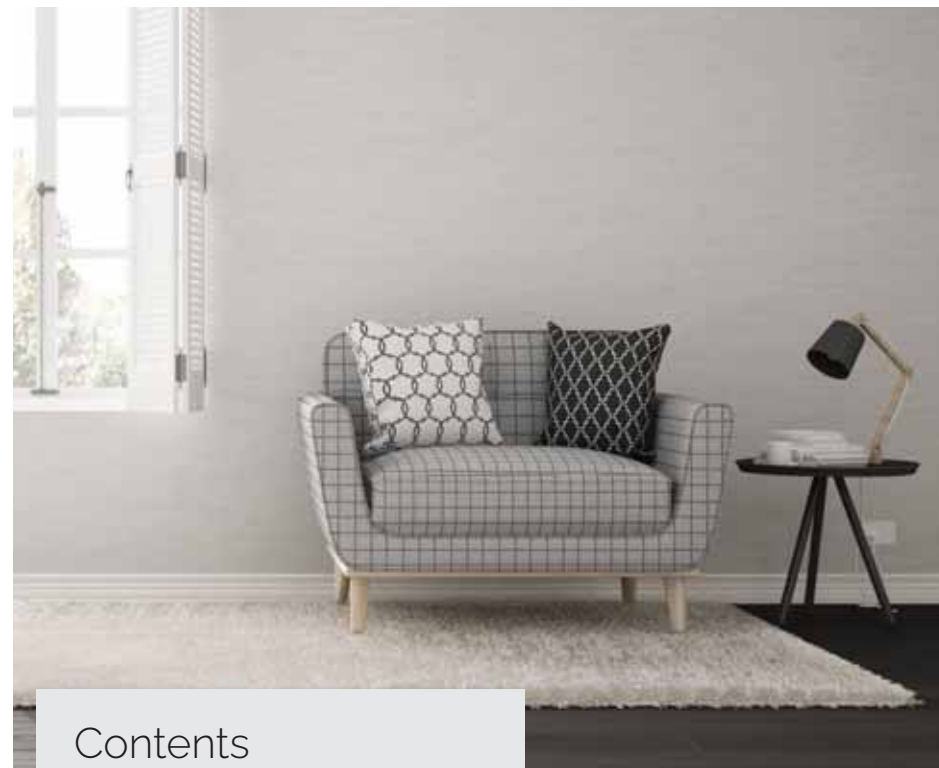

Contents

Switches	G4
Unfurnished Plates	G7
Back Boxes	G9
Power Sockets	G12
Fused Connection Units	G16
Control Switches	G17
Ceiling Accessories	G20
Connection & Flex Outlet Plates	G21
Shaver Socket & Blank Plates	G22
TV, Telephone & Satellite	G23
New Media™ Plates	G26
Pattress Boxes	G27
Back Boxes	G28



Antiviral & Antibacterial Certified

Polar™ plates are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases.

Polar™ plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses.

After a contact period of 4 hours, Polar™ was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.



25 Year Warranty

All Polar™ products are covered by our 25 year warranty against any fault in materials or manufacture experienced at any time within 25 years of the date of supply.

Switches

MINIGRID®

The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates. For information on the full range of modules available please refer to the MiniGrid® section of this catalogue.

A comprehensive selection of light switches, control switches, 45A and 50A switches are available for wall and ceiling mounting. All light switches are 10AX rated and are of modular construction. The wide range of modules available ranges from blanks, 1 way and 2 way, through intermediates, key switches and bell push, to 20A rated double pole switch modules.

All modules are simple 1 screw fixing and therefore offer the ultimate in flexibility when devising a custom made domestic grid installation. All Polar™ modules are fully interchangeable and can be used to replace existing modules or to furnish blank plates. In addition Polar™ modules can be used with all relevant items in the Click® moulded and metal ranges.

The gentle curve on the switch rocker of the module facilitates a smooth switching operation as well as providing a modern and distinctive design feature.

Switches


polar™

G5



Wide Rocker Switches - Non Modular

- PRW811** 10AX 1 Gang 2 Way Wide Rocker Switch
- PRW812** 10AX 2 Gang 2 Way Wide Rocker Switch
- PRW813** 10AX 3 Gang 2 Way Wide Rocker Switch

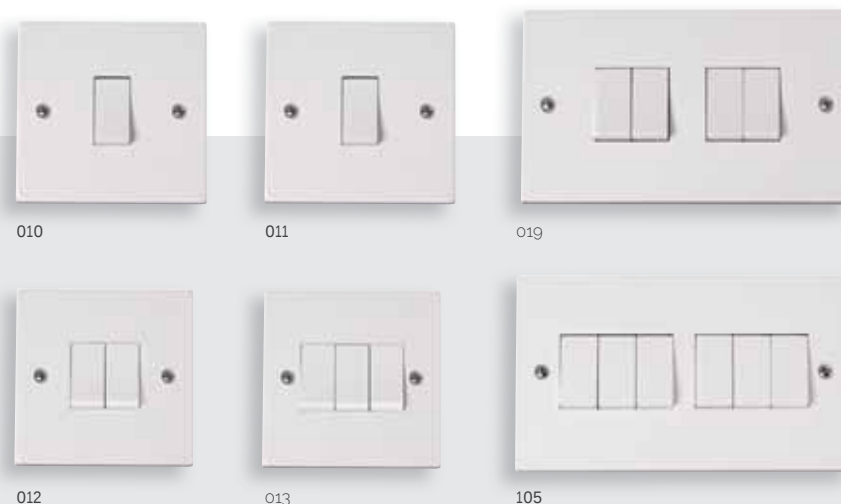

MINIGRID®

Switch modules interchangeable with MiniGrid® Modules in Polar White (PW) finish. For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

Plates Switches - MiniGrid®

- PRW010** 10AX 1 Gang 1 Way Plate Switch
- PRW011** 10AX 1 Gang 2 Way Plate Switch
- PRW012** 10AX 2 Gang 2 Way Plate Switch
- PRW013** 10AX 3 Gang 2 Way Plate Switch
- PRW019** 10AX 4 Gang 2 Way Plate Switch
- PRW105** 10AX 6 Gang 2 Way Plate Switch

Standards: BS EN 60669-1

Back Box Depth (mm): 16

Cable Size (mm²): 4 x 1.5 or 2 x 2.5

Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 11 (D) 2 Gang: 146 (W) x 86 (H) x 11 (D)

CLICK®

sales@scolmore.com | Call: 01827 63454 | scolmore.com



171

172

Architrave Switches - MiniGrid®

PRW171 10AX 1 Gang 2 Way Architrave Switch

PRW172 10AX 2 Gang 2 Way Architrave Switch

Architrave plates can be used with the dedicated architrave pattress boxes PRW175 & PRW176 or standard architrave flush boxes WA671 & WA672. They will also not accept MD070 & MD075 Switch Modules.

Plates Switches

PRW015 10AX 1 Gang 2 Way Paddle Switch

PRW025 10AX 1 Gang Intermediate Plate Switch

MINIGRID®

Switch modules interchangeable with MiniGrid® Modules in Polar White (PW) finish. For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

015

025

Standards: BS EN 60669-1

Back Box Depth (mm): 16 **171 172:** 25

Cable Size (mm²): 4 x 1.5 or 2 x 2.5

Dimensions (mm): 86 (W) x 86 (H) x 11 (D) **171:** 32 (W) x 86 (H) x 9.5 (D) **172:** 32 (W) x 146 (H) x 9.5 (D)




401

402

403



404

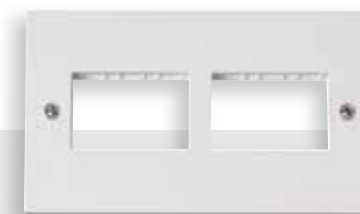

406



426



432

Unfurnished Plates - MiniGrid®

PRW401 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture

PRW402 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures

PRW403 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures

PRW404 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures

PRW406 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures

PRW426 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures

PRW432 2 Gang MiniGrid® Unfurnished Plate - 3 Apertures

Utilises Polar White (PW) MiniGrid® modules.

MINIGRID®

Switch modules interchangeable with MiniGrid® Modules in Polar White (PW) finish. For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

Standards: BS 5733

Back Box Depth (mm): Dependent On Module Fitted

Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 11 (D) **2 Gang:** 146 (W) x 86 (H) x 11 (D)


The furnished plate shown here contains a selection of both single and twin width MiniGrid® modules. The yoke 'GR100' is required to mount the MiniGrid® modules into prior to assembling the frontplate.



612

2 Tier Unfurnished Plates - MiniGrid®

PRW612 2 Tier MiniGrid® Unfurnished Plate & Yokes - 12 Apertures - Polar™

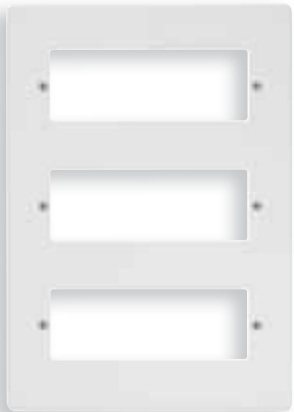

618

3 Tier Unfurnished Plates - MiniGrid®

PRW618 3 Tier MiniGrid® Unfurnished Plate & Yokes - 18 Apertures - Polar™

Switch modules interchangeable with MiniGrid® Modules in Polar White (PW) finish. For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

MINIGRID®

If dimmer modules are to be mounted directly above each other, the MD9014 (page J37) or similar height dimmer modules must be installed. Alternatively, retractive switch modules MD004 (page J21) can be used in conjunction with Click Smart+ dimming receivers (page A22).

Standards: BS 5733
Back Box Depth (mm): 47
Dimensions (mm): 612: 146 (W) x 153 (H) x 9.5 (D) 618: 146 (W) x 214 (H) x 9.5 (D)



MINIGRID®

Galvanised steel back boxes supplied for flush mounting of the large MiniGrid® plates. Mounting Yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.



WA512

WA518

Galvanised Steel Back Boxes

WA512 2 Tier 47mm Deep K.O. Box
WA518 3 Tier 47mm Deep K.O. Box

Standards: BS 4662
Dimensions (mm): WA512: 137 (W) x 137 (H) x 47 (D) WA518: 137 (W) x 197 (H) x 47 (D)



161



162



163



164



Interchangeable modules available on page J37.

Dimmer Switches (Trailing Edge)

- PRW161** 1 Gang 2 Way 100W Dimmer Switch
- PRW162** 2 Gang 2 Way 100W Dimmer Switch
- PRW163** 3 Gang 2 Way 100W Dimmer Switch
- PRW164** 4 Gang 2 Way 100W Dimmer Switch

We recommend the use of branded LED lamps with all Polar™ trailing edge dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. For further information please contact Click® Technical support team.

Standards: BS EN 60669-1 BS EN 60669-2-1 BS EN 55015 BS EN 61000-3-2
Type: Trailing Edge
Back Box Depth (mm): 25
Cable Size (mm²): 2 x 1.5
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 11 (D) 2 Gang: 146 (W) x 86 (H) x 11 (D)

Dimmer Modules

- MD9001** 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
- MD9010** 1-10V Analogue Dimmer Module (25 x 62mm)
- MD9014** 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

Dimmer M10 Nut Runner

- SP900** Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate



SP900


MD9014




145PL



146PL

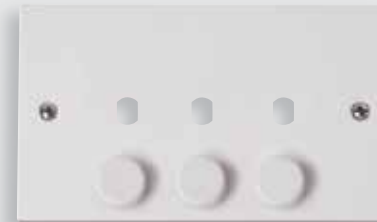

147PL

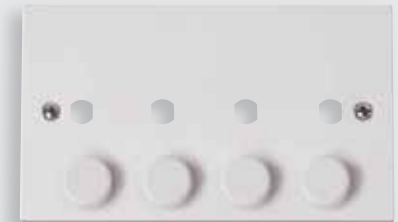

148PL

Dimmer Mounting Unfurnished Plates

- PRW145PL** 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
- PRW146PL** 2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
- PRW147PL** 3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
- PRW148PL** 4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures

The dimmer modules are supplied separately to the plates listed above.

Standards: BS 5733
Back Box Depth (mm): 25 (35 Flat Plate)
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 11 (D) 2 Gang: 146 (W) x 86 (H) x 11 (D)



Power Socket Outlets, Fused Connection Units & Control Switches

All socket outlets are tested and approved to BS1363. Socket outlets are available with single or double pole switches. Twin earth terminals are available on 1 and 2 gang socket outlets in order to comply with regulation 607 of BS7671 IEE Wiring Regulations. As with the plate switches, the actual switch rocker features a gentle curved appearance.

Power Socket Outlets



BA037

BA038

Round Pin Socket Outlets

PRW034 15A Switched Round Pin Socket
PRW038 5A Round Pin Socket
PRW039 2A Round Pin Socket

Unswitched European Socket Outlets

BA037PW 16A Single European Socket
BA038PW 16A Twin European Socket




034



038



039

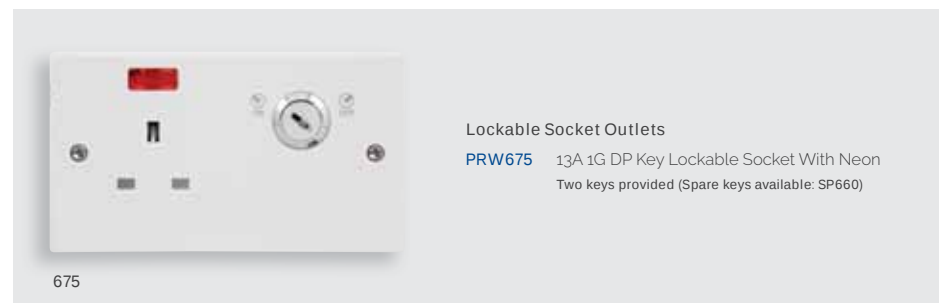

675

Lockable Socket Outlets

PRW675 13A 1G DP Key Lockable Socket With Neon
Two keys provided (Spare keys available: SP660)

Standards: BS 1363-2034 038 039: BS 546 675: BS EN 60669-1 BS 1363-2 BA037 BA038: IEC 60884
Back Box Depth (mm): 25 675: 35 BA037 BA038: 47
Cable Size (mm²): 3 x 2.5 or 2 x 4 034: 3 x 2.5 038: 4 x 1.5 or 3 x 2.5 039: 3 x 1.5
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 11 (D) 2 Gang: 146 (W) x 86 (H) x 11 (D)



Switched Socket Outlets

- PRW035** 13A 1 Gang DP Switched Socket
- PRW036** 13A 2 Gang DP Switched Socket (Twin Earth)
- PRW037** 13A 2 Gang DP Switched Clean Earth Socket
- PRW605** 13A 1 Gang Switched Socket
- PRW606** 13A 2 Gang Switched Socket
- PRW635** 13A 1 Gang DP Switched Socket With Twin Earth Terminals



Switched Safety Shutter Socket Outlets

Safety Shuttered sockets listed are only available for sale in the Republic of Ireland.

- PRW1035** 13A 1 Gang DP Switched Socket
- PRW1036** 13A 2 Gang DP Switched Socket (Twin Earth)
- PRW1037** 13A 2 Gang DP Switched Clean Earth Socket
- PRW1635** 13A 1 Gang DP Switched Socket (Twin Earth)



Unswitched Socket Outlets

- PRW030** 13A 1 Gang Unswitched Socket
- PRW032** 13A 2 Gang Unswitched Socket
- PRW030EX** 13A 1 Gang Unswitched Socket - Printed 'Not To Be Used For Outdoor Appliances'
- PRW630** 13A 1 Gang Unswitched Socket With Twin Earth Terminals

Standards: BS 1363-2 **Back Box Depth (mm):** 25
Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 11 (D) **2 Gang:** 146 (W) x 86 (H) x 11 (D)



780



771U



785




786

Switched Sockets With USB Outlets

- PRW771U** 13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
- PRW780** 13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)
- PRW785** 13A 1 Gang Switched Socket Outlet With Type A & C USB (4A) Outlets (Twin Earth)
- PRW786** 13A 2 Gang Switched Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)

Standards: BS 1363-2 BS 1363-2: 2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1
Back Box Depth (mm): 25 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 11 (D) **2 Gang:** 146 (W) x 86 (H) x 11 (D)

G16

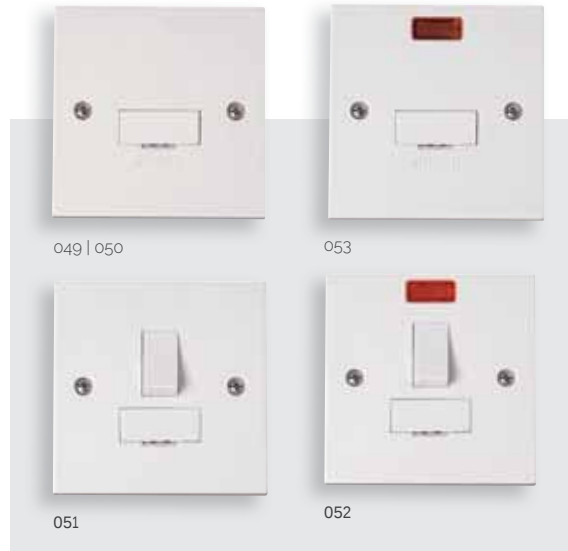

Fused Connection Units With Optional Flex Outlet

- PRW049** 3A Fused Connection Unit
- PRW050** 13A Fused Connection Unit
- PRW051** 13A Switched Fused Connection Unit
- PRW052** 13A Switched Fused Connection Unit With Neon
- PRW053** 13A Fused Connection Unit With Neon




Fused Control Switch Plates

- PRW290** 3A FCU With DP Switch (Linked)
- PRW291** 3A FCU With DP Switch & DP Fan Switch (Linked)

Standards: BS 1363-4 BS 1362 **290 291:** BS EN 60669-1 BS 5733
Back Box Depth (mm): 25 **290 291:** 16
Cable Size (mm²): 3 x 2.5 or 2 x 4 **049:** 4 x 2.5 or 2 x 4 **290 291:** 4 x 1.5 or 2 x 2.5
Dimensions (mm): 86 (W) x 86 (H) x 11 (D)

G17

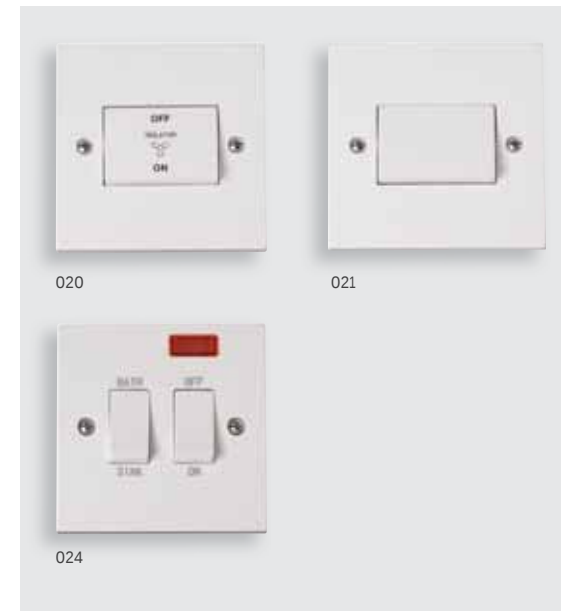


Fan Isolation Switch

- PRW020** 10A 3 Pole Fan Isolation Switch
- PRW021** 10A 3 Pole Isolation Switch

20A DP Sink / Bath Switch

- PRW024** 20A DP Sink/Bath Switch With Neon

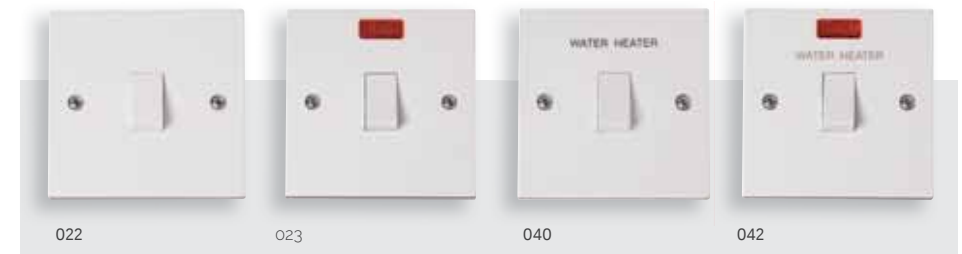

20A Control Switches with Optional Flex Outlet


- PRW022** 20A DP Switch
- PRW023** 20A DP Switch With Neon
- PRW040** 20A DP 'Water Heater' Switch
- PRW042** 20A DP 'Water Heater' Switch With Neon

Standards: BS EN 60669-1 **675:** BS 1363-2 **020 021:** BS EN 60669-2-4 BS EN 60669-1
Back Box Depth (mm): 25 **660 675:** 35
Cable Size (mm²): 3 x 2.5 **660 675:** 3 x 2.5 or 2 x 4
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 11 (D)



Lockable Switch

- PRW660** 20A Double Pole Key Lockable Switch
- Two keys provided (Spare keys available: SP660)

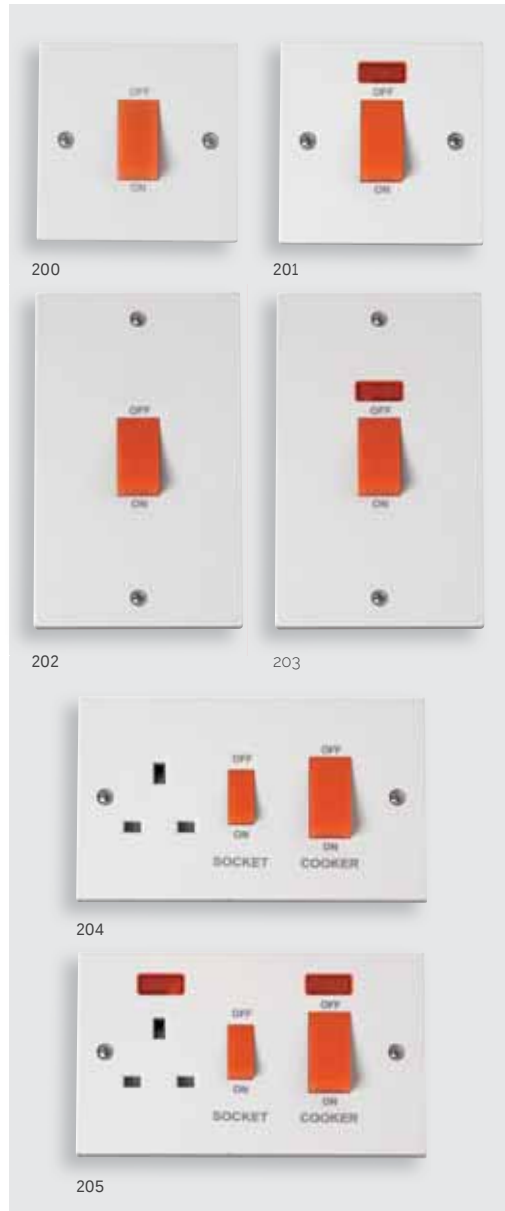

45A Switches And Socket Outlets

- PRW200** 45A 1 Gang DP Switch
- PRW201** 45A 1 Gang DP Switch With Neon
- PRW202** 45A 2 Gang DP Switch
- PRW203** 45A 2 Gang DP Switch With Neon
- PRW204** 45A 2 Gang DP Switch With 13A DP Switched Socket
- PRW205** 45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669-1 **204 205:** BS 4177
Back Box Depth (mm): 35
Cable Size (mm²): 1 x 16
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 11 (D) **2 Gang:** 146 (W) x 86 (H) x 11 (D) **202 203:** 86 (W) x 146 (H) x 11 (D)



45A Switches And Socket Outlets With White Rockers

- PRW500** 45A 1 Gang DP Switch With White Rocker
- PRW501** 45A 1 Gang DP Switch With White Rocker & Neon
- PRW502** 45A 2 Gang DP Switch With White Rocker
- PRW503** 45A 2 Gang DP Switch With White Rocker & Neon
- PRW504** 45A 2 Gang DP Switch With 13A DP Switched Socket & White Rockers
- PRW505** 45A 2 Gang DP Switch With 13A DP Switched Socket, White Rockers & Neons

Standards: BS EN 60669-1 **504 505:** BS 4177
Back Box Depth (mm): 35
Cable Size (mm²): 1 x 16
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 11 (D) **2 Gang:** 146 (W) x 86 (H) x 11 (D) **502 503:** 86 (W) x 146 (H) x 11 (D)



essentials™ Decorative covers available for PRC210, see Essentials™ page M38.

10AX & 16A Pull Cord Switches

- PRC009** 10AX 2 Way Ceiling Pull Cord Switch
- PRC210** 10AX 2 Way Pull Cord Switch
- PRC216** 16A DP Pull Cord Switch With Neon

45A & 50A Pull Cord Switches

- PRW210** 45A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
- PRW211** 50A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
- PRW213** 50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon & Pattress

Fan Isolation Pull Cord Switches

- PRW208** 10A 3 Pole Fan Isolation Pull Cord Switch

Suffix RD (Red cord & bangle) or AG (Anthracite Grey cord & bangle) to the above codes for product to be supplied with required cord and bangle. Example: A 10AX 2 Say Pull-cord Switch with red cord and bangle will become product code PRC210RD.

Standards: BS EN 60669-1 **Backbox:** **211:** 47 **208:** 25 **210:** 35
Cable Size (mm²): 2 x 1.5 or 1 x 2.5 **210:** 1 x 6 **211 213:** 1 x 25
Dimensions (mm): 86 (W) x 86 (H) x 43 (D) **009:** 76 (Dia) x 51.5 **210 216:** 70 (Dia) x 42 (D) **PRW213:** 100 (Dia) x 77 (D)



45A Cooker Connection Plates

- PRW215** 45A 1 Gang Cooker Connection Plate
- UK Design Registration No. 3015175

45A Cooker Outlet Plates


- PRW217** 45A Easyfit Dual Appliance Outlet Plate
- UK Design Registration No. 3015175
- Utilises standard 1 gang back box 25mm deep minimum.

Pattress Box for PRW217 - Urea

- PRW218** 35mm Deep Pattress Box For Use With PRW217



Standards: BS 5733
Back Box Depth (mm): **215:** 35 **217:** 25 **Cable Size (mm²):** **215:** 2 x 10 **217:** 1 x 10
Dimensions (mm): **215:** 86 (W) x 86 (H) x 22.5 (D) **217:** 85 (W) x 130 (H) x 27 (D) **218:** 85 (W) x 130 (H) x 37.5 (D)

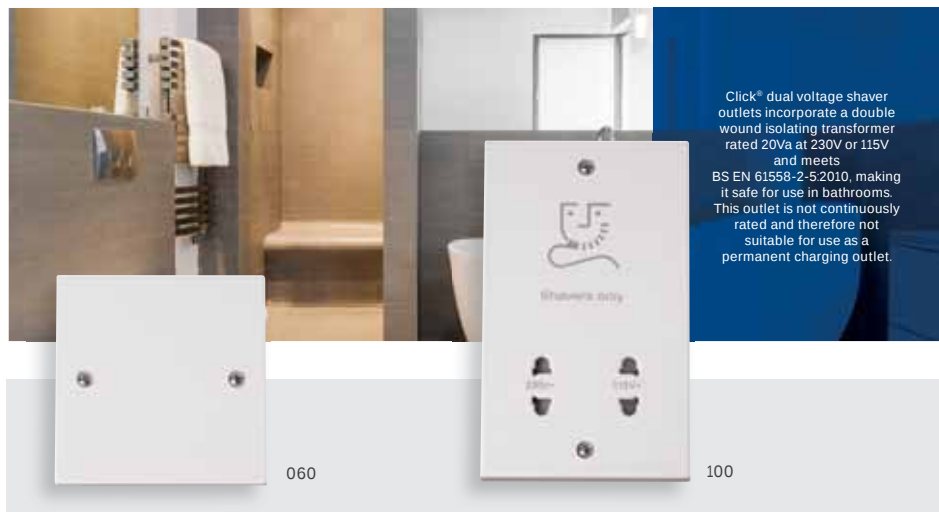

Blank Plates

- PRW060** 1 Gang Blank Plate
PRW061 2 Gang Blank Plate

Dual Voltage Shaver Socket Outlet

- PRW100** 115/230V Dual Voltage Shaver Socket



Flex Outlet Plates

- PRW017** 20A Flex Outlet Plate

Connector Box

- PRW090** 15A 10 Way Surface Connector Box
(for use with central heating installations)


Standards: BS 5733 **090:** BS 4662 **100:** BS EN IEC 61558-1 BS EN 61558-2-5
Back Box Depth (mm): 16 **090:** 25 **100:** 47
Cable Size (mm²): **017:** 3 x 2.5 or 2 x 4 **090:** 2 x 1.5 or 1 x 2.5 **100:** 2 x 1.5 or 1 x 2.5
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 11 (D) **2 Gang:** 146 (W) x 86 (H) x 11 (D) **090:** 147 (W) x 87 (H) x 41 (D)
100: 86 (W) x 146 (H) x 11 (D)



TV, Telephone & Satellite

Providing the means to facilitate the connection of modern communications equipment is as important today as it is to provide the electrical power to operate them.



This section is devoted to the New Media™ range of plate accessories which includes products for connecting telephone, computer, television and satellite devices.

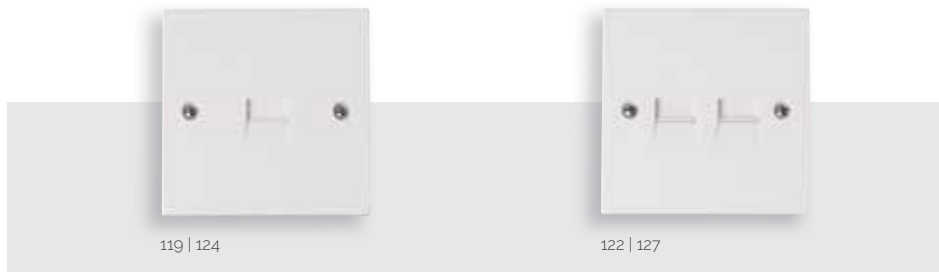

Telephone Outlets - Urea

- PRW119** Single Telephone Outlet - Master
- PRW122** Twin Telephone Outlet - Master
- PRW124** Single Telephone Outlet - Secondary
- PRW127** Twin Telephone Outlet - Secondary

Back Box Depth (mm): 16
Termination Type: IDC
Dimensions (mm): 86 (W) x 86 (H) x 11 (D)

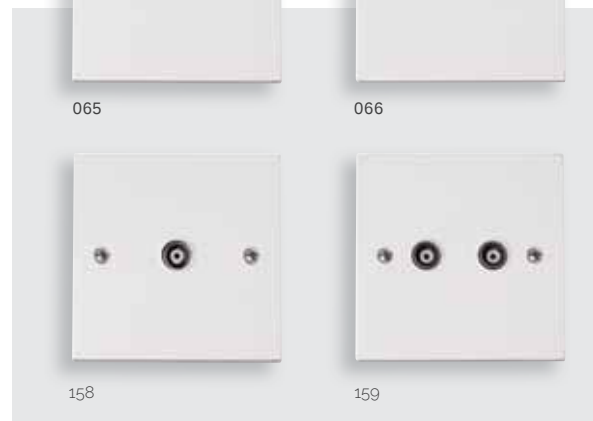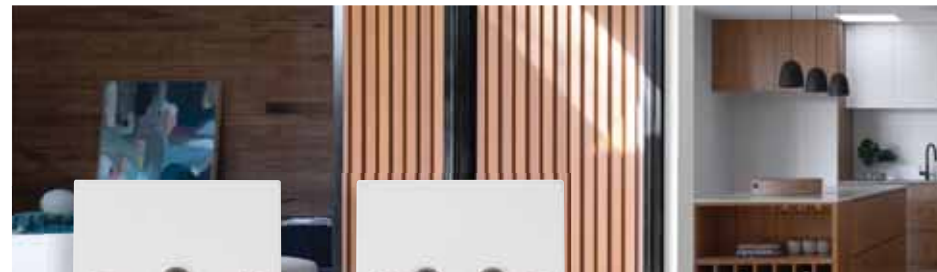


Non-isolated Coaxial Outlets (Unshielded)

- PRW065** Single Coaxial Outlet
- PRW066** Twin Coaxial Outlet

Isolated Coaxial Outlets (Unshielded)

- PRW158** Single Isolated Coaxial Outlet
- PRW159** Twin Isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

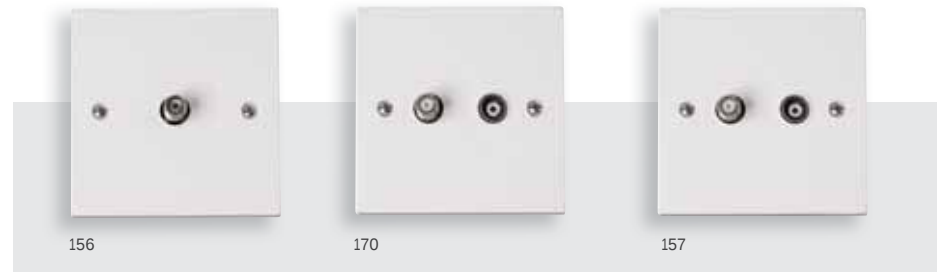

Satellite Outlets (Unshielded)

- PRW156** Non-isolated Single Satellite Outlet
- PRW170** Non-isolated Satellite & Non-isolated Coaxial Outlet
- PRW157** Isolated Satellite & Isolated Coaxial Outlet

Back Box Depth (mm): 16
Dimensions (mm): 86 (W) x 86 (H) x 11 (D)



Unfurnished Plates - New Media™

- PRW310** 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- PRW311** 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- PRW312** 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Standards: BS 5733
Back Box Depth (mm): Dependent On Modules Fitted
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 11 (D) 2 Gang: 146 (W) x 86 (H) x 11 (D)



Moulded Pattress Boxes

- PRW080** 1 Gang 16mm Deep Pattress Box With Earth Terminal
- PRW081** 1 Gang 25mm Deep Pattress Box
- PRW082** 2 Gang 25mm Deep Pattress Box
- PRW083** 1 Gang 35mm Deep Pattress Box
- PRW084** 2 Gang 35mm Deep Pattress Box
- PRW085** 1 Gang 47mm Deep Pattress Box With Earth Terminal
- PRW086** 2 Gang 47mm Deep Pattress Box Fitted With Cable Restraint & Earth Terminal
- PRW089** Dual Accessory 29mm Deep Pattress Box With Earth Terminal

Converter Pattress Box

- PRW091** 1 Gang To 2 Gang 16mm Deep Converter Pattress

Architrave Pattress Boxes

- PRW175** 1 Gang 19mm Deep Architrave Pattress Box with Earth Terminal
 - PRW176** 2 Gang 19mm Deep Architrave Pattress Box with Earth Terminal
- For Polar™ products only

PVC Pattress Boxes

- PRW230** 1 Gang 29mm Deep PVC Pattress Box - Trunking
- PRW240** 1 Gang 29mm Deep PVC Pattress Box - Conduit
- PRW235** 2 Gang 29mm Deep PVC Pattress Box - Trunking
- PRW245** 2 Gang 29mm Deep PVC Pattress Box - Conduit

essentials™ For the complete range of back boxes see Essentials™ page M4.



WA095



WA4247



WA107PBK



GA100

Galvanised Steel Back Boxes

- WA092** 1 Gang 16mm Deep Galvanised Steel K.O. Box
- WA093** 1 Gang 25mm Deep Galvanised Steel K.O. Box
- WA094** 2 Gang 25mm Deep Galvanised Steel K.O. Box
- WA095** 1 Gang 35mm Deep Galvanised Steel K.O. Box
- WA096** 2 Gang 35mm Deep Galvanised Steel K.O. Box
- WA097** 1 Gang 47mm Deep Galvanised Steel K.O. Box
- WA098** 2 Gang 47mm Deep Galvanised Steel K.O. Box
- WA099** 1 + 1 35mm Deep Dual Accessory Box
- WA102** 1 + 2 35mm Deep Dual Accessory Box
- WA671** 1 Gang 25mm Deep Architrave Box With 60.3mm Hole Centres
- WA672** 2 Gang 25mm Deep Architrave Box With 120.6mm Hole Centres

FlameGuard® Dry Lining Boxes

- WA4135** 1 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4235** 2 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4147** 1 Gang 47mm Deep FlameGuard® Dry Lining Box
- WA4247** 2 Gang 47mm Deep FlameGuard® Dry Lining Box

Dry Lining Boxes (Sprung Fixing Lugs)

- WA087SF** 1 Gang 35mm Deep Dry Lining Box
- WA088SF** 2 Gang 35mm Deep Dry Lining Box
- WA106SF** 1 Gang 47mm Deep Dry Lining Box
- WA107SF** 2 Gang 47mm Deep Dry Lining Box

Dry Lining Boxes

- WA087P** 1 Gang 35mm Deep Dry Lining Box
- WA087PBK** 1 Gang 35mm Deep Dry Lining Box
- WA088P** 2 Gang 35mm Deep Dry Lining Box
- WA088PBK** 2 Gang 35mm Deep Dry Lining Box
- WA106P** 1 Gang 47mm Deep Dry Lining Box
- WA106PBK** 1 Gang 47mm Deep Dry Lining Box
- WA107P** 2 Gang 47mm Deep Dry Lining Box
- WA107PBK** 2 Gang 47mm Deep Dry Lining Box
- WA108P** Round Ceiling 34mm Deep Dry Lining Box

Ezylink® Dry Lining Boxes

- GA100** 'Ezylink' Dry Lining Box Connector
 - GA100BK** 'Ezylink' Dry Lining Box Connector
- Suitable for use with WA087P, WA088P, WA106P & WA107P.

essentials™

For the complete range of back boxes see Essentials™ page M4.

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards. Fire: BS EN 1364-1 Acoustic: BS EN ISO 140-2. Complies with Building Regulations Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.

Visually Contrasting Wiring Accessories



Part M Range™

Visually Contrasting Wiring Accessories

The Mode® range has been expanded to include a range of anthracite grey finished accessories to comply with current Building Regulations Part M.

Our Part M™ range features the modular design of the Mode® range allowing designers and installers unprecedented flexibility in creating dedicated wiring solutions to deal with virtually all wiring requirements.

All Part M™ wiring accessories are tested and compliant with all UK and European standards.



25 Year Warranty

All Part M™ products are covered by our 25 year warranty against any fault in materials or manufacture experienced at any time within 25 years of the date of supply.

Building Regulations Part M

Part M1 of the Building Regulations refers to the 'Access and Use' of a building and its facilities with Sections 4.25 to 4.30 then refining the use and design considerations of switches, outlets and controls.

Part of the requirements of Part M1 is to aid disabled people within their surroundings, being able to activate a light, socket or control within arms length, for the visually impaired being able to identify the units' position against its surrounding décor, and for the infirm a suitable pull-cord switch to raise the alarm in the event of an emergency.

The Part M™ Range offers suitable solutions to the elements raised in Part M1 (4.25 to 4.30) with anthracite grey accessories contrasting against the high reflective décor used in the majority of today's buildings along with a range of pull-cord switches with alternative cords and bangles.



Antiviral & Antibacterial Certified

Part M™ plates are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases.

Part M™ plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses.

After a contact period of 4 hours, Part M™ was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.

Contents

Design Considerations	H4
Switches	H6
Unfurnished Plates	H8
Yokes & Back Boxes	H10
Power Sockets	H11
Control Switches	H15
Fused Connection Units	H16
Ceiling Accessories	H18
New Media™ Plates	H19
Design Provisions	H20
Back Boxes	H22

Design Considerations

The key factors that affect the use of switches, outlets and controls are ease of operation, visibility, height and freedom from obstruction.

Pull Cord Provisions

- Where wall mounted switches cannot be provided, i.e. bathrooms and toilets, lighting pull cords are recommended. A 50mm bangle visually contrasting with its background needs to be fitted between 900mm and 1100mm above the floor
- For emergency alarms systems the pull cord and bangle needs to be coloured red and located as close to a wall as possible. Two bangles are to be fitted, one set at 100mm and the other set between 800mm and 1000mm above the floor.

- A consistent relationship with doorways and corners will further reinforce the ease with which people manipulate switches and controls
- All users should be able to locate a control, know which setting it is on and use it without setting it on and use it without inadvertently changing its setting
- Controls that contrast visually with their surroundings are more convenient for visually impaired people, as are light switches that are activated by a large push pad
- It is also an advantage if individual switches on panels and on multiple socket outlets are well separated, or in the form of large touch plates, to avoid the inadvertent selection of an adjacent control by visually impaired people and people with limited dexterity.

Switches

MINIGRID®

The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates. For information on the full range of modules available please refer to the Minigrid® section of this catalogue.

All 10AX plate switches feature individual switch modules all fully interchangeable between plastic and metal ranges - thus providing optimum flexibility in wiring.

Switches

Part M Range™

H7



011

012

013

811

812

813

MINIGRID®

Polar White switch modules fitted, interchangeable with MiniGrid® Modules. For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

Plates Switches - MiniGrid®

CMA011AG	10AX 1 Gang 2 Way Plate Switch
CMA012AG	10AX 2 Gang 2 Way Plate Switch
CMA013AG	10AX 3 Gang 2 Way Plate Switch

Wide Rocker Switches - Non Modular

CMA811AG	10AX 1 Gang 2 Way Wide Rocker Switch
CMA812AG	10AX 2 Gang 2 Way Wide Rocker Switch
CMA813AG	10AX 3 Gang 2 Way Wide Rocker Switch
CMA825AG	10AX 1 Gang Wide Rocker Intermediate Switch
CMA828AG	10AX 1 Gang 2 Way Wide Rocker Retractive Switch

Standards: BS EN 60669-1
Back Box Depth (mm): 16
Cable Size (mm²): **011 012 013:** 4 x 1.5 or 2 x 2.5 **811 812 813 825 828:** 2 x 1.5
Dimensions (mm): 86 (W) x 86 (H) x 9.5 (D)

click®

sales@scolmore.com | Call: 01827 63454 | scolmore.com

H8



MINIGRID® For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

Unfurnished Plates - MiniGrid®

CMA401AG	1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
CMA402AG	1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
CMA403AG	1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
CMA404AG	2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
CMA426AG	2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures

Standards: BS 5733
Back Box Depth (mm): Dependent On Modules Fitted
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D)

H9



The furnished plate shown here contains a selection of both single and twin width MiniGrid® modules. The yoke 'GR100' is required to mount the MiniGrid® modules into prior to assembling the frontplate.



512

2 Tier Unfurnished Plates - MiniGrid®

VPAG512 2 Tier MiniGrid® Unfurnished Plate c/w Gaskets - 12 Apertures - Part M™

Polar™ & Deco® Victorian plate finishes also available. 2 x GR100 Yokes required, see page H10.



518

3 Tier Unfurnished Plates c/ w Gaskets - MiniGrid®

VPAG518 3 Tier MiniGrid® Unfurnished Plate c/w Gaskets - 18 Apertures - Part M™

Polar™ & Deco® Victorian plate finishes also available. 3 x GR100 Yokes required, see page H10.

MINIGRID®

If dimmer modules are to be mounted directly above each other, the MD9014 (page J37) or similar height dimmer modules must be installed. Alternatively, retractive switch modules MD004 (page J21) can be used in conjunction with Click Smart+ dimming receivers (page A22).

Standards: BS 5733
Back Box Depth (mm): 47
Dimensions (mm): **512:** 146 (W) x 146 (H) x 8 (D) **518:** 146 (W) x 227 (H) x 8 (D)

H10

Example of yoke furnished with modules

**MINIGRID®**

Galvanised steel back boxes supplied for flush mounting of the large MiniGrid® plates. Mounting Yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.



GR100

WA512

WA518

Yokes

GR100BK MiniGrid® Module Yoke - 6 Apertures - Black
 GR100PW MiniGrid® Module Yoke - 6 Apertures - White
 GR100GY MiniGrid® Module Yoke - 6 Apertures - Grey

2 or 3 yokes are required based on the backbox selected.

Galvanised Steel Back Boxes

WA512 2 Tier 47mm Deep K.O. Box
 WA518 3 Tier 47mm Deep K.O. Box

Standards: **512 518:** BS 4662
 Dimensions (mm): **GR100:** 129 (W) x 55 (H) x 14 (D) **WA512:** 137 (W) x 137 (H) x 47 (D) **WA518:** 137 (W) x 197 (H) x 47 (D)

Power Socket Outlets, Fused Connection Units & Control Switches

All Part M™ 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety.

The provision of large twin earth terminals on our two gang sockets and fused connection units greatly facilitates wiring and installation

The Part M™ range offers a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...

H12



835 | 1835



836 | 1836

Switched Socket Outlets

- CMA035AG 13A 1 Gang DP Switched Socket
 CMA835AG 13A 1 Gang DP Switched Socket With Neon
 CMA836AG 13A 2 Gang DP Switched Socket With Outboard Rockers (Twin Earth)
 CMA840AG 13A 2 Gang DP Switched Socket With Neons & Outboard Rockers (Twin Earth)

Switched Safety Shutter Socket Outlets

- CMA1035AG 13A 1 Gang DP Switched Socket
 CMA1835AG 13A 1 Gang DP Switched Socket & Neon
 CMA1836AG 13A 2 Gang DP Switched Socket With Outboard Rockers (Twin Earth)
 CMA1840AG 13A 2 Gang DP Switched Socket With Outboard Rockers & Neons (Twin Earth)

Safety Shuttered Sockets listed are only available for sale in the Republic of Ireland.



030



032

Unswitched Socket Outlets

- CMA030AG 13A 1 Gang Unswitched Socket
 CMA032AG 13A 2 Gang Unswitched Socket (Twin Earth)

Unswitched Safety Shutter Socket Outlets

- CMA1030AG 13A 1 Gang Unswitched Safety Socket Outlet (Twin Earth)
 CMA1032AG 13A 2 Gang Unswitched Safety Socket Outlet (Twin Earth)

Standards: BS 1363-2
 Back Box Depth (mm): 25 Cable Size (mm²): 3 x 2.5 or 2 x 4
 Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D)

H13



100

735
Locating socket736
Locating socket

Locating Plug Socket Outlets

- CMA735AG 13A 1 Gang DP Switched Locating Plug Socket
 CMA736AG 13A 2 Gang DP Switched Locating Plug Socket With Outboard Rockers (Twin Earth)

Dual Voltage Shaver Socket Outlet

- CMA100AG 115/230V Dual Voltage Shaver Socket

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010 making it safe for use in bathrooms. Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

Standards: BS 1363-2 **100:** BS EN IEC 61558-1 BS EN 61558-2-5
 Back Box Depth (mm): 25 Cable Size (mm²): 3 x 2.5 or 2 x 4 **100:** 2 x 1.5 or 1 x 2.5
 Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D) **100:** 86 (W) x 146 (H) x 9.5 (D)

H14



771U



780



786



Switched Sockets With USB Outlets

CMA771UAG 13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)

CMA780AG 13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

CMA785AG 13A 1 Gang Switched Socket Outlet With Type A & C USB (4A) Outlets (Twin Earth)

CMA786AG 13A 2 Gang Switched Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)

Standards: BS 1363-2: 2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1
Back Box Depth (mm): 25 Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D)

H15



504

023



500



2501



2023

20A Control Switches With Optional Flex Outlet Through The Bottom

CMA023AG 20A DP Switch With Neon

CMA2023AG 20A DP Switch With Red LED

45A Switches And Socket Outlets

CMA500AG 45A 1 Gang DP Switch

CMA501AG 45A 1 Gang DP Switch With Neon

CMA503AG 45A 2 Gang (Vertical) DP Switch With Neon

CMA504AG 45A 2 Gang DP Switch With 13A DP Switched Socket Outlet

50A Switches - White Rockers

CMA2501AG 50A 1 Gang DP Switch With White Rocker & Red LED

CMA2503AG 50A 2 Gang DP Switch With White Rocker & Red LED

Standards: BS EN 60669-1 **504:** BS 4177
Back Box Depth (mm): 35 **20A:** 25 Cable Size (mm²): 1 x 16 **20A:** 3 x 2.5
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D) **503 2503:** 86 (W) x 146 (H) x 9.5 (D)

H16



650



651



652



052

Fused Connection Units Without Flex Outlet

- CMA650AG 13A Fused Connection Unit
- CMA651AG 13A Switched Fused Connection Unit
- CMA652AG 13A Switched Fused Connection Unit With Neon
- CMA653AG 13A Fused Connection Unit With Neon
- CMA2653AG 13A Fused Connection Unit With Red LED

Fused Connection Units With Optional Flex Outlet Through The Bottom

- CMA052AG 13A Switched Fused Connection Unit With Neon

Standards: BS 1363-4 BS 1362 Back Box Depth (mm): 25
 Cable Size (mm²): 3 x 2.5 or 2 x 4
 Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D)

H17



2052



2651



2652



Lockable Fused Connection Units With Optional Flex Outlet Through The Bottom

- CMA2052AG 13A Switched Fused Connection Unit With Red LED

Lockable Fused Connection Units Without Flex Outlet

- CMA2651AG 13A Switched Fused Connection Unit
- CMA2652AG 13A Switched Fused Connection Unit With Red LED

Standards: BS 1363-4 BS 1362
 Back Box Depth (mm): 25 Cable Size (mm²): 3 x 2.5 or 2 x 4
 Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D)

H18



Pull Cord Switches

PRC210AG	10AX 2 Way Pull Cord Switch With Grey Bangle
PRC216AG	16A DP Pull Cord Switch With Grey Bangle
PRW208AG	10A 3 Pole Fan Isolation Pull Cord Switch With Grey Bangle
PRW210AG	45A DP Pull Cord Switch With Mechanical 'On/Off' & Neon - Grey Bangle
PRW210RD	45A DP Pull Cord Switch With Mechanical 'On/Off' & Neon - Red Bangle
PRW211AG	50A DP Pull Cord Switch With Mechanical 'On/Off' & Neon - Grey Bangle
PRW211RD	50A DP Pull Cord Switch With Mechanical 'On/Off' & Neon - Red Bangle
PRW213AG	50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon, Pattress & Grey Bangle
PRW213RD	50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon, Pattress & Red Bangle

Standards: BS EN 60669-1
Back Box Depth (mm): **208: 25** **PRC210 213 216:** Pattress Supplied **PRW210:** 35 **211:** 47
Cable Size (mm²): **208 PRC210 216:** 2 x 1.5 or 1 x 2.5 **PRW210:** 1 x 6 **211 213:** 1 x 25
Dimensions (mm): 86 (W) x 86 (H) x 43 (D) **PRW213:** 100 (Dia) x 77 (D) **PRC210 216:** 70 (Dia) x 42 (D)

H19



Unfurnished Plates - New Media™

CMA310AG	1 Gang New Media™ Unfurnished Plate - 1 Aperture
CMA311AG	1 Gang New Media™ Unfurnished Plate - 2 Apertures
CMA312AG	2 Gang New Media™ Unfurnished Plate - 4 Apertures

Spacer Gaskets

CMA1GAG	1 Gang 2mm Spacer Gasket
CMA2GAG	2 Gang 2mm Spacer Gasket

Standards: BS 5733
Back Box Depth (mm): Dependent On Modules Fitted
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D) **1GAG:** 116 (W) x 116 (H) x 2 (D) **2GAG:** 176 (W) x 116 (H) x 2 (D)

Provision for meeting the design considerations

Section 4.30 of Part M™ lays out the provisions for satisfying the design considerations.

LRV values for finishes with * should be used with caution as the gloss level on these can give inaccurate results depending on lighting and or viewing conditions.

Part M™ Section 0.26 indicates that the visual perception of one element of the building, or fitting within the building against another has a greater light reflectance value difference of 30 points, where black = 0 points and white = 100 points. Where illuminance on surfaces is greater than 200 LUX a difference in light reflectance value should be a minimum of 20 points.

Example: Anthracite grey (LRV 8.9) on a brilliant white background (LRV 100) gives a contrast of 91.1 points which complies with Part M™.

Section 4.30 (m) frontplates contrast visually with their backgrounds. This requirement is open to interpretation, with one being the complete product contrasting against its background and another with the switch contrasting against its frontplate. The Part M™ range of products satisfies both.

The contrast values are stipulated within - Design guidance for internal built environments - Reading University.

The information relayed in this brochure is for guidance only, with the specifier or contractor having the responsibility of selecting the products which comply with Part M™ and ensuring they are installed and positioned to meet the regulations.

Range	LRV	
CMA***AG	8.9	Anthracite Grey Range
CMA***	74.3	Mode® Range
PRW***	74.3	Polar™ Range
CCA***	74.3	Curva® Range
WA***	83.6	Accessories White Range
CL***	37	Metal Clad Range
WA***RD	15.3	Red Range

GridPro®, Minigrid® & New Media™ Modules		
Finish	LRV	
PW	74.3	Polar White
WH	83.6	Accessories White
BK	4.9	Black
RD	15.3	Red

Decorative Finishes		
Finish	LRV	
AB*	34.1	Antique Brass
BN*	18.4	Black Nickel
PN*	43.3	Pearl Nickel
SB*	66.9	Satin Brass
SC*	38.3	Satin Chrome
SS*	49.8	Stainless Steel



- a. Socket outlets are located consistently to doorways and room corners, but in any case no nearer than 350mm from room corners.
- b. Wall mounted sockets outlets, telephone, data and TV outlets are located between 400mm and 1000mm above the floor, with a preference for the lower end of the range.

- c. Switches for permanently wired appliances are located between 400mm and 1200mm above the floor, unless needed at a higher level for particular appliances.
- d. Controls that need close vision are located between 1200mm and 1400mm above the floor, so that readings may be taken by a person sitting or standing.

- e. All switches that require precise hand movements are located between 750mm and 1200mm above the floor.
- f. Light switches for use by the general public have large push pads and align with door handles within the range 900mm to

1100mm, for ease of location when entering a room.

- g. Simple push button controls that require limited dexterity are not more than 1200mm above the floor.



WA095



WA106P



WA107PBK



GA100

Galvanised Steel Back Boxes

WA092	1 Gang 16mm Deep Galvanised Steel K.O. Box
WA093	1 Gang 25mm Deep Galvanised Steel K.O. Box
WA094	2 Gang 25mm Deep Galvanised Steel K.O. Box
WA095	1 Gang 35mm Deep Galvanised Steel K.O. Box
WA096	2 Gang 35mm Deep Galvanised Steel K.O. Box
WA097	1 Gang 47mm Deep Galvanised Steel K.O. Box
WA098	2 Gang 47mm Deep Galvanised Steel K.O. Box
WA099	1 + 1 35mm Deep Dual Accessory Box
WA102	1 + 2 35mm Deep Dual Accessory Box

Dry Lining Boxes (Sprung Fixing Lugs)

WA087SF	1 Gang 35mm Deep Dry Lining Box
WA088SF	2 Gang 35mm Deep Dry Lining Box
WA106SF	1 Gang 47mm Deep Dry Lining Box
WA107SF	2 Gang 47mm Deep Dry Lining Box

Dry Lining Boxes

WA087P	1 Gang 35mm Deep Dry Lining Box
WA087PBK	1 Gang 35mm Deep Dry Lining Box
WA088P	2 Gang 35mm Deep Dry Lining Box
WA088PBK	2 Gang 35mm Deep Dry Lining Box
WA106P	1 Gang 47mm Deep Dry Lining Box
WA106PBK	1 Gang 47mm Deep Dry Lining Box
WA107P	2 Gang 47mm Deep Dry Lining Box
WA107PBK	2 Gang 47mm Deep Dry Lining Box
WA108P	Round Ceiling 34mm Deep Dry Lining Box

Ezylink® Dry Lining Boxes

GA100	Ezylink® Dry Lining Box Connector
GA100BK	Ezylink® Dry Lining Box Connector

Suitable for use with WA087P, WA088P, WA106P & WA107P.

essentials™

For the complete range of back boxes see Essentials™ page M4.



WA4135



WA4147



WA4235



WA4247



For the complete range of FlameGuard® back boxes see Essentials™ page M8.

FlameGuard® Dry Lining Boxes

WA4135	1 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4235	2 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4147	1 Gang 47mm Deep FlameGuard® Dry Lining Box
WA4247	2 Gang 47mm Deep FlameGuard® Dry Lining Box

Spacer Gaskets

CMA095	1 Gang 10mm Spacer Gasket - Polar White
CMA096	2 Gang 10mm Spacer Gasket - Polar White

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards. Fire: BS EN 1364-1 Acoustic: BS EN ISO 140-2. Complies with Building Regulations Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.

H24

Interchangeable

Plates & Modules






Interchangeable Plates & Modules

This comprehensive selection of GridPro® frontplates and modules offer ultimate flexibility.

As well as a wide range of modules to choose from all of our switch modules are 20A rated so they are ideal for both domestic and commercial applications.

The GridPro® range will complement your existing Click® installation, as it was specifically designed to seamlessly match our existing ranges of Click® wiring accessories.

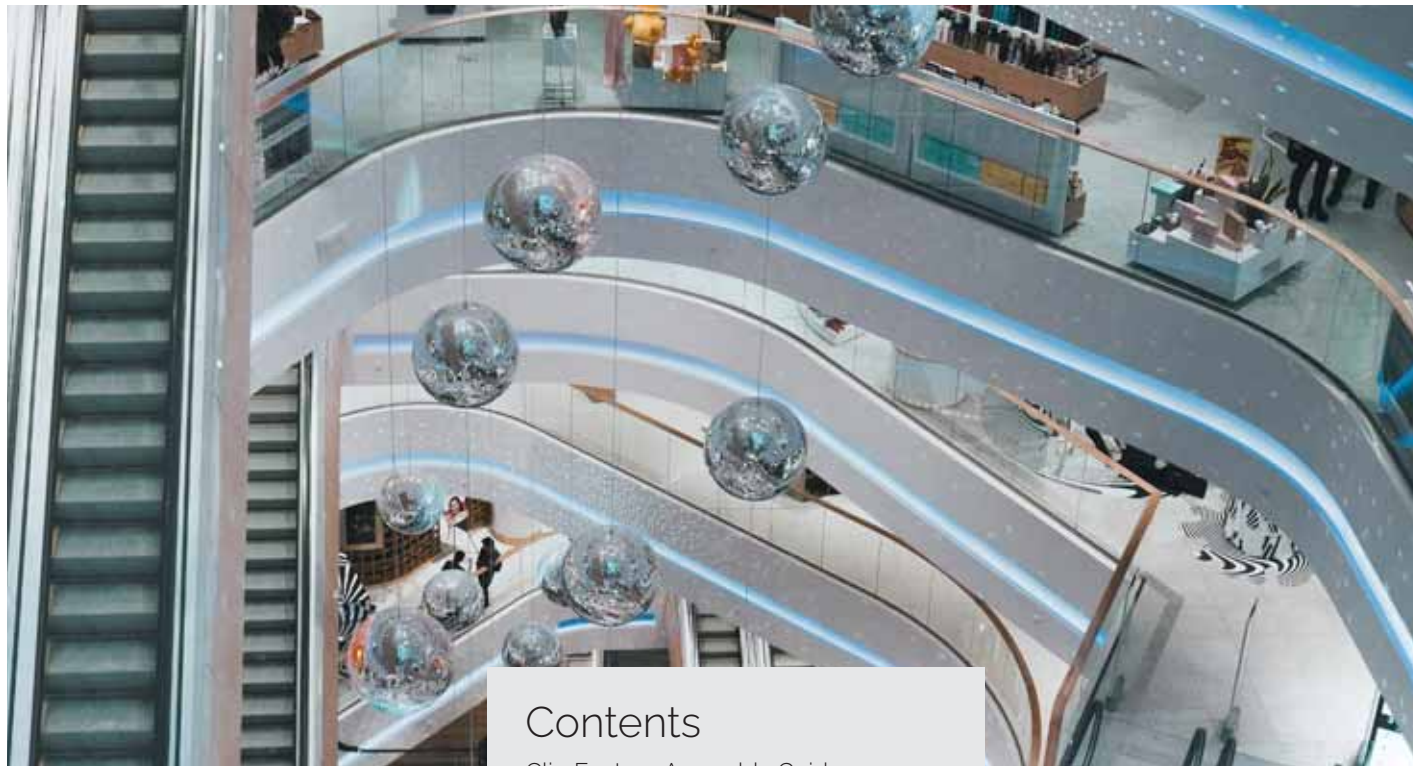

Contents

Clip Feature Assembly Guide	I20
Screw Feature Assembly Guide	I22
Modules	I26
Dimmer Mounting Kits	I86
Dimmer Modules	I90
Deco Plus® Frontplates	I92
Definity™ Frontplates	I100
Define® Frontplates	I109
Deco® Frontplates	I119
Mode® Frontplates	I127
Part M™ Frontplates	I133
Polar™ Frontplates	I139
Metal Clad Frontplates	I145
Yokes & Back Boxes	I151



20 Year Warranty

All GridPro® products are covered by our 20 year warranty against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.

One Module Fits All

...via a clipping feature & screw attachment on each module.

Ideal for isolation of kitchen appliances!

Clipping feature allows easy removal and assembly of the module onto a grid Yoke by hand or small tool.

Screw attachment feature allows the modules to be assembled onto 1 - 4 gang GridPro® frontplates without a yoke.

Ergonomic front mounting module designed with a large radius on the corners, allowing easy assembly.

Ergonomic Modules


...every pro needs.

Our new range features design elements that enable quicker and easier installation whilst maintaining all the key features and stylish design of the existing range of Click® wiring accessories.

When a yoke is required for the larger GridPro® frontplates another unique feature of our modules is the

clip on the top and bottom of the module, which allows easy removal and assembly of the module onto a grid Yoke by hand or a small tool.

Our GridPro® modules do not require a special back box so can be used with standard BS4662 Back Boxes.

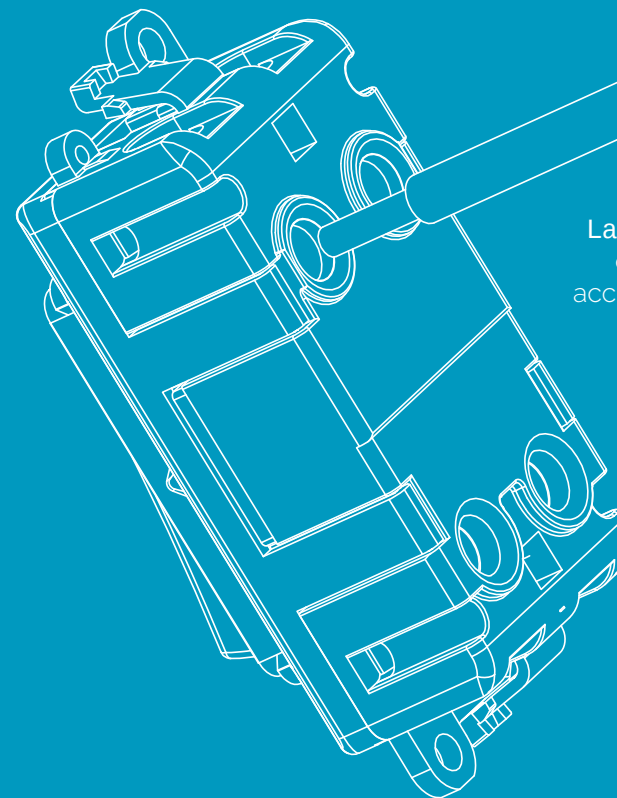

Large filleted terminal cable entry holes accepts 2 x 4mm² cable.

All modules come with backed off captive terminal screws for ease of assembly.



A screwdriver guide ensures the screwdriver easily locates with terminal screw head to clamp cable in position. The terminal screw apertures are designed to help guide the tool.



No Yoke!

...for 1-4 gang GridPro® frontplates.




For use with 1 - 4 gang GridPro® frontplates*...



*excluding the screwless Definity® GridPro® frontplates, which have their own dedicated inserts.

The GridPro® modules are secured to the back of the 1 - 4 gang GridPro® frontplates via the screw feature on the modules*. The benefit of not using a yoke is that it allows the installer to use standard back boxes!

*excluding the screwless Definity® GridPro® frontplates, which have their own dedicated inserts.

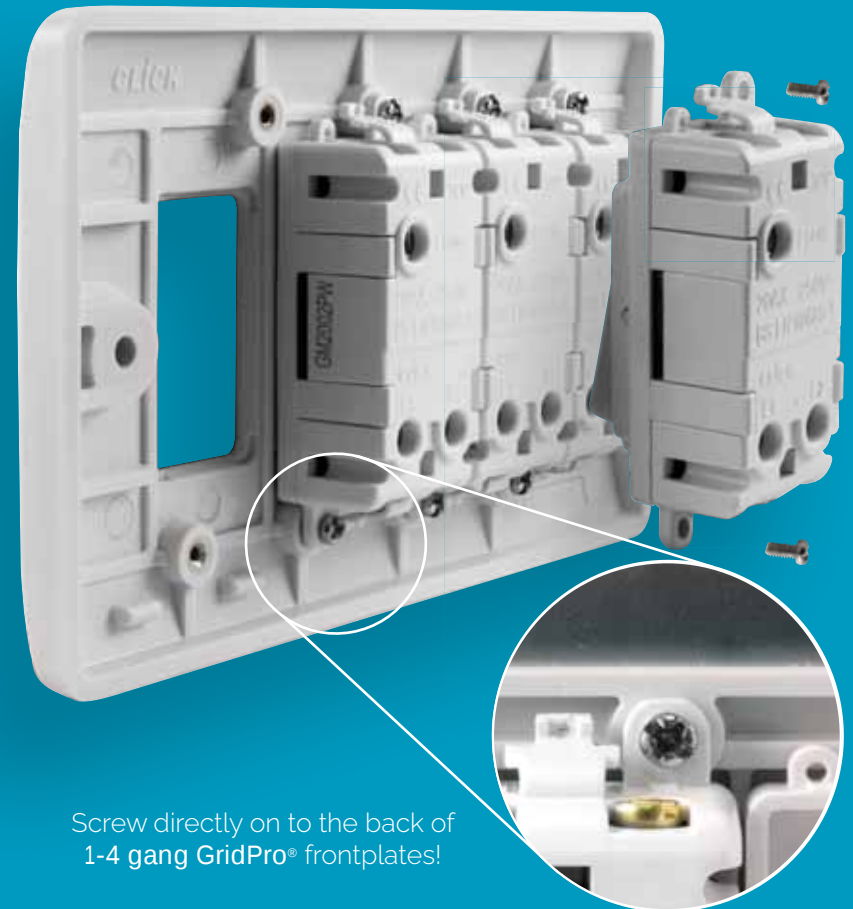


Screw directly on to the back of 1-4 gang GridPro® frontplates!

Clip-On Modules

...for fast and easy installation.

When a yoke is required on the multi tier GridPro® frontplates the module can be assembled using the clip attachment, which secures them to the metal yokes.

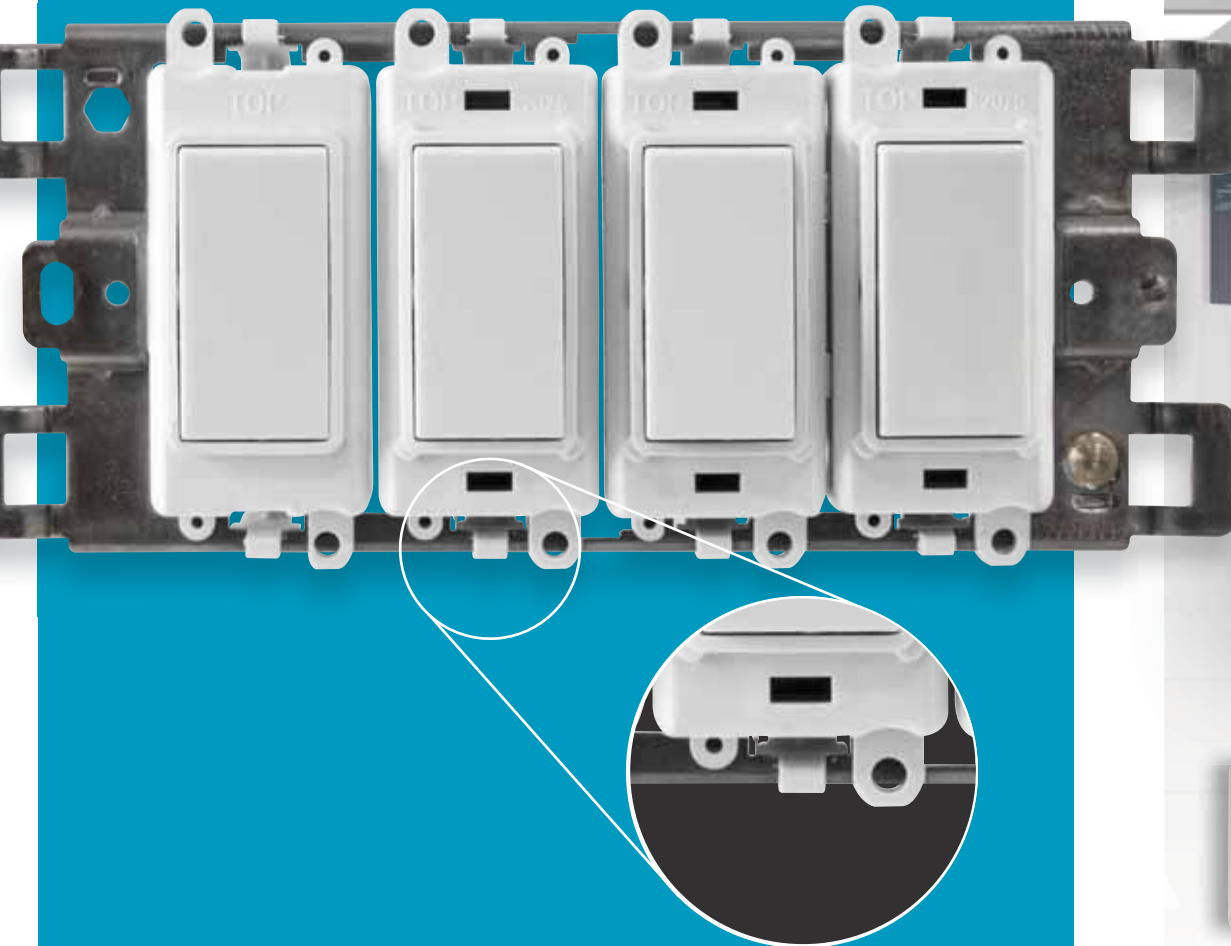

For use with 6 - 24 gang GridPro® frontplates*


*excluding the screwless Definity® GridPro® frontplates, which have their own dedicated inserts.

Horizontal Fixing Screws

...on all GridPro® frontplates.



GridPro® frontplates have horizontal mounted screws to give a uniform, aesthetic look throughout the range.



No Yoke needed
on 1 - 4 gang
GridPro® frontplates!



Screw modules directly onto the back of
1-4 gang GridPro® frontplates*.



*excluding the screwless Definity™ GridPro® frontplates, which have their own dedicated inserts.

Antibacterial & Antiviral Certified Products

The antimicrobial symbol is shown on all pages where products are protected by this feature.

Mode®, Polar™ & Part M™ plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses.

After a contact period of 4 hours, Mode®, Polar™ & Part M™ was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.



MODE® polar™ Part M Range™


Mode®, Polar™ & Part M™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.

Standard BS4662 Back Boxes

...are all you need.



A unique feature of 1 - 4 gang GridPro® frontplates is that any British Standard BS4662 flush mounted back boxes can be used. This is because our 1 - 4 gang GridPro® frontplates do not require a yoke!





*excluding the screwless Definity™ GridPro® frontplates, which have their own dedicated inserts.



Universal Yokes



snap off tabs.

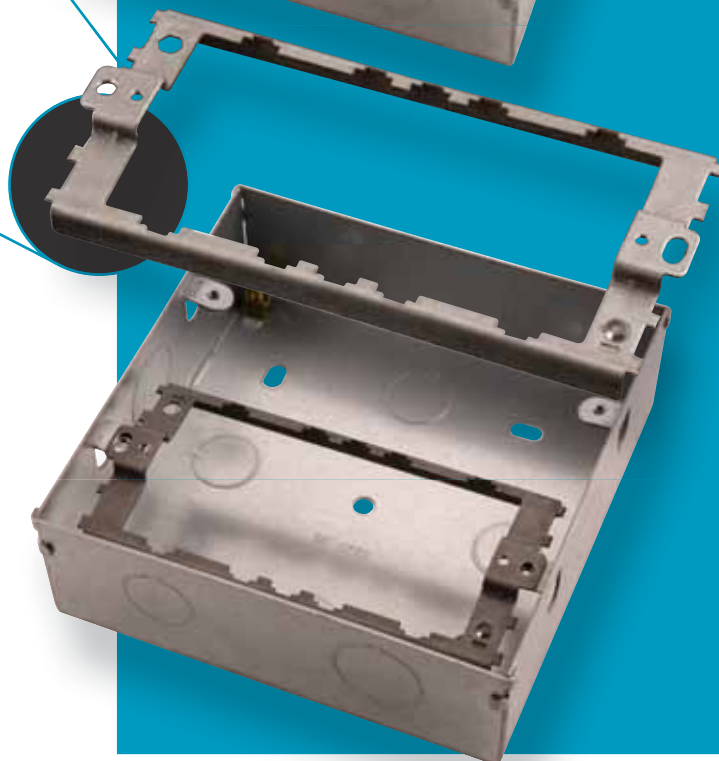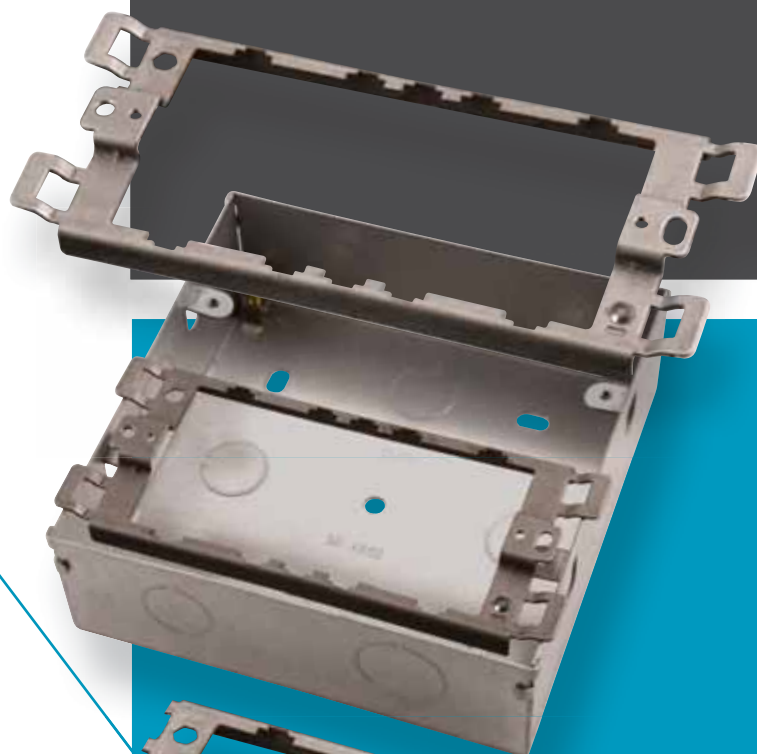

Removal of the end tabs allows the GridPro® yoke to be universal, therefore it may be used for any Click® plate styles* including Define® and Metal Clad variants.

*excluding the Definity™ GridPro® frontplates, which have their own dedicated inserts.


Remove tabs with a simple snap to allow the yoke to fit within the back box.

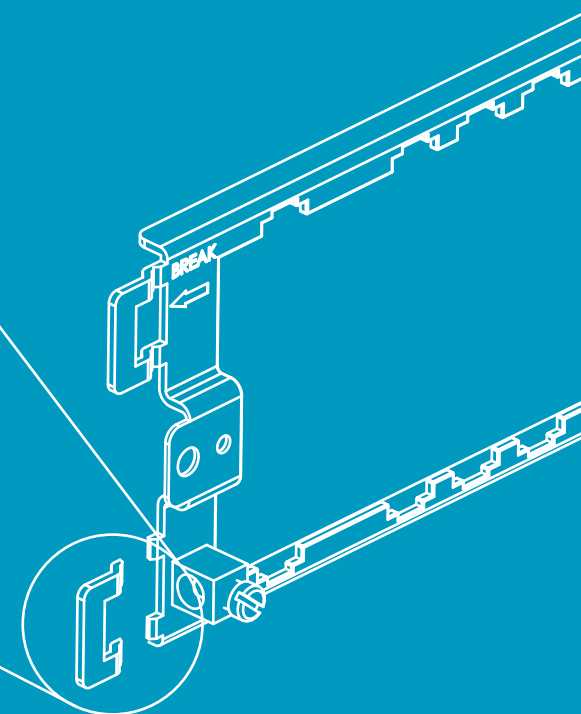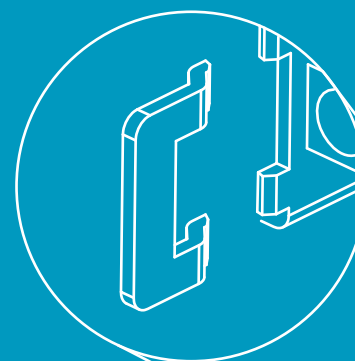

Clip Feature Assembly

MODE[®] polar[™] deco[®] deco[®] PLUS⁺

1. Fit and secure appropriate back box and yoke, (for Define[®] and Metal Clad remove tabs on yoke). Pull the cable through yoke and strip insulation accordingly. Ensure an earth connection between frame and yoke (if required).

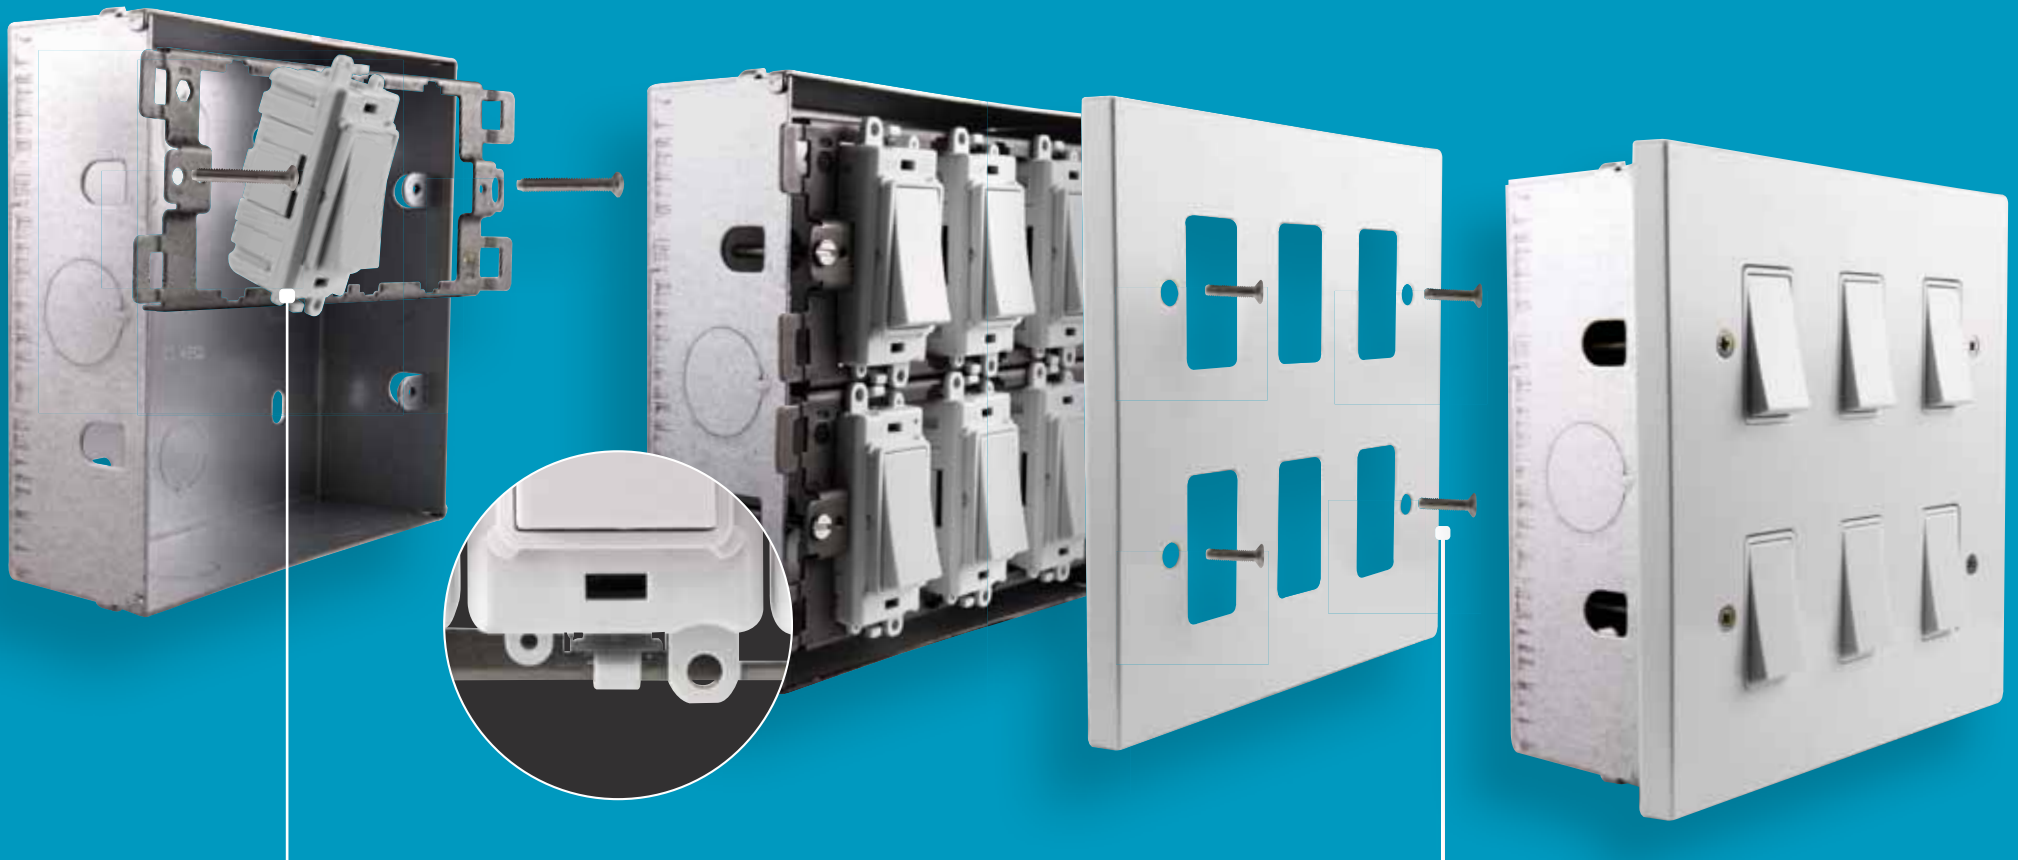


2. Systematically terminate cables into each module.
Clip modules into yoke with a pivot motion.

3. Attach GridPro[®] frontplate using
the fixing screws provided.

Screw Feature Assembly

essentials™ define™ Part M Range™ **MODE** *polar*™ deco™ deco PLUS™

1. Fit and secure appropriate back box, pull cable through frame and strip insulation accordingly.

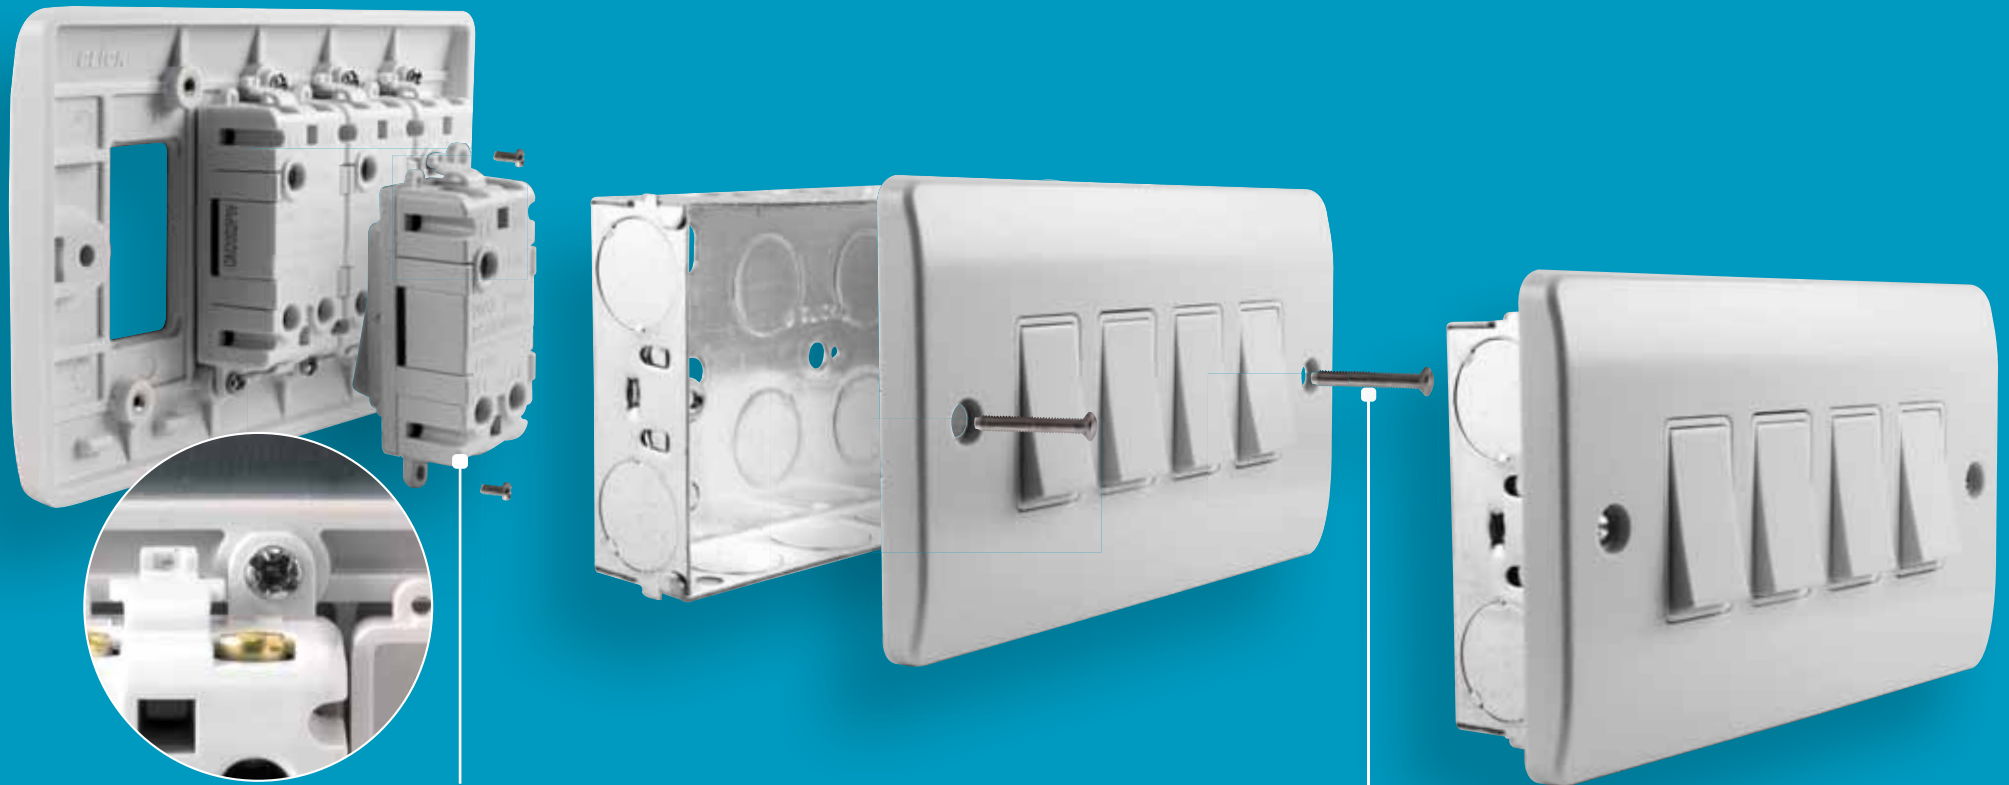

2. Screw each module into the GridPro® frontplate with the screws provided and systematically terminate cables into each module.

3. Attach the GridPro® frontplate using the fixing screws provided.



Module Finishes

All GridPro® modules featured in this brochure are available in thirteen distinctive, quality finishes, with black or white inserts.

Antique brass, black nickel, matt black & matt bronze finishes are available with black inserts only.

Brushed stainless, satin chrome and stainless steel finishes are available with grey inserts.

Red switch module options are available (with white inserts only).

The GridPro® module rockers are styled to match the existing range of Click® wiring accessories to complement any existing Click® installation.

A simple code structure signifies the module colour and product finish...

GM

GridPro®
Module

2001

Product

BK

Module
Colour

CH

Product
Finish



Satin Brass*
(SB)



Polished Brass
(BR)



Polished Chrome
(CH)



Brushed Stainless*
(BS)



Satin Chrome*
(SC)



Stainless Steel
(SS)



Pearl Nickel
(PN)



Black Nickel
(BN)



Antique Brass*
(AB)



Matt Bronze
(BZ)



Matt Black
(MB)



Black
(BK)



White
(PW)



Red
(RD)




20AX 1 Way Switch Modules

GM2001PW	20AX 1 Way Switch Module - White
GM2001BK	20AX 1 Way Switch Module - Black
GM2001PWBR	20AX 1 Way Switch Module - White - Polished Brass
GM2001PWBS	20AX 1 Way Switch Module - White - Brushed Stainless
GM2001PWCH	20AX 1 Way Switch Module - White - Polished Chrome
GM2001PWPN	20AX 1 Way Switch Module - White - Pearl Nickel
GM2001PWBS	20AX 1 Way Switch Module - White - Satin Brass
GM2001PWSC	20AX 1 Way Switch Module - White - Satin Chrome
GM2001PWSS	20AX 1 Way Switch Module - White - Stainless Steel
GM2001BKAB	20AX 1 Way Switch Module - Black - Antique Brass
GM2001BKBN	20AX 1 Way Switch Module - Black - Black Nickel
GM2001BKBR	20AX 1 Way Switch Module - Black - Polished Brass
GM2001BKBS	20AX 1 Way Switch Module - Black - Brushed Stainless
GM2001BKBS	20AX 1 Way Switch Module - Black - Matt Bronze
GM2001BKCH	20AX 1 Way Switch Module - Black - Polished Chrome
GM2001BKPN	20AX 1 Way Switch Module - Black - Pearl Nickel
GM2001BKSB	20AX 1 Way Switch Module - Black - Satin Brass
GM2001BKSC	20AX 1 Way Switch Module - Black - Satin Chrome
GM2001BKSS	20AX 1 Way Switch Module - Black - Stainless Steel
GM2001BKMB	20AX 1 Way Switch Module - Black - Matt Black
GM2001GYBS	20AX 1 Way Switch Module - Grey - Brushed Stainless
GM2001GYSC	20AX 1 Way Switch Module - Grey - Satin Chrome
GM2001GYSS	20AX 1 Way Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1

Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4

Dimensions (mm): 24,5 (W) x 50 (H) x 22,5 (D)

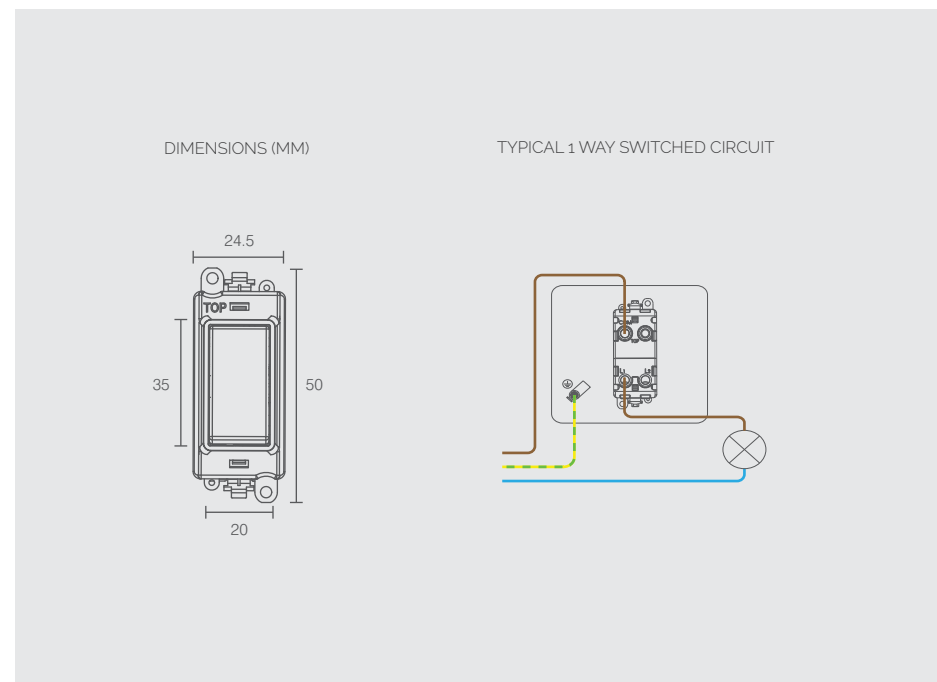

Material Composition

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)
Cover, Insert & Rear Housing: Nylon
Terminals: Brass
Terminal Screws: Steel & Yellow Passivated
Silver "on-lay" Copper / Brass Contacts

Voltage

250V~ 50Hz

Current Rating (A)

20AX (suitable for inductive loads)

Terminal Size

Ø 5mm

Torque Value

1.2Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco[®], Deco Plus[®], Mode[®], Polar[™]) 35mm - 47mm (Define[®], Definity[™])

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Ce

Yes (Non

IP Rating

IP20

Operation

-5°C

Standards

BS EN 6066c

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.


All white molded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



20AX 2 Way Switch Modules

GM2002PW	20AX 2 Way Switch Module - White
GM2002BK	20AX 2 Way Switch Module - Black
GM2002PWBR	20AX 2 Way Switch Module - White - Polished Brass
GM2002PWBS	20AX 2 Way Switch Module - White - Brushed Stainless
GM2002PWCH	20AX 2 Way Switch Module - White - Polished Chrome
GM2002PWP	20AX 2 Way Switch Module - White - Pearl Nickel
GM2002PWSB	20AX 2 Way Switch Module - White - Satin Brass
GM2002PWSC	20AX 2 Way Switch Module - White - Satin Chrome
GM2002PWSS	20AX 2 Way Switch Module - White - Stainless Steel
GM2002PWRD	20AX 2 Way Switch Module - White - Red
GM2002BKAB	20AX 2 Way Switch Module - Black - Antique Brass
GM2002BKBN	20AX 2 Way Switch Module - Black - Black Nickel
GM2002BKBR	20AX 2 Way Switch Module - Black - Polished Brass
GM2002BKBS	20AX 2 Way Switch Module - Black - Brushed Stainless
GM2002BKBZ	20AX 2 Way Switch Module - Black - Matt Bronze
GM2002BKCH	20AX 2 Way Switch Module - Black - Polished Chrome
GM2002BKPN	20AX 2 Way Switch Module - Black - Pearl Nickel
GM2002BKSB	20AX 2 Way Switch Module - Black - Satin Brass
GM2002BKSC	20AX 2 Way Switch Module - Black - Satin Chrome
GM2002BKSS	20AX 2 Way Switch Module - Black - Stainless Steel
GM2002BKMB	20AX 2 Way Switch Module - Black - Matt Black
GM2002GYBS	20AX 2 Way Switch Module - Grey - Brushed Stainless
GM2002GYSC	20AX 2 Way Switch Module - Grey - Satin Chrome
GM2002GYSS	20AX 2 Way Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1
Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 24.5 (W) x 50 (H) x 22.5 (D)

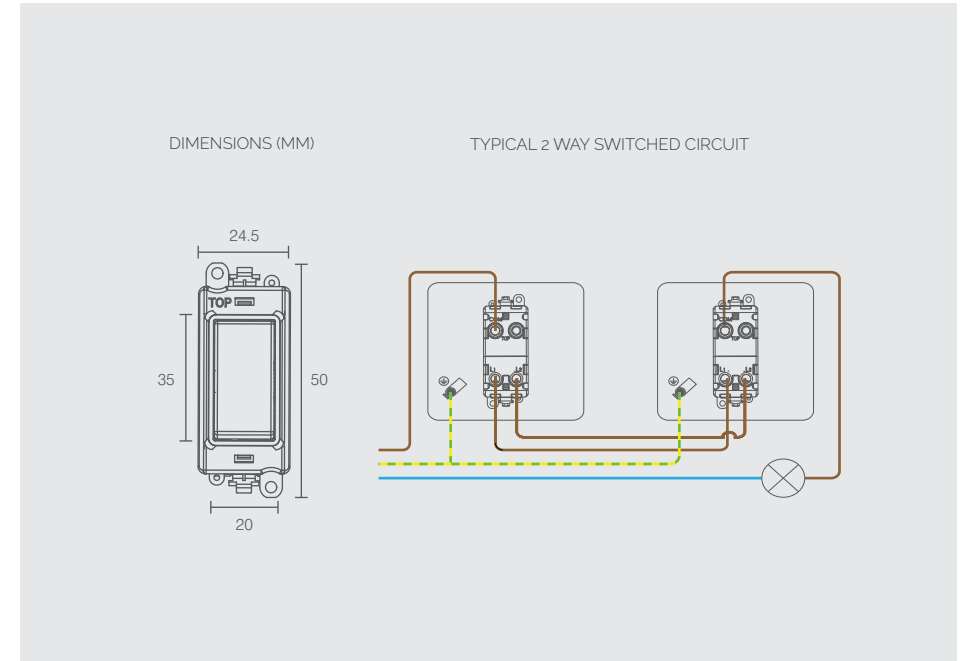

Material Composition

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)
 Cover, Insert & Rear Housing: Nylon
 Terminals: Brass
 Terminal Screws: Steel & Yellow Passivated
 Silver "on-lay" Copper / Brass Contacts

Voltage

250V~ 50Hz

Current Rating (A)

20AX (suitable for inductive loads)

Terminal Size

ø 5mm

Torque Value

1.2Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Certified

Yes (Non Ingot Switches Only)

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS EN 60669-1

Additional Information:


Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



20AX 2 Way Retractive Switch Modules

GM2004PW	20AX 2 Way Retractive Switch Module - White
GM2004BK	20AX 2 Way Retractive Switch Module - Black
GM2004PWBR	20AX 2 Way Retractive Switch Module - White - Polished Brass
GM2004PWBS	20AX 2 Way Retractive Switch Module - White - Brushed Stainless
GM2004PWCH	20AX 2 Way Retractive Switch Module - White - Polished Chrome
GM2004PWPN	20AX 2 Way Retractive Switch Module - White - Pearl Nickel
GM2004PWSB	20AX 2 Way Retractive Switch Module - White - Satin Brass
GM2004PWSC	20AX 2 Way Retractive Switch Module - White - Satin Chrome
GM2004PWSS	20AX 2 Way Retractive Switch Module - White - Stainless Steel
GM2004PWRD	20AX 2 Way Retractive Switch Module - White - Red
GM2004BKAB	20AX 2 Way Retractive Switch Module - Black - Antique Brass
GM2004BKBN	20AX 2 Way Retractive Switch Module - Black - Black Nickel
GM2004BKBR	20AX 2 Way Retractive Switch Module - Black - Polished Brass
GM2004BKBS	20AX 2 Way Retractive Switch Module - Black - Brushed Stainless
GM2004BKBZ	20AX 2 Way Retractive Switch Module - Black - Matt Bronze
GM2004BKCH	20AX 2 Way Retractive Switch Module - Black - Polished Chrome
GM2004BKPN	20AX 2 Way Retractive Switch Module - Black - Pearl Nickel
GM2004BKSB	20AX 2 Way Retractive Switch Module - Black - Satin Brass
GM2004BKSC	20AX 2 Way Retractive Switch Module - Black - Satin Chrome
GM2004BKSS	20AX 2 Way Retractive Switch Module - Black - Stainless Steel
GM2004BKMB	20AX 2 Way Retractive Switch Module - Black - Matt Black
GM2004GYBS	20AX 2 Way Retractive Switch Module - Grey - Brushed Stainless
GM2004GYSC	20AX 2 Way Retractive Switch Module - Grey - Satin Chrome
GM2004GYSS	20AX 2 Way Retractive Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1
Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 24.5 (W) x 50 (H) x 22.5 (D)

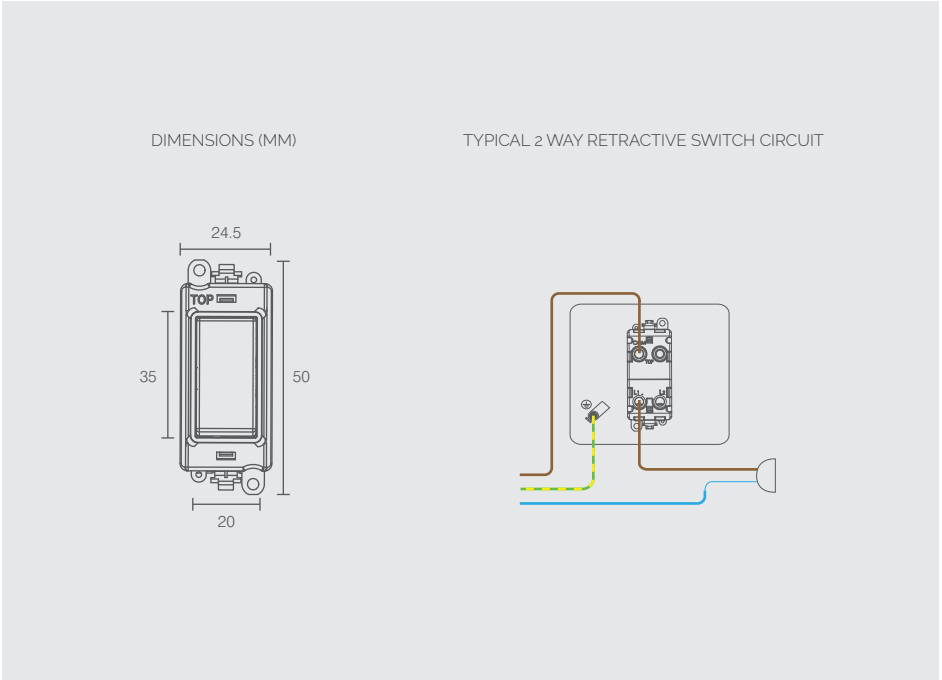

Material Composition

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)
 Cover, Insert & Rear Housing: Nylon
 Terminals: Brass
 Terminal Screws: Steel & Yellow Passivated
 Silver 'on-lay' Copper / Brass Contacts

Voltage

250V~ 50Hz

Current Rating (A)

20AX

Terminal Size

ø 5mm

Torque Value

12Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco[®], Deco Plus[®], Mode[®], Polar[®]) 35mm - 47mm (Define[®], Definity[®])

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Certified

Yes (Non Ingot Switches Only)

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS EN 60669-1

Additional Information:


Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



20AX Intermediate Switch Modules

GM2028PW GM2028BK	20AX Intermediate Switch Module - White 20AX Intermediate Switch Module - Black
GM2028PWBR GM2028PWBS GM2028PWCH GM2028PWPN GM2028PWBSB GM2028PWSC GM2028PWSS GM2028PWWD	20AX Intermediate Switch Module - White - Polished Brass 20AX Intermediate Switch Module - White - Brushed Stainless 20AX Intermediate Switch Module - White - Polished Chrome 20AX Intermediate Switch Module - White - Pearl Nickel 20AX Intermediate Switch Module - White - Satin Brass 20AX Intermediate Switch Module - White - Satin Chrome 20AX Intermediate Switch Module - White - Stainless Steel 20AX Intermediate Switch Module - White - Red
GM2028BKAB GM2028BKBN GM2028BKBR GM2028BKBS GM2028BKBS GM2028BKCH GM2028BKPN GM2028BKSB GM2028BKSC GM2028BKSS GM2028BKMB	20AX Intermediate Switch Module - Black - Antique Brass 20AX Intermediate Switch Module - Black - Black Nickel 20AX Intermediate Switch Module - Black - Polished Brass 20AX Intermediate Switch Module - Black - Brushed Stainless 20AX Intermediate Switch Module - Black - Matt Bronze 20AX Intermediate Switch Module - Black - Polished Chrome 20AX Intermediate Switch Module - Black - Pearl Nickel 20AX Intermediate Switch Module - Black - Satin Brass 20AX Intermediate Switch Module - Black - Satin Chrome 20AX Intermediate Switch Module - Black - Stainless Steel 20AX Intermediate Switch Module - Black - Matt Black
GM2028GYBS GM2028GYSC GM2028GYSS	20AX Intermediate Switch Module - Grey - Brushed Stainless 20AX Intermediate Switch Module - Grey - Satin Chrome 20AX Intermediate Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1
Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 24.5 (W) x 50 (H) x 22.5 (D)

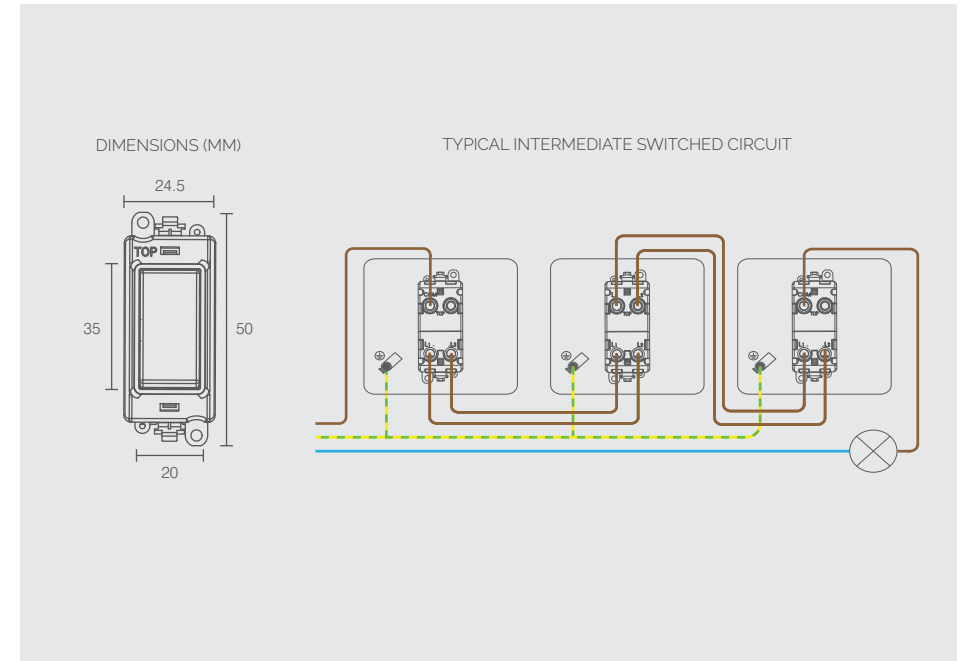

Material Composition

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)
Cover, Insert & Rear Housing: Nylon
Terminals: Brass
Terminal Screws: Steel & Yellow Passivated
Silver "on-lay" Copper / Brass Contacts

Voltage

250V~ 50Hz

Current Rating (A)

20AX (suitable for inductive loads)

Terminal Size

Ø 5mm

Torque Value

12Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco', **Deco Plus'**, **Mode'**, **Polar'**) 35mm - 47mm (Define', Definity')

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Certified

Yes (Non Ingot Switches Only)

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS EN 60669-1

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

**IN HOUSE LASER ETCHING**

Our in house laser printer provides flexibility to suit large volume batch or custom jobs. The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

The GM2018 modules listed are available with the following laser etched legends:

-BL	Boiler
-CH	Cooker Hood
-DW	Dishwasher
-FD	Fridge
-FF	Fridge Freezer
-FN	Fan
-FZ	Freezer
-HB	Hob
-HT	Hot Tap
-MW	Microwave
-OV	Oven
-TD	Tumble Dryer
-WC	Wine Cooler
-WD	Waste Disposal
-WDR	Warming Drawer
-WH	Water Heater
-WM	Washing Machine

Suffix the two letters to complete the product code with legend eg. GM2018PWCH-WM



20AX Double Pole Switch Modules - Laser Etched Legend

GM2018PW	20AX Double Pole Switch Module - White
GM2018BK	20AX Double Pole Switch Module - Black
GM2018PWBR	20AX Double Pole Switch Module - White - Polished Brass
GM2018PWBS	20AX Double Pole Switch Module - White - Brushed Stainless
GM2018PWCH	20AX Double Pole Switch Module - White - Polished Chrome
GM2018PWPN	20AX Double Pole Switch Module - White - Pearl Nickel
GM2018PWSB	20AX Double Pole Switch Module - White - Satin Brass
GM2018PWSC	20AX Double Pole Switch Module - White - Satin Chrome
GM2018PWSS	20AX Double Pole Switch Module - White - Stainless Steel
GM2018PWDR	20AX Double Pole Switch Module - White - Red
GM2018BKAB	20AX Double Pole Switch Module - Black - Antique Brass
GM2018BKBN	20AX Double Pole Switch Module - Black - Black Nickel
GM2018BKBR	20AX Double Pole Switch Module - Black - Polished Brass
GM2018BKBS	20AX Double Pole Switch Module - Black - Brushed Stainless
GM2018BKBZ	20AX Double Pole Switch Module - Black - Matt Bronze
GM2018BKCH	20AX Double Pole Switch Module - Black - Polished Chrome
GM2018BKPN	20AX Double Pole Switch Module - Black - Pearl Nickel
GM2018BKSB	20AX Double Pole Switch Module - Black - Satin Brass
GM2018BKSC	20AX Double Pole Switch Module - Black - Satin Chrome
GM2018BKSS	20AX Double Pole Switch Module - Black - Stainless Steel
GM2018BKMB	20AX Double Pole Switch Module - Black - Matt Black
GM2018GYBS	20AX Double Pole Switch Module - Grey - Brushed Stainless
GM2018GYSC	20AX Double Pole Switch Module - Grey - Satin Chrome
GM2018GYSS	20AX Double Pole Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1

Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4

Dimensions (mm): 24.5 (W) x 50 (H) x 22.5 (D)

DIMENSIONS (MM)**TYPICAL WIRING DIAGRAM****Material Composition**

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)
Cover, Insert & Rear Housing: Nylon
Terminals: Brass, Terminal Screws: Steel & Yellow Passivated
Silver "on-lay" Copper / Brass Contacts

Voltage

250V~ 50Hz

Current Rating (A)

20AX

Terminal Size

Ø 5mm

Torque Value

12Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco*, Deco Plus*, Mode*, Polar*) 35mm - 47mm (Define*, Definity*)

Double Pole

Yes

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Certified

Yes (Non Ingot Switches Only)

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS EN 60669-1

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.

**IN HOUSE LASER ETCHING**

Our in house laser printer provides flexibility to suit large volume batch or custom jobs. The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

The GM2018N modules listed are available with the following laser etched legends:

- BL Boiler
- CH Cooker Hood
- DW Dishwasher
- FD Fridge
- FF Fridge Freezer
- FN Fan
- FZ Freezer
- HB Hob
- HT Hot Tap
- MW Microwave
- OV Oven
- TD Tumble Dryer
- WC Wine Cooler
- WD Waste Disposal
- WDR Warming Drawer
- WH Water Heater
- WM Washing Machine

Suffix the two letters to complete the product code with legend eg. GM2018NPWCH-WM



20AX Double Pole Switch Modules with Neon

GM2018NPW	20AX Double Pole Switch With Neon Module - White
GM2018NBK	20AX Double Pole Switch With Neon Module - Black
GM2018NPWBR	20AX Double Pole Switch With Neon Module - White - Polished Brass
GM2018NPWBS	20AX Double Pole Switch With Neon Module - White - Brushed Stainless
GM2018NPWCH	20AX Double Pole Switch With Neon Module - White - Polished Chrome
GM2018NPWPN	20AX Double Pole Switch With Neon Module - White - Pearl Nickel
GM2018NPWSB	20AX Double Pole Switch With Neon Module - White - Satin Brass
GM2018NPWSC	20AX Double Pole Switch With Neon Module - White - Satin Chrome
GM2018NPWSC	20AX Double Pole Switch With Neon Module - White - Stainless Steel
GM2018NBKAB	20AX Double Pole Switch With Neon Module - Black - Antique Brass
GM2018NBKBN	20AX Double Pole Switch With Neon Module - Black - Black Nickel
GM2018NBKBR	20AX Double Pole Switch With Neon Module - Black - Polished Brass
GM2018NBKBS	20AX Double Pole Switch With Neon Module - Black - Brushed Stainless
GM2018NBKBZ	20AX Double Pole Switch With Neon Module - Black - Matt Bronze
GM2018NBKCH	20AX Double Pole Switch With Neon Module - Black - Polished Chrome
GM2018NBKPN	20AX Double Pole Switch With Neon Module - Black - Pearl Nickel
GM2018NBKSB	20AX Double Pole Switch With Neon Module - Black - Satin Brass
GM2018NBKSC	20AX Double Pole Switch With Neon Module - Black - Satin Chrome
GM2018NBKSS	20AX Double Pole Switch With Neon Module - Black - Stainless Steel
GM2018NBKMB	20AX Double Pole Switch With Neon Module - Black - Matt Black
GM2018NGYBS	20AX Double Pole Switch With Neon Module - Grey - Brushed Stainless
GM2018NGYSC	20AX Double Pole Switch With Neon Module - Grey - Satin Chrome
GM2018NGYSS	20AX Double Pole Switch With Neon Module - Grey - Stainless Steel

Standards: BS EN 60669-1

Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4

Dimensions (mm): 24.5 (W) x 50 (H) x 22.5 (D)

DIMENSIONS (MM)**TYPICAL WIRING DIAGRAM****Material Composition**

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)
Cover, Insert & Rear Housing: Nylon
Terminals: Brass, Terminal Screws: Steel & Yellow Passivated
Silver "on-lay" Copper / Brass Contacts

Voltage

250V~ 50Hz

Current Rating (A)

20AX

Terminal Size

ø 5mm

Torque Value

12Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco*, Deco Plus*, Mode*, Polar*) 35mm - 47mm (Define*, Definity*)

Double Pole

Yes

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Certified

Yes (Non Ingot Switches Only)

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS EN 60669-1

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.


All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



20AX 3 Position Switch Modules

GM2070PW	20AX 3 Position Switch Module - White
GM2070BK	20AX 3 Position Switch Module - Black
GM2070PWBR	20AX 3 Position Switch Module - White - Polished Brass
GM2070PWBS	20AX 3 Position Switch Module - White - Brushed Stainless
GM2070PWCH	20AX 3 Position Switch Module - White - Polished Chrome
GM2070WPNN	20AX 3 Position Switch Module - White - Pearl Nickel
GM2070PWSB	20AX 3 Position Switch Module - White - Satin Brass
GM2070PWSC	20AX 3 Position Switch Module - White - Satin Chrome
GM2070PWSS	20AX 3 Position Switch Module - White - Stainless Steel
GM2070BKAB	20AX 3 Position Switch Module - Black - Antique Brass
GM2070BKBN	20AX 3 Position Switch Module - Black - Black Nickel
GM2070BKBR	20AX 3 Position Switch Module - Black - Polished Brass
GM2070BKBS	20AX 3 Position Switch Module - Black - Brushed Stainless
GM2070BKZ	20AX 3 Position Switch Module - Black - Matt Bronze
GM2070BKCH	20AX 3 Position Switch Module - Black - Polished Chrome
GM2070BKPN	20AX 3 Position Switch Module - Black - Pearl Nickel
GM2070BKSB	20AX 3 Position Switch Module - Black - Satin Brass
GM2070BKSC	20AX 3 Position Switch Module - Black - Satin Chrome
GM2070BKSS	20AX 3 Position Switch Module - Black - Stainless Steel
GM2070BKMB	20AX 3 Position Switch Module - Black - Matt Black
GM2070GYBS	20AX 3 Position Switch Module - Grey - Brushed Stainless
GM2070GYSC	20AX 3 Position Switch Module - Grey - Satin Chrome
GM2070GYSS	20AX 3 Position Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1
Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 24.5 (W) x 50 (H) x 26 (D)

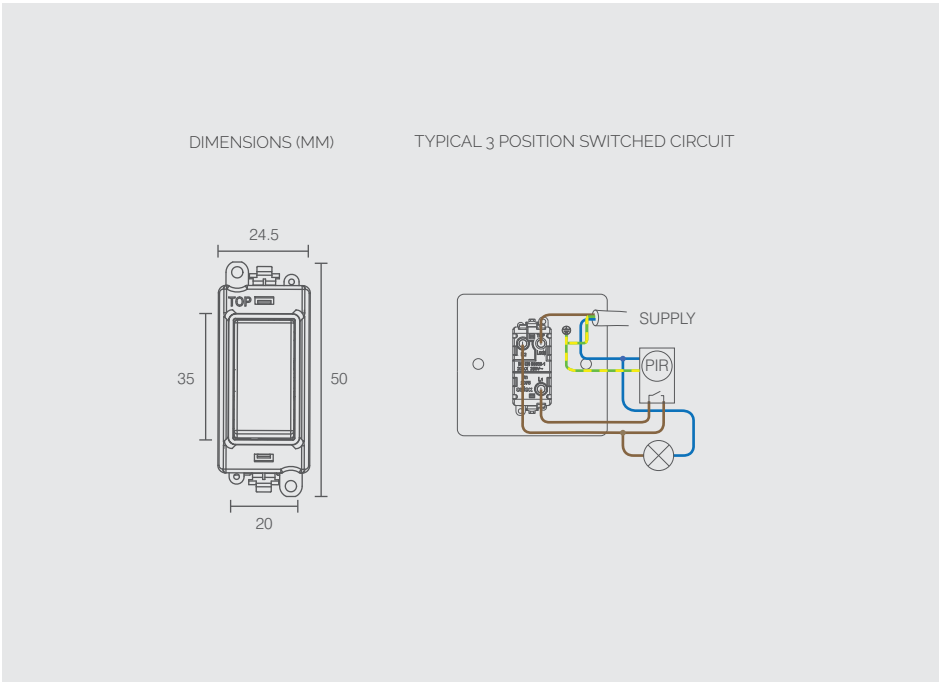

Material Composition

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)
 Cover, Insert & Rear Housing: Nylon
 Terminals: Brass
 Terminal Screws: Steel & Yellow Passivated
 Silver "on-lay" Copper / Brass Contacts

Voltage

250V~ 50Hz

Current Rating (A)

20AX (suitable for inductive loads)

Terminal Size

Ø 5mm

Torque Value

12Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco[®], Deco Plus[®], Mode[®], Polar[®]) 35mm - 47mm (Define[®], Definity[®])

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Certified

Yes (Non Ingot Switches Only)

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS EN 60669-1

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



20AX 3 Position Retractive Switch Modules


GM2075PW	20AX 3 Position Retractive Switch Module - White
GM2075BK	20AX 3 Position Retractive Switch Module - Black
GM2075PWBR	20AX 3 Position Retractive Switch Module - White - Polished Brass
GM2075PWBS	20AX 3 Position Retractive Switch Module - White - Brushed Stainless
GM2075PWCH	20AX 3 Position Retractive Switch Module - White - Polished Chrome
GM2075PWPN	20AX 3 Position Retractive Switch Module - White - Pearl Nickel
GM2075PWSB	20AX 3 Position Retractive Switch Module - White - Satin Brass
GM2075PWSC	20AX 3 Position Retractive Switch Module - White - Satin Chrome
GM2075PWSS	20AX 3 Position Retractive Switch Module - White - Stainless Steel
GM2075PWDR	20AX 3 Position Retractive Switch Module - White - Red
GM2075BKAB	20AX 3 Position Retractive Switch Module - Black - Antique Brass
GM2075BKBN	20AX 3 Position Retractive Switch Module - Black - Black Nickel
GM2075BKBR	20AX 3 Position Retractive Switch Module - Black - Polished Brass
GM2075BKBS	20AX 3 Position Retractive Switch Module - Black - Brushed Stainless
GM2075BKBZ	20AX 3 Position Retractive Switch Module - Black - Matt Bronze
GM2075BKCH	20AX 3 Position Retractive Switch Module - Black - Polished Chrome
GM2075BKPN	20AX 3 Position Retractive Switch Module - Black - Pearl Nickel
GM2075BKSB	20AX 3 Position Retractive Switch Module - Black - Satin Brass
GM2075BKSC	20AX 3 Position Retractive Switch Module - Black - Satin Chrome
GM2075BKSS	20AX 3 Position Retractive Switch Module - Black - Stainless Steel
GM2075BKMB	20AX 3 Position Retractive Switch Module - Black - Matt Black
GM2075GYBS	20AX 3 Position Retractive Switch Module - Grey - Brushed Stainless
GM2075GYSC	20AX 3 Position Retractive Switch Module - Grey - Satin Chrome
GM2075GYSS	20AX 3 Position Retractive Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1


Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4

Dimensions (mm): 24.5 (W) x 50 (H) x 26 (D)

DIMENSIONS (MM)



TYPICAL WIRING DIAGRAM



Material Composition

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)
Cover, Insert & Rear Housing: Nylon
Terminals: Brass
Terminal Screws: Steel & Yellow Passivated
Silver "on-lay" Copper / Brass Contacts

Voltage

250V~ 50Hz

Current Rating (A)

20AX

Terminal Size

ø 5mm

Torque Value

12Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco⁺, Deco Plus⁺, Mode⁺, Polar⁺) 35mm - 47mm (Define⁺, Definity⁺)

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Certified

Yes (Non Ingot Switches Only)

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS EN 60669-1

Additional Information:


Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



20AX 2 Way Toggle Switch Modules

GM209002PWBR	20AX 2 Way Toggle Switch Module - White - Polished Brass
GM209002PWBS	20AX 2 Way Toggle Switch Module - White - Brushed Stainless
GM209002PWCH	20AX 2 Way Toggle Switch Module - White - Polished Chrome
GM209002PWPN	20AX 2 Way Toggle Switch Module - White - Pearl Nickel
GM209002PWSB	20AX 2 Way Toggle Switch Module - White - Satin Brass
GM209002PWSC	20AX 2 Way Toggle Switch Module - White - Satin Chrome
GM209002PWSS	20AX 2 Way Toggle Switch Module - White - Stainless Steel
GM209002BK	20AX 2 Way Toggle Switch Module - Black
GM209002BKAB	20AX 2 Way Toggle Switch Module - Black - Antique Brass
GM209002BKBN	20AX 2 Way Toggle Switch Module - Black - Black Nickel
GM209002BKBR	20AX 2 Way Toggle Switch Module - Black - Polished Brass
GM209002BKBS	20AX 2 Way Toggle Switch Module - Black - Brushed Stainless
GM209002BKBZ	20AX 2 Way Toggle Switch Module - Black - Matt Bronze
GM209002BKCH	20AX 2 Way Toggle Switch Module - Black - Polished Chrome
GM209002BKPN	20AX 2 Way Toggle Switch Module - Black - Pearl Nickel
GM209002BKSB	20AX 2 Way Toggle Switch Module - Black - Satin Brass
GM209002BKSC	20AX 2 Way Toggle Switch Module - Black - Satin Chrome
GM209002BKSS	20AX 2 Way Toggle Switch Module - Black - Stainless Steel
GM209002BKMB	20AX 2 Way Toggle Switch Module - Black - Matt Black
GM209002GYBS	20AX 2 Way Toggle Switch Module - Grey - Brushed Stainless
GM209002GYSC	20AX 2 Way Toggle Switch Module - Grey - Satin Chrome
GM209002GYSS	20AX 2 Way Toggle Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1
Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 24.5 (W) x 50 (H) x 19.5 (D)

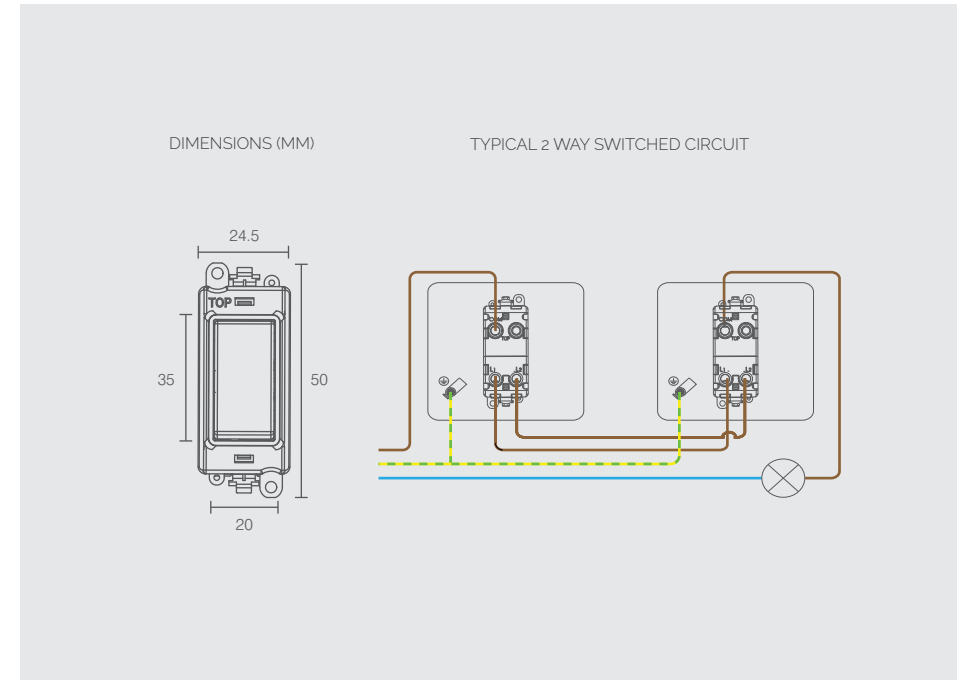

Material Composition

Rocker Switch: Plated Cast Copper
 Cover, Insert & Rear Housing: Nylon
 Terminals: Brass
 Terminal Screws: Steel & Yellow Passivated
 Silver "on-lay" Copper / Brass Contacts

Voltage

250V~ 50Hz

Current Rating (A)

20AX (suitable for inductive loads)

Terminal Size

Ø 5mm

Torque Value

12Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco[®], Deco Plus[®], Mode[®], Polar[®]) 35mm - 47mm (Define[®], Definity[®])

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Certified

No

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS EN 60669-1

Additional Information:


Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



20AX Double Pole Toggle Switch Modules

GM209018PWBR	20AX Double Pole Toggle Switch Module - White - Polished Brass
GM209018PWBS	20AX Double Pole Toggle Switch Module - White - Brushed Stainless
GM209018PWCH	20AX Double Pole Toggle Switch Module - White - Polished Chrome
GM209018PWPN	20AX Double Pole Toggle Switch Module - White - Pearl Nickel
GM209018PWSB	20AX Double Pole Toggle Switch Module - White - Satin Brass
GM209018PWSC	20AX Double Pole Toggle Switch Module - White - Satin Chrome
GM209018PWSS	20AX Double Pole Toggle Switch Module - White - Stainless Steel
GM209018BK	20AX Double Pole Toggle Switch Module - Black
GM209018BKAB	20AX Double Pole Toggle Switch Module - Black - Antique Brass
GM209018BKBN	20AX Double Pole Toggle Switch Module - Black - Black Nickel
GM209018BKBR	20AX Double Pole Toggle Switch Module - Black - Polished Brass
GM209018BKBS	20AX Double Pole Toggle Switch Module - Black - Brushed Stainless
GM209018BKBZ	20AX Double Pole Toggle Switch Module - Black - Matt Bronze
GM209018BKCH	20AX Double Pole Toggle Switch Module - Black - Polished Chrome
GM209018BKPN	20AX Double Pole Toggle Switch Module - Black - Pearl Nickel
GM209018BKSB	20AX Double Pole Toggle Switch Module - Black - Satin Brass
GM209018BKSC	20AX Double Pole Toggle Switch Module - Black - Satin Chrome
GM209018BKSS	20AX Double Pole Toggle Switch Module - Black - Stainless Steel
GM209018BKMB	20AX Double Pole Toggle Switch Module - Black - Matt Black
GM209018GYBS	20AX Double Pole Toggle Switch Module - Grey - Brushed Stainless
GM209018GYSC	20AX Double Pole Toggle Switch Module - Grey - Satin Chrome
GM209018GYSS	20AX Double Pole Toggle Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1
Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 24.5 (W) x 50 (H) x 19.5 (D)

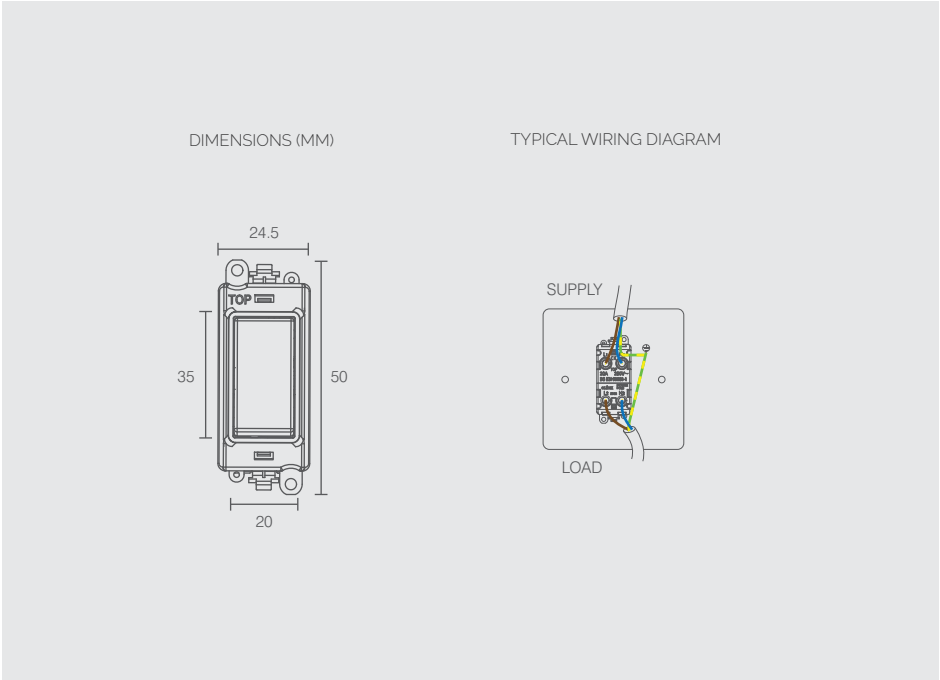

Material Composition

Rocker Switch: Plated Cast Copper
 Cover, Insert & Rear Housing: Nylon
 Terminals: Brass
 Terminal Screws: Steel & Yellow Passivated
 Silver "on-lay" Copper / Brass Contacts

Voltage

250V~ 50Hz

Current Rating (A)

20AX (suitable for inductive loads)

Terminal Size

Ø 5mm

Torque Value

12Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco[®], **Deco Plus[®]**, **Mode[®]**, **Polar[®]**) 35mm - 47mm (Define[®], Definity[®])

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Certified

No

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS EN 60669-1

Additional Information:


Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



20AX Intermediate Toggle Switch Modules

GM209028PWBR	20AX Intermediate Toggle Switch Module - White - Polished Brass
GM209028PWBH	20AX Intermediate Toggle Switch Module - White - Brushed Stainless
GM209028PWBH	20AX Intermediate Toggle Switch Module - White - Polished Chrome
GM209028PWPB	20AX Intermediate Toggle Switch Module - White - Pearl Nickel
GM209028PWSB	20AX Intermediate Toggle Switch Module - White - Satin Brass
GM209028PWSH	20AX Intermediate Toggle Switch Module - White - Satin Chrome
GM209028PWSH	20AX Intermediate Toggle Switch Module - White - Stainless Steel
GM209028BK	20AX Intermediate Toggle Switch Module - Black
GM209028BKAB	20AX Intermediate Toggle Switch Module - Black - Antique Brass
GM209028BKBN	20AX Intermediate Toggle Switch Module - Black - Black Nickel
GM209028BKBR	20AX Intermediate Toggle Switch Module - Black - Polished Brass
GM209028BKBS	20AX Intermediate Toggle Switch Module - Black - Brushed Stainless
GM209028BKBN	20AX Intermediate Toggle Switch Module - Black - Matt Bronze
GM209028BKCH	20AX Intermediate Toggle Switch Module - Black - Polished Chrome
GM209028BKPN	20AX Intermediate Toggle Switch Module - Black - Pearl Nickel
GM209028BKSB	20AX Intermediate Toggle Switch Module - Black - Satin Brass
GM209028BKSC	20AX Intermediate Toggle Switch Module - Black - Satin Chrome
GM209028BKSS	20AX Intermediate Toggle Switch Module - Black - Stainless Steel
GM209028BKMB	20AX Intermediate Toggle Switch Module - Black - Matt Black
GM209028GYBS	20AX Intermediate Toggle Switch Module - Grey - Brushed Stainless
GM209028GYSC	20AX Intermediate Toggle Switch Module - Grey - Satin Chrome
GM209028GYSS	20AX Intermediate Toggle Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1
Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 24.5 (W) x 50 (H) x 19.5 (D)

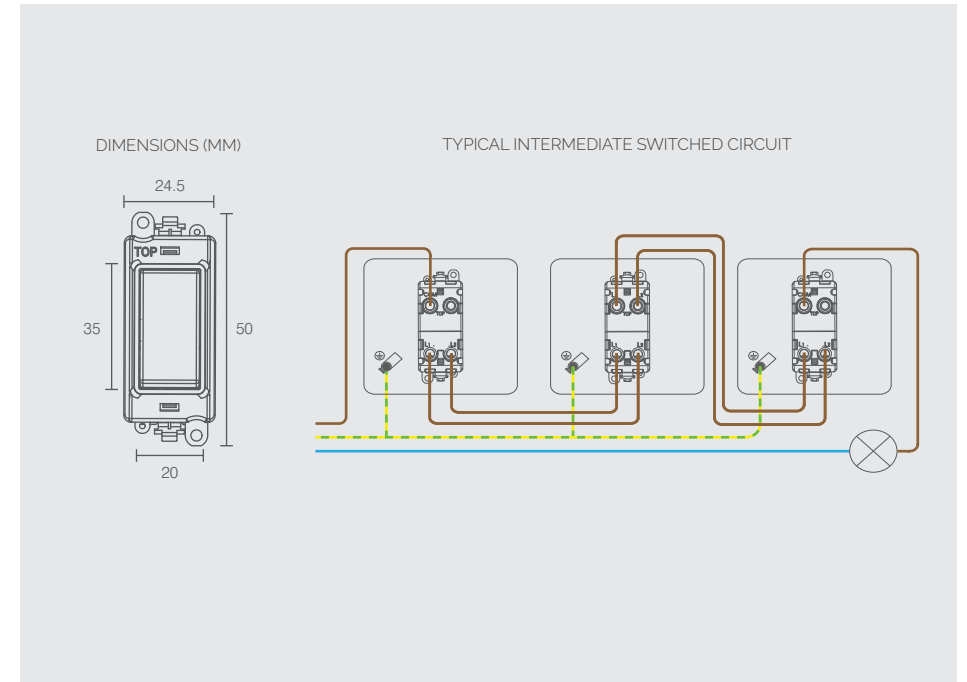

Material Composition

Rocker Switch: Plated Cast Copper
 Cover, Insert & Rear Housing: Nylon
 Terminals: Brass
 Terminal Screws: Steel & Yellow Passivated
 Silver "on-lay" Copper / Brass Contacts

Voltage

250V~ 50Hz

Current Rating (A)

20AX (suitable for inductive loads)

Terminal Size

Ø 5mm

Torque Value

12Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Certified

No

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS EN 60669-1

Additional Information:


Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



10A 3 Pole Fan Isolation Modules

GM1020PW	10A 3 Pole Fan Isolation Switch Module - White
GM1020PWBR	10A 3 Pole Fan Isolation Switch Module - White - Polished Brass
GM1020PWBS	10A 3 Pole Fan Isolation Switch Module - White - Brushed Stainless
GM1020PWCH	10A 3 Pole Fan Isolation Switch Module - White - Polished Chrome
GM1020PWPN	10A 3 Pole Fan Isolation Switch Module - White - Pearl Nickel
GM1020PWSB	10A 3 Pole Fan Isolation Switch Module - White - Satin Brass
GM1020PWSC	10A 3 Pole Fan Isolation Switch Module - White - Satin Chrome
GM1020PWSS	10A 3 Pole Fan Isolation Switch Module - White - Stainless Steel
GM1020BK	10A 3 Pole Fan Isolation Switch Module - Black
GM1020BKAB	10A 3 Pole Fan Isolation Switch Module - Black - Antique Brass
GM1020BKBN	10A 3 Pole Fan Isolation Switch Module - Black - Black Nickel
GM1020BKBR	10A 3 Pole Fan Isolation Switch Module - Black - Polished Brass
GM1020BKBS	10A 3 Pole Fan Isolation Switch Module - Black - Brushed Stainless
GM1020BKBZ	10A 3 Pole Fan Isolation Switch Module - Black - Matt Bronze
GM1020BKCH	10A 3 Pole Fan Isolation Switch Module - Black - Polished Chrome
GM1020BKMB	10A 3 Pole Fan Isolation Switch Module - Black - Metal Black
GM1020BKPN	10A 3 Pole Fan Isolation Switch Module - Black - Pearl Nickel
GM1020BKSB	10A 3 Pole Fan Isolation Switch Module - Black - Satin Brass
GM1020BKSC	10A 3 Pole Fan Isolation Switch Module - Black - Satin Chrome
GM1020BKSS	10A 3 Pole Fan Isolation Switch Module - Black - Stainless Steel
GM1020GYBS	10A 3 Pole Fan Isolation Switch Module - Grey - Brushed Stainless
GM1020GYSC	10A 3 Pole Fan Isolation Switch Module - Grey - Satin Chrome
GM1020GYSS	10A 3 Pole Fan Isolation Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-2-4 BS EN 60669-1
Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 4 x 1.5 or 2 x 2.5
Dimensions (mm): 24.5 (W) x 50 (H) x 22.5 (D)

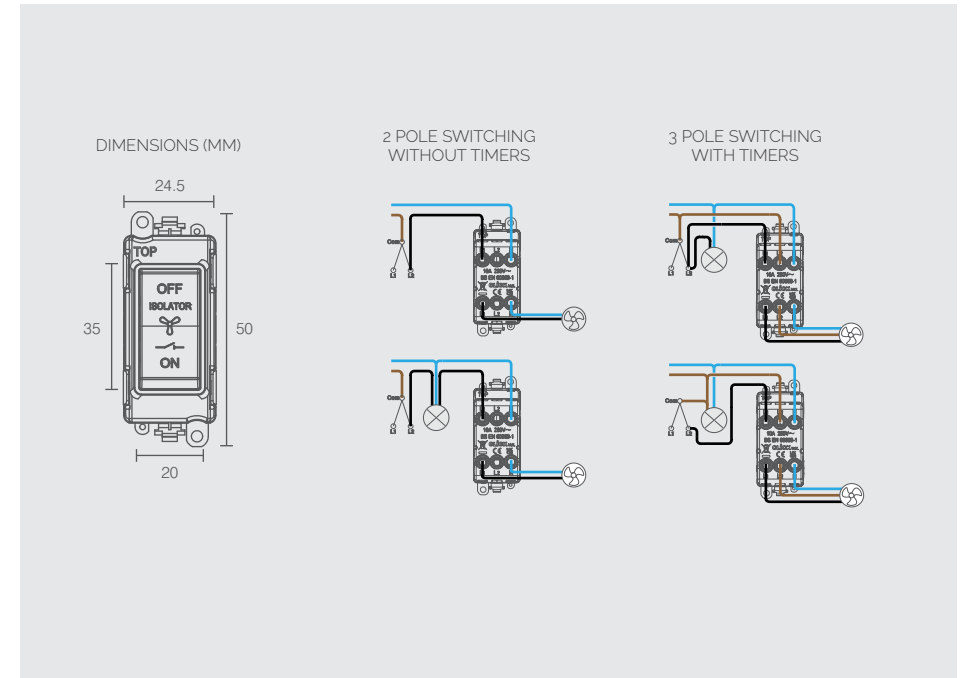

Material Composition

Body & Insert: Nylon
 Switch: Nylon
 Insert Cover: Stainless Steel
 Terminals: Brass
 Terminal Screws: Steel & Yellow Passivated
 Silver "on-lay" Copper / Brass Contacts

Voltage

250V~ 50Hz

Current Rating (A)

20AX

Terminal Size

Ø 3.5mm

Torque Value

0.5Nm

Cable Size (mm²)

2 x 2.5mm², 4 x 1.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco[®], Deco Plus[®], Mode[®], Polar[®]) 35mm - 47mm (Define[®], Definity[®])

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Certified

No

IP Rating

IP20

Operational Temperature

-5 to +40

Standards

BS EN 60669-2-4, BS EN 60669-1

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



10A 3 Pole Fan Isolation Keyswitch Modules




GM1030PW	10A 3 Pole Fan Isolation Keyswitch Module - White
GM1030PWBR	10A 3 Pole Fan Isolation Keyswitch Module - White - Polished Brass
GM1030PWBS	10A 3 Pole Fan Isolation Keyswitch Module - White - Brushed Stainless
GM1030PWCH	10A 3 Pole Fan Isolation Keyswitch Module - White - Polished Chrome
GM1030PWPN	10A 3 Pole Fan Isolation Keyswitch Module - White - Pearl Nickel
GM1030PWSB	10A 3 Pole Fan Isolation Keyswitch Module - White - Satin Brass
GM1030PWSC	10A 3 Pole Fan Isolation Keyswitch Module - White - Satin Chrome
GM1030PWSS	10A 3 Pole Fan Isolation Keyswitch Module - White - Stainless Steel
GM1030BK	10A 3 Pole Fan Isolation Keyswitch Module - Black
GM1030BKAB	10A 3 Pole Fan Isolation Keyswitch Module - Black - Antique Brass
GM1030BKBN	10A 3 Pole Fan Isolation Keyswitch Module - Black - Black Nickel
GM1030BKBR	10A 3 Pole Fan Isolation Keyswitch Module - Black - Polished Brass
GM1030BKBS	10A 3 Pole Fan Isolation Keyswitch Module - Black - Brushed Stainless
GM1030BKBZ	10A 3 Pole Fan Isolation Keyswitch Module - Black - Matt Bronze
GM1030BKCH	10A 3 Pole Fan Isolation Keyswitch Module - Black - Polished Chrome
GM1030BKMB	10A 3 Pole Fan Isolation Keyswitch Module - Black - Metal Black
GM1030BKPN	10A 3 Pole Fan Isolation Keyswitch Module - Black - Pearl Nickel
GM1030BKSB	10A 3 Pole Fan Isolation Keyswitch Module - Black - Satin Brass
GM1030BKSC	10A 3 Pole Fan Isolation Keyswitch Module - Black - Satin Chrome
GM1030BKSS	10A 3 Pole Fan Isolation Keyswitch Module - Black - Stainless Steel
GM1030GYBS	10A 3 Pole Fan Isolation Keyswitch Module - Grey - Brushed Stainless
GM1030GYSC	10A 3 Pole Fan Isolation Keyswitch Module - Grey - Satin Chrome
GM1030GYSS	10A 3 Pole Fan Isolation Keyswitch Module - Grey - Stainless Steel

Standards: BS EN 60669-2-4 BS EN 60669-1

Back Box Depth (mm): 25 (35 Flat Plate) Cable Size (mm²): 4 x 1.5 or 2 x 2.5

Dimensions (mm): 24.5 (W) x 50 (H) x 22.5 (D)

DIMENSIONS (MM)

2 POLE SWITCHING
WITHOUT TIMERS3 POLE SWITCHING
WITH TIMERS

MI003 Spare Key For Keyswitch

Material Composition

Body & Insert: Nylon
Switch: Nylon
Insert Cover: Stainless Steel
Terminals: Brass
Terminal Screws: Steel & Yellow Passivated
Silver "on-lay" Copper / Brass Contacts
250V~ 50Hz

Voltage

Current Rating (A)

Terminal Size

Torque Value

Cable Size (mm²)

Back Box Depth (mm)

Modular

Warranty (Years)

Antimicrobial Certified

IP Rating

Operational Temperature

Standards

20AX

ø 3.5mm

0.5Nm

2 x 2.5mm², 4 x 1.5mm² or 1 x 6mm²

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

Yes

20 Years

No

IP20

-5 to +40

BS EN 60669-2-4, BS EN 60669-1

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.


All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



20AX 2 Way Keyswitch Modules

GM2003PW	20AX 2 Way Keyswitch Module - White
GM2003BK	20AX 2 Way Keyswitch Module - Black
GM2003PWBR	20AX 2 Way Keyswitch Module - White - Polished Brass
GM2003PWBS	20AX 2 Way Keyswitch Module - White - Brushed Stainless
GM2003PWCH	20AX 2 Way Keyswitch Module - White - Polished Chrome
GM2003PWPN	20AX 2 Way Keyswitch Module - White - Pearl Nickel
GM2003PWSB	20AX 2 Way Keyswitch Module - White - Satin Brass
GM2003PWSC	20AX 2 Way Keyswitch Module - White - Satin Chrome
GM2003PWSS	20AX 2 Way Keyswitch Module - White - Stainless Steel
GM2003BKAB	20AX 2 Way Keyswitch Module - Black - Antique Brass
GM2003BKBN	20AX 2 Way Keyswitch Module - Black - Black Nickel
GM2003BKBR	20AX 2 Way Keyswitch Module - Black - Polished Brass
GM2003BKBS	20AX 2 Way Keyswitch Module - Black - Brushed Stainless
GM2003BKBZ	20AX 2 Way Keyswitch Module - Black - Matt Bronze
GM2003BKCH	20AX 2 Way Keyswitch Module - Black - Polished Chrome
GM2003BKPN	20AX 2 Way Keyswitch Module - Black - Pearl Nickel
GM2003BKSB	20AX 2 Way Keyswitch Module - Black - Satin Brass
GM2003BKSC	20AX 2 Way Keyswitch Module - Black - Satin Chrome
GM2003BKSS	20AX 2 Way Keyswitch Module - Black - Stainless Steel
GM2003BKMB	20AX 2 Way Keyswitch Module - Black - Matt Black
GM2003GYBS	20AX 2 Way Keyswitch Module - Grey - Brushed Stainless
GM2003GYSC	20AX 2 Way Keyswitch Module - Grey - Satin Chrome
GM2003GYSS	20AX 2 Way Keyswitch Module - Grey - Stainless Steel

Standards: BS EN 60669-1
Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 24.5 (W) x 50 (H) x 22.5 (D)

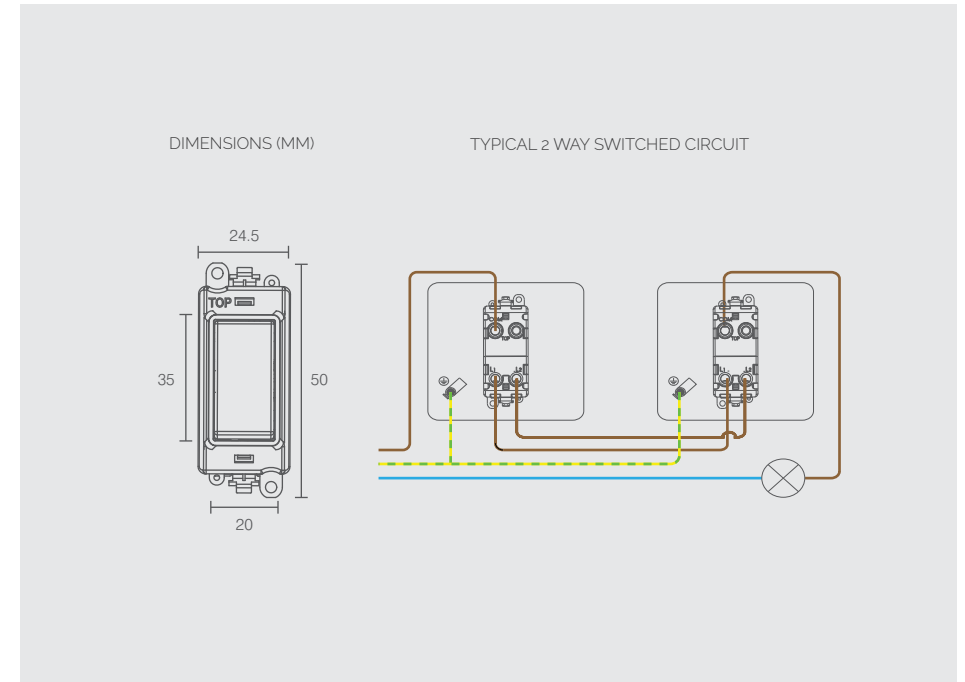

Material Composition

Cover: Nylon or Nylon + Stainless Steel Cover (Ingot)
 Insert & Rear Housing: Nylon
 Terminals: Brass
 Terminal Screws: Steel & Yellow Passivated
 Silver "on-lay" Copper / Brass Contacts

Voltage

250V~ 50Hz

Current Rating (A)

20AX (suitable for inductive loads)

Terminal Size

Ø 5mm

Torque Value

12Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco[®], Deco Plus[®], Mode[®], Polar[®]) 35mm - 47mm (Define[®], Definity[®])

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Certified

No

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS EN 60669-1

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

**20AX 2 Way Retractive Keyswitch Modules**


GM2014PW	20AX 2 Way Retractive Keyswitch Module - White
GM2014BK	20AX 2 Way Retractive Keyswitch Module - Black
GM2014PWBR	20AX 2 Way Retractive Keyswitch Module - White - Polished Brass
GM2014PWBS	20AX 2 Way Retractive Keyswitch Module - White - Brushed Stainless
GM2014PWCH	20AX 2 Way Retractive Keyswitch Module - White - Polished Chrome
GM2014PWPN	20AX 2 Way Retractive Keyswitch Module - White - Pearl Nickel
GM2014PWSB	20AX 2 Way Retractive Keyswitch Module - White - Satin Brass
GM2014PWSC	20AX 2 Way Retractive Keyswitch Module - White - Satin Chrome
GM2014PWSS	20AX 2 Way Retractive Keyswitch Module - White - Stainless Steel
GM2014BKAB	20AX 2 Way Retractive Keyswitch Module - Black - Antique Brass
GM2014BKBN	20AX 2 Way Retractive Keyswitch Module - Black - Black Nickel
GM2014BKBR	20AX 2 Way Retractive Keyswitch Module - Black - Polished Brass
GM2014BKBS	20AX 2 Way Retractive Keyswitch Module - Black - Brushed Stainless
GM2014BKBZ	20AX 2 Way Retractive Keyswitch Module - Black - Matt Bronze
GM2014BKCH	20AX 2 Way Retractive Keyswitch Module - Black - Polished Chrome
GM2014BKPN	20AX 2 Way Retractive Keyswitch Module - Black - Pearl Nickel
GM2014BKSB	20AX 2 Way Retractive Keyswitch Module - Black - Satin Brass
GM2014BKSC	20AX 2 Way Retractive Keyswitch Module - Black - Satin Chrome
GM2014BKSS	20AX 2 Way Retractive Keyswitch Module - Black - Stainless Steel
GM2014BKMB	20AX 2 Way Retractive Keyswitch Module - Black - Matt Black
GM2014GYBS	20AX 2 Way Retractive Keyswitch Module - Grey - Brushed Stainless
GM2014GYSC	20AX 2 Way Retractive Keyswitch Module - Grey - Satin Chrome
GM2014GYSS	20AX 2 Way Retractive Keyswitch Module - Grey - Stainless Steel

Standards: BS EN 60669-1


Back Box Depth (mm): 25 (35 Flat Plate) Cable Size (mm²): 3 x 2.5 or 2 x 4

Dimensions (mm): 24.5 (W) x 50 (H) x 22.5 (D)

DIMENSIONS (MM)



TYPICAL RETRACTIVE SWITCH CIRCUIT

**Material Composition**

Cover: Nylon or Nylon + Stainless Steel Cover (Ingot)
 Insert & Rear Housing: Nylon
 Terminals: Brass
 Terminal Screws: Steel & Yellow Passivated
 Silver "on-lay" Copper / Brass Contacts

Voltage

250V~ 50Hz

Current Rating (A)**20AX****Terminal Size**

ø 5mm

Torque Value

12Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco', Deco Plus', Mode', Polar') 35mm - 47mm (Define', Definity')

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Certified

No

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS EN 60669-1

Additional Information:


Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



20AX Intermediate Keyswitch Modules

GM2029PW	20AX Intermediate Keyswitch Module - White
GM2029BK	20AX Intermediate Keyswitch Module - Black
GM2029PWBR	20AX Intermediate Keyswitch Module - White - Polished Brass
GM2029PWBS	20AX Intermediate Keyswitch Module - White - Brushed Stainless
GM2029PWCH	20AX Intermediate Keyswitch Module - White - Polished Chrome
GM2029PWPN	20AX Intermediate Keyswitch Module - White - Pearl Nickel
GM2029PWSB	20AX Intermediate Keyswitch Module - White - Satin Brass
GM2029PWSC	20AX Intermediate Keyswitch Module - White - Satin Chrome
GM2029PWSS	20AX Intermediate Keyswitch Module - White - Stainless Steel
GM2029BKAB	20AX Intermediate Keyswitch Module - Black - Antique Brass
GM2029BKBN	20AX Intermediate Keyswitch Module - Black - Black Nickel
GM2029BKBR	20AX Intermediate Keyswitch Module - Black - Polished Brass
GM2029BKBS	20AX Intermediate Keyswitch Module - Black - Brushed Stainless
GM2029BKBZ	20AX Intermediate Keyswitch Module - Black - Matt Bronze
GM2029BKCH	20AX Intermediate Keyswitch Module - Black - Polished Chrome
GM2029BKPN	20AX Intermediate Keyswitch Module - Black - Pearl Nickel
GM2029BKSB	20AX Intermediate Keyswitch Module - Black - Satin Brass
GM2029BKSC	20AX Intermediate Keyswitch Module - Black - Satin Chrome
GM2029BKSS	20AX Intermediate Keyswitch Module - Black - Stainless Steel
GM2029BKMB	20AX Intermediate Keyswitch Module - Black - Matt Black
GM2029GYBS	20AX Intermediate Keyswitch Module - Grey - Brushed Stainless
GM2029GYSC	20AX Intermediate Keyswitch Module - Grey - Satin Chrome
GM2029GYSS	20AX Intermediate Keyswitch Module - Grey - Stainless Steel

Standards: BS EN 60669-1
 Back Box Depth (mm): 25 (35 Flat Plate) Cable Size (mm²): 3 x 2.5 or 2 x 4
 Dimensions (mm): 24.5 (W) x 50 (H) x 22.5 (D)

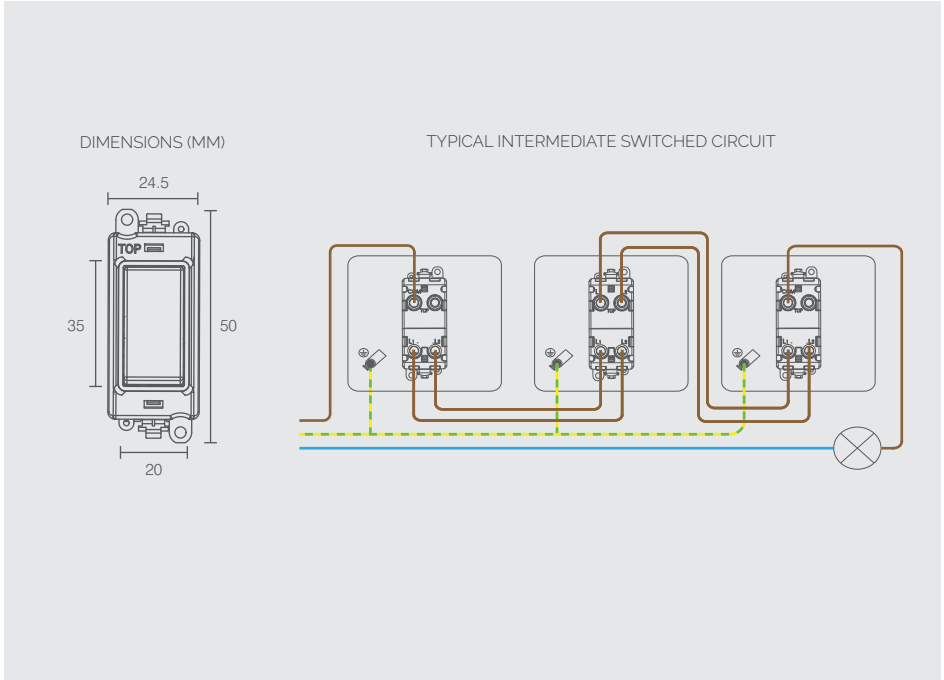

Material Composition

Cover: Nylon or Nylon + Stainless Steel Cover (Ingot)
 Insert & Rear Housing: Nylon
 Terminals: Brass
 Terminal Screws: Steel & Yellow Passivated
 Silver "on-lay" Copper / Brass Contacts

Voltage

250V~ 50Hz

Current Rating (A)

20AX (suitable for inductive loads)

Terminal Size

Ø 5mm

Torque Value

12Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco*, Deco Plus*, Mode*, Polar*) 35mm - 47mm (Define*, Definity*)

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Certified

No

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS EN 60669-1

Additional Information:


Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



20AX Double Pole Keyswitch Modules

GM2046PW	20AX Double Pole Keyswitch Module - White
GM2046BK	20AX Double Pole Keyswitch Module - Black
GM2046PWBR	20AX Double Pole Keyswitch Module - White - Polished Brass
GM2046PWBS	20AX Double Pole Keyswitch Module - White - Brushed Stainless
GM2046PWCH	20AX Double Pole Keyswitch Module - White - Polished Chrome
GM2046PWPN	20AX Double Pole Keyswitch Module - White - Pearl Nickel
GM2046PWSB	20AX Double Pole Keyswitch Module - White - Satin Brass
GM2046PWSC	20AX Double Pole Keyswitch Module - White - Satin Chrome
GM2046PWSS	20AX Double Pole Keyswitch Module - White - Stainless Steel
GM2046BKAB	20AX Double Pole Keyswitch Module - Black - Antique Brass
GM2046BKBN	20AX Double Pole Keyswitch Module - Black - Black Nickel
GM2046BKBR	20AX Double Pole Keyswitch Module - Black - Polished Brass
GM2046BKBS	20AX Double Pole Keyswitch Module - Black - Brushed Stainless
GM2046BKBZ	20AX Double Pole Keyswitch Module - Black - Matt Bronze
GM2046BKCH	20AX Double Pole Keyswitch Module - Black - Polished Chrome
GM2046BKPN	20AX Double Pole Keyswitch Module - Black - Pearl Nickel
GM2046BKSB	20AX Double Pole Keyswitch Module - Black - Satin Brass
GM2046BKSC	20AX Double Pole Keyswitch Module - Black - Satin Chrome
GM2046BKSS	20AX Double Pole Keyswitch Module - Black - Stainless Steel
GM2046BKMB	20AX Double Pole Keyswitch Module - Black - Matt Black
GM2046GYBS	20AX Double Pole Keyswitch Module - Grey - Brushed Stainless
GM2046GYSC	20AX Double Pole Keyswitch Module - Grey - Satin Chrome
GM2046GYSS	20AX Double Pole Keyswitch Module - Grey - Stainless Steel

Standards: BS EN 60669-1
Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 24.5 (W) x 50 (H) x 22.5 (D)

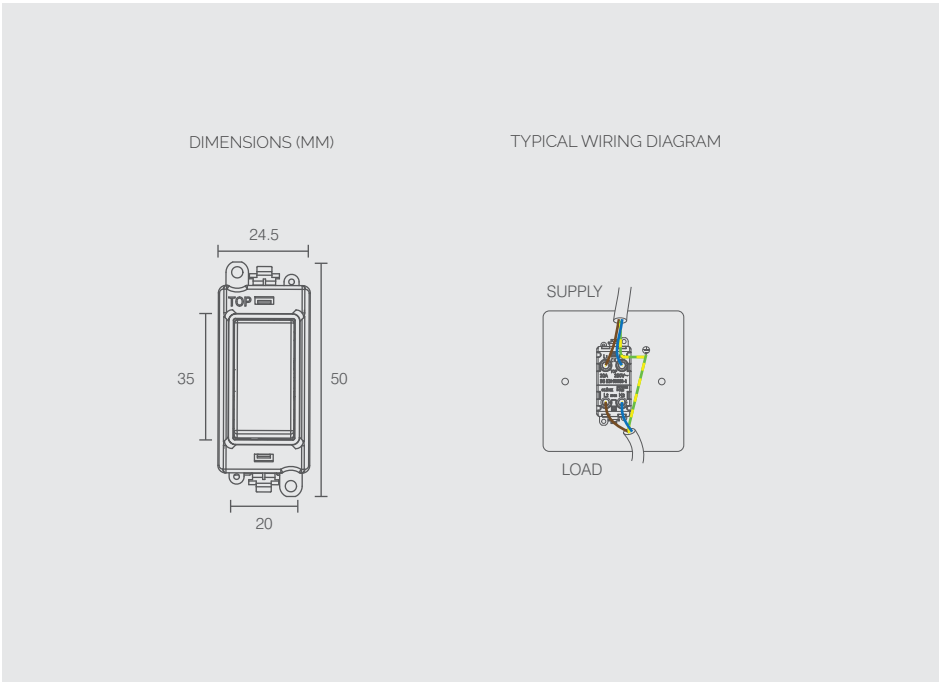

Material Composition

Cover: Nylon or Nylon + Stainless Steel Cover (Ingot)
 Insert & Rear Housing: Nylon
 Terminals: Brass, Terminal Screws: Steel & Yellow Passivated
 Silver "on-lay" Copper / Brass Contacts

Voltage

250V~ 50Hz

Current Rating (A)

20AX

Terminal Size

ø 5mm

Torque Value

1.2Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco[®], Deco Plus[®], Mode[®], Polar[®]) 35mm - 47mm (Define[®], Definity[®])

Double Pole

Yes

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Certified

No

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS EN 60669-1

Additional Information:


Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



20AX Double Pole Keyswitch Modules - 'Emergency Test'

GM2046BKET	20AX Double Pole Keyswitch 'Emergency Test' - Black
GM2046PWET	20AX Double Pole Keyswitch 'Emergency Test' - White
GM2046RDET	20AX Double Pole Keyswitch 'Emergency Test' - Red
GM2046PWBRET	20AX Double Pole Keyswitch 'Emergency Test' - White - Polished Brass
GM2046PWBSET	20AX Double Pole Keyswitch 'Emergency Test' - White - Brushed Stainless
GM2046PWCHET	20AX Double Pole Keyswitch 'Emergency Test' - White - Polished Chrome
GM2046PWPNET	20AX Double Pole Keyswitch 'Emergency Test' - White - Pearl Nickel
GM2046PWSBET	20AX Double Pole Keyswitch 'Emergency Test' - White - Satin Brass
GM2046PWSSET	20AX Double Pole Keyswitch 'Emergency Test' - White - Satin Chrome
GM2046PWSSET	20AX Double Pole Keyswitch 'Emergency Test' - White - Stainless Steel
GM2046BKABET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Antique Brass
GM2046BKBNET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Black Nickel
GM2046BKBRET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Polished Brass
GM2046BKBSSET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Brushed Stainless
GM2046BKBSSET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Matt Bronze
GM2046BKCHET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Polished Chrome
GM2046BKPNET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Pearl Nickel
GM2046BKSBET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Satin Brass
GM2046BKSCET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Satin Chrome
GM2046BKSSSET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Stainless Steel
GM2046BKMBET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Matt Black
GM2046GYBSET	20AX Double Pole Keyswitch 'Emergency Test' - Grey - Brushed Stainless
GM2046GYSCET	20AX Double Pole Keyswitch 'Emergency Test' - Grey - Satin Chrome
GM2046GYSSSET	20AX Double Pole Keyswitch 'Emergency Test' - Grey - Stainless Steel

Standards: BS EN 60669-1
Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 24.5 (W) x 50 (H) x 22.5 (D)

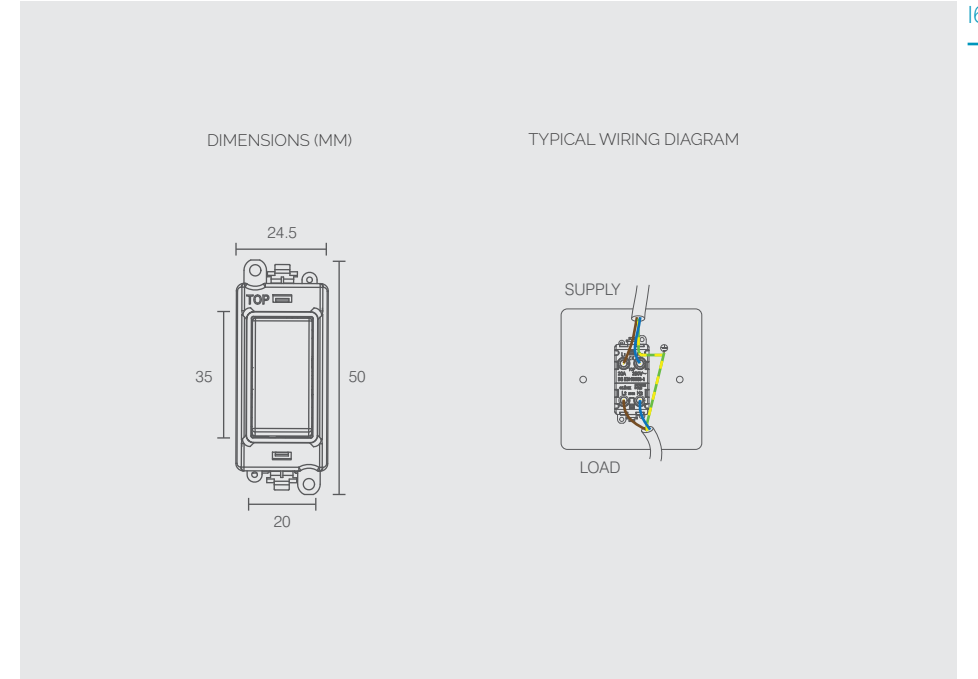

Material Composition

Cover: Nylon or Nylon + Stainless Steel Cover (Ingot)
 Insert & Rear Housing: Nylon
 Terminals: Brass, Terminal Screws: Steel & Yellow Passivated
 Silver 'on-lay' Copper / Brass Contacts

Voltage

250V~ 50Hz

Current Rating (A)

20AX

Terminal Size

ø 5mm

Torque Value

1.2Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco, Deco Plus, Mode, Polar) 35mm - 47mm (Define, Definity)

Double Pole

Yes

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Certified

No

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS EN 60669-1

Additional Information:


Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



13A Fused Modules

GM2047PW	13A Fused Module - White
GM2047BK	13A Fused Module - Black
GM2047PWBR	13A Fused Module - White - Polished Brass
GM2047PWBS	13A Fused Module - White - Brushed Stainless
GM2047PWCH	13A Fused Module - White - Polished Chrome
GM2047PWPN	13A Fused Module - White - Pearl Nickel
GM2047PWSB	13A Fused Module - White - Satin Brass
GM2047PWSC	13A Fused Module - White - Satin Chrome
GM2047PWSS	13A Fused Module - White - Stainless Steel
GM2047BKAB	13A Fused Module - Black - Antique Brass
GM2047BKBN	13A Fused Module - Black - Black Nickel
GM2047BKBR	13A Fused Module - Black - Polished Brass
GM2047BKBS	13A Fused Module - Black - Brushed Stainless
GM2047BKBZ	13A Fused Module - Black - Matt Bronze
GM2047BKCH	13A Fused Module - Black - Polished Chrome
GM2047BKPN	13A Fused Module - Black - Pearl Nickel
GM2047BKSB	13A Fused Module - Black - Satin Brass
GM2047BKSC	13A Fused Module - Black - Satin Chrome
GM2047BKSS	13A Fused Module - Black - Stainless Steel
GM2047BKMB	13A Fused Module - Black - Matt Black
GM2047GYBS	13A Fused Module - Grey - Brushed Stainless
GM2047GYSC	13A Fused Module - Grey - Satin Chrome
GM2047GYSS	13A Fused Module - Grey - Stainless Steel

Standards: BS 1363-4 BS 1362
Back Box Depth (mm): 25 (35 Flat Plate) Cable Size (mm²): 3 x 2.5, 2 x 4
Dimensions (mm): 24.5 (W) x 50 (H) x 25 (D)

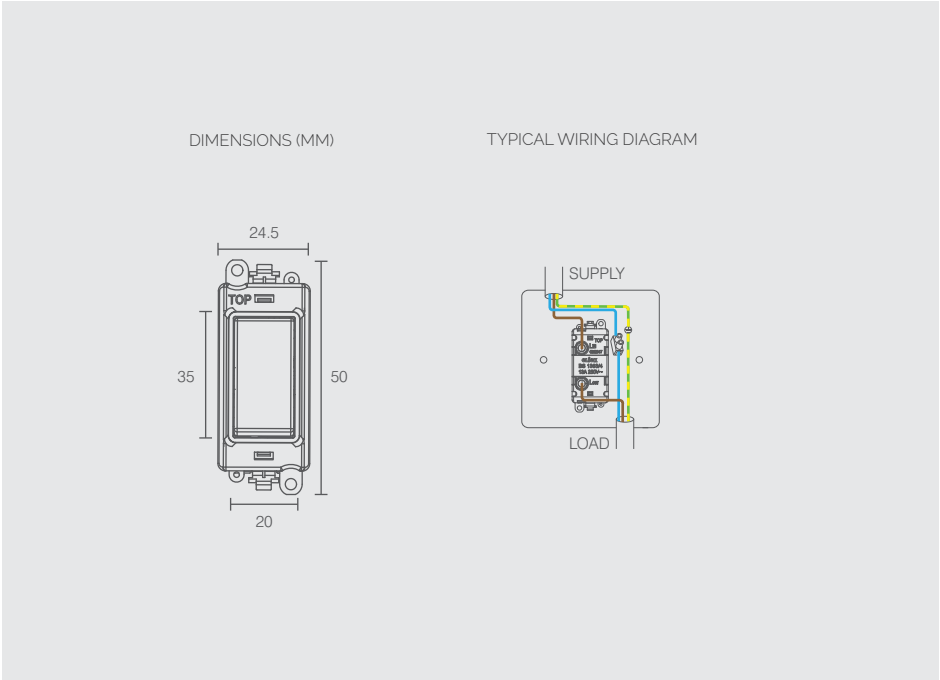

Material Composition	Cover: Nylon or Nylon + Stainless Steel Cover (Ingot) Insert & Rear Housing: Nylon Terminals: Brass, Terminal Screws: Steel & Yellow Passivated
Voltage	250V~ 50Hz
Current Rating (A)	13A
Terminal Size	ø 5mm
Torque Value	12Nm
Cable Size (mm²)	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth (mm)	25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)
Lockable	No
Modular	Yes
Warranty (Years)	20 Years
Antimicrobial Certified	No
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS 1363-4


Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 13A; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



13A Lockable Fused Modules

GM2047-LPW	13A Fused Lockable Module - White
GM2047-LBK	13A Fused Lockable Module - Black
GM2047-LPWBR	13A Fused Lockable Module - White - Polished Brass
GM2047-LPWBS	13A Fused Lockable Module - White - Brushed Stainless
GM2047-LPWCH	13A Fused Lockable Module - White - Polished Chrome
GM2047-LPWP	13A Fused Lockable Module - White - Pearl Nickel
GM2047-LPWSB	13A Fused Lockable Module - White - Satin Brass
GM2047-LPWSC	13A Fused Lockable Module - White - Satin Chrome
GM2047-LPWSS	13A Fused Lockable Module - White - Stainless Steel
GM2047-LBKAB	13A Fused Lockable Module - Black - Antique Brass
GM2047-LBKBN	13A Fused Lockable Module - Black - Black Nickel
GM2047-LBKBR	13A Fused Lockable Module - Black - Polished Brass
GM2047-LBKBS	13A Fused Lockable Module - Black - Brushed Stainless
GM2047-LBKBS	13A Fused Lockable Module - Black - Matt Bronze
GM2047-LBKCH	13A Fused Lockable Module - Black - Polished Chrome
GM2047-LBKPN	13A Fused Lockable Module - Black - Pearl Nickel
GM2047-LBKSB	13A Fused Lockable Module - Black - Satin Brass
GM2047-LBKSC	13A Fused Lockable Module - Black - Satin Chrome
GM2047-LBKSS	13A Fused Lockable Module - Black - Stainless Steel
GM2047-LBKMB	13A Fused Lockable Module - Black - Matt Black
GM2047-LGYBS	13A Fused Lockable Module - Grey - Brushed Stainless
GM2047-LGYSC	13A Fused Lockable Module - Grey - Satin Chrome
GM2047-LGYSS	13A Fused Lockable Module - Grey - Stainless Steel

Standards: BS 1363-4 BS 1362
Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5, 2 x 4
Dimensions (mm): 24.5 (W) x 50 (H) x 25 (D)

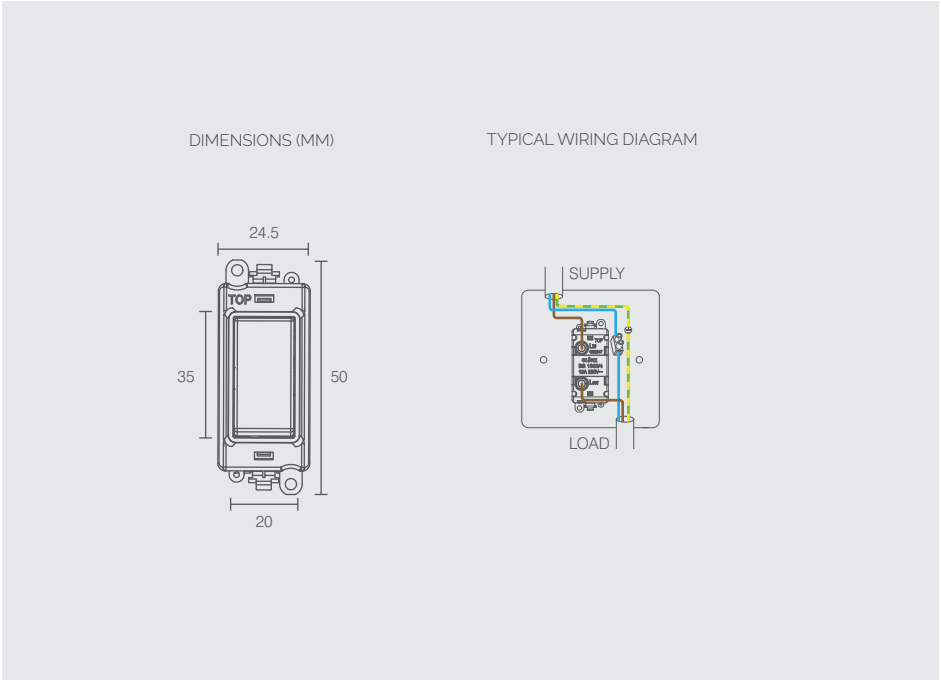

Material Composition	Cover: Nylon or Nylon + Stainless Steel Cover (Ingot) Insert & Rear Housing: Nylon Terminals: Brass, Terminal Screws: Steel & Yellow Passivated
Voltage	250V~ 50Hz
Current Rating (A)	13A
Terminal Size	ø 5mm
Torque Value	1.2Nm
Cable Size (mm²)	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth (mm)	25mm - 47mm (Deco*, Deco Plus*, Mode*, Polar*) 35mm - 47mm (Define*, Definity*)
Lockable	GM2047-L Only
Modular	Yes
Warranty (Years)	20 Years
Antimicrobial Certified	No
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS 1363-4


Additional Information:
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 13A; therefore all terminals should not exceed the stated amperage.
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
 All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



20A Flex Outlet Modules

GM2017PW	20A Flex Outlet Module - White
GM2017BK	20A Flex Outlet Module - Black
GM2017PWBR	20A Flex Outlet Module - White - Polished Brass
GM2017PWBS	20A Flex Outlet Module - White - Brushed Stainless
GM2017PWCH	20A Flex Outlet Module - White - Polished Chrome
GM2017PWPN	20A Flex Outlet Module - White - Pearl Nickel
GM2017PWSB	20A Flex Outlet Module - White - Satin Brass
GM2017PWSC	20A Flex Outlet Module - White - Satin Chrome
GM2017PWSS	20A Flex Outlet Module - White - Stainless Steel
GM2017BKAB	20A Flex Outlet Module - Black - Antique Brass
GM2017BKBN	20A Flex Outlet Module - Black - Black Nickel
GM2017BKBR	20A Flex Outlet Module - Black - Polished Brass
GM2017BKBS	20A Flex Outlet Module - Black - Brushed Stainless
GM2017BKBZ	20A Flex Outlet Module - Black - Matt Bronze
GM2017BKCH	20A Flex Outlet Module - Black - Polished Chrome
GM2017BKPN	20A Flex Outlet Module - Black - Pearl Nickel
GM2017BKSB	20A Flex Outlet Module - Black - Satin Brass
GM2017BKSC	20A Flex Outlet Module - Black - Satin Chrome
GM2017BKSS	20A Flex Outlet Module - Black - Stainless Steel
GM2017BKMB	20A Flex Outlet Module - Black - Matt Black
GM2017GYBS	20A Flex Outlet Module - Grey - Brushed Stainless
GM2017GYSC	20A Flex Outlet Module - Grey - Satin Chrome
GM2017GYSS	20A Flex Outlet Module - Grey - Stainless Steel

Standards: BS 5733
Back Box Depth (mm): 25 (35 Flat Plate) Cable Size (mm²): 3 x 2.5, 2 x 4
Dimensions (mm): 24.5 (W) x 50 (H) x 28 (D)

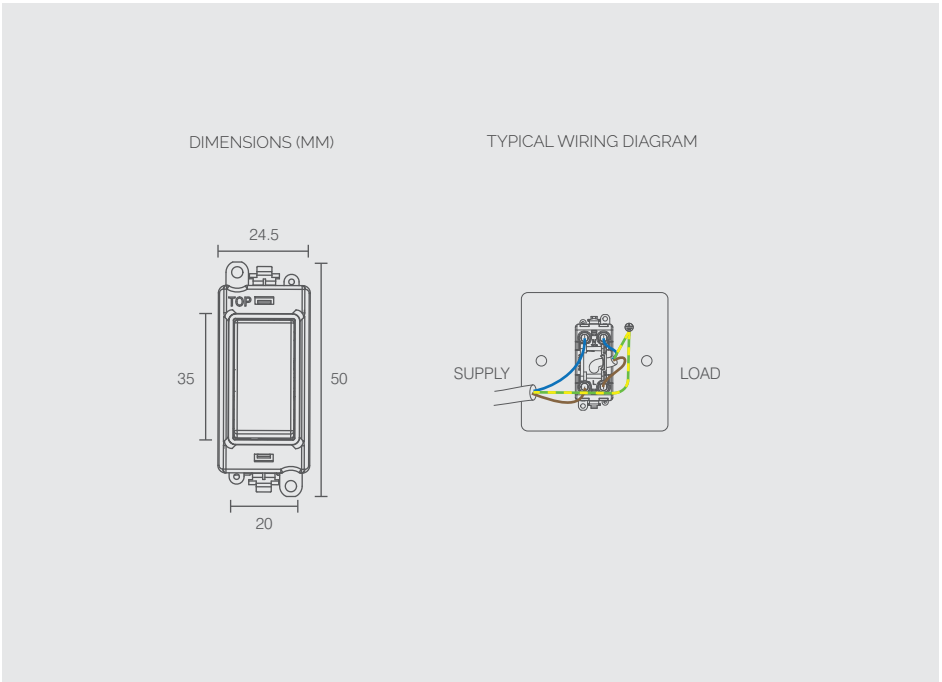

Material Composition

Cover: Nylon or Nylon + Stainless Steel Cover (Ingot)
Insert & Rear Housing: Nylon
Terminals: Brass
Terminal Screws: Steel & Yellow Passivated

Voltage

250V~ 50Hz

Current Rating (A)

20A

Terminal Size

Ø 5mm

Torque Value

1.2Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco⁺, Deco Plus⁺, Mode⁺, Polar⁺) 35mm - 47mm (Define⁺, Definity⁺)

Modular

Yes

Warranty (Years)

20 Years

Antimicrobial Certified

No

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS 5733

Additional Information:


Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20A; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



Blank Modules

GM2008PW	Blank Module - White
GM2008BK	Blank Module - Black
GM2008PWBR	Blank Module - White - Polished Brass
GM2008PWBS	Blank Module - White - Brushed Stainless
GM2008PWCH	Blank Module - White - Polished Chrome
GM2008PWPN	Blank Module - White - Pearl Nickel
GM2008PWSB	Blank Module - White - Satin Brass
GM2008PWSC	Blank Module - White - Satin Chrome
GM2008PWSS	Blank Module - White - Stainless Steel
GM2008BKAB	Blank Module - Black - Antique Brass
GM2008BKBN	Blank Module - Black - Black Nickel
GM2008BKBR	Blank Module - Black - Polished Brass
GM2008BKBS	Blank Module - Black - Brushed Stainless
GM2008BKBZ	Blank Module - Black - Matt Bronze
GM2008BKCH	Blank Module - Black - Polished Chrome
GM2008BKPN	Blank Module - Black - Pearl Nickel
GM2008BKSB	Blank Module - Black - Satin Brass
GM2008BKSC	Blank Module - Black - Satin Chrome
GM2008BKSS	Blank Module - Black - Stainless Steel
GM2008BKMB	Blank Module - Black - Matt Black
GM2008GYBS	Blank Module - Grey - Brushed Stainless
GM2008GYSC	Blank Module - Grey - Satin Chrome
GM2008GYSS	Blank Module - Grey - Stainless Steel

Standards: BS 5733
Back Box Depth (mm): 25 Minimum
Dimensions (mm): 24.5 (W) x 50 (H) x 12 (D)

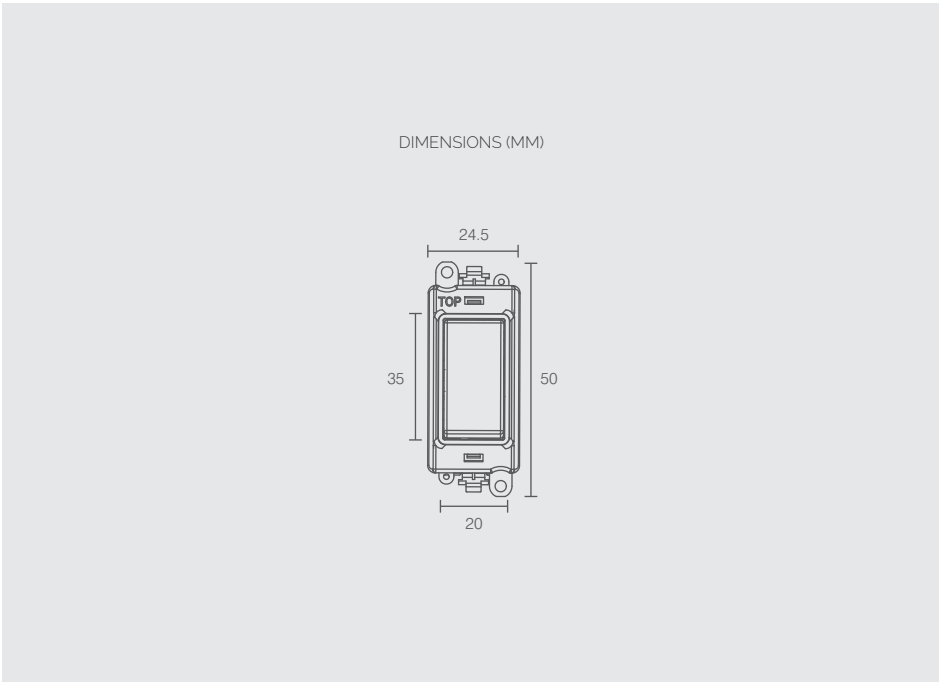

Material Composition	Module Front: Nylon or Nylon + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon
Back Box Depth (mm)	25mm - 47mm (Deco [®] , Deco Plus [®] , Mode [®] , Polar [®]) 35mm - 47mm (Define [®] , Definity [®])
Modular	Yes
Warranty (Years)	20 Years
Antimicrobial Certified	No
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS 5733


Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.



Indicator Modules

GM2080BK	240V - Red Indicator Module - Black
GM2080PW	240V - Red Indicator Module - White
GM2080GY	240V - Red Indicator Module - Grey
GM2081BK	240V - Amber Indicator Module - Black
GM2081PW	240V - Amber Indicator Module - White
GM2081GY	240V - Amber Indicator Module - Grey
GM2082BK	240V - Green Indicator Module - Black
GM2082PW	240V - Green Indicator Module - White
GM2082GY	240V - Green Indicator Module - Grey

Standards: BS 5733
 Back Box Depth (mm): 25 (35 Flat Plate)
 Cable Size (mm²): 3 x 2.5, 2 x 4
 Dimensions (mm): 24.5 (W) x 50 (H) x 22.5 (D)

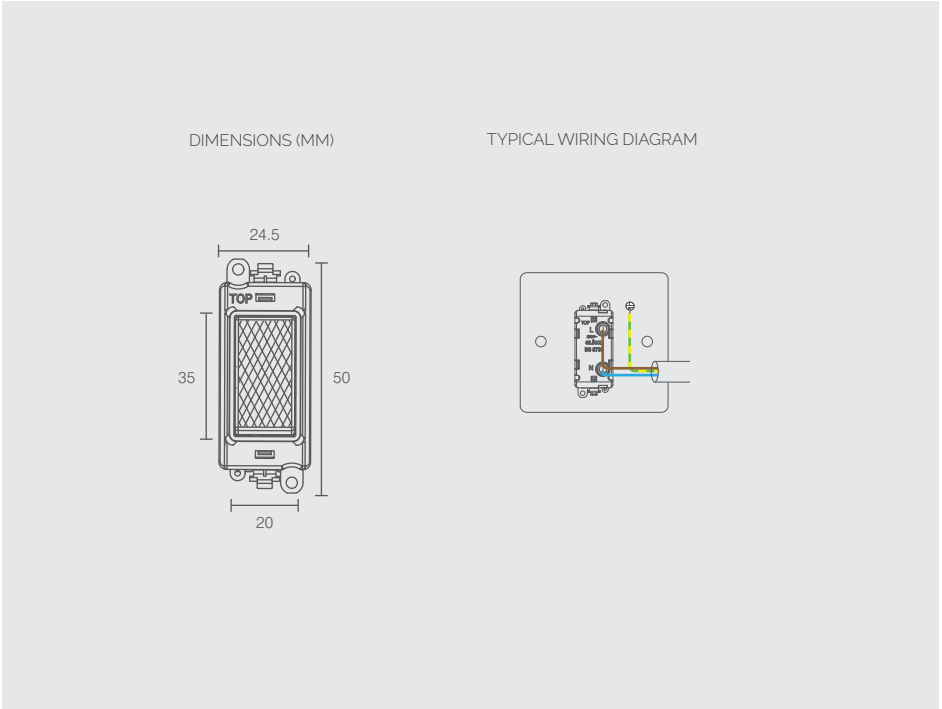

Material Composition

Indicator Lens: Polycarbonate / ABS
 Cover, Insert & Rear Housing: Nylon
 Terminals: Brass, Terminal Screws: Steel & Yellow Passivated

Voltage

250V - 50Hz

Terminal Size

ø 5mm

Torque Value

12Nm

Cable Size (mm²)

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth (mm)

25mm - 47mm (Deco⁺, Deco Plus⁺, Mode⁺, Polar⁺) 35mm - 47mm (Define⁺, Definity⁺)

Modular

Yes

Warranty (Years)

20 Years

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS 5733

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.



IN HOUSE LASER ETCHING
Our in house laser printer provides flexibility to suit large volume batch or custom jobs.
The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.


Green Blank LED Illuminated Modules

GM2008GTBK	250V- Green LED Transparent Illuminated Blank Module - Black
GM2008GTPW	250V- Green LED Transparent Illuminated Blank Module - White
GM2008GTAB	250V- Green LED Transparent Illuminated Blank Module - Antique Brass
GM2008GTBN	250V- Green LED Transparent Illuminated Blank Module - Black Nickel
GM2008GTBR	250V- Green LED Transparent Illuminated Blank Module - Polished Brass
GM2008GTBS	250V- Green LED Transparent Illuminated Blank Module - Brushed Steel
GM2008GTBZ	250V- Green LED Transparent Illuminated Blank Module - Matt Bronze
GM2008GTCH	250V- Green LED Transparent Illuminated Blank Module - Polished Chrome
GM2008GTPN	250V- Green LED Transparent Illuminated Blank Module - Pearl Nickel
GM2008GTSB	250V- Green LED Transparent Illuminated Blank Module - Satin Brass
GM2008GTSC	250V- Green LED Transparent Illuminated Blank Module - Satin Chrome
GM2008GTSS	250V- Green LED Transparent Illuminated Blank Module - Stainless Steel

Red Blank LED Illuminated Modules

GM2008RTBK	250V- Red LED Transparent Illuminated Blank Module - Black
GM2008RTPW	250V- Red LED Transparent Illuminated Blank Module - White
GM2008RTAB	250V- Red LED Transparent Illuminated Blank Module - Antique Brass
GM2008RTBN	250V- Red LED Transparent Illuminated Blank Module - Black Nickel
GM2008RTBR	250V- Red LED Transparent Illuminated Blank Module - Polished Brass
GM2008RTBS	250V- Red LED Transparent Illuminated Blank Module - Brushed Steel
GM2008RTBZ	250V- Red LED Transparent Illuminated Blank Module - Matt Bronze
GM2008RTCH	250V- Red LED Transparent Illuminated Blank Module - Polished Chrome
GM2008RTPN	250V- Red LED Transparent Illuminated Blank Module - Pearl Nickel
GM2008RTSB	250V- Red LED Transparent Illuminated Blank Module - Satin Brass
GM2008RTSC	250V- Red LED Transparent Illuminated Blank Module - Satin Chrome
GM2008RTSS	250V- Red LED Transparent Illuminated Blank Module - Stainless Steel

Standards: BS 5733
Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5, 2 x 4
Dimensions (mm): 24.5 (W) x 50 (H) x 19.5 (D)

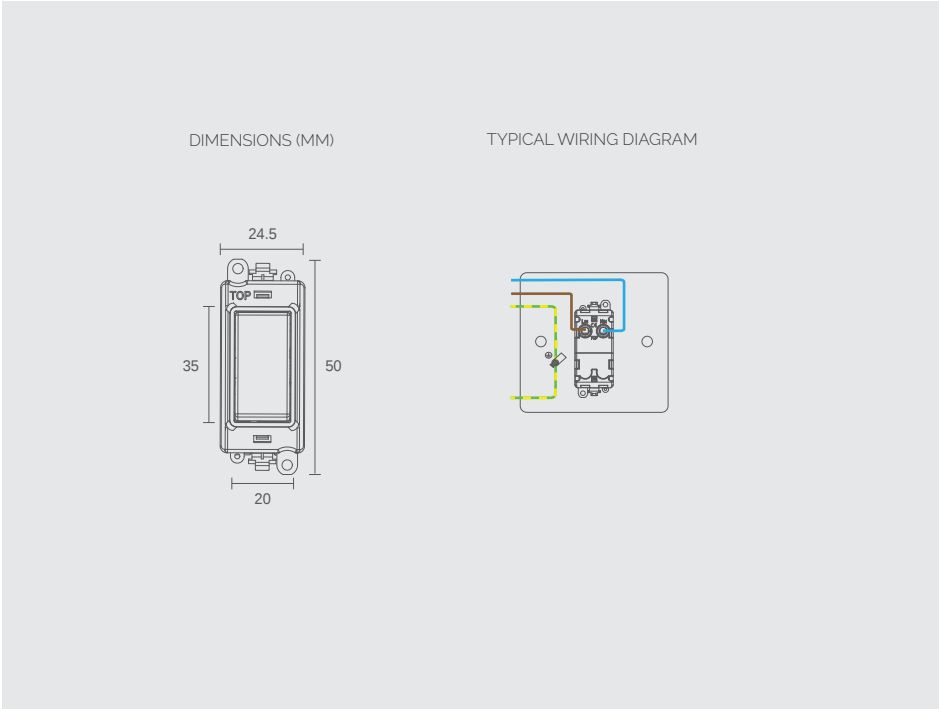

Material Composition	Transparent Trim: Polycarbonate Blank Section: Decorative (Stainless Steel), Moulded (Polycarbonate) Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated
Voltage	250V- 50Hz
Terminal Size	ø 5mm
Torque Value	12Nm
Cable Size (mm²)	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth (mm)	25mm - 47mm (Deco', Deco Plus', Mode', Polar') 35mm - 47mm (Define', Definity')
Modular	Yes
Warranty (Years)	20 Years
Anti Microbial Certified	No
IP Rating	IP20
Operational Temperature	+5°C to +40°C
Standards	BS 5733

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.



20AX Locator Switch Modules (Blue LED)

GM2001BTBK	20AX 1 Way Locator Black Switch Module With Transparent Surround
GM2001BTPW	20AX 1 Way Locator White Switch Module With Transparent Surround
GM2002BTBK	20AX 2 Way Locator Black Switch Module With Transparent Surround
GM2002BTPW	20AX 2 Way Locator White Switch Module With Transparent Surround
GM2028BTBK	20AX Intermediate Switch Module - Black With Transparent Surround
GM2028BTPW	20AX Intermediate Switch Module - White With Transparent Surround


The switch will illuminate when the switch is in the 'OFF' position.

20AX Indicator Switch Modules (Blue LED)

GM2018BTBK	20AX Double Pole Switch Module - Black With Transparent Surround
GM2018BTPW	20AX Double Pole Switch Module - White With Transparent Surround

The switch will illuminate when the switch is in the 'ON' position.

Standards: BS EN 60669-1
Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 3 x 2.5, 2 x 4
Dimensions (mm): 24.5 (W) x 50 (H) x 22.5 (D)

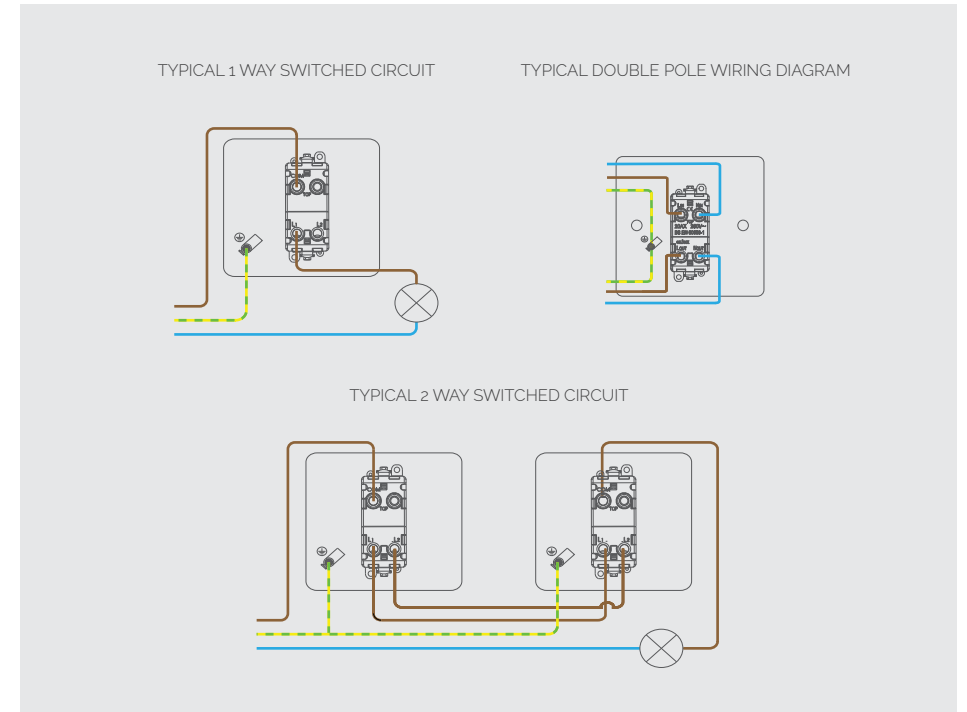

Material Composition

Transparent Trim: Polycarbonate
 Switch: Urea
 Rear Housing: Nylon
 Terminals: Brass
 Terminal Screws: Steel & Yellow Passivated
 Contacts: Silver "on-lay" Copper / Brass

Voltage	250V~ 50Hz
Current Rating (A)	20AX (suitable for inductive loads)
Terminal Size	ø 5mm
Torque Value	12Nm
Cable Size (mm²)	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth (mm)	25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)
Modular	Yes
Warranty (Years)	20 Years
Anti Microbial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	+5°C to +40°C
Standards	BS EN 60669-1

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.




Time Delay Switch Modules

- GM2600BK** 230V~ Time Delay Switch 300W - Black
- GM2600PW** 230V~ Time Delay Switch 300W - White
- Requires retractive switch see page I30

Buzzer Module

- GM2650BK** 230V~ Buzzer Unit Module - Black
- GM2650PW** 230V~ Buzzer Unit Module - White
- Requires retractive switch see page I30

Standards: BS 5733
Back Box Depth (mm): 25 (35 Flat Plate)
Cable Size (mm²): 2 x 1.5
Dimensions (mm): **2600:** 24.5 (W) x 50 (H) x 25 (D) **2650:** 24.5 (W) x 50 (H) x 31.5 (D)

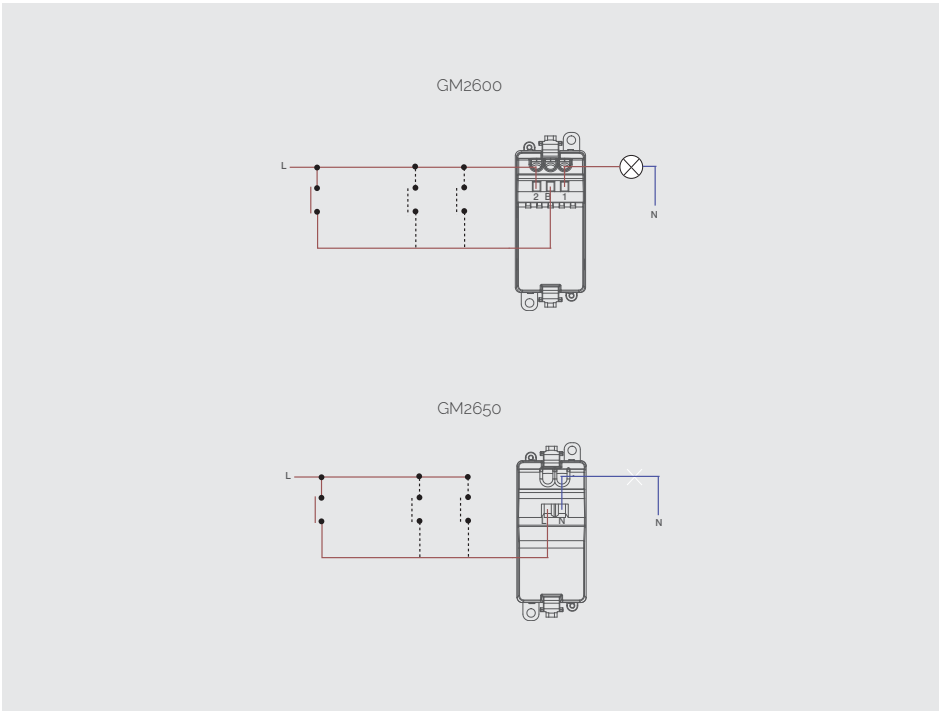

	GM2600	GM2650
Material Composition	Cover, Insert & Rear Housing: Nylon	
	Terminals: Brass	
	Terminal Screws: Steel & Yellow Passivated	
Voltage	240V	200-250V
USB Type	N/A	N/A
USB Charging Output	N/A	N/A
Cable Size (mm²)	2 x 1.5mm ²	2 x 1.5mm ²
Terminal Type	Screw Terminals	Screw Terminals
	35mm	25mm
Back Box Depth (mm)	(Deco/Deco Plus/Mode/Polar) 47mm (Define/Definity)	(Deco/Deco Plus/Mode/Polar) 35mm (Define/Definity)
Modular	Yes	
Warranty (Years)	20 Years (2 Year Electronics)	
Anti Microbial Certified	No	
IP Rating	IP20	
Operational Temperature	-5°C to +40°C	
Standards	BS5733	BS5733

Additional Information:
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
 All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.




USB Connection Modules

- GM2300BK USB Throughput Module - Black
- GM2300PW USB Throughput Module - White
- Flylead: 95mm overall length

USB Charging Modules

- GM2515BK 2.4A USB Charging Modules - Black
- GM2515WH 2.4A USB Charging Modules - White
- GM2586PW 2.4A 'A' & 3A 'C' USB Dual Charging Modules - White
- GM2586BK 2.4A 'A' & 3A 'C' USB Dual Charging Modules - Black

Standards: BS EN 62368-1 BS EN 61000-6-1 BS EN 61000-6-3
Back Box Depth (mm): 35 (47 Flat Plate) **2300:** 47
Cable Size (mm²): 3 x 2.5, 2 x 4 or 1 x 6.0
Dimensions (mm): 24.5 (W) x 50 (H) x 40 (D)

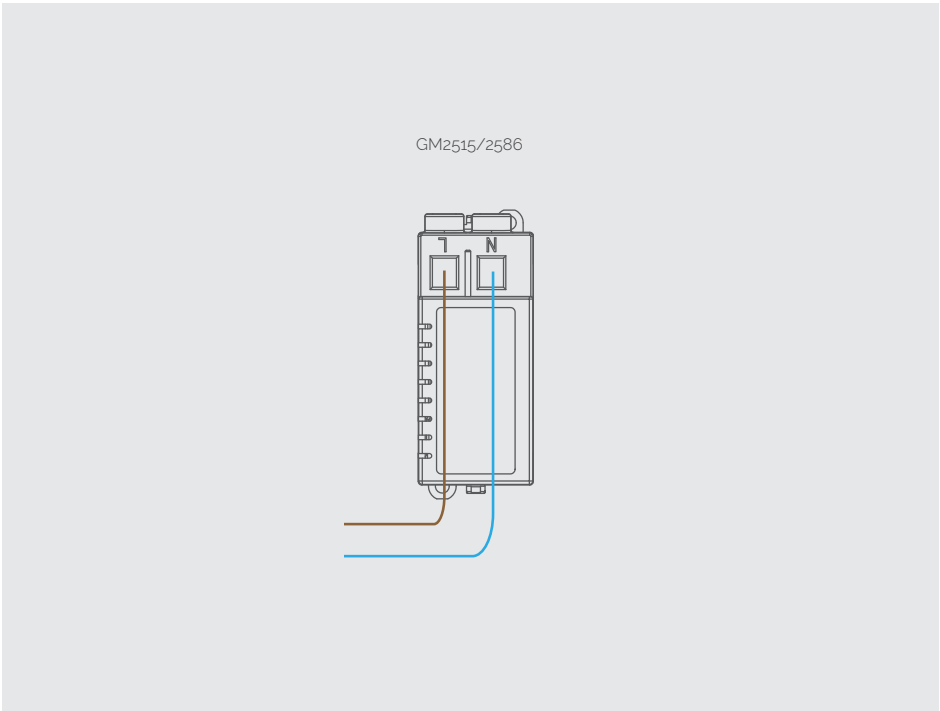

	GM2300	GM2515	GM2586
Material Composition		Cover, Insert & Rear Housing: Nylon	
		Terminals: Brass	
		Terminal Screws: Steel & Yellow Passivated	
Voltage	30V DC MAX	240V	240V
	2 x Type A	Type A	Type A & C
	N/A	5V DC 2.4A	5V DC 2.4A / 5V DC 3A
	N/A	3 x 2.5mm ²	3 x 2.5mm ²
USB Type	N/A		
USB Charging Output	N/A		
Cable Size (mm ²)	N/A		
Terminal Type	N/A	Screw Terminals	Screw Terminals
Back Box Depth (mm)		35mm (Deco/Deco Plus/Mode/Polar)	
		47mm (Define/Definity)	
Modular		Yes	
Warranty (Years)		20 Years (2 Year Electronics)	
Anti Microbial Certified		No	
IP Rating		IP20	
Operational Temperature		-5°C to +40°C	
		BS EN 62368-1,	BS EN 62368-1,
		BS EN 61000-6-1,	BS EN 61000-6-1,
		BS EN 61000-6-3;	BS EN 61000-6-3;
Standards	N/A		

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product.
These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.




Media Modules

- GM2490BK** RCA X 2 Outlet Module - Black
GM2490PW RCA X 2 Outlet Module - White
GM2495BK Loudspeaker X 2 Outlet Module - Black
GM2495PW Loudspeaker X 2 Outlet Module - White
GM2496BK 3.5mm Audio Jack Module - Black
GM2496PW 3.5mm Audio Jack Module - White
Flylead: 98mm overall length


GM2497BK HIFI Module- Black
GM2497PW HIFI Module - White

Back Box Depth (mm): 25 **496:** 35 (47 Flat Plate) **497:** 25 (35 Flat Plate)
Cable Size (mm²): Dependent on Modules Fitted
Dimensions (mm): **GM2490:** 24.5 (W) x 50 (H) x 15 (D) **GM2495:** 24.5 (W) x 50 (H) x 13.5 (D)
GM2496: 24.5 (W) x 50 (H) x 35 (D) **GM2497:** 24.5 (W) x 50 (H) x 19.5 (D)

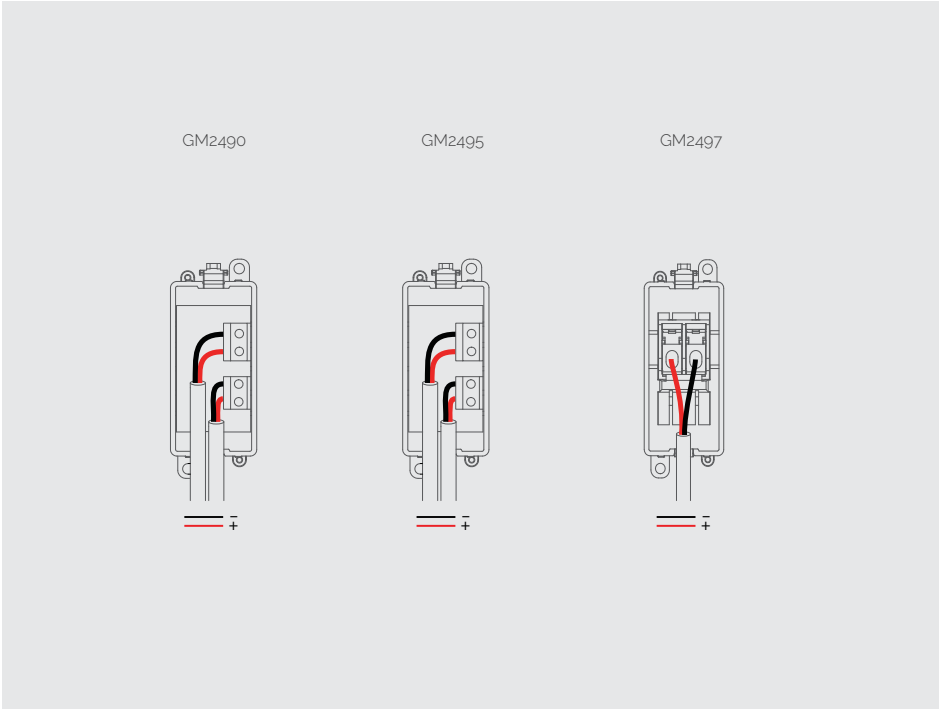

	GM2490	GM2495	GM2496	GM2497
Material Composition		Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated		
Cable Size (mm²)	2 x 1.5mm ²	2 x 1.5mm ²	N/A	2 x 1.5mm ²
Terminal Type	Screw Terminals	Screw Down or Banana Plug	N/A	Screw Terminals
Back Box Depth (mm)	25 Minimum	25 Minimum	35mm Minimum	25 Minimum
Modular		Yes		
Warranty (Years)		20 Years (2 Year Electronics)		
Anti Microbial Certified		No		
IP Rating		IP20		
Operational Temperature		-5°C to +40°C		


Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.

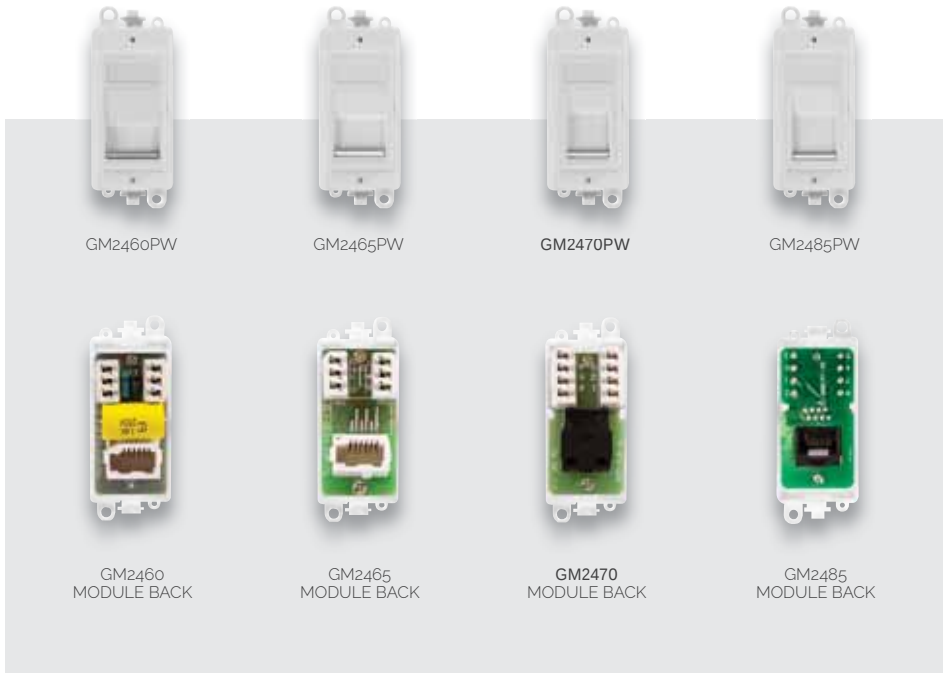

Telephone / Data Modules

- GM2460BK Telephone Socket Module (Master) - Black
- GM2460PW Telephone Socket Module (Master) - White
- GM2465BK Telephone Socket Module (Secondary) - Black
- GM2465PW Telephone Socket Module (Secondary) - White
- GM2470BK RJ11 Module - Black
- GM2470PW RJ11 Module -White
- GM2485BK RJ45 Cat-6 Module - Black
- GM2485PW RJ45 Cat-6 Module - White

Back Box Depth (mm): 25
Dimensions (mm): GM2460 GM2465: 24.5 (W) x 50 (H) x 18 (D) GM2470: 24.5 (W) x 50 (H) x 16 (D) GM2485: 24.5 (W) x 50 (H) x 17.5 (D)

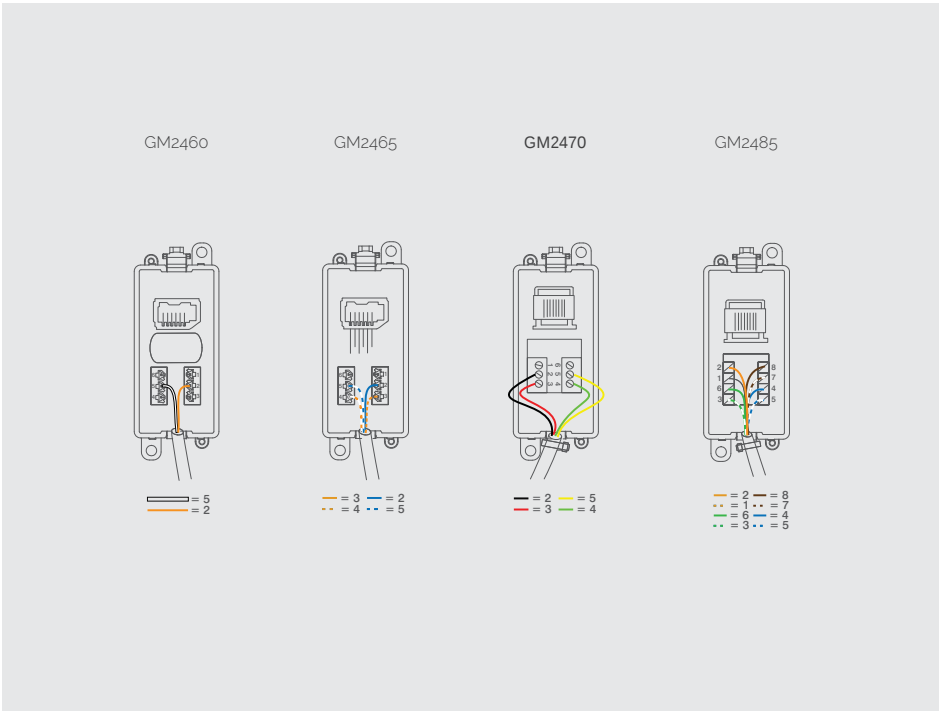

	GM2460	GM2465	GM2470	GM2485
Material Composition		Cover, Insert & Rear Housing: Nylon		
Terminal Type		Terminals: Brass		
Back Box Depth (mm)		IDC		
Modular		25 Minimum		
Warranty (Years)		Yes		
Anti Microbial Certified		20 Years (2 Year Electronics)		
IP Rating		No		
Operational Temperature		IP20		
		-5°C to +40°C		


Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



TV / Satellite Modules

GM2305BK	VGA Module - Black
GM2305PW	VGA Module - White
	Flylead: 160mm overall length
GM2405BK	Satellite Module - Black
GM2405PW	Satellite Module - White
GM2410BK	Non-isolated Female Coaxial Module - Black
GM2410PW	Non-isolated Female Coaxial Module - White
GM2415BK	Non-isolated Male Coaxial Module - Black
GM2415PW	Non-isolated Male Coaxial Module - White
GM2501BK	HDMI Module (V2.0) - Black
GM2501PW	HDMI Module (V2.0) - White
	Flylead: 145mm overall length

Back Box Depth (mm): 47 2405: 25 (35 Flat Plate) 2501: 47
Dimensions (mm): GM2305: 24.5 (W) x 50 (H) x 43 (D) GM2405 GM2410 GM2415: 24.5 (W) x 50 (H) x 20 (D)
GM2501: 24.5 (W) x 50 (H) x 45 (D)

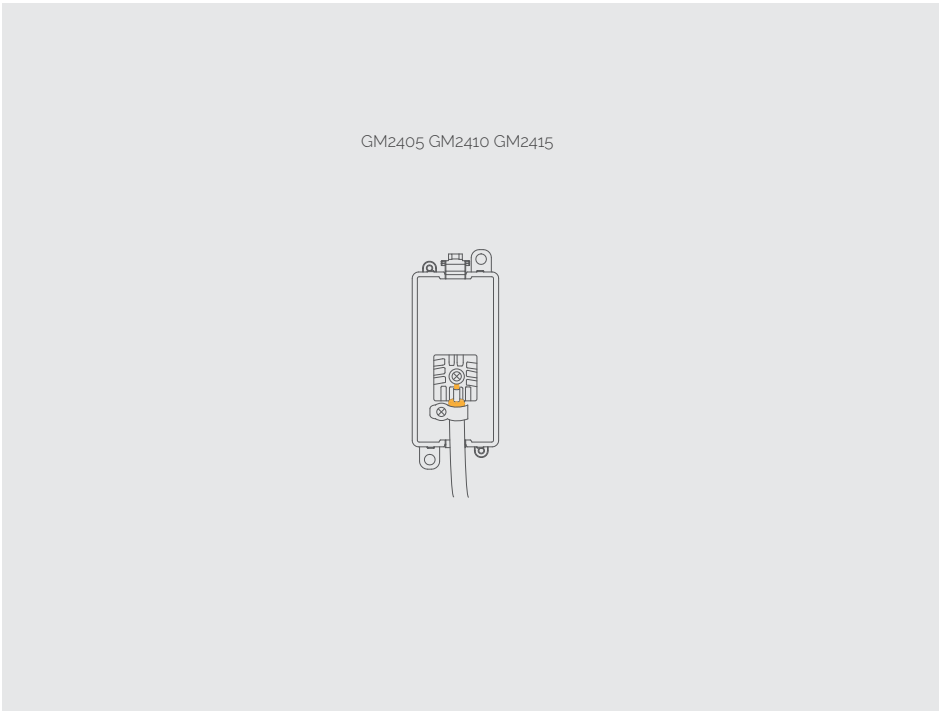

	GM2305	GM2405	GM2410	GM2415	GM2501
Material Composition		Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Brass			
Terminal Type	VGA		Screw Terminals		HDMI
Version	N/A	N/A	N/A	N/A	2
Shielded			Yes		
Isolated	N/A	No	No	No	N/A
Modular			Yes		
Warranty (Years)		20 Years (2 Year Electronics)			
Anti Microbial Certified			No		
IP Rating			IP20		
Operational Temperature			-5°C to +40°C		

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



1 Module Dimmer Mounting Kit

GM050PW	1 Module Dimmer Mounting Kit - White
GM050BK	1 Module Dimmer Mounting Kit - Black
GM050PWBR	1 Module Dimmer Mounting Kit - White - Polished Brass
GM050PWBS	1 Module Dimmer Mounting Kit - White - Brushed Stainless
GM050PWCH	1 Module Dimmer Mounting Kit - White - Polished Chrome
GM050PWPN	1 Module Dimmer Mounting Kit - White - Pearl Nickel
GM050PWSB	1 Module Dimmer Mounting Kit - White - Satin Brass
GM050PWSC	1 Module Dimmer Mounting Kit - White - Satin Chrome
GM050PWSS	1 Module Dimmer Mounting Kit - White - Stainless Steel
GM050BKAB	1 Module Dimmer Mounting Kit - Black - Antique Brass
GM050BKBN	1 Module Dimmer Mounting Kit - Black - Black Nickel
GM050BKBR	1 Module Dimmer Mounting Kit - Black - Polished Brass
GM050BKBS	1 Module Dimmer Mounting Kit - Black - Brushed Stainless
GM050BKBZ	1 Module Dimmer Mounting Kit - Black - Matt Bronze
GM050BKCH	1 Module Dimmer Mounting Kit - Black - Polished Chrome
GM050BKPN	1 Module Dimmer Mounting Kit - Black - Pearl Nickel
GM050BKSB	1 Module Dimmer Mounting Kit - Black - Satin Brass
GM050BKSC	1 Module Dimmer Mounting Kit - Black - Satin Chrome
GM050BKSS	1 Module Dimmer Mounting Kit - Black - Stainless Steel
GM050BKMB	1 Module Dimmer Mounting Kit - Black - Matt Black
GM050GYBS	1 Module Dimmer Mounting Kit - Grey - Brushed Stainless
GM050GYSC	1 Module Dimmer Mounting Kit - Grey - Satin Chrome
GM050GYSS	1 Module Dimmer Mounting Kit - Grey - Stainless Steel

Standards: BS 5733
Back Box Depth (mm): 47 **Cable Size (mm²):** Dependent on Dimmer used
Dimensions (mm): 24.5 (W) x 50 (H)



Material Composition	Mounting Kit: Nylon
Back Box Depth (mm)	Dependent on Modules Fitted (Deco®, Deco Plus®, Mode®, Polar®, Define®, Definity™)
Modular	Yes
Warranty (Years)	20 Years
Antimicrobial Certified	No
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS 5733


Additional Information:
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.



2 Module Dimmer Mounting Kit


GM150PW	2 Module Dimmer Mounting Kit - White
GM150BK	2 Module Dimmer Mounting Kit - Black
GM150PWBR	2 Module Dimmer Mounting Kit - White - Polished Brass
GM150PWBS	2 Module Dimmer Mounting Kit - White - Brushed Stainless
GM150PWCH	2 Module Dimmer Mounting Kit - White - Polished Chrome
GM150PWPN	2 Module Dimmer Mounting Kit - White - Pearl Nickel
GM150PWBSB	2 Module Dimmer Mounting Kit - White - Satin Brass
GM150PWSC	2 Module Dimmer Mounting Kit - White - Satin Chrome
GM150PWSS	2 Module Dimmer Mounting Kit - White - Stainless Steel
GM150BKAB	2 Module Dimmer Mounting Kit - Black - Antique Brass
GM150BKBN	2 Module Dimmer Mounting Kit - Black - Black Nickel
GM150BKBR	2 Module Dimmer Mounting Kit - Black - Polished Brass
GM150BKBS	2 Module Dimmer Mounting Kit - Black - Brushed Stainless
GM150KBZ	2 Module Dimmer Mounting Kit - Black - Matt Bronze
GM150BKCH	2 Module Dimmer Mounting Kit - Black - Polished Chrome
GM150BKPN	2 Module Dimmer Mounting Kit - Black - Pearl Nickel
GM150BKSB	2 Module Dimmer Mounting Kit - Black - Satin Brass
GM150BKSC	2 Module Dimmer Mounting Kit - Black - Satin Chrome
GM150BKSS	2 Module Dimmer Mounting Kit - Black - Stainless Steel
GM150BKMB	2 Module Dimmer Mounting Kit - Black - Matt Black
GM150GYBS	2 Module Dimmer Mounting Kit - Grey - Brushed Stainless
GM150GYSC	2 Module Dimmer Mounting Kit - Grey - Satin Chrome
GM150GYSS	2 Module Dimmer Mounting Kit - Grey - Stainless Steel
GM2001PWRD	20AX 1 Way Switch Module - White - Red

Standards: BS 5733 GM2001PWRD : BS EN 60669-1
Back Box Depth (mm): 47 GM2001PWRD : 25 (35 Flat Plate) **Cable Size (mm²):** Dependant on Dimmer used
Dimensions (mm): 49 (W) x 50 (H) GM2001PWRD : 24.5 (W) x 50 (H) x 22.5 (D)

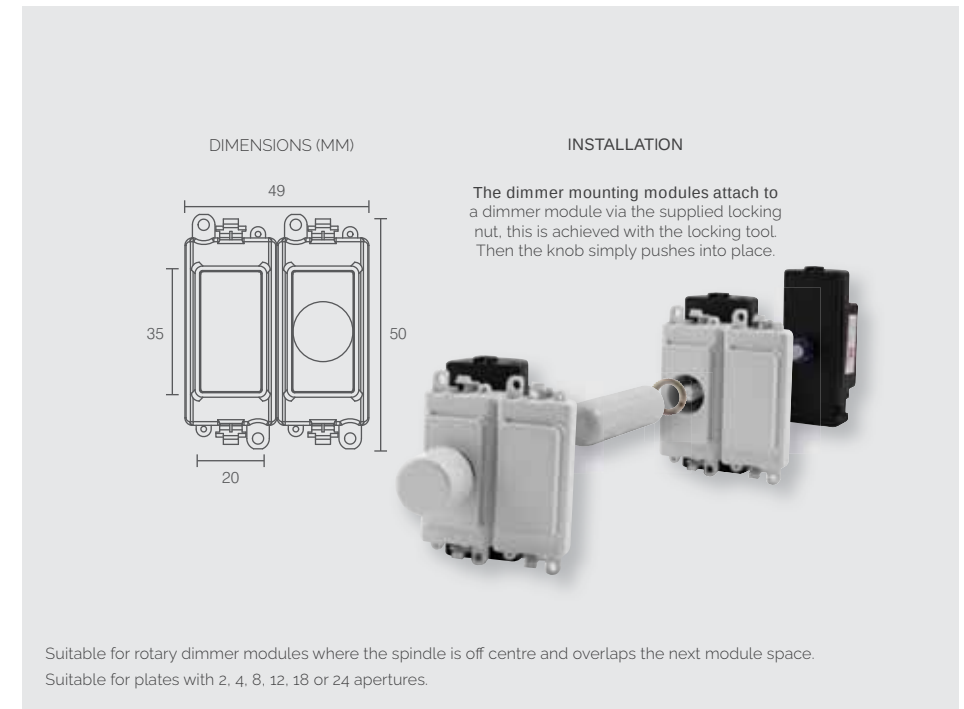

Material Composition	Mounting Kit: Nylon
Back Box Depth (mm)	Dependent on Modules Fitted (Deco®, Deco Plus®, Mode®, Polar®, Define®, Definity®)
Modular	Yes
Warranty (Years)	20 Years
Antimicrobial Certified	No
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS 5733

Additional Information:
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product.
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

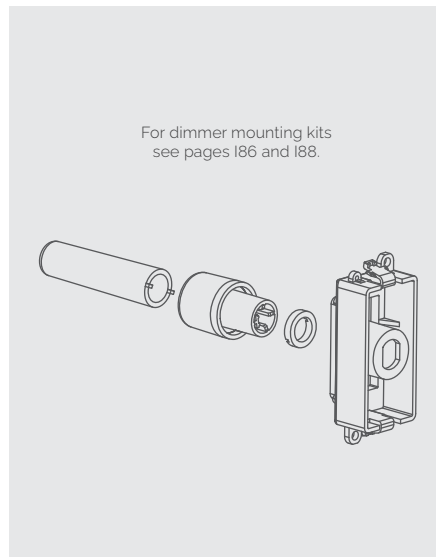

Dimmer Modules

- GM9001** 6A 2 Way Push On/Off (Non-Dimmable) Module
GM9010 1-10V Analogue Dimmer Module

The Click® dimming modules above are suitable for mounting next to each other using the appropriate mounting kit. Due to their physical size, they are not suitable to be mounted directly above each other.

Dimmer Modules

- MD9014** 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)
 Due to the reduced height, the MD9014 is suitable for mounting directly above each other.

Standards: BS EN 60669-1BS EN 55015 BS EN 61000-3-2 BS EN 61000-3-3
9014: BS EN 60669 BS EN 55015BS EN 61000 **9001:** BS EN 60669-1
Back Box Depth (mm): 25 (35 Flat Plate) **Cable Size (mm²):** 2 x 1.5
Dimmer Type: **9001:** None (On & Off Only) **9010:** Analogue **MD9014:** Trailing & Leading Edge

GridPro® Frontplates

The GridPro® frontplates illustrated on the following pages are all unfurnished for easy and quick configuration with the required modules.

The 1 - 24 gang frontplates designed for GridPro® are available from each of the existing Click® wiring accessory ranges.

These additions seamlessly match the range they belong to, including standard fixing centres allowing uniform alignment. All existing range finishes and warranties apply to the GridPro® frontplates.

We have ensured all Mode® and Polar™ products maintain the urea material to provide consistent aesthetics and colour matching throughout the range, as well as keeping the antimicrobial properties these products are known for.

Deco Plus® GridPro® Frontplates



The Deco Plus® range is a premium decorative metal range of wiring accessories, this range is available in 8 different finishes to complement any room.

Deco Plus® GridPro® Frontplates



193



DPAB20401



DPBR20401



DPCH20401



DPSB20402



DPSC20402



DPSS20402

Accessory can be used with standard BS4662 Back Boxes.



Deco Plus® 1 Gang GridPro® Frontplates

- DPAB20401 1 Gang GridPro® Frontplate - Antique Brass
- DPBN20401 1 Gang GridPro® Frontplate - Black Nickel
- DPBR20401 1 Gang GridPro® Frontplate - Polished Brass
- DPCH20401 1 Gang GridPro® Frontplate - Polished Chrome
- DPSB20401 1 Gang GridPro® Frontplate - Satin Brass
- DPSC20401 1 Gang GridPro® Frontplate - Satin Chrome
- DPSS20401 1 Gang GridPro® Frontplate - Stainless Steel
- DPMB20401 1 Gang GridPro® Frontplate - Matt Black

Deco Plus® 2 Gang GridPro® Frontplates

- DPAB20402 2 Gang GridPro® Frontplate - Antique Brass
- DPBN20402 2 Gang GridPro® Frontplate - Black Nickel
- DPBR20402 2 Gang GridPro® Frontplate - Polished Brass
- DPCH20402 2 Gang GridPro® Frontplate - Polished Chrome
- DPSB20402 2 Gang GridPro® Frontplate - Satin Brass
- DPSC20402 2 Gang GridPro® Frontplate - Satin Chrome
- DPSS20402 2 Gang GridPro® Frontplate - Stainless Steel
- DPMB20402 2 Gang GridPro® Frontplate - Matt Black




Standards: BS 5733
Back Box Depth (mm): 25
Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code:

DP - Plate Style BN - Plate Finish 20401 - Product No.
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, MB Matt Black.



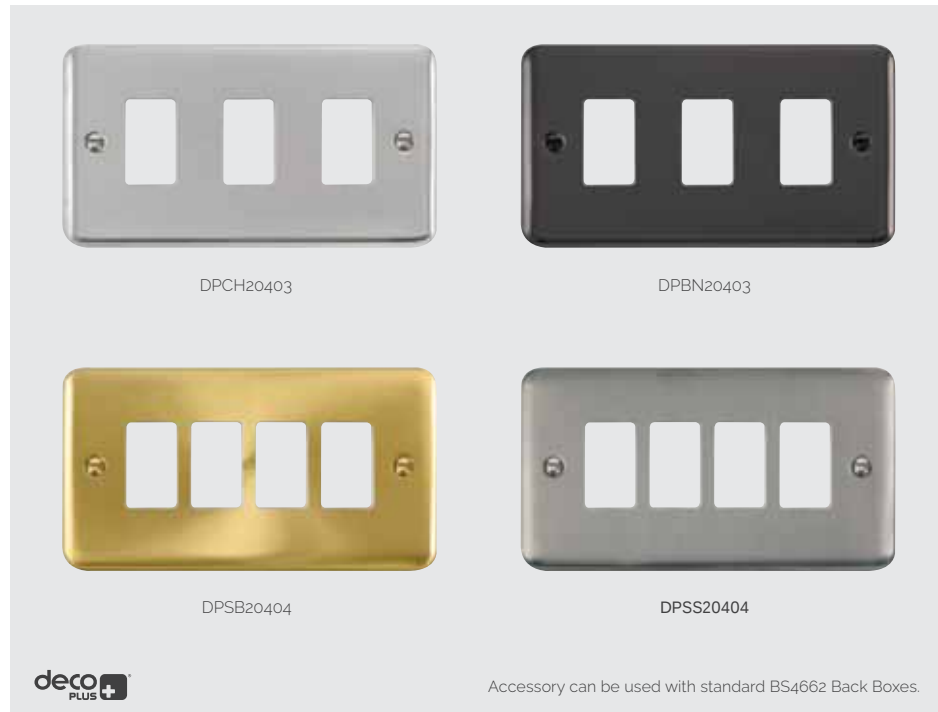

Deco Plus® 3 Gang GridPro® Frontplates

DPAB20403	3 Gang GridPro® Frontplate - Antique Brass
DPBN20403	3 Gang GridPro® Frontplate - Black Nickel
DPBR20403	3 Gang GridPro® Frontplate - Polished Brass
DPCH20403	3 Gang GridPro® Frontplate - Polished Chrome
DPSB20403	3 Gang GridPro® Frontplate - Satin Brass
DPSC20403	3 Gang GridPro® Frontplate - Satin Chrome
DPSS20403	3 Gang GridPro® Frontplate - Stainless Steel
DPMB20403	3 Gang GridPro® Frontplate - Matt Black

Deco Plus® 4 Gang GridPro® Frontplates

DPAB20404	4 Gang GridPro® Frontplate - Antique Brass
DPBN20404	4 Gang GridPro® Frontplate - Black Nickel
DPBR20404	4 Gang GridPro® Frontplate - Polished Brass
DPCH20404	4 Gang GridPro® Frontplate - Polished Chrome
DPSB20404	4 Gang GridPro® Frontplate - Satin Brass
DPSC20404	4 Gang GridPro® Frontplate - Satin Chrome
DPSS20404	4 Gang GridPro® Frontplate - Stainless Steel
DPMB20404	4 Gang GridPro® Frontplate - Matt Black




Standards: BS 5733
Back Box Depth (mm): 25
Dimensions (mm): 146 (W) x 88 (H) x 8 (D)

Understanding the code:

DP - Plate Style BN - Plate Finish 20401 - Product No.

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, MB Matt Black.

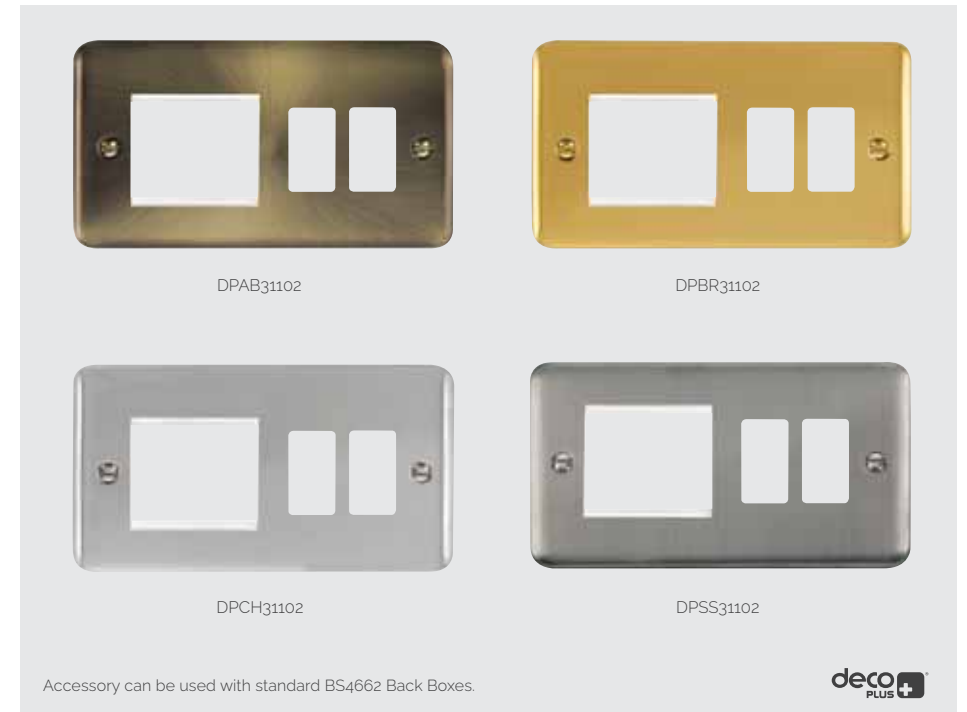

Deco Plus® Hotel Accessory GridPro® Frontplates

DPAB31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Antique Brass
DPBN31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Black Nickel
DPBR31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Polished Brass
DPCH31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Polished Chrome
DPSB31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Satin Brass
DPSC31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Satin Chrome
DPSS31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Stainless Steel
DPMB31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Matt Black

new media™

See our dedicated New Media™ section for more information on the range of New Media™ modules available.




Standards: BS 5733
Back Box Depth (mm): Dependent On Modules Fitted
Dimensions (mm): 146 (W) x 88 (H) x 8 (D)


Understanding the code:

DP - Plate Style BN - Plate Finish 20401 - Product No.

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, MB Matt Black.

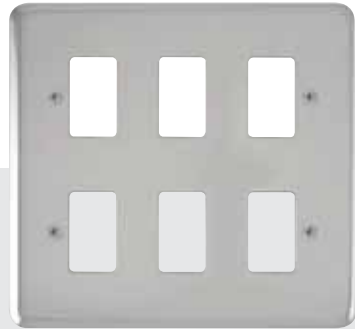

DPCH20506

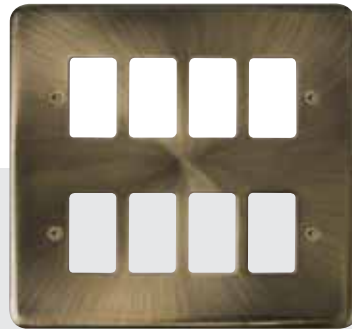

DPAB20508



Requires 2 x GR20400 Yokes.
Compatible with Back Box WA512.
For more information on Back Boxes and Yokes see from page 1151.

Deco Plus® 6 Gang GridPro® Frontplates

DPAB20506	6 Gang GridPro® Frontplate - Antique Brass
DPBN20506	6 Gang GridPro® Frontplate - Black Nickel
DPBR20506	6 Gang GridPro® Frontplate - Polished Brass
DPCH20506	6 Gang GridPro® Frontplate - Polished Chrome
DPSB20506	6 Gang GridPro® Frontplate - Satin Brass
DPSC20506	6 Gang GridPro® Frontplate - Satin Chrome
DPSS20506	6 Gang GridPro® Frontplate - Stainless Steel
DPMB20506	6 Gang GridPro® Frontplate - Matt Black



Deco Plus® 8 Gang GridPro® Frontplates


DPAB20508	8 Gang GridPro® Frontplate - Antique Brass
DPBN20508	8 Gang GridPro® Frontplate - Black Nickel
DPBR20508	8 Gang GridPro® Frontplate - Polished Brass
DPCH20508	8 Gang GridPro® Frontplate - Polished Chrome
DPSB20508	8 Gang GridPro® Frontplate - Satin Brass
DPSC20508	8 Gang GridPro® Frontplate - Satin Chrome
DPSS20508	8 Gang GridPro® Frontplate - Stainless Steel
DPMB20508	8 Gang GridPro® Frontplate - Matt Black

Standards: BS 5733
Back Box Depth (mm): 47
Dimensions (mm): 148 (W) x 148 (H) x 8 (D)


Understanding the code:

DP - Plate Style BN - Plate Finish 20401 - Product No.

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, MB Matt Black.

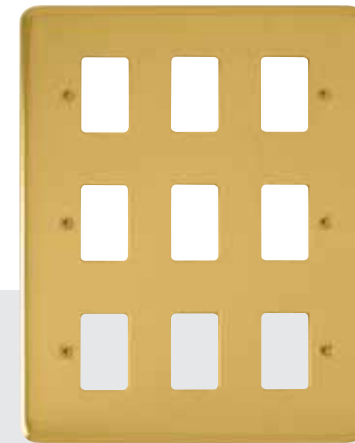

DPBR20509

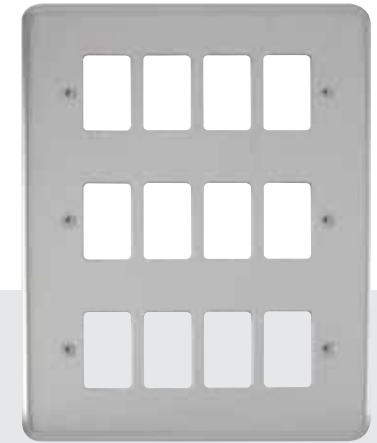

DPCH20512

Requires 3 x GR20400 Yokes.
Compatible with Back Box WA518.
For more information on Back Boxes and Yokes see from page 1151.



Deco Plus® 9 Gang GridPro® Frontplates

DPAB20509	9 Gang GridPro® Frontplate - Antique Brass
DPBN20509	9 Gang GridPro® Frontplate - Black Nickel
DPBR20509	9 Gang GridPro® Frontplate - Polished Brass
DPCH20509	9 Gang GridPro® Frontplate - Polished Chrome
DPSB20509	9 Gang GridPro® Frontplate - Satin Brass
DPSC20509	9 Gang GridPro® Frontplate - Satin Chrome
DPSS20509	9 Gang GridPro® Frontplate - Stainless Steel
DPMB20509	9 Gang GridPro® Frontplate - Matt Black



Deco Plus® 12 Gang GridPro® Frontplates


DPAB20512	12 Gang GridPro® Frontplate - Antique Brass
DPBN20512	12 Gang GridPro® Frontplate - Black Nickel
DPBR20512	12 Gang GridPro® Frontplate - Polished Brass
DPCH20512	12 Gang GridPro® Frontplate - Polished Chrome
DPSB20512	12 Gang GridPro® Frontplate - Satin Brass
DPSC20512	12 Gang GridPro® Frontplate - Satin Chrome
DPSS20512	12 Gang GridPro® Frontplate - Stainless Steel
DPMB20512	12 Gang GridPro® Frontplate - Matt Black

Standards: BS 5733
Back Box Depth (mm): 47
Dimensions (mm): 148 (W) x 207 (H) x 8 (D)

Understanding the code:

DP - Plate Style BN - Plate Finish 20401 - Product No.

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, MB Matt Black.

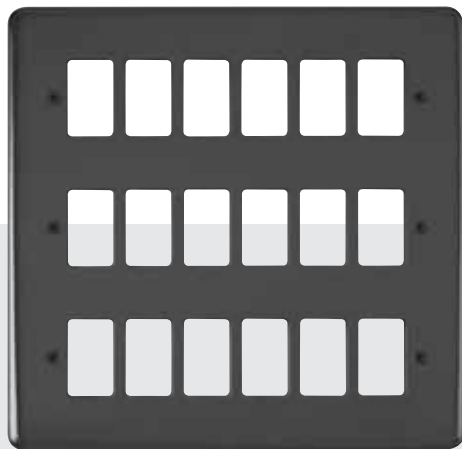

DPBN20518



Requires 3 x GR20600 Yokes.
Compatible with Back Box WA20518.
For more information on Back Boxes and Yokes see from page 151.

Deco Plus® 18 Gang GridPro® Frontplates


DPAB20518	18 Gang GridPro® Frontplate - Antique Brass
DPBN20518	18 Gang GridPro® Frontplate - Black Nickel
DPBR20518	18 Gang GridPro® Frontplate - Polished Brass
DPCH20518	18 Gang GridPro® Frontplate - Polished Chrome
DPSB20518	18 Gang GridPro® Frontplate - Satin Brass
DPSC20518	18 Gang GridPro® Frontplate - Satin Chrome
DPSS20518	18 Gang GridPro® Frontplate - Stainless Steel
DPMB20518	18 Gang GridPro® Frontplate - Matt Black



Standards: BS 5733
Back Box Depth (mm): 56
Dimensions (mm): 198 (W) x 207 (H) x 8 (D)

Understanding the code:

DP - Plate Style BN - Plate Finish 20401 - Product No.
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, MB Matt Black.

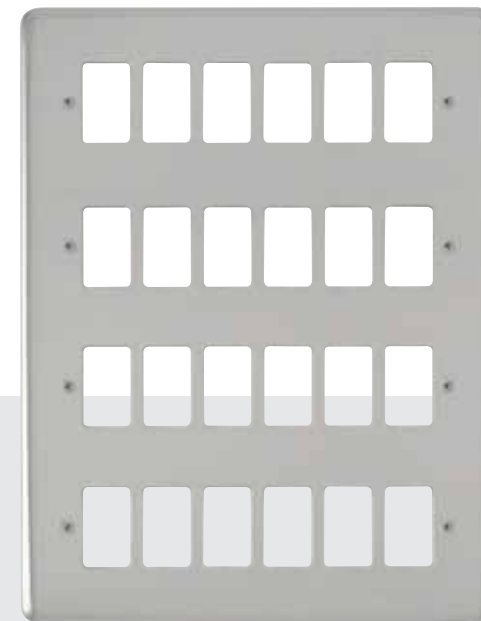

DPCH20524



Requires 4 x GR20600 Yokes.
Compatible with Back Box WA20524.
For more information on Back Boxes and Yokes see from page 151.

Deco Plus® 24 Gang GridPro® Frontplates

DPAB20524	24 Gang GridPro® Frontplate - Antique Brass
DPBN20524	24 Gang GridPro® Frontplate - Black Nickel
DPBR20524	24 Gang GridPro® Frontplate - Polished Brass
DPCH20524	24 Gang GridPro® Frontplate - Polished Chrome
DPSB20524	24 Gang GridPro® Frontplate - Satin Brass
DPSC20524	24 Gang GridPro® Frontplate - Satin Chrome
DPSS20524	24 Gang GridPro® Frontplate - Stainless Steel
DPMB20524	24 Gang GridPro® Frontplate - Matt Black



Standards: BS 5733
Back Box Depth (mm): 56
Dimensions (mm): 198 (W) x 268 (H) x 8 (D)

Understanding the code:

DP - Plate Style BN - Plate Finish 20401 - Product No.
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, MB Matt Black.



Definity™ GridPro® Frontplates


The Screwless Range

definity

Screwless, push-fit frontplates in 9 assorted finishes, the ultimate finishing touch. The frontplates are supplied independently **of the inserts which means that the initial** installation of the product can be carried out and any subsequent decoration or maintenance completed before the final selection and fixing of the frontplate.

Definity™ Assembly

1. Fit and secure appropriate back box and insert, pull cable through insert and strip insulation accordingly.
Ensure an earth connection between frame and insert (if required).

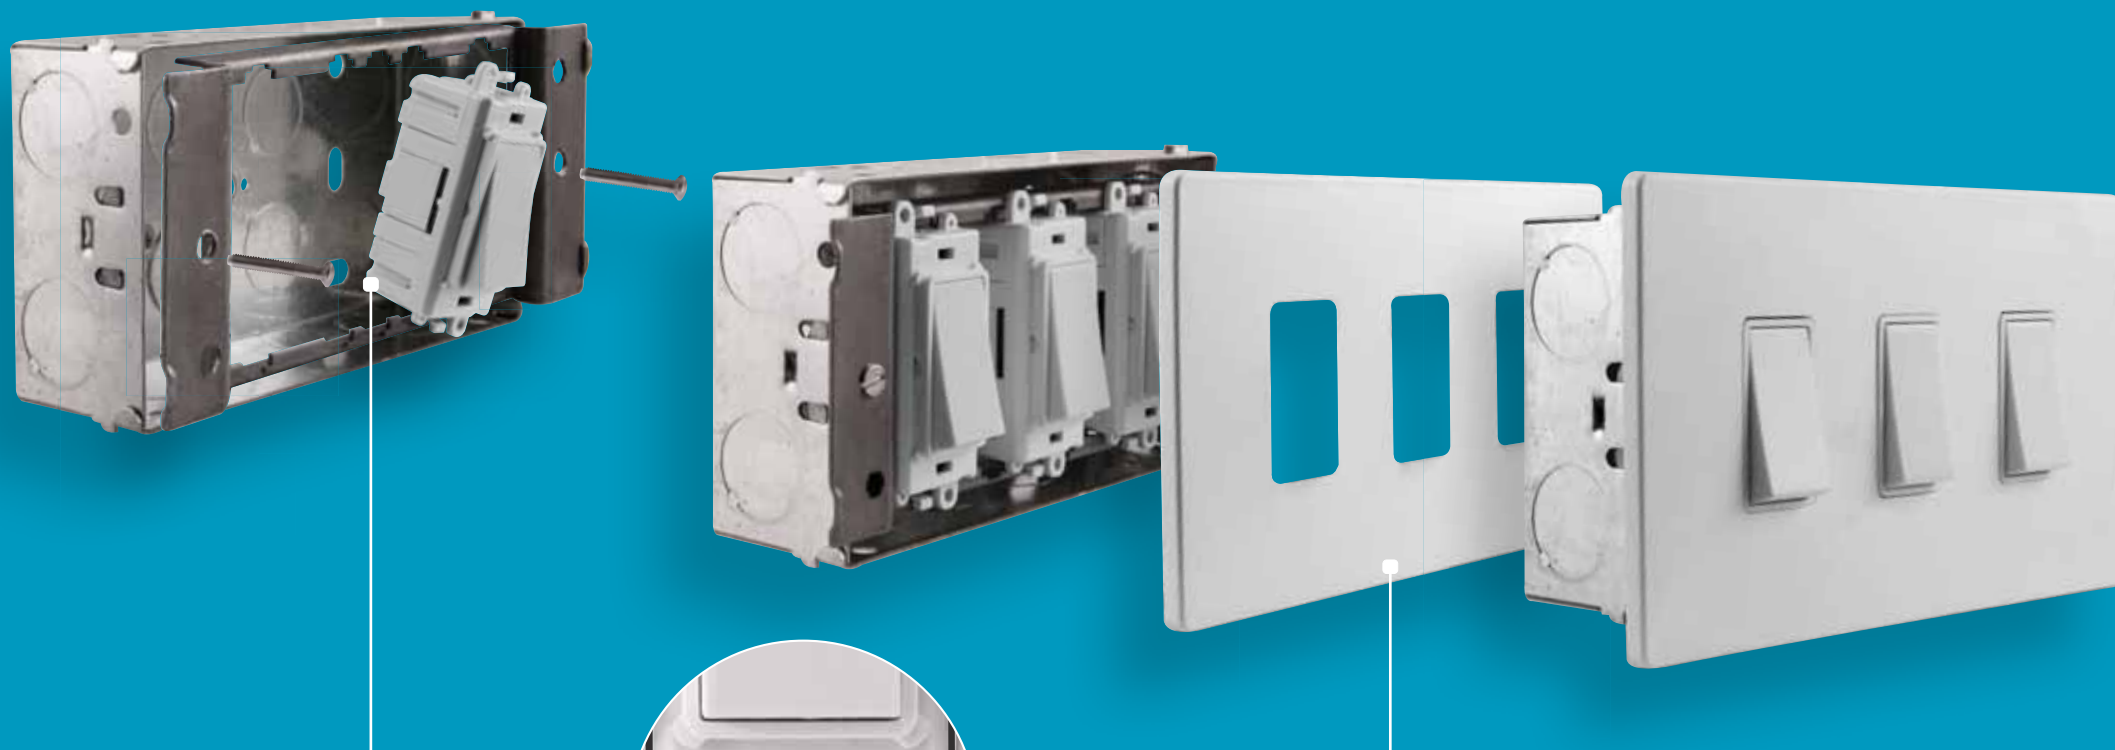

2. Systematically terminate cables into each module.
Clip the modules into a designated Definity™ insert with a pivot motion.



3. Clip the Definity™ GridPro® frontplate directly to insert.



Definity™ 1 Gang GridPro® Frontplates

- SCP20401AB 1 Gang GridPro® Frontplate - Antique Brass
 SCP20401BK 1 Gang GridPro® Frontplate - Matt Black
 SCP20401BZ 1 Gang GridPro® Frontplate - Matt Bronze
 SCP20401BS 1 Gang GridPro® Frontplate - Brushed Stainless
 SCP20401CH 1 Gang GridPro® Frontplate - Polished Chrome
 SCP20401PW 1 Gang GridPro® Frontplate - White
 SCP20401SS 1 Gang GridPro® Frontplate - Stainless Steel
 SCP20401MW 1 Gang GridPro® Frontplate - Metal White
 SCP20401MB 1 Gang GridPro® Frontplate - Metal Black

Definity™ 2 Gang GridPro® Frontplates

- SCP20402AB 2 Gang GridPro® Frontplate - Antique Brass
 SCP20402BK 2 Gang GridPro® Frontplate - Matt Black
 SCP20402BZ 2 Gang GridPro® Frontplate - Matt Bronze
 SCP20402BS 2 Gang GridPro® Frontplate - Brushed Stainless
 SCP20402CH 2 Gang GridPro® Frontplate - Polished Chrome
 SCP20402PW 2 Gang GridPro® Frontplate - White
 SCP20402SS 2 Gang GridPro® Frontplate - Stainless Steel
 SCP20402MW 2 Gang GridPro® Frontplate - Metal White
 SCP20402MB 2 Gang GridPro® Frontplate - Metal Black

Definity™ Insert

SIN20200 1 & 2 GridPro® Module Insert



Standards: BS 5733


Back Box Depth (mm): Dependent on Modules Fitted

Dimensions (mm): 86 (W) x 86 (H) x 4 (D) 20200: 82 (W) x 60 (H) x 8 (D)

Understanding the code:

SCP - Plate Style 20401 - Product No. CH - Plate Finish

AB Antique Brass CH Polished Chrome BS Brushed Stainless SS Stainless Steel BZ Matt Bronze BK Matt Black PW White MW Metal White MB Metal Black

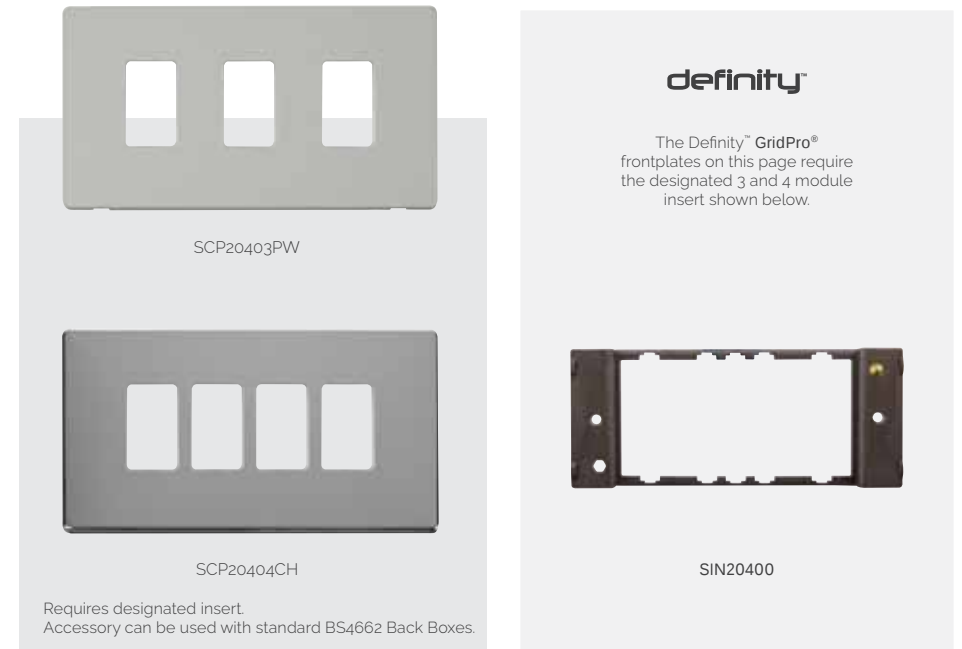

Definity™ 3 Gang GridPro® Frontplates

- SCP20403AB 3 Gang GridPro® Frontplate - Antique Brass
 SCP20403BK 3 Gang GridPro® Frontplate - Matt Black
 SCP20403BZ 3 Gang GridPro® Frontplate - Matt Bronze
 SCP20403BS 3 Gang GridPro® Frontplate - Brushed Stainless
 SCP20403CH 3 Gang GridPro® Frontplate - Polished Chrome
 SCP20403PW 3 Gang GridPro® Frontplate - White
 SCP20403SS 3 Gang GridPro® Frontplate - Stainless Steel
 SCP20403MW 3 Gang GridPro® Frontplate - Metal White
 SCP20403MB 3 Gang GridPro® Frontplate - Metal Black

Definity™ 4 Gang GridPro® Frontplates

- SCP20404AB 4 Gang GridPro® Frontplate - Antique Brass
 SCP20404BK 4 Gang GridPro® Frontplate - Matt Black
 SCP20404BZ 4 Gang GridPro® Frontplate - Matt Bronze
 SCP20404BS 4 Gang GridPro® Frontplate - Brushed Stainless
 SCP20404CH 4 Gang GridPro® Frontplate - Polished Chrome
 SCP20404PW 4 Gang GridPro® Frontplate - White
 SCP20404SS 4 Gang GridPro® Frontplate - Stainless Steel
 SCP20404MW 4 Gang GridPro® Frontplate - Metal White
 SCP20404MB 4 Gang GridPro® Frontplate - Metal Black

SIN20400

3 & 4 GridPro® Module Insert



Standards: BS 5733

Back Box Depth (mm): Dependent on Modules Fitted

Dimensions (mm): 146 (W) x 86 (H) x 4 (D)

Understanding the code:

SCP - Plate Style 20403 - Product No. CH - Plate Finish

AB Antique Brass CH Polished Chrome BS Brushed Stainless SS Stainless Steel BZ Matt Bronze BK Matt Black PW White MW Metal White MB Metal Black



SCP31102BS




SCP31102PW

Requires designated insert.
Accessory can be used with standard BS4662 Back Boxes.

definity™

The Definity™ GridPro® frontplates on this page require the designated Hotel Accessory module insert shown below.



SIN31102

Definity™ Hotel Accessory GridPro® Frontplates

SCP31102AB	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - Antique Brass
SCP31102BK	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - Matt Black
SCP31102BZ	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - Matt Bronze
SCP31102BS	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - Brushed Stainless
SCP31102CH	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - Polished Chrome
SCP31102PW	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - White
SCP31102SS	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - Stainless Steel
SCP31102MW	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - Metal White
SCP31102MB	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - Metal Black

Definity™ Hotel Accessory GridPro® Insert

SIN31102BK	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Insert
-------------------	--

new media™

See our dedicated New Media™ section for more information on the range of modules available.



Standards: BS 5733


Back Box Depth (mm): Dependent On Modules Fitted

Dimensions (mm): 146 (W) x 86 (H) x 4 (D)


Understanding the code:

SCP - Plate Style **31102** - Product No. **CH** - Plate Finish

AB Antique Brass **CH** Polished Chrome **BS** Brushed Stainless **SS** Stainless Steel **BZ** Matt Bronze **BK** Matt Black **PW** White **MW** Metal White **MB** Metal Black

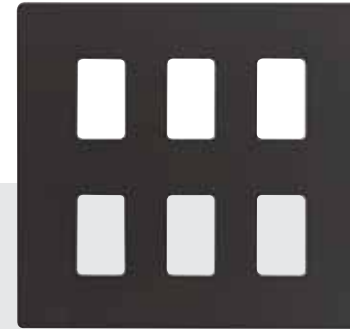

SCP20506BK

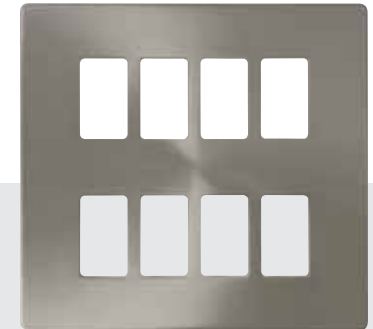

SCP20508BS

Requires designated insert.
Compatible with Back Box WA512.
For more information on Back Boxes see from page 1151.

definity™

The Definity™ GridPro® frontplates on this page require the designated 3 and 4 module insert shown here.



SIN20400

Definity™ 6 Gang GridPro® Frontplates

SCP20506AB	6 Gang GridPro® Frontplate - Antique Brass
SCP20506BK	6 Gang GridPro® Frontplate - Matt Black
SCP20506BZ	6 Gang GridPro® Frontplate - Matt Bronze
SCP20506BS	6 Gang GridPro® Frontplate - Brushed Stainless
SCP20506CH	6 Gang GridPro® Frontplate - Polished Chrome
SCP20506PW	6 Gang GridPro® Frontplate - White
SCP20506SS	6 Gang GridPro® Frontplate - Stainless Steel
SCP20506MW	6 Gang GridPro® Frontplate - Metal White
SCP20506MB	6 Gang GridPro® Frontplate - Metal Black

Definity™ 8 Gang GridPro® Frontplates

SCP20508AB	8 Gang GridPro® Frontplate - Antique Brass
SCP20508BK	8 Gang GridPro® Frontplate - Matt Black
SCP20508BZ	8 Gang GridPro® Frontplate - Matt Bronze
SCP20508BS	8 Gang GridPro® Frontplate - Brushed Stainless
SCP20508CH	8 Gang GridPro® Frontplate - Polished Chrome
SCP20508PW	8 Gang GridPro® Frontplate - White
SCP20508SS	8 Gang GridPro® Frontplate - Stainless Steel
SCP20508MW	8 Gang GridPro® Frontplate - Metal White
SCP20508MB	8 Gang GridPro® Frontplate - Metal Black

Definity™ Insert

SIN20400	3 & 4 GridPro® Module Insert
-----------------	------------------------------



Standards: BS 5733

Back Box Depth (mm): Dependent on Modules Fitted

Dimensions (mm): 146 (W) x 146 (H) x 4 (D) **20400:** 142 (W) x 60 (H) x 8 (D)

Understanding the code:

SCP - Plate Style **20401** - Product No. **CH** - Plate Finish


AB Antique Brass **CH** Polished Chrome **BS** Brushed Stainless **SS** Stainless Steel **BZ** Matt Bronze **BK** Matt Black **PW** White **MW** Metal White **MB** Metal Black

The Define® flat plate range of accessories offers up a host of new design opportunities with a comprehensive range of electrical accessory products available in 5 different decorative plate finishes.

Define® GridPro® Frontplates

The Decorative Flat Plate Range

define®

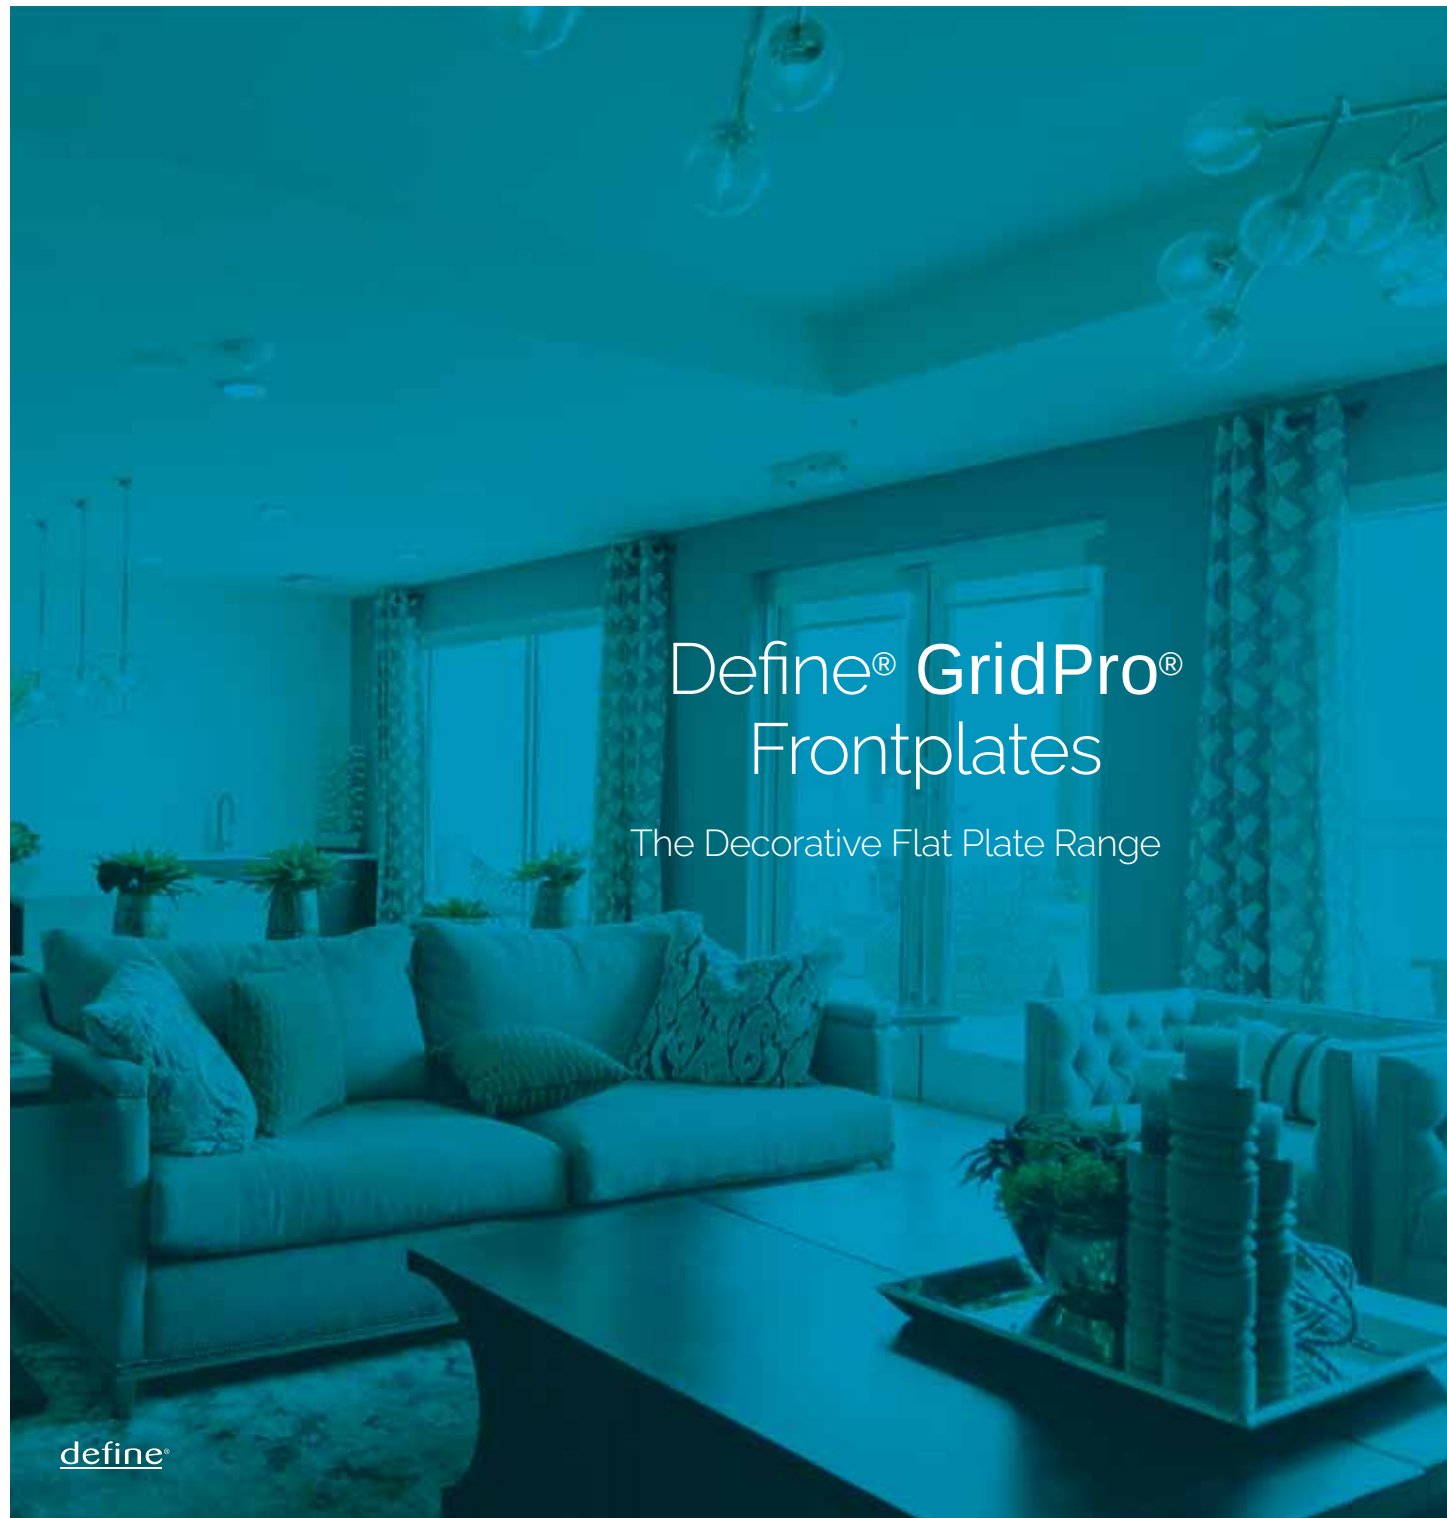


Fully Adjustable Assembly

essentials™ **define**®



1. Fit and secure appropriate back box and yoke with tabs removed.
Pull the cable through yoke and strip insulation accordingly.
Ensure an earth connection between frame and yoke (if required).
The fixing screws are backed off to allow adjustment for yoke.

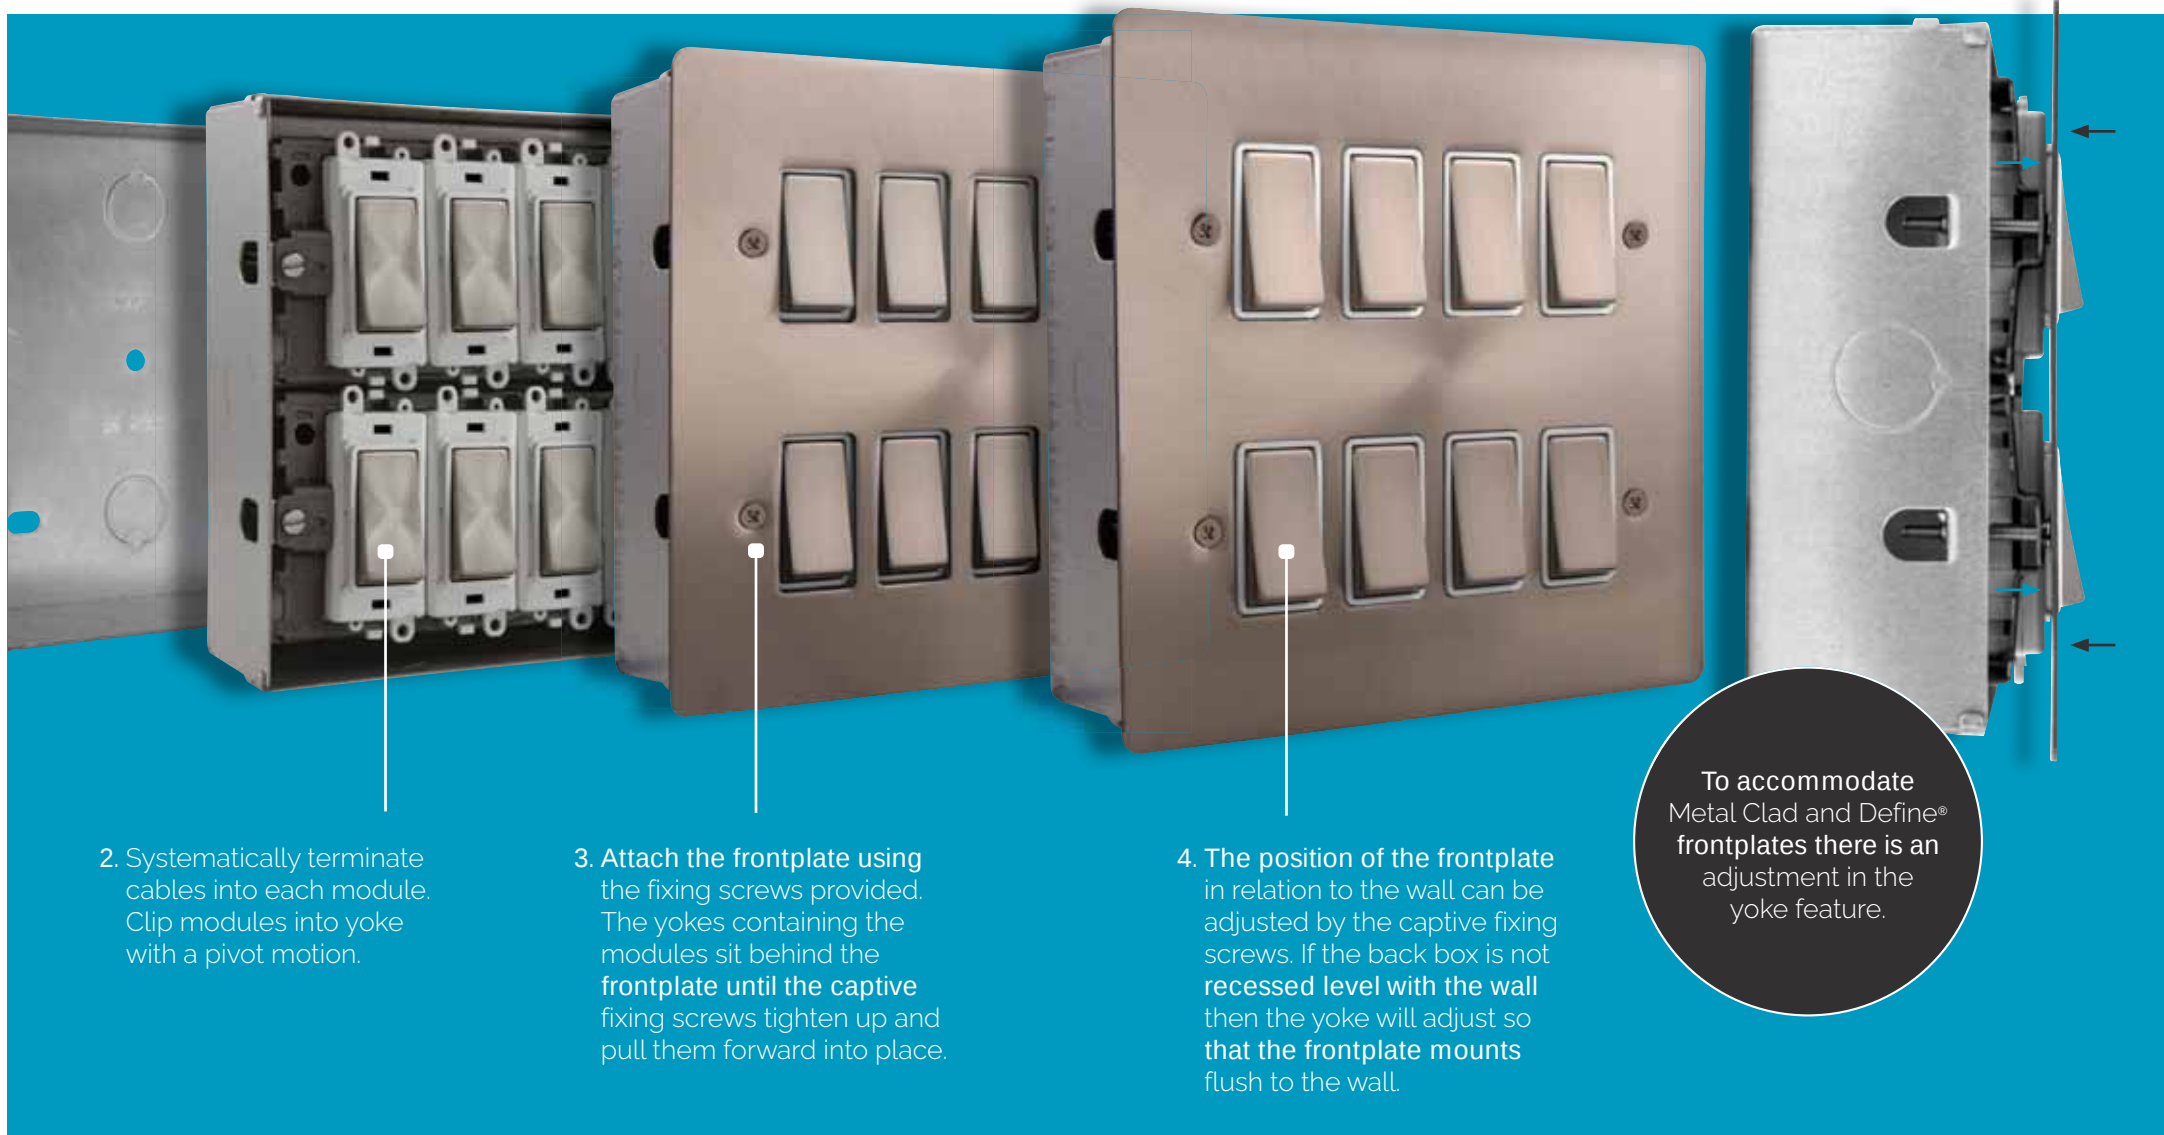


2. Systematically terminate cables into each module.
Clip modules into yoke with a pivot motion.

3. **Attach the frontplate** using the fixing screws provided. The yokes containing the modules sit behind the **frontplate** until the captive fixing screws tighten up and pull them forward into place.

4. The position of the frontplate in relation to the wall can be adjusted by the captive fixing screws. If the back box is not **recessed level with the wall** then the yoke will adjust so **that the frontplate mounts flush to the wall**.

To accommodate Metal Clad and Define® frontplates there is an adjustment in the yoke feature.

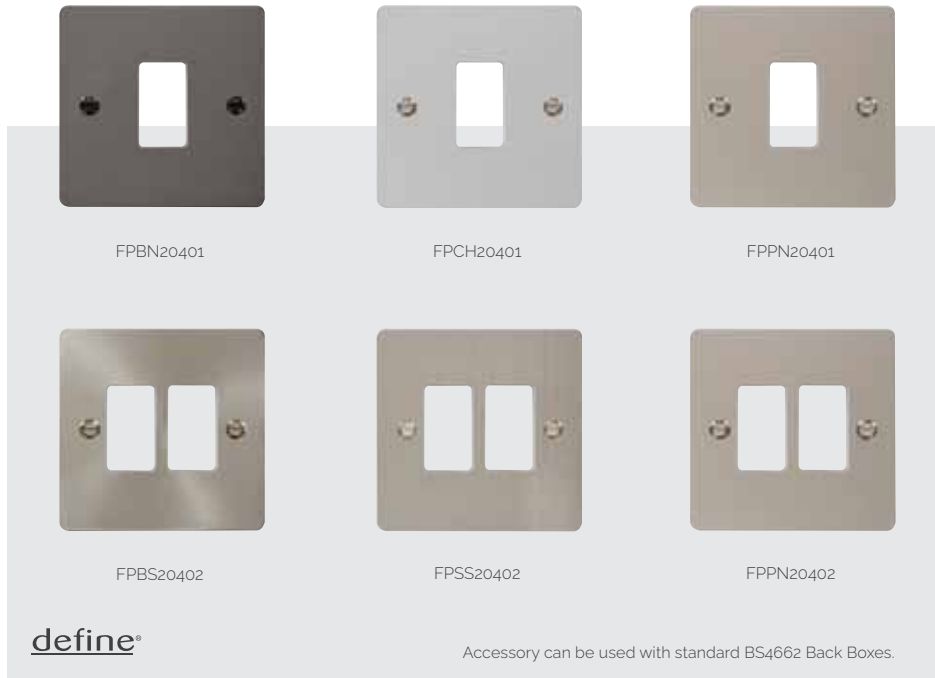

Define® 1 Gang GridPro® Frontplates

FPBN20401	1 Gang GridPro® Frontplate - Black Nickel
FPBS20401	1 Gang GridPro® Frontplate - Brushed Stainless
FPCH20401	1 Gang GridPro® Frontplate - Polished Chrome
FPPN20401	1 Gang GridPro® Frontplate - Pearl Nickel
FPSS20401	1 Gang GridPro® Frontplate - Stainless Steel


Define® 2 Gang GridPro® Frontplates

FPBN20402	2 Gang GridPro® Frontplate - Black Nickel
FPBS20402	2 Gang GridPro® Frontplate - Brushed Stainless
FPCH20402	2 Gang GridPro® Frontplate - Polished Chrome
FPPN20402	2 Gang GridPro® Frontplate - Pearl Nickel
FPSS20402	2 Gang GridPro® Frontplate - Stainless Steel



Standards: BS 5733
Back Box Depth (mm): 35
Dimensions (mm): 86 (W) x 86 (H) x 1.3 (D)

Understanding the code:
FP - Plate Style BN - Plate Finish 20401 - Product No.
CH Polished Chrome, BN Black Nickel, PN Pearl Nickel, BS Brushed Stainless, SS Stainless Steel.

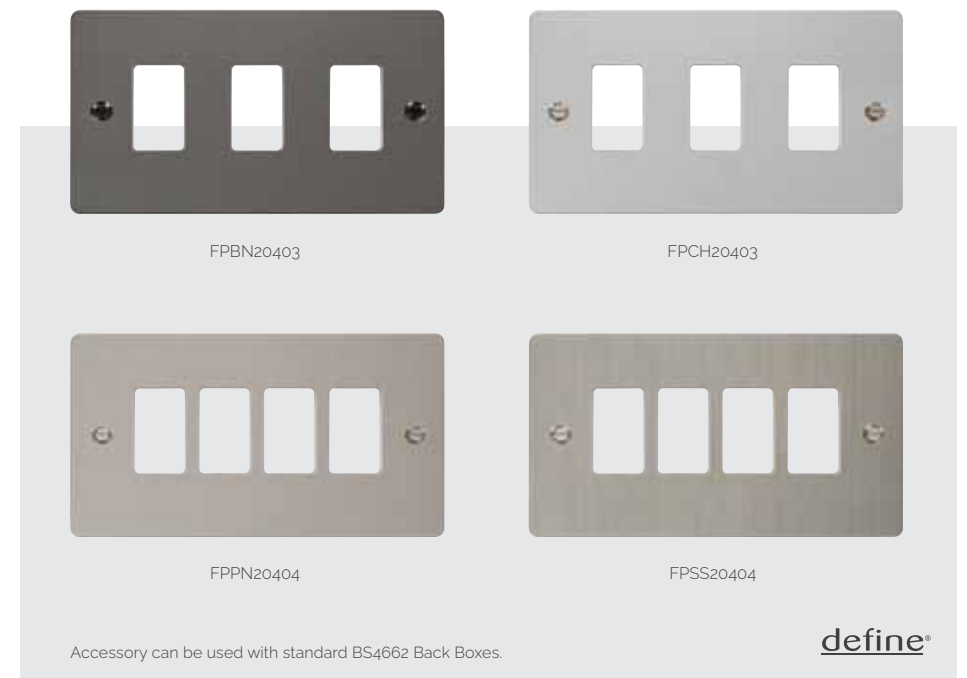

Define® 3 Gang GridPro® Frontplates

FPBN20403	3 Gang GridPro® Frontplate - Black Nickel
FPBS20403	3 Gang GridPro® Frontplate - Brushed Stainless
FPCH20403	3 Gang GridPro® Frontplate - Polished Chrome
FPPN20403	3 Gang GridPro® Frontplate - Pearl Nickel
FPSS20403	3 Gang GridPro® Frontplate - Stainless Steel


Define® 4 Gang GridPro® Frontplates

FPBN20404	4 Gang GridPro® Frontplate - Black Nickel
FPBS20404	4 Gang GridPro® Frontplate - Brushed Stainless
FPCH20404	4 Gang GridPro® Frontplate - Polished Chrome
FPPN20404	4 Gang GridPro® Frontplate - Pearl Nickel
FPSS20404	4 Gang GridPro® Frontplate - Stainless Steel



Standards: BS 5733
Back Box Depth (mm): 35
Dimensions (mm): 146 (W) x 88 (H) x 1.3 (D)

Understanding the code:
FP - Plate Style BN - Plate Finish 20404 - Product No.
CH Polished Chrome, BN Black Nickel, PN Pearl Nickel, BS Brushed Stainless, SS Stainless Steel.

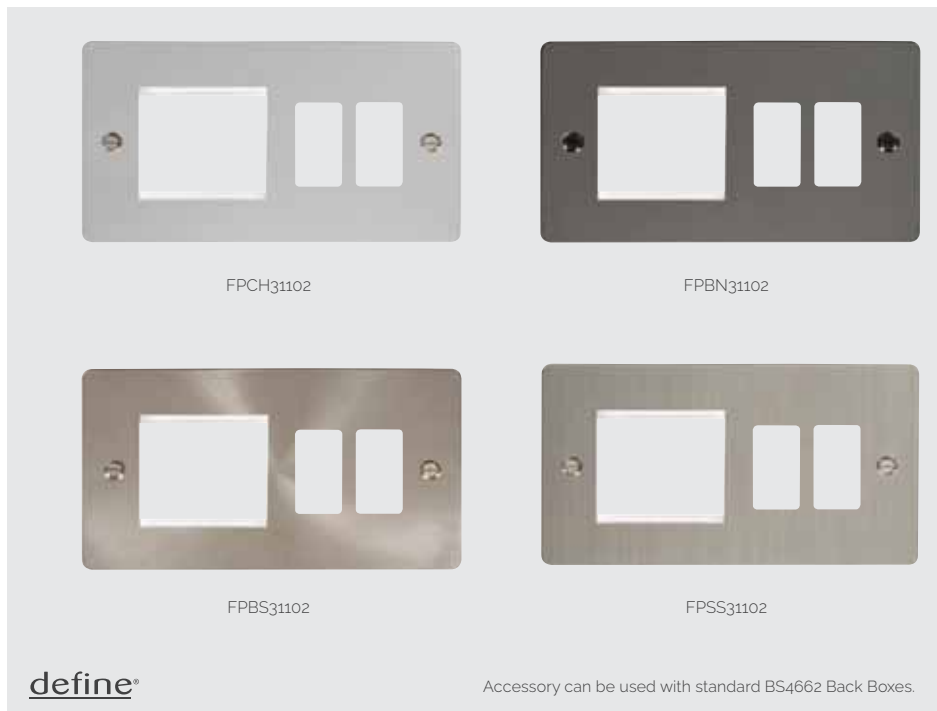

Define® Hotel Accessory GridPro® Frontplates

FPBN31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Black Nickel
FPBS31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Brushed Stainless
FPCH31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Polished Chrome
FPPN31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Pearl Nickel
FPSS31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Stainless Steel



new media™

See our dedicated New Media™ section for more information on the range of New Media™ modules available.

Standards: BS 5733


Back Box Depth (mm): Dependent On Modules Fitted

Dimensions (mm): 146 (W) x 88 (H) x 1.3 (D)

Understanding the code:

FP - Plate Style **BN** - Plate Finish **31102** - Product No.

CH Polished Chrome, **BN** Black Nickel, **PN** Pearl Nickel, **BS** Brushed Stainless, **SS** Stainless Steel.

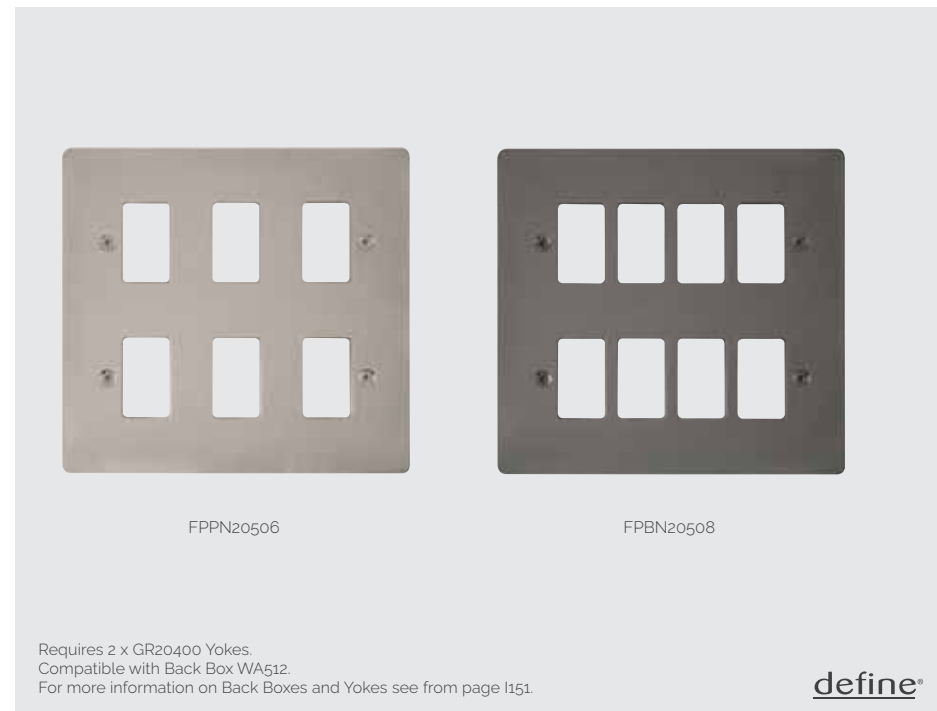

Define® 6 Gang GridPro® Frontplates

FPBN20506	6 Gang GridPro® Frontplate - Black Nickel
FPBS20506	6 Gang GridPro® Frontplate - Brushed Stainless
FPCH20506	6 Gang GridPro® Frontplate - Polished Chrome
FPPN20506	6 Gang GridPro® Frontplate - Pearl Nickel
FPSS20506	6 Gang GridPro® Frontplate - Stainless Steel

Define® 8 Gang GridPro® Frontplates

FPBN20508	8 Gang GridPro® Frontplate - Black Nickel
FPBS20508	8 Gang GridPro® Frontplate - Brushed Stainless
FPCH20508	8 Gang GridPro® Frontplate - Polished Chrome
FPPN20508	8 Gang GridPro® Frontplate - Pearl Nickel
FPSS20508	8 Gang GridPro® Frontplate - Stainless Steel



Standards: BS 5733


Back Box Depth (mm): 47

Dimensions (mm): 148 (W) x 148 (H) x 1.3 (D)


Understanding the code:

FP - Plate Style **BN** - Plate Finish **20404** - Product No.

CH Polished Chrome, **BN** Black Nickel, **PN** Pearl Nickel, **BS** Brushed Stainless, **SS** Stainless Steel.

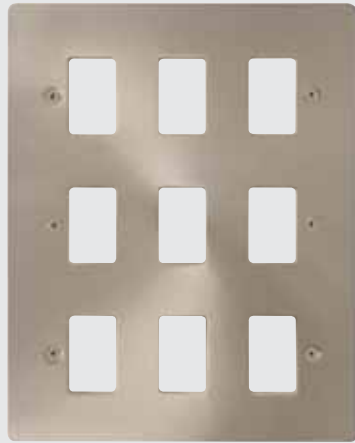

FPBN20509

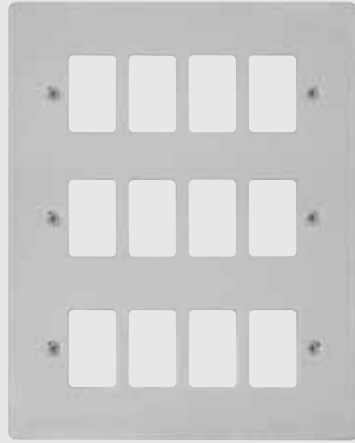

FPCH20512

define®

Requires 3 x GR20400 Yokes.
Compatible with Back Box WA518.
For more information on Back Boxes and Yokes see from page I151.

Define® 9 Gang GridPro® Frontplates

FPBN20509	9 Gang GridPro® Frontplate - Black Nickel
FPBS20509	9 Gang GridPro® Frontplate - Brushed Stainless
FPCH20509	9 Gang GridPro® Frontplate - Polished Chrome
FPPN20509	9 Gang GridPro® Frontplate - Pearl Nickel
FPSS20509	9 Gang GridPro® Frontplate - Stainless Steel


Define® 12 Gang GridPro® Frontplates

FPBN20512	12 Gang GridPro® Frontplate - Black Nickel
FPBS20512	12 Gang GridPro® Frontplate - Brushed Stainless
FPCH20512	12 Gang GridPro® Frontplate - Polished Chrome
FPPN20512	12 Gang GridPro® Frontplate - Pearl Nickel
FPSS20512	12 Gang GridPro® Frontplate - Stainless Steel



Standards: BS 5733
Back Box Depth (mm): 47
Dimensions (mm): 148 (W) x 207 (H) x 1.3 (D)

Understanding the code:
FP - Plate Style BN - Plate Finish 20509 - Product No.
CH Polished Chrome, BN Black Nickel, PN Pearl Nickel, BS Brushed Stainless, SS Stainless Steel.

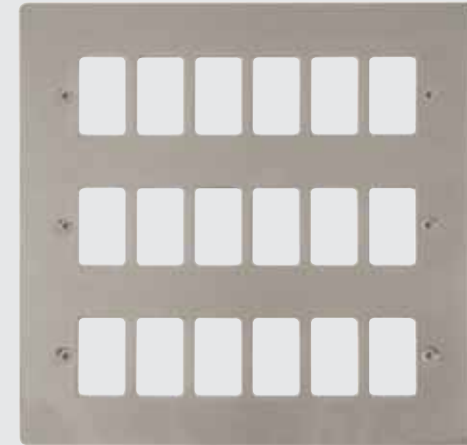

FPPN20518

define®

Requires 3 x GR20600 Yokes.
Compatible with Back Box WA20518.
For more information on Back Boxes and Yokes see from page I151.


Define® 18 Gang GridPro® Frontplates

FPBN20518	18 Gang GridPro® Frontplate - Black Nickel
FPBS20518	18 Gang GridPro® Frontplate - Brushed Stainless
FPCH20518	18 Gang GridPro® Frontplate - Polished Chrome
FPPN20518	18 Gang GridPro® Frontplate - Pearl Nickel
FPSS20518	18 Gang GridPro® Frontplate - Stainless Steel



Standards: BS 5733
Back Box Depth (mm): 56
Dimensions (mm): 198 (W) x 207 (H) x 1.3 (D)

Understanding the code:
FP - Plate Style BN - Plate Finish 20518 - Product No.
CH Polished Chrome, BN Black Nickel, PN Pearl Nickel, BS Brushed Stainless, SS Stainless Steel.

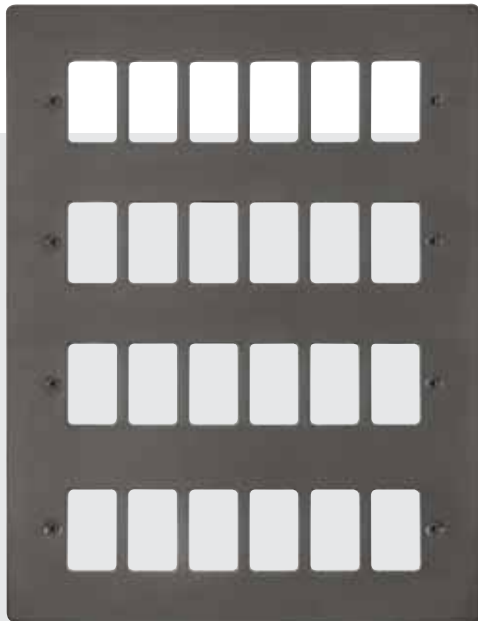

FPBN20524

define®

Requires 4 x GR20600 Yokes.
Compatible with Back Box WA20524.
For more information on Back Boxes and Yokes see from page I151.

Define® 24 Gang GridPro® Frontplates

FPBN20524	24 Gang GridPro® Frontplate - Black Nickel
FPBS20524	24 Gang GridPro® Frontplate - Brushed Stainless
FPCH20524	24 Gang GridPro® Frontplate - Polished Chrome
FPPN20524	24 Gang GridPro® Frontplate - Pearl Nickel
FPSS20524	24 Gang GridPro® Frontplate - Stainless Steel



Standards: BS 5733
Back Box Depth (mm): 56
Dimensions (mm): 198 (W) x 268 (H) x 1.3 (D)

Understanding the code:
FP - Plate Style BN - Plate Finish 20518 - Product No.
CH Polished Chrome, BN Black Nickel, PN Pearl Nickel, BS Brushed Stainless, SS Stainless Steel.

Deco® GridPro®
Frontplates

Decorative Metal Wiring Accessories.



Available in 9 finishes, a brand that is
synonymous with high quality, long life, high
specification and unprecedented value for money.



Deco® 1 Gang GridPro® Frontplates

VPAB20401	1 Gang GridPro® Frontplate - Antique Brass
VPBN20401	1 Gang GridPro® Frontplate - Black Nickel
VPBR20401	1 Gang GridPro® Frontplate - Polished Brass
VPCH20401	1 Gang GridPro® Frontplate - Polished Chrome
VPPN20401	1 Gang GridPro® Frontplate - Pearl Nickel
VPSB20401	1 Gang GridPro® Frontplate - Satin Brass
VPSC20401	1 Gang GridPro® Frontplate - Satin Chrome
VPSS20401	1 Gang GridPro® Frontplate - Stainless Steel
VPMB20401	1 Gang GridPro® Frontplate - Matt Black

Deco® 2 Gang GridPro® Frontplates


VPAB20402	2 Gang GridPro® Frontplate - Antique Brass
VPBN20402	2 Gang GridPro® Frontplate - Black Nickel
VPBR20402	2 Gang GridPro® Frontplate - Polished Brass
VPCH20402	2 Gang GridPro® Frontplate - Polished Chrome
VPPN20402	2 Gang GridPro® Frontplate - Pearl Nickel
VPSB20402	2 Gang GridPro® Frontplate - Satin Brass
VPSC20402	2 Gang GridPro® Frontplate - Satin Chrome
VPSS20402	2 Gang GridPro® Frontplate - Stainless Steel
VPMB20402	2 Gang GridPro® Frontplate - Matt Black



Standards: BS 5733
Back Box Depth (mm): 25
Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code:

VP - Plate Style BN - Plate Finish 20401 - Product No.
CH Polished Chrome, SC Satin Chrome, BR Polished Brass, BN Black Nickel, PN Pearl Nickel, AB Antique Brass, SB Satin Brass, SS Stainless Steel, MB Matt Black.

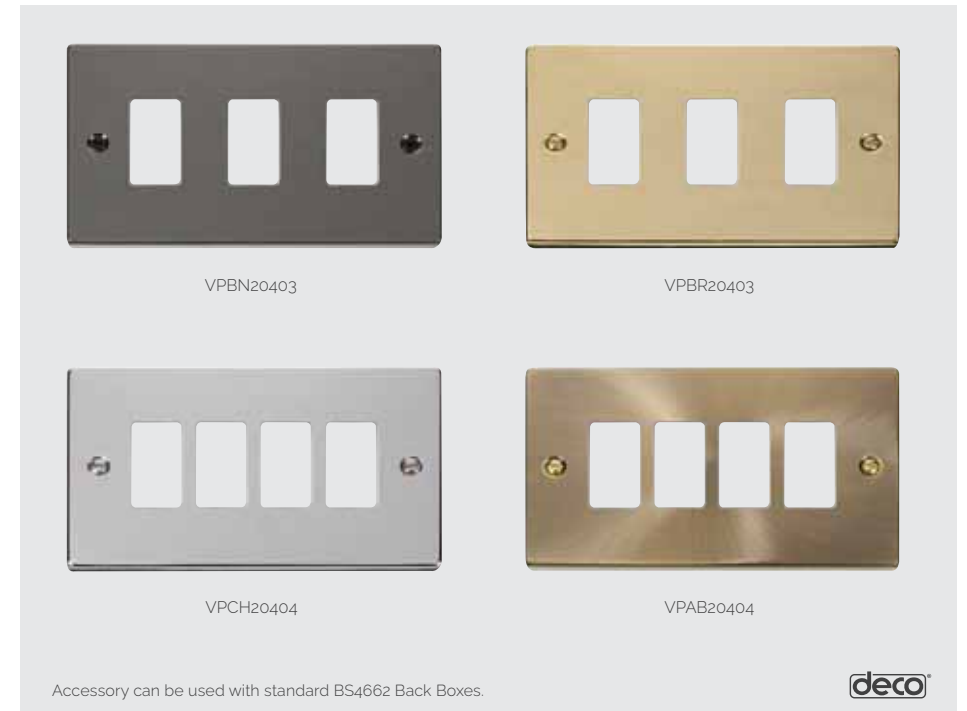

Deco® 3 Gang GridPro® Frontplates

VPAB20403	3 Gang GridPro® Frontplate - Antique Brass
VPBN20403	3 Gang GridPro® Frontplate - Black Nickel
VPBR20403	3 Gang GridPro® Frontplate - Polished Brass
VPCH20403	3 Gang GridPro® Frontplate - Polished Chrome
VPPN20403	3 Gang GridPro® Frontplate - Pearl Nickel
VPSB20403	3 Gang GridPro® Frontplate - Satin Brass
VPSC20403	3 Gang GridPro® Frontplate - Satin Chrome
VPSS20403	3 Gang GridPro® Frontplate - Stainless Steel
VPMB20403	3 Gang GridPro® Frontplate - Matt Black

Deco® 4 Gang GridPro® Frontplates

VPAB20404	4 Gang GridPro® Frontplate - Antique Brass
VPBN20404	4 Gang GridPro® Frontplate - Black Nickel
VPBR20404	4 Gang GridPro® Frontplate - Polished Brass
VPCH20404	4 Gang GridPro® Frontplate - Polished Chrome
VPPN20404	4 Gang GridPro® Frontplate - Pearl Nickel
VPSB20404	4 Gang GridPro® Frontplate - Satin Brass
VPSC20404	4 Gang GridPro® Frontplate - Satin Chrome
VPSS20404	4 Gang GridPro® Frontplate - Stainless Steel
VPMB20404	4 Gang GridPro® Frontplate - Matt Black



Standards: BS 5733
Back Box Depth (mm): 25
Dimensions (mm): 146 (W) x 88 (H) x 8 (D)

Understanding the code:

VP - Plate Style BN - Plate Finish 20403 - Product No.
CH Polished Chrome, SC Satin Chrome, BR Polished Brass, BN Black Nickel, PN Pearl Nickel, AB Antique Brass, SB Satin Brass, SS Stainless Steel, MB Matt Black.



Deco® Hotel Accessory GridPro® Frontplates

VPAB31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Antique Brass
VPBN31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Black Nickel
VPBR31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Polished Brass
VPCH31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Polished Chrome
VPPN31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Pearl Nickel
VPSB31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Satin Brass
VPSC31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Satin Chrome
VPSS31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Stainless Steel
VPMB31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Matt Black

new media™

See our dedicated New Media™ section for more information on the range of New Media™ modules available.



Standards: BS 5733


Back Box Depth (mm): Dependent On Modules Fitted

Dimensions (mm): 146 (W) x 88 (H) x 8 (D)

Understanding the code:

VP - Plate Style BN - Plate Finish 31102 - Product No.

CH Polished Chrome, SC Satin Chrome, BR Polished Brass, BN Black Nickel, PN Pearl Nickel, AB Antique Brass, SB Satin Brass, SS Stainless Steel, MB Matt Black.

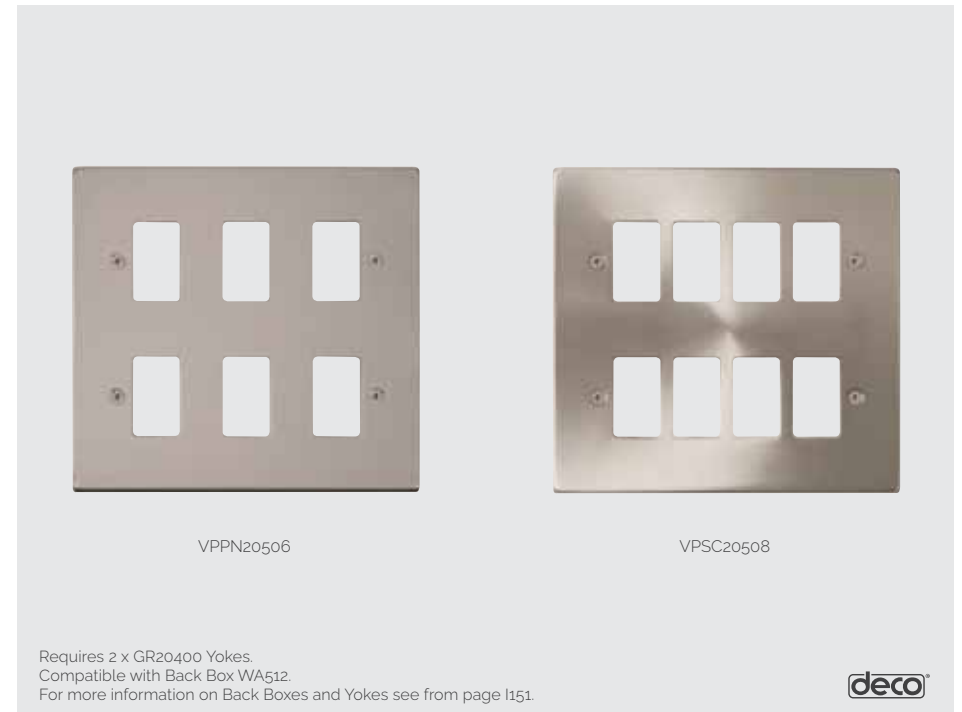

Deco® 6 Gang GridPro® Frontplates

VPAB20506	6 Gang GridPro® Frontplate - Antique Brass
VPBN20506	6 Gang GridPro® Frontplate - Black Nickel
VPBR20506	6 Gang GridPro® Frontplate - Polished Brass
VPCH20506	6 Gang GridPro® Frontplate - Polished Chrome
VPPN20506	6 Gang GridPro® Frontplate - Pearl Nickel
VPSB20506	6 Gang GridPro® Frontplate - Satin Brass
VPSC20506	6 Gang GridPro® Frontplate - Satin Chrome
VPSS20506	6 Gang GridPro® Frontplate - Stainless Steel
VPMB20506	6 Gang GridPro® Frontplate - Matt Black

Deco® 8 Gang GridPro® Frontplates

VPAB20508	8 Gang GridPro® Frontplate - Antique Brass
VPBN20508	8 Gang GridPro® Frontplate - Black Nickel
VPBR20508	8 Gang GridPro® Frontplate - Polished Brass
VPCH20508	8 Gang GridPro® Frontplate - Polished Chrome
VPPN20508	8 Gang GridPro® Frontplate - Pearl Nickel
VPSB20508	8 Gang GridPro® Frontplate - Satin Brass
VPSC20508	8 Gang GridPro® Frontplate - Satin Chrome
VPSS20508	8 Gang GridPro® Frontplate - Stainless Steel
VPMB20508	8 Gang GridPro® Frontplate - Matt Black

Standards: BS 5733

Back Box Depth (mm): 47


Dimensions (mm): 146 (W) x 146 (H) x 8 (D)

Understanding the code:


VP - Plate Style BN - Plate Finish 20506 - Product No.

CH Polished Chrome, SC Satin Chrome, BR Polished Brass, BN Black Nickel, PN Pearl Nickel, AB Antique Brass, SB Satin Brass, SS Stainless Steel, MB Matt Black.



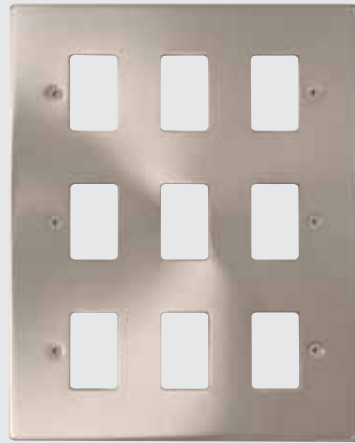

VPSC20509

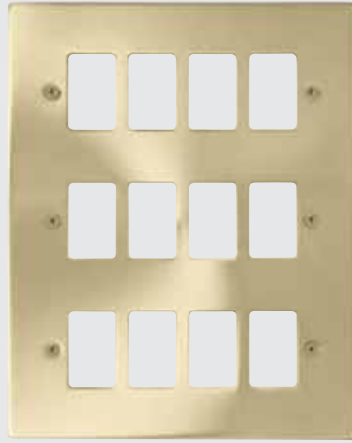

VPSB20512



Requires 3 x GR20400 Yokes.
Compatible with Back Box WA518.
For more information on Back Boxes and Yokes see from page 1151.

Deco® 9 Gang GridPro® Frontplates

VPAB20509	9 Gang GridPro® Frontplate - Antique Brass
VPBN20509	9 Gang GridPro® Frontplate - Black Nickel
VPBR20509	9 Gang GridPro® Frontplate - Polished Brass
VPCH20509	9 Gang GridPro® Frontplate - Polished Chrome
VPBN20509	9 Gang GridPro® Frontplate - Pearl Nickel
VPSB20509	9 Gang GridPro® Frontplate - Satin Brass
VPSC20509	9 Gang GridPro® Frontplate - Satin Chrome
VPSS20509	9 Gang GridPro® Frontplate - Stainless Steel
VPMB20509	9 Gang GridPro® Frontplate - Matt Black

Deco® 12 Gang GridPro® Frontplates


VPAB20512	12 Gang GridPro® Frontplate - Antique Brass
VPBN20512	12 Gang GridPro® Frontplate - Black Nickel
VPBR20512	12 Gang GridPro® Frontplate - Polished Brass
VPCH20512	12 Gang GridPro® Frontplate - Polished Chrome
VPBN20512	12 Gang GridPro® Frontplate - Pearl Nickel
VPSB20512	12 Gang GridPro® Frontplate - Satin Brass
VPSC20512	12 Gang GridPro® Frontplate - Satin Chrome
VPSS20512	12 Gang GridPro® Frontplate - Stainless Steel
VPMB20512	12 Gang GridPro® Frontplate - Matt Black



Standards: BS 5733
Back Box Depth (mm): 47
Dimensions (mm): 146 (W) x 206 (H) x 8 (D)

Understanding the code:

VP - Plate Style BN - Plate Finish 20509 - Product No.
CH Polished Chrome, SC Satin Chrome, BR Polished Brass, BN Black Nickel, PN Pearl Nickel, AB Antique Brass, SB Satin Brass, SS Stainless Steel, MB Matt Black.

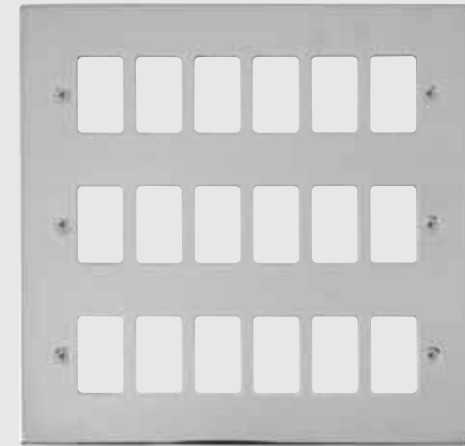

VPCH20518



Requires 3 x GR20600 Yokes.
Compatible with Back Box WA20518.
For more information on Back Boxes and Yokes see from page 1151.

Deco® 18 Gang GridPro® Frontplates


VPAB20518	18 Gang GridPro® Frontplate - Antique Brass
VPBN20518	18 Gang GridPro® Frontplate - Black Nickel
VPBR20518	18 Gang GridPro® Frontplate - Polished Brass
VPCH20518	18 Gang GridPro® Frontplate - Polished Chrome
VPBN20518	18 Gang GridPro® Frontplate - Pearl Nickel
VPSB20518	18 Gang GridPro® Frontplate - Satin Brass
VPSC20518	18 Gang GridPro® Frontplate - Satin Chrome
VPSS20518	18 Gang GridPro® Frontplate - Stainless Steel
VPMB20518	18 Gang GridPro® Frontplate - Matt Black



Standards: BS 5733
Back Box Depth (mm): 56
Dimensions (mm): 196 (W) x 207 (H) x 8 (D)

Understanding the code:

VP - Plate Style BN - Plate Finish 20518 - Product No.
CH Polished Chrome, SC Satin Chrome, BR Polished Brass, BN Black Nickel, PN Pearl Nickel, AB Antique Brass, SB Satin Brass, SS Stainless Steel, MB Matt Black.

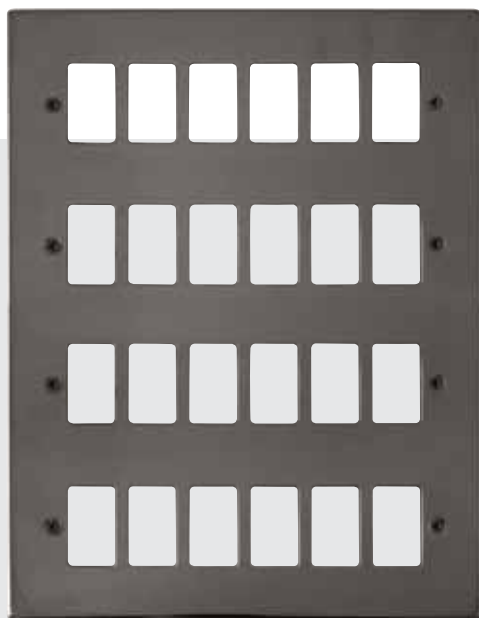

VPBN20524



Requires 4 x GR20600 Yokes.
Compatible with Back Box WA20524.
For more information on Back Boxes and Yokes see from page I151.

Deco® 24 Gang GridPro® Frontplates

VPAB20524	24 Gang GridPro® Frontplate - Antique Brass
VPBN20524	24 Gang GridPro® Frontplate - Black Nickel
VPBR20524	24 Gang GridPro® Frontplate - Polished Brass
VPCH20524	24 Gang GridPro® Frontplate - Polished Chrome
VPBN20524	24 Gang GridPro® Frontplate - Pearl Nickel
VPSB20524	24 Gang GridPro® Frontplate - Satin Brass
VPSC20524	24 Gang GridPro® Frontplate - Satin Chrome
VPSS20524	24 Gang GridPro® Frontplate - Stainless Steel
VPMB20524	24 Gang GridPro® Frontplate - Matt Black



Standards: BS 5733
Back Box Depth (mm): 56
Dimensions (mm): 196 (W) x 268 (H) x 8 (D)

Understanding the code:

VP - Plate Style BN - Plate Finish 20524 - Product No.
CH Polished Chrome, SC Satin Chrome, BR Polished Brass, BN Black Nickel, PN Pearl Nickel, AB Antique Brass, SB Satin Brass, SS Stainless Steel, MB Matt Black.



ANTIBACTERIAL
& ANTIVIRAL
Certified Products

Mode® GridPro® Frontplates


A stylish, contemporary and flexible range of
smooth profile wiring accessories

MODE®

Mode® accessories have been designed and developed as a high quality, flexible and modern solution to virtually any domestic or commercial wiring requirement.

Mode® accessories have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses. After a **contact period of 4 hours**, Mode® was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

Mode® wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.

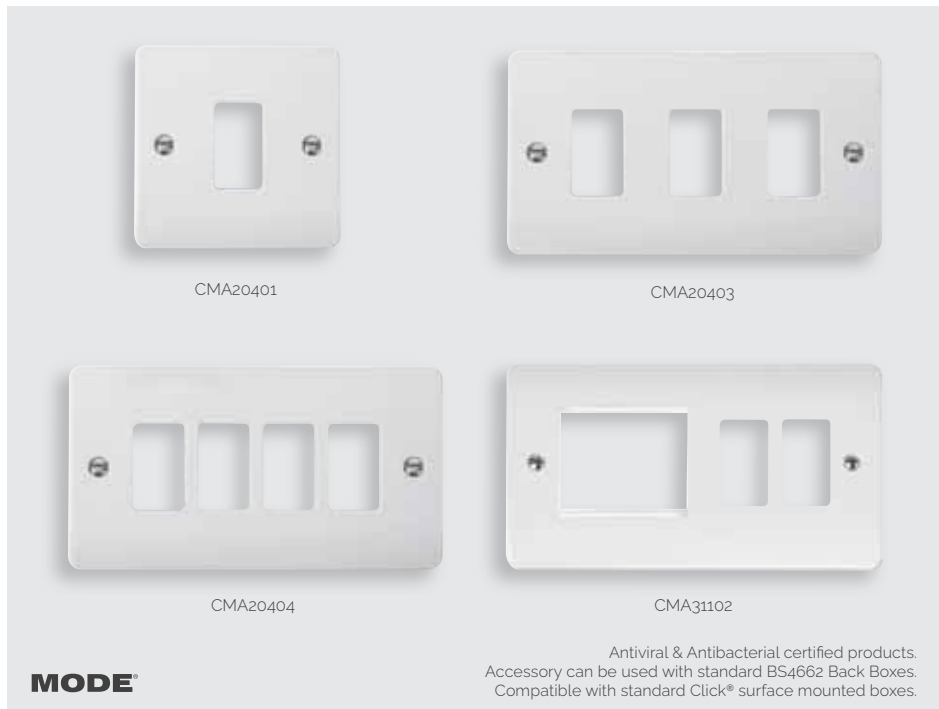

Mode® 1 Gang GridPro® Frontplates

CMA20401 1 Gang GridPro® Frontplate

Mode® 2 Gang GridPro® Frontplates

CMA20402 2 Gang GridPro® Frontplate

Mode® 3 Gang GridPro® Frontplates

CMA20403 3 Gang GridPro® Frontplate

Mode® 4 Gang GridPro® Frontplates

CMA20404 4 Gang GridPro® Frontplate


Mode® Hotel Accessory GridPro® Frontplates

CMA31102 Hotel Accessory Plate - 2 Gang Gridpro® Frontplate
With Twin New Media Aperture - White



See our dedicated New Media™ section for more information
on the range of New Media™ modules available.

Standards: BS 5733
Back Box Depth (mm): 25 **31102:** Dependent On Modules Fitted
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9 (D), **2 Gang:** 146 (W) x 86 (H) x 9 (D)

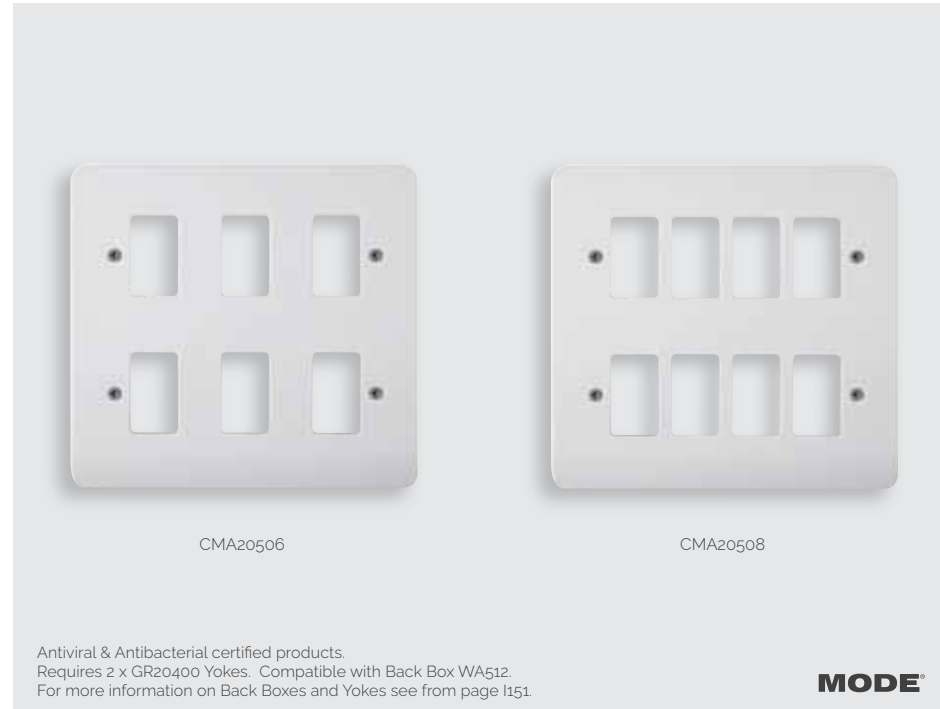

Mode® 6 Gang GridPro® Frontplates

CMA20506 6 Gang GridPro® Frontplate

Mode® 8 Gang GridPro® Frontplates

CMA20508 8 Gang GridPro® Frontplate - Mode



Standards: BS 5733
Back Box Depth (mm): 47
Dimensions (mm): 146 (W) x 146 (H) x 9 (D)





Mode® 9 Gang GridPro® Frontplates

CMA20509 9 Gang GridPro® Frontplate - Mode



Mode® 12 Gang GridPro® Frontplates

CMA20512 12 Gang GridPro® Frontplate



Standards: BS 5733
Back Box Depth (mm): 47
Dimensions (mm): 146 (W) x 206 (H) x 9 (D)



Mode® 18 Gang GridPro® Frontplates

CMA20518 18 Gang GridPro® Frontplate

Requires 3 x GR20600 Yokes.



Standards: BS 5733
Back Box Depth (mm): 56
Dimensions (mm): 196 (W) x 206 (H) x 9 (D)





CMA20524

MODE®

Antiviral & Antibacterial certified products.
Compatible with Back Box WA20524.
For more information on Back Boxes and Yokes see from page I151.

Mode® 24 Gang GridPro® Frontplates

CMA20524 24 Gang GridPro® Frontplate

Requires 4 x GR20600 Yokes.



**ANTIBACTERIAL
& ANTIVIRAL**
Certified Products

CLICK®

Standards: BS 5733
Back Box Depth (mm): 56
Dimensions (mm): 196 (W) x 266 (H) x 9 (D)



Part M™ GridPro® Frontplates


Visually Contrasting Wiring Accessories

Part M Range™

The Mode® range has been expanded to include a range of anthracite grey finished accessories to comply with current Building Regulations Part M.

Our Part M™ range features the modular design of the Mode® range allowing designers and installers unprecedented flexibility in creating dedicated wiring solutions to deal specifically with virtually all wiring requirements.

All Part M™ wiring accessories are tested and compliant with all UK and European standards.

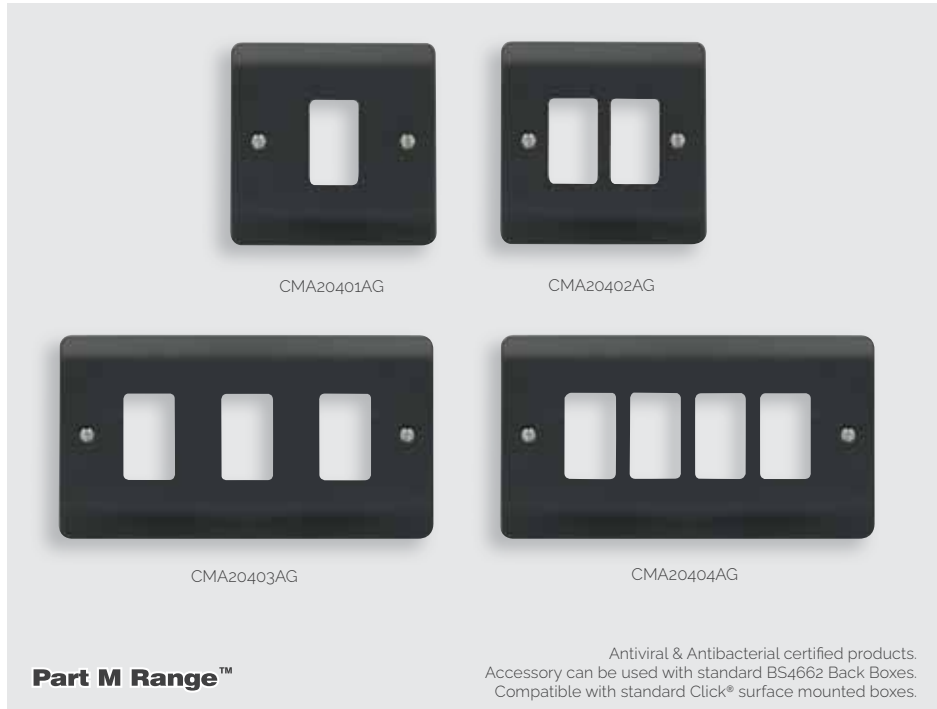

Part M™ 1 Gang GridPro® Frontplates

CMA20401AG 1 Gang GridPro® Frontplate

Part M™ 2 Gang GridPro® Frontplates

CMA20402AG 2 Gang GridPro® Frontplate

Part M™ 3 Gang GridPro® Frontplates


CMA20403AG 3 Gang GridPro® Frontplate

Part M™ 4 Gang GridPro® Frontplates

CMA20404AG 4 Gang GridPro® Frontplate



Standards: BS 5733
Back Box Depth (mm): 25
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 9 (D) 2 Gang: 146 (W) x 86 (H) x 9 (D)

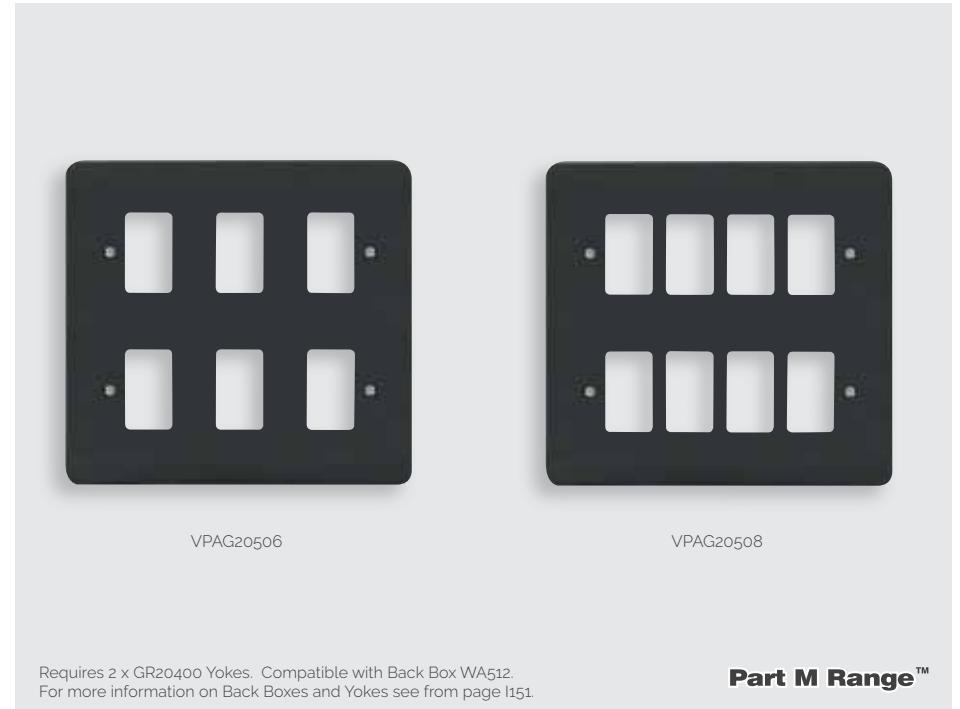

Part M™ 6 Gang GridPro® Frontplates

VPAG20506 6 Gang GridPro® Frontplate - Anthracite Grey

Part M™ 8 Gang GridPro® Frontplates

VPAG20508 8 Gang GridPro® Frontplate - Anthracite Grey



Standards: BS 5733
Back Box Depth (mm): 47
Dimensions (mm): 146 (W) x 146 (H) x 8 (D)



VPAG20509

VPAG20512

Part M Range™

Requires 3 x GR20400 Yokes. Compatible with Back Box WA518.
For more information on Back Boxes and Yokes see from page 151.

Part M™ 9 Gang GridPro® Frontplates

VPAG20509 9 Gang GridPro® Frontplate - Anthracite Grey

Part M™ 12 Gang GridPro® Frontplates

VPAG20512 12 Gang GridPro® Frontplate - Anthracite Grey



Standards: BS 5733
Back Box Depth (mm): 47
Dimensions (mm): 146 (W) x 206 (H) x 8 (D)



VPAG20518

Part M Range™


Compatible with Back Box WA20518.
For more information on Back Boxes and Yokes see from page 151.

Part M™ 18 Gang GridPro® Frontplates

VPAG20518 18 Gang GridPro® Frontplate - Anthracite Grey



Standards: BS 5733
Back Box Depth (mm): 56
Dimensions (mm): 196 (W) x 207 (H) x 8 (D)

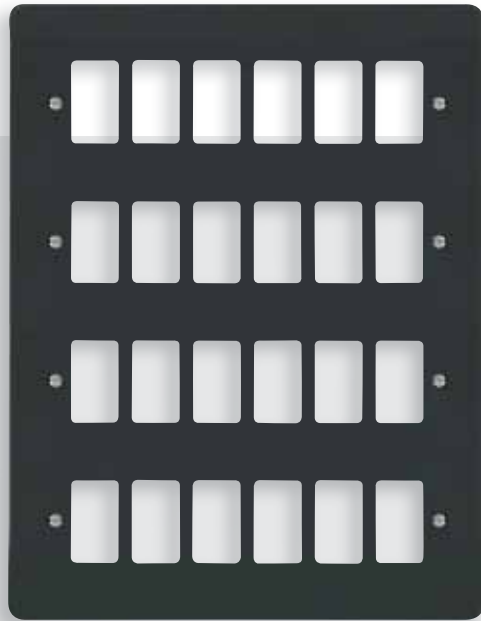

VPAG20524

Part M Range™

Compatible with Back Box WA20524.

For more information on Back Boxes and Yokes see from page l151.

Part M™ 24 Gang GridPro® Frontplates

VPAG20524

24 Gang GridPro® Frontplate - Anthracite Grey



Standards: BS 5733
Back Box Depth (mm): 56
Dimensions (mm): 196 (W) x 268 (H) x 8 (D)



Polar™ GridPro® Frontplates


A premium range of bright white accessories



So confident are we of the durability and reliability of the Polar™ product that we guarantee these products against any fault in materials or manufacture for at least 25 years.

Polar™ plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses. After a contact **period of 4 hours, Polar™** was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

Polar™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.

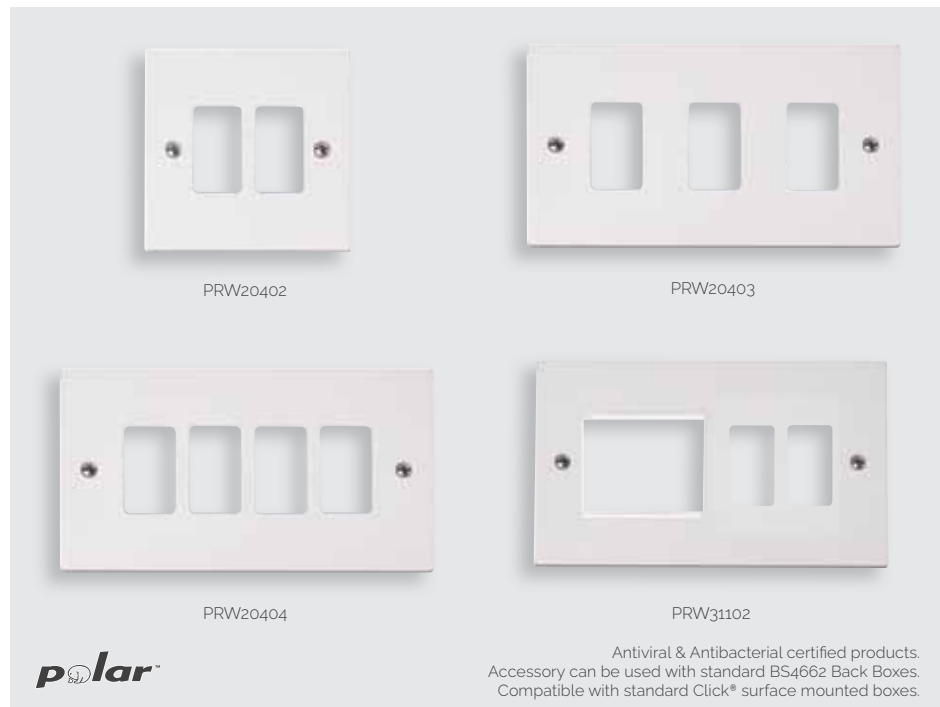

Polar™ 1 Gang GridPro® Frontplates

PRW20401 1 Gang GridPro® Frontplate

Polar™ 2 Gang GridPro® Frontplates

PRW20402 2 Gang GridPro® Frontplate

Polar™ 3 Gang GridPro® Frontplates

PRW20403 3 Gang GridPro® Frontplate

Polar™ 4 Gang GridPro® Frontplates

PRW20404 4 Gang GridPro® Frontplate

Polar™ Hotel Accessory GridPro® Frontplates


PRW31102 Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - White

new media™

See our dedicated New Media™ section for more information on the range of New Media™ modules available.



CLICK®

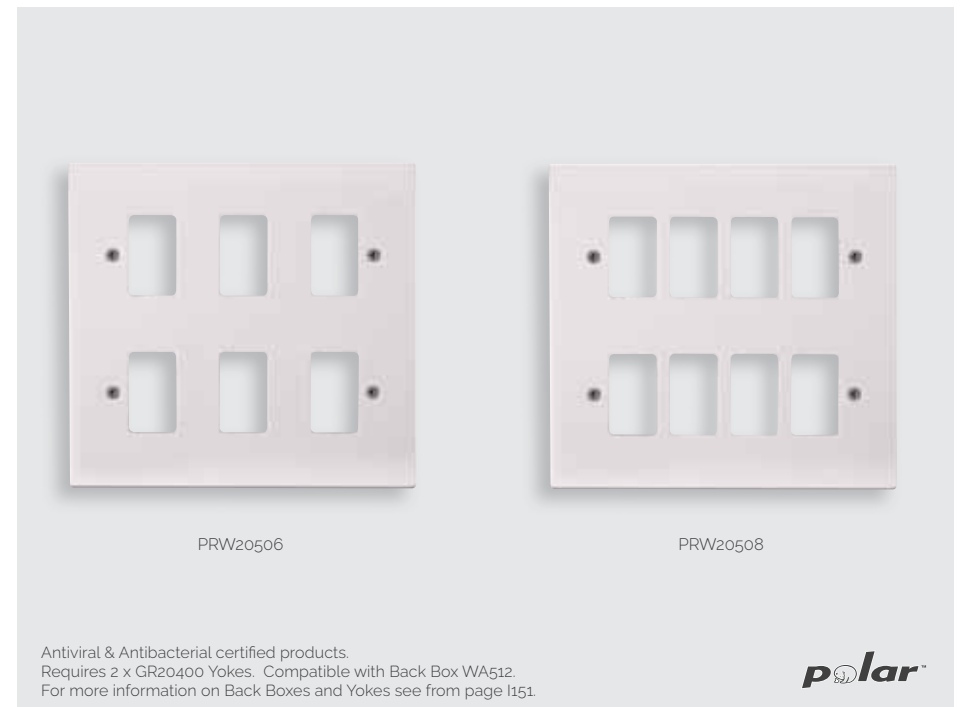

Polar™ 6 Gang GridPro® Frontplates

PRW20506 6 Gang GridPro® Frontplate

Polar™ 8 Gang GridPro® Frontplates


PRW20508 8 Gang GridPro® Frontplate - Polar



Standards: BS 5733
Back Box Depth (mm): 47
Dimensions (mm): 146 (W) x 146 (H) x 9 (D)



CLICK®

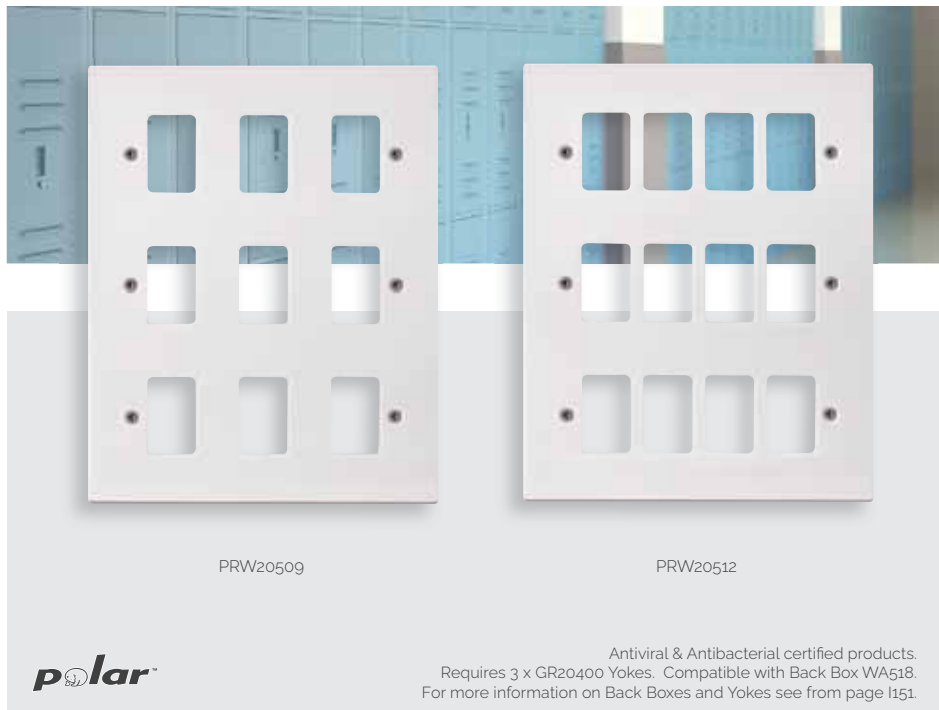

Polar™ 9 Gang GridPro® Frontplates

PRW20509 9 Gang GridPro® Frontplate - Polar

Polar™ 12 Gang GridPro® Frontplates

PRW20512 12 Gang GridPro® Frontplate



Standards: BS 5733
Back Box Depth (mm): 47
Dimensions (mm): 146 (W) x 206 (H) x 9 (D)




Polar™ 18 Gang GridPro® Frontplates

PRW20518 18 Gang GridPro® Frontplate

Requires 3 x GR20600 Yokes.



Standards: BS 5733
Back Box Depth (mm): 56
Dimensions (mm): 196 (W) x 206 (H) x 9 (D)

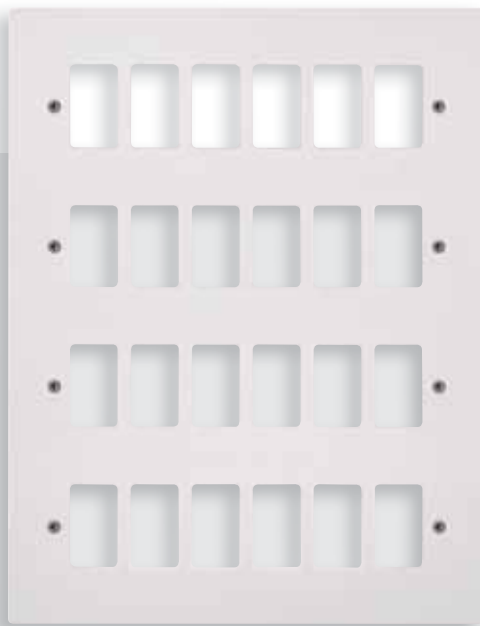

PRW20524



Antiviral & Antibacterial certified products.
Compatible with Back Box WA20524.
For more information on Back Boxes and Yokes see from page I151.

Polar™ 24 Gang GridPro® Frontplates

PRW20524 24 Gang GridPro® Frontplate


Requires 4 x GR20600 Yokes.



Standards: BS 5733
Back Box Depth (mm): 56
Dimensions (mm): 196 (W) x 266 (H) x 9 (D)



A comprehensive selection of metal clad electrical accessory products are featured in the following pages. Electrophoretically coated plates and back boxes provide a durable and long lasting heavy duty finish to this attractive range of products.

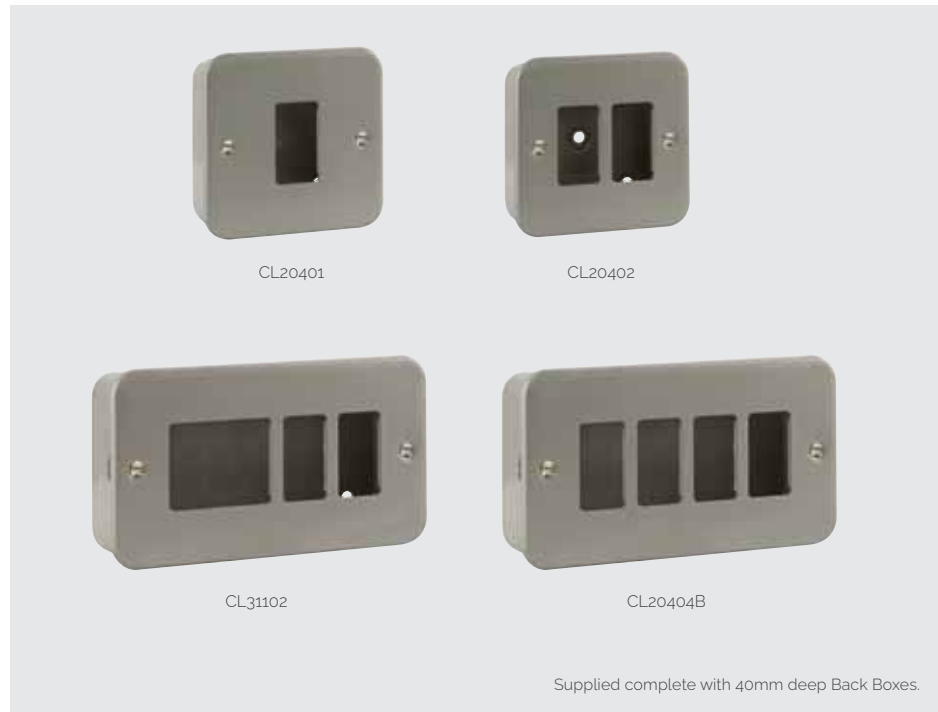

Metal Clad GridPro® Frontplates with Back Box

- CL20401** 1 Gang GridPro® Frontplate & Back Box
CL20402 2 Gang GridPro® Frontplate & Back Box
CL20403 3 Gang GridPro® Frontplate & Back Box
CL20404 4 Gang GridPro® Frontplate & Back Box

Metal Clad GridPro® Frontplates with Back Box no Knockouts

- CL20401B** 1 Gang GridPro® Frontplate & Back Box (No Knockouts)
CL20402B 2 Gang GridPro® Frontplate & Back Box (No Knockouts)
CL20403B 3 Gang GridPro® Frontplate & Back Box (No Knockouts)
CL20404B 4 Gang GridPro® Frontplate & Back Box (No Knockouts)

Metal Clad Hotel Accessory GridPro® Frontplates

- CL31102** Hotel Accessory Plate - 2 Gang GridPro® Frontplate With Twin New Media Aperture With Back Box
CL31102B Hotel Accessory Plate - 2 Gang GridPro® Frontplate With Twin New Media Aperture With Back Box (No Knockouts)



essentials™

Standards: BS 5733 **Back Box Depth (mm):** 40
Dimensions (mm): 1 Gang: 80 (W) x 80 (H) x 42 (D) 2 Gang: 140 (W) x 80 (H) x 42 (D)
Knockouts: 1&2 Gang: 5 x Ø20 3&4 Gang: 7 x Ø20



Metal Clad 6 Gang GridPro® Frontplates with Back Box

- CL20506** 6 Gang GridPro® Frontplate & Back Box

Metal Clad 6 Gang GridPro® Frontplates with Back Box (No Knockouts)

- CL20506B** 6 Gang GridPro® Frontplate & Back Box (No Knockouts)

Metal Clad 8 Gang GridPro® Frontplates with Back Box

- CL20508** 8 Gang GridPro® Frontplate & Back Box

Metal Clad 8 Gang GridPro® Frontplates with Back Box (No Knockouts)

- CL20508B** 8 Gang GridPro® Frontplate & Back Box (No Knockouts)

50mm deep back box is required when installing the dimmer mounting kits.

For 50mm deep Back Boxes see page M32.



essentials™

Standards: BS 5733
Back Box Depth (mm): 40
Dimensions (mm): 146 (W) x 146 (H) x 42 (D) **Knockouts:** 8 x Ø20, 1 x 67 x 32



CL20509

CL20512B

Requires 3 x GR20400 Yokes. See page 1151.
Supplied complete with 40mm deep Back Boxes.

Metal Clad 9 Gang GridPro® Frontplates with Back Box

CL20509 9 Gang GridPro® Frontplate & Back Box

Metal Clad 9 Gang GridPro® Frontplates with Back Box (No Knockouts)

CL20509B 9 Gang GridPro® Frontplate & Back Box (No Knockouts)

Metal Clad 12 Gang GridPro® Frontplates with Back Box

CL20512 12 Gang GridPro® Frontplate & Back Box

Metal Clad 12 Gang GridPro® Frontplates with Back Box (No Knockouts)

CL20512B 12 Gang GridPro® Frontplate & Back Box (No Knockouts)

50mm deep back box is required when installing the dimmer mounting kits.

For 50mm deep Back Boxes, see page M32.



essentials™

Standards: BS 5733
Back Box Depth (mm): 40
Dimensions (mm): 146 (W) x 207 (H) x 42 (D) **Knockouts:** 5 x Ø20, 5 x Ø25, 1 x 67 x 32



CL20518B

Requires 3 x GR20600 Yokes. See page 1151.
Supplied complete with 56mm deep Back Boxes.

Metal Clad 18 Gang GridPro® Frontplates with Back Box

CL20518 18 Gang GridPro® Frontplate & Back Box

Metal Clad 18 Gang GridPro® Frontplates with Back Box (No Knockouts)

CL20518B 18 Gang GridPro® Frontplate & Back Box (No Knockouts)



essentials™

Standards: BS 5733
Back Box Depth (mm): 56
Dimensions (mm): 196 (W) x 206 (H) x 58 (D) **Knockouts:** 6 x Ø20, 6 x Ø25, 1 x 102 x 50



CL20524

Requires 4 x GR20600 Yokes. See page l151.
Supplied complete with 56mm deep Back Boxes.

Metal Clad 24 Gang GridPro® Frontplates with Back Box

CL20524 24 Gang GridPro® Frontplate & Back Box



Metal Clad 24 Gang GridPro® Frontplates with Back Box (No Knockouts)

CL20524B 24 Gang GridPro® Frontplate & Back Box (No Knockouts)



essentials™

Standards: BS 5733
Back Box Depth (mm): 56
Dimensions (mm): 196 (W) x 268 (H) x 58 (D) **Knockouts:** 6 x Ø20, 6 x Ø25, 1 x 102 x 50

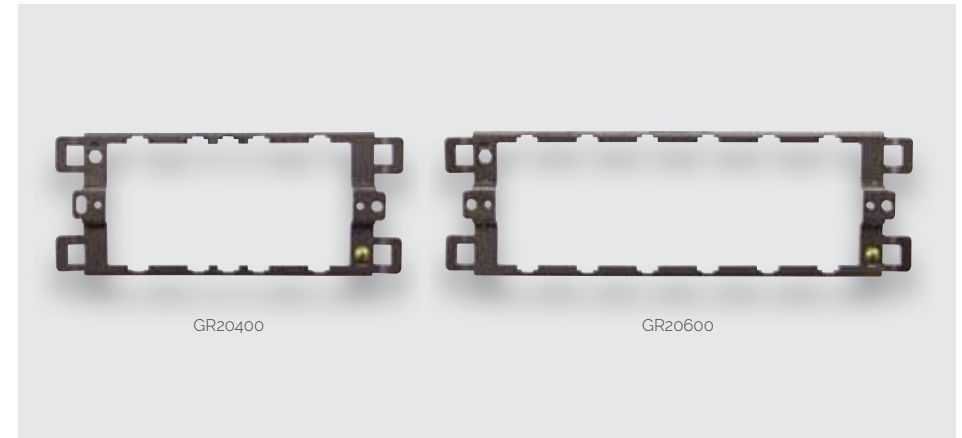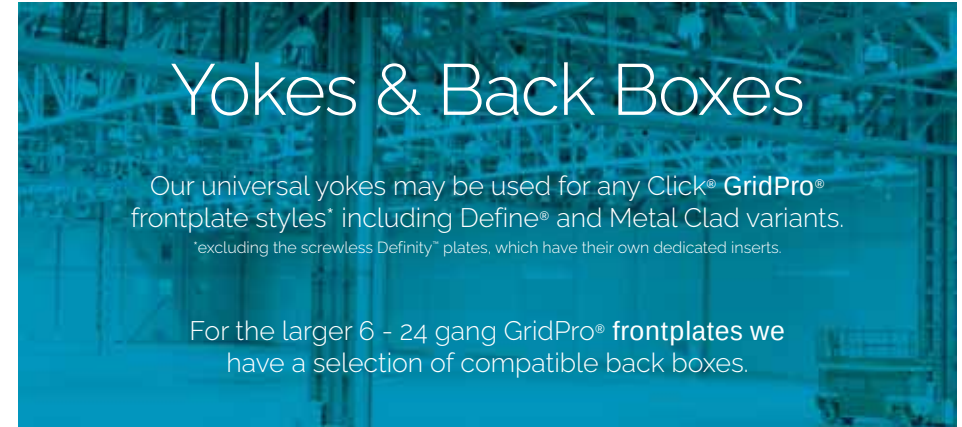

GR20400

GR20600

GridPro® Universal Yokes

GR20400

GR20600

GridPro® 3 & 4 Module Universal Yoke

GridPro® 6 Module Universal Yoke

Standards: BS 5733
Dimensions (mm): **20400:** 143 (W) x 60 (H) x 8 (D) **20600:** 190 (W) x 60 (H) x 8 (D)

essentials™



WA512

WA518

WA512
for use with 6 & 8
Gang GridPro®
Frontplates.



WA518
for use with 9 &
12 Gang GridPro®
Frontplates.



Galvanised Steel Back Boxes

WA512 2 Tier 47mm Deep K.O. Box
WA518 3 Tier 47mm Deep K.O. Box

essentials™

Standards: BS 4662
Dimensions (mm): **WA512:** 137 (W) x 137 (H) x 47 (D) **WA518:** 137 (W) x 197 (H) x 47 (D)
Knockouts: **WA512:** 7 x Ø20, 3 x Ø25 **WA518:** 8 x Ø20, 4 x Ø25




WA20518

WA20524

WA20518
for use with 18
Gang GridPro®
Frontplates.



WA20524
for use with 24
Gang GridPro®
Frontplates.



GridPro® Flush Mounted Back Boxes

WA20518 18 Gang GridPro® Flush Mounted Back Box - 56mm Deep
WA20524 24 Gang GridPro® Flush Mounted Back Box - 56mm Deep

Standards: BS 4662
Back Box Depth (mm): 56
Dimensions (mm): **WA20518:** 185 (W) x 197 (H) x 56 (D) **WA20524:** 185 (W) x 255 (H) x 56 (D)
Knockouts: **WA20518:** 10 x Ø20, 6 x Ø25 **WA20524:** 10 x Ø20, 6 x Ø25

essentials™

l154

Plates & Modules





Interchangeable Plates & Modules

This section serves to introduce the extended range of MiniGrid® mounting plates and modules. All of these new items are comprehensively illustrated throughout the following pages.

Since the launch of the moulded Click® and Polar™ accessory ranges the modular switch arrangement standard in both products has proved to be a highly valued facility amongst designers and installers alike.

Simple, single screw installation of the modules on the mounting plates has encouraged contractors to devise and install customised switching solutions on-site.

The fully interchangeable MiniGrid® modules are fitted as standard into our moulded Polar™, Mode® & Part M Range™, decorative Define®, Deco®, Deco Plus® & Definity™ and Metal Clad ranges.



20 Year Warranty

All MiniGrid® products are covered by our 20 year warranty against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.

Contents

MiniGrid® Unfurnished Plates	J5	DP Resistive Switch Modules	J22
Yokes & Back Boxes	J7	2 Way Key Modules	J23
Deco Plus® Unfurnished Plates	J8	DP 'Emergency Test' Key Modules	J24
Deco® Unfurnished Plates	J10	DP Resistive Key Modules	J25
Define® Unfurnished Plates	J11	Indicator & Blank Modules	J26
Definity™ Unfurnished Plates	J12	Fused Connection Unit Modules	J27
Mode® & Part M™ Unfurnished Plates	J13	20A Flex Outlet Modules	J28
Polar™ Unfurnished Plates	J14	1 Way Retractive 'Bell' Switch Module	J29
Metal Clad Unfurnished Plates	J15	10A 3 Position Switch Modules	J30
Red Unfurnished Plates	J16	Fan Isolation Switch Modules	J32
1 & 2 Way Switch Modules	J18	2 Way Switch Modules	J33
Intermediate Switch Modules	J19	20A DP Switch Modules	J34
2 Way Paddle Switch Modules	J20	Dimmer Module Mounting Kits	J36
2 Way Retractive Switch Modules	J21	Dimmer Modules	J37
		Toggle Switch Modules	J38

MiniGrid® Plates


The MiniGrid® plates illustrated on the following pages are all unfurnished for easy and quick configuration with required modules.



Unfurnished Plates



J5

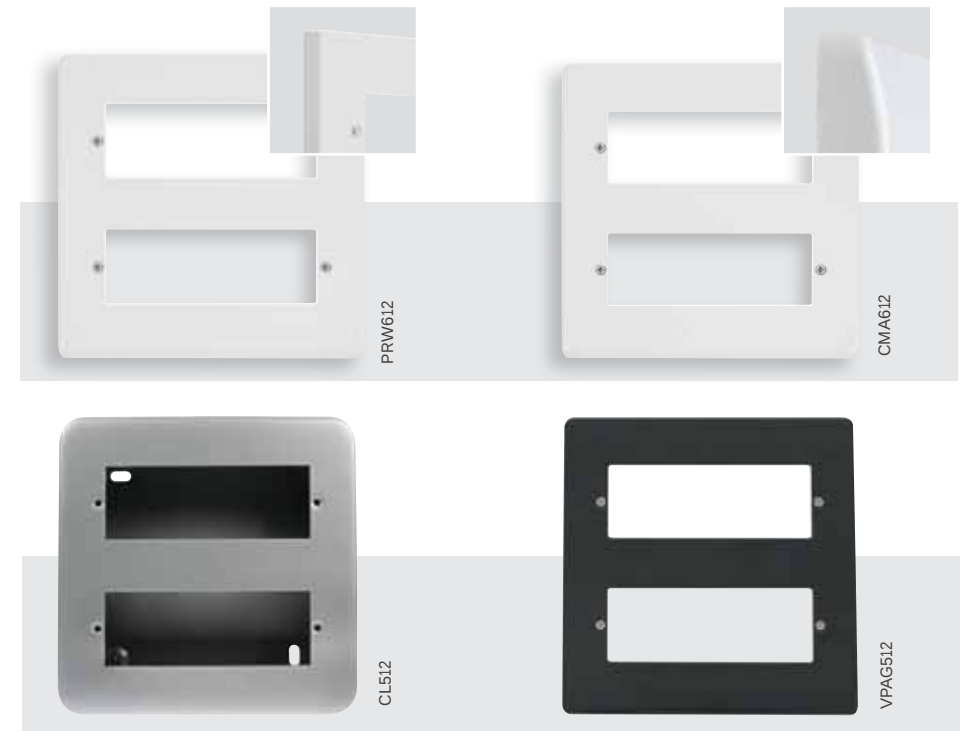

Antiviral Certified: Polar™ Mode® and Part M™ plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses. After a contact period of 4 hours, Polar™ Mode® and Part M™ was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

Antibacterial Certified: Polar™ Mode® and Part M™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.

2 Tier Unfurnished Plates - MiniGrid®

PRW612 2 Tier MiniGrid® Unfurnished Plate & Yokes - 12 Apertures - Polar™

CMA612 2 Tier MiniGrid® Unfurnished Plate & Yokes - 12 Apertures - Mode®

GR101 yokes supplied complete with the frontplate

VPAG512 2 Tier MiniGrid® Unfurnished Plate c/w Gaskets - 12 Apertures - Part M™

CL512 2 Tier MiniGrid® Unfurnished Plate - 12 Apertures - Metal Clad

2 x GR100PW Yokes required, see page J7.

When using dimmer mounting kit, 50mm deep back box required, see page M32


If dimmer modules are to be mounted directly above each other, the MD9014 (page J37) or similar height dimmer modules must be installed. Alternatively, retractive switch modules MD004 (page J21) can be used in conjunction with Click Smart+ dimming receivers (page A22).

Standards: BS 5733 **Back Box Depth (mm):** 47 **CL512:** 40 (Supplied)

Dimensions (mm): **CMA612:** 146 (W) x 153 (H) x 9.5 (D) **VPAG512:** 146 (W) x 146 (H) x 8 (D)

PRW612: 146 (W) x 153 (H) x 9.5 (D) **CL512:** 148 (W) x 148 (H) x 42 (D)



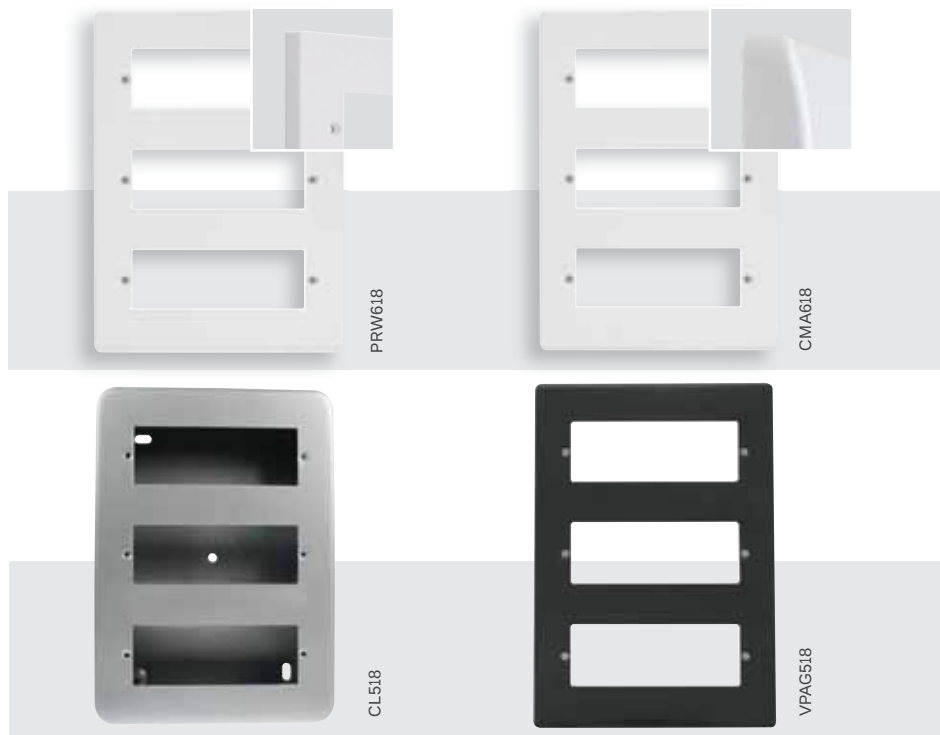

Antiviral Certified: Polar™ and Mode® plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses. After a contact period of 4 hours, Polar™ and Mode® was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

Antibacterial Certified: Polar™ and Mode® wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.

3 Tier Unfurnished Plates - MiniGrid®

PRW618 3 Tier MiniGrid® Unfurnished Plate & Yokes - 18 Apertures - Polar™

CMA618 3 Tier MiniGrid® Unfurnished Plate & Yokes - 18 Apertures - Mode®

618: GR101 yokes supplied complete with the frontplate

VPAG518 3 Tier MiniGrid® Unfurnished Plate c/w Gaskets - 18 Apertures - Part M™


CL518 3 Tier MiniGrid® Unfurnished Plate - 18 Apertures - Metal Clad

3 x GR100 Yokes required, see page J7

When using dimmer mounting kit, 50mm deep back box required, see page M32

If dimmer modules are to be mounted directly above each other, the MD9014 (page J37) or similar height dimmer modules must be installed. Alternatively, retractable switch modules MD004 (page J21) can be used in conjunction with Click Smart dimming receivers (page A22).

Standards: BS 5733 **Back Box Depth (mm):** 47 **CL518:** 40
Dimensions (mm): **CMA618:** 146 (W) x 214 (H) x 9.5 (D) **PRW518:** 146 (W) x 214 (H) x 9.5 (D)
CL518: 148 (W) x 207 (H) x 42 (D) **VPAG518:** 146 (W) x 227 (H) x 8 (D)

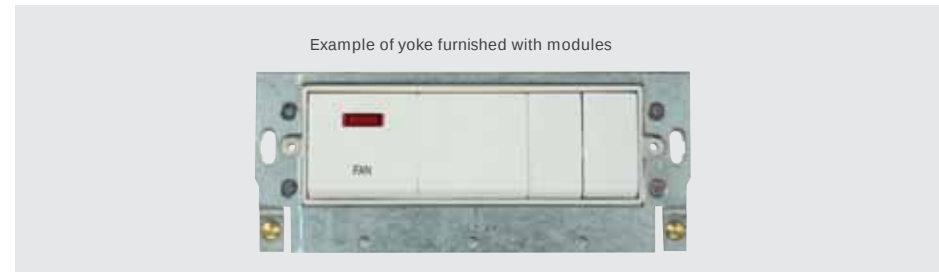

MINIGRID®

Galvanised steel back boxes supplied for flush mounting of the large MiniGrid® plates. Mounting Yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.



Yokes

GR100BK MiniGrid® Module Yoke - 6 Apertures - Black
GR100PW MiniGrid® Module Yoke - 6 Apertures - White
GR100GY MiniGrid® Module Yoke - 6 Apertures - Grey

Galvanised Steel Back Boxes

WA512 2 Tier 47mm Deep K.O. Box
WA518 3 Tier 47mm Deep K.O. Box

Galvanised steel back boxes supplied for flush mounting of the large MiniGrid® plates. Mounting Yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.

Yokes & recommended ranges:
 Black & Grey - Deco® & Deco Plus®
 Polar White - Part M™ & Metal Clad


Standards: 512 518: BS 4662
Dimensions (mm): **GR100:** 129 (W) x 55 (H) x 14 (D) **512:** 137 (W) x 137 (H) x 47 (D) **518:** 137 (W) x 197 (H) x 47 (D)



MINIGRID®

The furnished Deco® plate shown here contains five double width modules and eight single width modules.

VPCH518

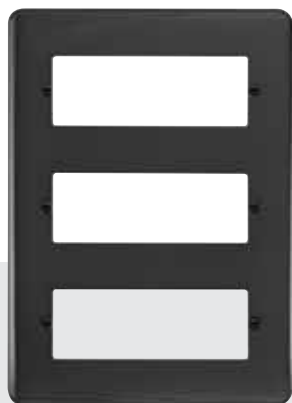

DPBN518



DPCH512



VPAB512

Deco Plus® Unfurnished Plates c / w Gaskets - MiniGrid®

DP512** 2 Tier MiniGrid® Unfurnished Plate - 12 Apertures

2 x GR100 Yokes required, see page J7

DP518** 3 Tier MiniGrid® Unfurnished Plate - 18 Apertures

3 x GR100 Yokes required, see page J7

Deco® Unfurnished Plates c / w Gaskets - MiniGrid®

VP512** 2 Tier MiniGrid® Unfurnished Plate - 12 Apertures

2 x GR100 Yokes required, see page J7

VP518** 3 Tier MiniGrid® Unfurnished Plate - 18 Apertures

3 x GR100 Yokes required, see page J7

If dimmer modules are to be mounted directly above each other, the MD9014 (page J37) or similar height dimmer modules must be installed. Alternatively, retractive switch modules MD004 (page J21) can be used in conjunction with Click Smart+ dimming receivers (page A22).

Standards: BS 5733

Back Box Depth (mm): 47

Dimensions (mm): **512:** 146 (W) x 146 (H) x 8 (D) **518:** 146 (W) x 227 (H) x 8 (D)

Deco Plus® Please add 2 letter prefix to identify required finish i.e. DPBN036 for Black Nickel.

AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **SS** Stainless Steel, **BN** Black Nickel, **MB** Matt Black.

Deco® Please add 2 letter prefix to identify required finish i.e. VPCH311 for Chrome.

AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **SS** Stainless Steel, **BN** Black Nickel, **PN** Pearl Nickel,

MB Matt Black.



401

404

402

406

403

426

471

These plates must be used with the architrave back boxes WA671 / WA672 and can only be flush mounted. Not compatible with MD070 & MD075 Switch modules.

472



For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

Unfurnished Plates - MiniGrid®

401 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture

402 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures

403 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures

404 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures

406 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures

426 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures

Architrave Unfurnished Plates - MiniGrid®

471 1 Gang MiniGrid® Unfurnished Architrave Plate - 1 Aperture

472 2 Gang MiniGrid® Unfurnished Architrave Plate - 2 Apertures

Standards: BS 5733 **Back Box Depth (mm):** Dependent On Module Fitted

Dimensions (mm): **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D)

Single architrave: 35 (W) x 88 (H) x 8 (D) **Twin architrave:** 35 (W) x 150 (H) x 8 (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts

DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour

AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **MB** Matt Black.



Unfurnished Plates - MiniGrid®

- | | | | |
|-----|--|---|--|
| 401 | 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture | 406 | 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures |
| 402 | 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures | 426 | 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures |
| 403 | 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures | 432 | 2 Gang MiniGrid® Unfurnished Plate - 3 Apertures |
| 404 | 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures | Please note 432 is not available in BN, BR, PN or SB. See range of MiniGrid® Modules in the MiniGrid® section | |

Architrave Switch Plates (Unfurnished)

- | | |
|-----|---|
| 471 | 1 Gang MiniGrid® Unfurnished Architrave Plate - 1 Aperture |
| 472 | 2 Gang MiniGrid® Unfurnished Architrave Plate - 2 Apertures |

Standards: BS 5733

Back Box Depth (mm): Dependent On Modules Fitted 471: 16 472: 25

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) 471: 35 (W) x 89 (H) x 8 (D) 472: 35 (W) x 149 (H) x 8 (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts

VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,

BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, MB Matt Black.



Unfurnished Plates - MiniGrid®

- | | |
|-----|--|
| 401 | 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture |
| 402 | 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures |
| 403 | 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures |
| 404 | 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures |
| 406 | 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures |
| 426 | 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures |

Standards: BS 5733

Back Box Depth (mm): Dependent On Modules Fitted

Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 1.3 (D) 2 Gang: 146 (W) x 88 (H) x 1.3 (D)

Understanding the code:

FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour

BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)
Please select one of each component: Choose Insert (Blue Code) then Choose Cover Plate (Orange Code)



SIN401
SCP401



SIN402
SCP402



SIN403
SCP403



SIN404
SCP404



SIN406
SCP406



SIN426
SCP426

SCP401, SCP402, SCP403 available in Red (RD), Antique Brass (AB) & Matt Bronze (BZ)
SCP404, SCP406, SCP426 available in Antique Brass (AB) & Matt Bronze (BZ)

MiniGrid® Unfurnished Plate Inserts

- SIN401 1 Gang MiniGrid® Unfurnished Plate Insert - 1 Aperture
- SIN402 1 Gang MiniGrid® Unfurnished Plate Insert - 2 Apertures
- SIN403 1 Gang MiniGrid® Unfurnished Plate Insert - 3 Apertures
- SIN404 2 Gang MiniGrid® Unfurnished Plate Insert - 2 x 2 Apertures
- SIN406 2 Gang MiniGrid® Unfurnished Plate Insert - 2 x 3 Apertures
- SIN426 2 Gang MiniGrid® Unfurnished Plate Insert - 6 In-Line Apertures

MiniGrid® Cover Plates

- SCP401 1 Gang MiniGrid® Cover Plate - 1 Aperture
- SCP402 1 Gang MiniGrid® Cover Plate - 2 Apertures
- SCP403 1 Gang MiniGrid® Cover Plate - 3 Apertures
- SCP404 2 Gang MiniGrid® Cover Plate - 2 x 2 Apertures
- SCP406 2 Gang MiniGrid® Cover Plate - 2 x 3 Apertures
- SCP426 2 Gang MiniGrid® Cover Plate - 6 In-Line Apertures

definity™ For the complete range of MiniGrid® modules, see page J18.

Standards: BS 5733
Back Box Depth (mm): Dependent On Modules Fitted
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 4 (D) **2 Gang:** 146 (W) x 86 (H) x 4 (D)

Understanding the code:

SIN - Insert Prefix 036 - Product No BK - Insert Colour SS - 'Ingot' Switch Finish (if applicable).

PW White, BK Black, GY Grey (Grey is Ingot only)

SCP - Definity™ Cover Plate Prefix 436 - Product No SS - Plate Colour.

BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, MB Metal Black, PW White, BK Matt Black.



CMA401AG



CMA402AG




CMA403AG

Part M Range™



CMA426

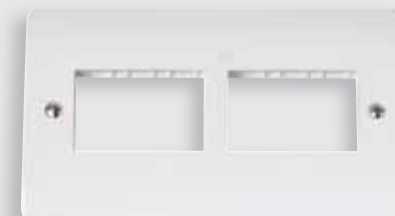

CMA406

MODE® PW coloured modules should be used with CMA plates



Antiviral Certified: Mode® and Part M™ plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses. After a contact period of 4 hours, Mode® and Part M™ was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

Antibacterial Certified: Mode® and Part M™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.

Unfurnished Plates - MiniGrid®

- CMA401 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- CMA402 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- CMA403 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- CMA404 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- CMA406 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
- CMA426 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures
- CMA432 2 Gang MiniGrid® Unfurnished Plate - 3 Apertures

Unfurnished Plates - MiniGrid®

- CMA401AG 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- CMA402AG 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- CMA403AG 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- CMA404AG 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- CMA426AG 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures

Standards: BS 5733 Back Box Depth (mm): Dependent On Modules Fitted
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D)



Antiviral Certified: Polar™ plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses. After a contact period of 4 hours, Polar™ was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

Antibacterial Certified: Polar™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.

Unfurnished Plates - MiniGrid®

- PRW401 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- PRW402 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- PRW403 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- PRW404 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- PRW406 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
- PRW426 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures
- PRW432 2 Gang MiniGrid® Unfurnished Plate - 3 Apertures



PRW plates should be used with PW coloured modules.

Standards: BS 5733 Back Box Depth (mm): Dependent On Modules Fitted
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 11 (D) **2 Gang:** 146 (W) x 86 (H) x 11 (D)



essentials™

CL plates should be used with WH coloured modules.

Unfurnished Plates - MiniGrid® c / w 40mm Mounting Box

- CL401 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- CL402 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- CL403 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- CL404 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- CL406 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
- CL426 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures

Standards: BS 5733
Back Box Depth (mm): 40
Dimensions (mm): **1 Gang:** 80 (W) x 80 (H) x 42 (D) **2 Gang:** 140 (W) x 80 (H) x 42 (D)



WA401RD



WA402RD



WA403RD



essentials™

Unfurnished Plates - MiniGrid®

- WA401RD** 1 Gang MiniGrid® Unfurnished Plate
- 1 Aperture
- WA402RD** 1 Gang MiniGrid® Unfurnished Plate
- 2 Apertures
- WA403RD** 1 Gang MiniGrid® Unfurnished Plate
- 3 Apertures

Standards: BS 5733 Back Box Depth (mm): Dependent On Modules Fitted
Dimensions (mm): 86 (W) x 86 (H) x 11 (D)



MiniGrid® Modules

IN HOUSE LASER ETCHING

Our in house laser printer provides flexibility to suit large volume batch or custom jobs. The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

The MiniGrid® modules illustrated on the following pages are all easily and quickly exchanged or mounted onto unfurnished plates by means of a simple single screw fixing.



MD001WH



MD001
(Back)



MD002BR



MD002
(Back)



10AX 1 Way Switch Modules

- MD001BK 1 Way Switch Module - Black
- MD001PW 1 Way Switch Module - Polar™ White
- MD001WH 1 Way Switch Module - Click® White

10AX 2 Way Switch Modules

- MD002BK 2 Way Switch Module - Black
- MD002PW 2 Way Switch Module - Polar™ White
- MD002WH 2 Way Switch Module - Click® White
- MD002RD 2 Way Switch Module - Red

Ingot 10AX 2 Way Switch Modules

- MD002AB Ingot 2 Way Switch Module - Antique Brass
- MD002BN Ingot 2 Way Switch Module - Black Nickel
- MD002BR Ingot 2 Way Switch Module - Polished Brass
- MD002BS Ingot 2 Way Switch Module - Brushed Stainless
- MD002CH Ingot 2 Way Switch Module - Polished Chrome
- MD002PN Ingot 2 Way Switch Module - Pearl Nickel
- MD002SB Ingot 2 Way Switch Module - Satin Brass
- MD002SC Ingot 2 Way Switch Module - Satin Chrome
- MD002SS Ingot 2 Way Switch Module - Stainless Steel
- MD002MB Ingot 2 Way Switch Module - Matt Black
- MD002BZ Ingot 2 Way Switch Module - Matt Bronze

Conventional moulded 1 way, 2 way and intermediate switch modules can be used in all Click® accessories, Polar™ and Mode® moulded and metal ranges.

Standards: BS EN 60669-1
Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): 25 (W) x 53 (H) x 20 (D)



MD028PW



MD028AB



MD028BR



MD028SS



MD028
(Back)



MD028BS



MD028CH



MD028SB

Conventional moulded 1 way, 2 way and intermediate switch modules can be used in all Click® accessories, Polar™ and Mode® moulded and metal ranges.


10AX Intermediate Switch Modules

- MD028BK Intermediate Switch Module - Black
- MD028PW Intermediate Switch Module - Polar™ White
- MD028WH Intermediate Switch Module - Click® White

Ingot 10AX Intermediate Switch Modules

- MD028AB Intermediate Switch Module - Antique Brass
- MD028BN Intermediate Switch Module - Black Nickel
- MD028BR Intermediate Switch Module - Polished Brass
- MD028BS Intermediate Switch Module - Brushed Stainless
- MD028CH Intermediate Switch Module - Polished Chrome
- MD028PN Intermediate Switch Module - Pearl Nickel
- MD028SB Intermediate Switch Module - Satin Brass
- MD028SC Intermediate Switch Module - Satin Chrome
- MD028SS Intermediate Switch Module - Stainless Steel
- MD028MB Intermediate Switch Module - Matt Black
- MD028BZ Intermediate Switch Module - Matt Bronze

Standards: BS EN 60669-1
Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): 25 (W) x 53 (H) x 20 (D)

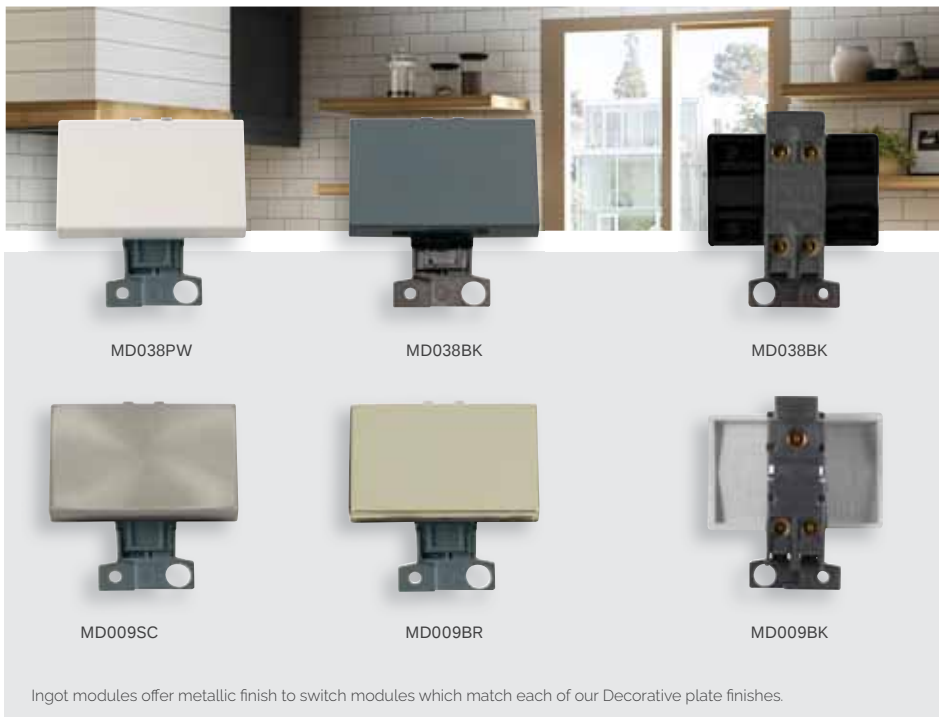

10AX 2 Way Paddle Switch Modules (Triple Width)

- MD009BK 2 Way Paddle Switch Module - Black
- MD009PW 2 Way Paddle Switch Module - Polar™ White
- MD009WH 2 Way Paddle Switch Module - Click® White

10AX 2 Way Intermediate Paddle Switch Modules (Triple Width)

- MD038BK Intermediate Switch Module - Black
- MD038PW Intermediate Switch Module - Polar™ White
- MD038WH Intermediate Switch Module - Click® White

Ingot 10AX 2 Way Paddle Switch Modules (Triple Width)

- MD009AB 2 Way Paddle Switch Module - Antique Brass
- MD009BN 2 Way Paddle Switch Module - Black Nickel
- MD009BR 2 Way Paddle Switch Module - Polished Brass
- MD009BS 2 Way Paddle Switch Module - Brushed Stainless
- MD009CH 2 Way Paddle Switch Module - Polished Chrome
- MD009PN 2 Way Paddle Switch Module - Pearl Nickel
- MD009SB 2 Way Paddle Switch Module - Satin Brass
- MD009SC 2 Way Paddle Switch Module - Satin Chrome
- MD009SS 2 Way Paddle Switch Module - Stainless Steel
- MD009MB 2 Way Paddle Switch Module - Matt Black
- MD009BZ 2 Way Paddle Switch Module - Matt Bronze

Standards: BS EN 60669-1
Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): 48 (W) x 52 (H) x 20 (D)



10AX 2 Way Retractive Switch Modules

- MD004BK 2 Way Retractive Switch Module - Black
- MD004PW 2 Way Retractive Switch Module - Polar™ White
- MD004WH 2 Way Retractive Switch Module - Click® White

Ingot 10AX 2 Way Retractive Switch Modules

- MD004AB 2 Way Retractive Switch Module - Antique Brass
- MD004BN 2 Way Retractive Switch Module - Black Nickel
- MD004BR 2 Way Retractive Switch Module - Polished Brass
- MD004BS 2 Way Retractive Switch Module - Brushed Stainless
- MD004CH 2 Way Retractive Switch Module - Polished Chrome
- MD004PN 2 Way Retractive Switch Module - Pearl Nickel
- MD004SB 2 Way Retractive Switch Module - Satin Brass
- MD004SC 2 Way Retractive Switch Module - Satin Chrome
- MD004SS 2 Way Retractive Switch Module - Stainless Steel
- MD004MB 2 Way Retractive Switch Module - Matt Black
- MD004BZ 2 Way Retractive Switch Module - Matt Bronze

Standards: BS EN 60669-1
Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): 25 (W) x 53 (H) x 20 (D)



10AX 13A DP Resistive Switch Modules

MD018BK	DP Switch Module - Black
MD018PW	DP Switch Module - Polar™ White
MD018RD	DP Switch Module - Red
MD018WH	DP Switch Module - Click® White

Ingot 10AX 13A DP Resistive Switch Modules

MD018AB	DP Switch Module - Antique Brass
MD018BN	DP Switch Module - Black Nickel
MD018BR	DP Switch Module - Polished Brass
MD018BS	DP Switch Module - Brushed Stainless
MD018CH	DP Switch Module - Polished Chrome
MD018PN	DP Switch Module - Pearl Nickel
MD018SB	DP Switch Module - Satin Brass
MD018SC	DP Switch Module - Satin Chrome
MD018SS	DP Switch Module - Stainless Steel
MD018MB	DP Switch Module - Matt Black
MD018BZ	DP Switch Module - Matt Bronze

Standards: BS EN 60669-1
Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): 25 (W) x 53 (H) x 20 (D)

Understanding the code:


MD - Module Style 536 - Product No BN - Module Finish -WM - Legend Style

IN HOUSE LASER ETCHING
Our in house laser printer provides flexibility to suit large volume batch or custom jobs. The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

The MD018 modules listed are available with the laser etched legends listed here.

-BL	Boiler
-CH	Cooker Hood
-DW	Dishwasher
-FD	Fridge
-FF	Fridge Freezer
-FN	Fan
-FZ	Freezer
-HB	Hob
-HT	Hot Tap
-MW	Microwave
-OV	Oven
-TD	Tumble Dryer
-WC	Wine Cooler
-WD	Waste Disposal
-WDR	Warming Drawer
-WH	Water Heater
-WM	Washing Machine

Suffix the two letters to complete the product code with legend eg. MD018CH-FN

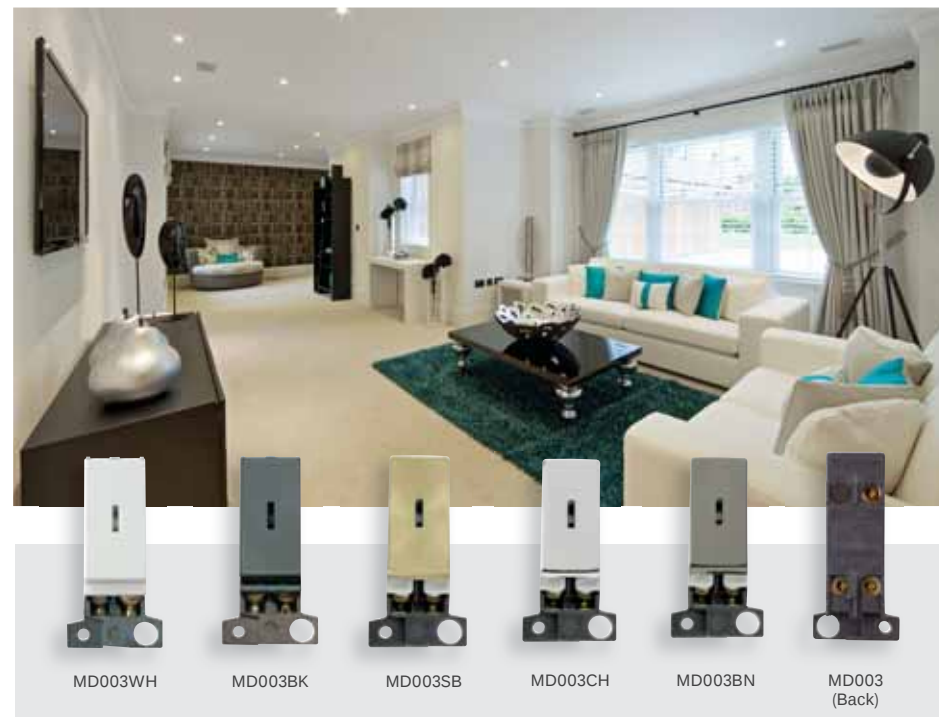

10AX 2 Way Keyswitch Modules

MD003BK	2 Way Keyswitch Module - Black
MD003PW	2 Way Keyswitch Module - Polar™ White
MD003WH	2 Way Keyswitch Module - Click® White

Ingot 10AX 2 Way Keyswitch Modules

MD003AB	2 Way Keyswitch Module - Antique Brass
MD003BN	2 Way Keyswitch Module - Black Nickel
MD003BR	2 Way Keyswitch Module - Polished Brass
MD003BS	2 Way Keyswitch Module - Brushed Stainless
MD003CH	2 Way Keyswitch Module - Polished Chrome
MD003PN	2 Way Keyswitch Module - Pearl Nickel
MD003SB	2 Way Keyswitch Module - Satin Brass
MD003SC	2 Way Keyswitch Module - Satin Chrome
MD003SS	2 Way Keyswitch Module - Stainless Steel
MD003MB	2 Way Keyswitch Module - Matt Black
MD003BZ	2 Way Keyswitch Module - Matt Bronze

Spare Key For Keyswitch
MI003 Spare Key For Keyswitch



MI003

Standards: BS EN 60669-1
Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): 25 (W) x 52.5 (H) x 20 (D) MI003: 50 (W) x 14 (H) x 1 (D)



MD029BS



MD029CH



MD029BZ



MD029
(Back)



10AX DP Keyswitch 'Emergency Test' Modules

- MD029BK DP Keyswitch Module 'Emergency Test' - Black
- MD029PW DP Keyswitch Module 'Emergency Test' - Polar™ White
- MD029WH DP Keyswitch Module 'Emergency Test' - Click® White

Ingot 10AX DP Keyswitch 'Emergency Test' Modules

- MD029AB DP Keyswitch Module 'Emergency Test' - Antique Brass
- MD029BN DP Keyswitch Module 'Emergency Test' - Black Nickel
- MD029BR DP Keyswitch Module 'Emergency Test' - Polished Brass
- MD029BS DP Keyswitch Module 'Emergency Test' - Brushed Stainless
- MD029CH DP Keyswitch Module 'Emergency Test' - Polished Chrome
- MD029PN DP Keyswitch Module 'Emergency Test' - Pearl Nickel
- MD029SB DP Keyswitch Module 'Emergency Test' - Satin Brass
- MD029SC DP Keyswitch Module 'Emergency Test' - Satin Chrome
- MD029SS DP Keyswitch Module 'Emergency Test' - Stainless Steel
- MD029MB DP Keyswitch Module 'Emergency Test' - Matt Black
- MD029BZ DP Keyswitch Module 'Emergency Test' - Matt Bronze

Spare Key For Keyswitch

- MI003 Spare Key For Keyswitch



MI003

Standards: BS EN 60669-1
Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): 25 (W) x 52.5 (H) x 20 (D)



MD046BK



MD046PW



MD046RDTT



MD046
(Back)



10AX 13A DP Resistive Keyswitch Modules

- MD046BK DP Keyswitch Module - Black
- MD046PW DP Keyswitch Module - Polar™ White
- MD046RD DP Keyswitch Module - Red
- MD046WH DP Keyswitch Module - Click® White
- MD046RDTT DP Keyswitch Module 'Test' - Red

Ingot 10AX 13A DP Resistive Keyswitch Modules

- MD046AB DP Keyswitch Module - Antique Brass
- MD046BN DP Keyswitch Module - Black Nickel
- MD046BR DP Keyswitch Module - Polished Brass
- MD046BS DP Keyswitch Module - Brushed Stainless
- MD046CH DP Keyswitch Module - Polished Chrome
- MD046PN DP Keyswitch Module - Pearl Nickel
- MD046SB DP Keyswitch Module - Satin Brass
- MD046SC DP Keyswitch Module - Satin Chrome
- MD046SS DP Keyswitch Module - Stainless Steel
- MD046MB DP Keyswitch Module - Matt Black
- MD046BZ DP Keyswitch Module - Matt Bronze

Spare Key For Keyswitch

- MI003 Spare Key For Keyswitch



MI003

Standards: BS EN 60669-1
Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): 25 (W) x 52.5 (H) x 20 (D)



Indicator Modules

MD280	240V Red Indicator Module
MD281	240V Amber Indicator Module
MD282	240V Green Indicator Module



Blank Modules

MD008BK	Blank Module - Black
MD008PW	Blank Module - Polar™ White
MD008WH	Blank Module - Click® White

Ingot Blank Modules

MD008AB	Blank Module - Antique Brass
MD008BN	Blank Module - Black Nickel
MD008BR	Blank Module - Polished Brass
MD008BS	Blank Module - Brushed Stainless
MD008CH	Blank Module - Polished Chrome
MD008PN	Blank Module - Pearl Nickel
MD008SB	Blank Module - Satin Brass
MD008SC	Blank Module - Satin Chrome
MD008SS	Blank Module - Stainless Steel
MD008MB	Blank Module - Matt Black
MD008BZ	Blank Module - Matt Bronze

Standards: BS 5733
 Cable Size (mm²): 280: 4 x 1.5 or 2 x 2.5
 Dimensions (mm): 25 (W) x 52 (H) x 20 (D) 280: 25 (W) x 52.5 (H) x 19 (D)



13A Fused FCU Modules

MD047BK	13A Fused FCU Module - Black
MD047PW	13A Fused FCU Module - Polar™ White
MD047RD	13A Fused FCU Module - Red
MD047WH	13A Fused FCU Module - Click® White

Ingot 13A Fused Connection Unit Modules

MD047BKAB	FCU Module - Antique Brass
MD047BKBN	FCU Module - Black Nickel
MD047BKBR	FCU Module - Polished Brass
MD047BKBS	FCU Module - Brushed Stainless
MD047BKCH	FCU Module - Polished Chrome
MD047BKPN	FCU Module - Pearl Nickel
MD047BKSB	FCU Module - Satin Brass
MD047BKSC	FCU Module - Satin Chrome
MD047BKSS	FCU Module - Stainless Steel
MD047BKMB	FCU Module - Matt Black
MD047BKBZ	FCU Module - Matt Bronze
MD047WHBR	FCU Module - Polished Brass
MD047WHBS	FCU Module - Brushed Stainless
MD047WHCH	FCU Module - Polished Chrome
MD047WHPN	FCU Module - Pearl Nickel
MD047WHBS	FCU Module - Satin Brass
MD047WHSC	FCU Module - Satin Chrome
MD047WHSS	FCU Module - Stainless Steel
MD047GYBS	FCU Module - Brushed Stainless
MD047GYSC	FCU Module - Satin Chrome
MD047GYSS	FCU Module - Stainless Steel

Standards: BS 5733 BS 1362
 Cable Size (mm²): 4 x 1.5 or 2 x 2.5
 Dimensions (mm): 25 (W) x 57 (H) x 25.2 (D)



Complete with cord restraint, live and neutral terminals.

20A Flex Outlet Modules

- MD017BK Flex Outlet Module - Black
- MD017PW Flex Outlet Module - Polar™ White
- MD017WH Flex Outlet Module - Click® White

Ingot 20A Flex Outlet Modules

- MD017BKAB Flex Outlet Module - Antique Brass
- MD017BKBN Flex Outlet Module - Black Nickel
- MD017BKBR Flex Outlet Module - Polished Brass
- MD017BKBS Flex Outlet Module - Brushed Stainless
- MD017BKCH Flex Outlet Module - Polished Chrome
- MD017BKPN Flex Outlet Module - Pearl Nickel
- MD017BKSB Flex Outlet Module - Satin Brass
- MD017BKSC Flex Outlet Module - Satin Chrome
- MD017BKSS Flex Outlet Module - Stainless Steel
- MD017BKMB Flex Outlet Module - Matt Black
- MD017KBZ Flex Outlet Module - Matt Bronze

- MD017WHBR Flex Outlet Module - Polished Brass
- MD017WHBS Flex Outlet Module - Brushed Stainless
- MD017WHCH Flex Outlet Module - Polished Chrome
- MD017WHPN Flex Outlet Module - Pearl Nickel
- MD017WHSB Flex Outlet Module - Satin Brass
- MD017WHSC Flex Outlet Module - Satin Chrome
- MD017WHSS Flex Outlet Module - Stainless Steel

- MD017GYBS Flex Outlet Module - Brushed Stainless
- MD017GYSC Flex Outlet Module - Satin Chrome
- MD017GYSS Flex Outlet Module - Stainless Steel

Standards: BS 5733
Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): 25 (W) x 56.5 (H) x 30 (D) Flex outlet dia. (mm): 11




10AX 1 Way Retractive 'Bell' Switch Modules

- MD005BK 1 Way Retractive Switch Module 'Bell' - Black
- MD005PW 1 Way Retractive Switch Module 'Bell' - Polar™ White
- MD005WH 1 Way Retractive Switch Module 'Bell' - Click® White

Ingot 10AX 1 Way Retractive 'Bell' Switch Modules

- MD005AB 1 Way Retractive Switch Module 'Bell' - Antique Brass
- MD005BN 1 Way Retractive Switch Module 'Bell' - Black Nickel
- MD005BR 1 Way Retractive Switch Module 'Bell' - Polished Brass
- MD005BS 1 Way Retractive Switch Module 'Bell' - Brushed Stainless
- MD005CH 1 Way Retractive Switch Module 'Bell' - Polished Chrome
- MD005PN 1 Way Retractive Switch Module 'Bell' - Pearl Nickel
- MD005SB 1 Way Retractive Switch Module 'Bell' - Satin Brass
- MD005SC 1 Way Retractive Switch Module 'Bell' - Satin Chrome
- MD005SS 1 Way Retractive Switch Module 'Bell' - Stainless Steel
- MD005MB 1 Way Retractive Switch Module 'Bell' - Matt Black
- MD005BZ 1 Way Retractive Switch Module 'Bell' - Matt Bronze

Standards: BS EN 60669-1
Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): 25 (W) x 53 (H) x 20 (D)



MD070PW

MD070BK

MD070AB

MD070BN

MD070BR

MD070BS

MD070CH

MD070 (Back)

10A 3 Position Switch Modules


- MD070BK 3 Position Switch Module - Black
- MD070PW 3 Position Switch Module - Polar™ White
- MD070WH 3 Position Switch Module - Click® White

Ingot 10A 3 Position Switch Modules

- MD070AB 3 Position Switch Module - Antique Brass
- MD070BN 3 Position Switch Module - Black Nickel
- MD070BR 3 Position Switch Module - Polished Brass
- MD070BS 3 Position Switch Module - Brushed Stainless
- MD070CH 3 Position Switch Module - Polished Chrome
- MD070PN 3 Position Switch Module - Pearl Nickel
- MD070SB 3 Position Switch Module - Satin Brass
- MD070SC 3 Position Switch Module - Satin Chrome
- MD070SS 3 Position Switch Module - Stainless Steel
- MD070MB 3 Position Switch Module - Matt Black
- MD070BZ 3 Position Switch Module - Matt Bronze

All 3 position switches feature a central off position.

Standards: BS EN 60669-1
Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): 25 (W) x 57 (H) x 27 (D)



MD075PW

MD075BK

MD075AB

MD075BN

MD075BS

MD075CH

MD075PN

MD075 (Back)

10A 3 Position Retractive Switch Modules

- MD075BK 3 Position Retractive Switch Module - Black
- MD075PW 3 Position Retractive Switch Module - Polar™ White
- MD075WH 3 Position Retractive Switch Module - Click® White

Ingot 10A 3 Position Retractive Switch Modules

- MD075AB 3 Position Retractive Switch Module - Antique Brass
- MD075BN 3 Position Retractive Switch Module - Black Nickel
- MD075BR 3 Position Retractive Switch Module - Polished Brass
- MD075BS 3 Position Retractive Switch Module - Brushed Stainless
- MD075CH 3 Position Retractive Switch Module - Polished Chrome
- MD075PN 3 Position Retractive Switch Module - Pearl Nickel
- MD075SB 3 Position Retractive Switch Module - Satin Brass
- MD075SC 3 Position Retractive Switch Module - Satin Chrome
- MD075SS 3 Position Retractive Switch Module - Stainless Steel
- MD075MB 3 Position Retractive Switch Module - Matt Black
- MD075BZ 3 Position Retractive Switch Module - Matt Bronze

3 position retractive switches are "push-to-make" and feature a central off position

Standards: BS EN 60669-1
Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): 25 (W) x 57 (H) x 27 (D)



10A 3 Pole Lockable Fan Isolation Modules (Twin Width)

- MD220BK 3 Pole Lockable Fan Switch Module - Black
- MD220PW 3 Pole Lockable Fan Switch Module - Polar™ White
- MD220WH 3 Pole Lockable Fan Switch Module - Click® White



10A 3 Pole Fan Isolation Modules (Twin Width)

- MD020BK 3 Pole Fan Isolation Switch Module - Black
- MD020PW 3 Pole Fan Isolation Switch Module - Polar™ White
- MD020WH 3 Pole Fan Isolation Switch Module - Click® White

Ingot 10A 3 Pole Fan Isolation Modules (Twin Width)

- MD020AB 3 Pole Fan Isolation Switch Module - Antique Brass
- MD020BN 3 Pole Fan Isolation Switch Module - Black Nickel
- MD020BR 3 Pole Fan Isolation Switch Module - Polished Brass
- MD020BS 3 Pole Fan Isolation Switch Module - Brushed Stainless
- MD020CH 3 Pole Fan Isolation Switch Module - Polished Chrome
- MD020PN 3 Pole Fan Isolation Switch Module - Pearl Nickel
- MD020SB 3 Pole Fan Isolation Switch Module - Satin Brass
- MD020SC 3 Pole Fan Isolation Switch Module - Satin Chrome
- MD020SS 3 Pole Fan Isolation Switch Module - Stainless Steel
- MD020MB 3 Pole Fan Isolation Switch Module - Matt Black
- MD020BZ 3 Pole Fan Isolation Switch Module - Matt Bronze

Standards: BS EN 60669-2-4 BS EN 60669-1
Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): 41 (W) x 52.5 (H) x 22 (D)



20A 2 Way Switch Modules (Twin Width)

- MD024BK 2 Way Switch Module - Black
- MD024PW 2 Way Switch Module - Polar™ White
- MD024WH 2 Way Switch Module - Click® White

Ingot 20A 2 Way Switch Modules (Twin Width)

- MD024BN 2 Way Switch Module - Black Nickel
- MD024BS 2 Way Switch Module - Brushed Stainless
- MD024CH 2 Way Switch Module - Polished Chrome
- MD024SC 2 Way Switch Module - Satin Chrome
- MD024SS 2 Way Switch Module - Stainless Steel
- MD024MB 2 Way Switch Module - Matt Black
- MD024BZ 2 Way Switch Module - Matt Bronze

20A 2 Way Retractive Switch Modules (Twin Width)

- MD204PW 2 Way Retractive Switch Module - Polar™ White

Standards: BS EN 60669-1
Cable Size (mm²): 3 x 2.5 or 2 x 4 MD032: 4 x 2.5 or 2 x 4
Dimensions (mm): 41 (W) x 52.5 (H) x 22 (D)

32A DP Switch Modules (Twin Width)

- MD032BK DP Switch Module - Black
- MD032PW DP Switch Module - Polar™ White
- MD032WH DP Switch Module - Click® White

Ingot 32A DP Switch Modules (Twin Width)

- MD032BN DP Switch Module - Black Nickel
- MD032BS DP Switch Module - Brushed Stainless
- MD032CH DP Switch Module - Polished Chrome
- MD032SC DP Switch Module - Satin Chrome
- MD032SS DP Switch Module - Stainless Steel
- MD032MB DP Switch Module - Matt Black
- MD032BZ DP Switch Module - Matt Bronze



IN HOUSE LASER ETCHING
Our in house laser printer provides flexibility to suit large volume batch or custom jobs. The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

The MD022 modules listed are available with the laser etched legends listed here.

- BL Boiler
- CH Cooker Hood
- DW Dishwasher
- FD Fridge
- FF Fridge Freezer
- FN Fan
- FZ Freezer
- HB Hob
- HT Hot Tap
- MW Microwave
- OV Oven
- TD Tumble Dryer
- WC Wine Cooler
- WD Waste Disposal
- WDR Warming Drawer
- WH Water Heater
- WM Washing Machine

Suffix the two letters to complete the product code with legend eg. MD022CH-FN

20A DP Switch Modules (Twin Width)

- MD022BK DP Switch Module - Black
- MD022PW DP Switch Module - Polar™ White
- MD022WH DP Switch Module - Click® White

Ingot 20A DP Switch Modules (Twin Width)

- MD022AB DP Switch Module - Antique Brass
- MD022BN DP Switch Module - Black Nickel
- MD022BR DP Switch Module - Polished Brass
- MD022BS DP Switch Module - Brushed Stainless
- MD022CH DP Switch Module - Polished Chrome
- MD022PN DP Switch Module - Pearl Nickel
- MD022SB DP Switch Module - Satin Brass
- MD022SC DP Switch Module - Satin Chrome
- MD022SS DP Switch Module - Stainless Steel
- MD022MB DP Switch Module - Matt Black
- MD022BZ DP Switch Module - Matt Bronze

Standards: BS EN 60669-1
Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 41 (W) x 52.5 (H) x 22 (D)

Understanding the code:

MD - Module Style 536 - Product No BN - Module Finish WM - Legend Style



IN HOUSE LASER ETCHING
Our in house laser printer provides flexibility to suit large volume batch or custom jobs. The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

The MD023 modules listed are available with the laser etched legends listed here.

- BL Boiler
- CH Cooker Hood
- DW Dishwasher
- FD Fridge
- FF Fridge Freezer
- FN Fan
- FZ Freezer
- HB Hob
- HT Hot Tap
- MW Microwave
- OV Oven
- TD Tumble Dryer
- WC Wine Cooler
- WD Waste Disposal
- WDR Warming Drawer
- WH Water Heater
- WM Washing Machine

Suffix the two letters to complete the product code with legend eg. MD023CH-FN

20A DP Switch Modules With Neon (Twin Width)

- MD023BK DP Switch With Neon Module - Black
- MD023PW DP Switch With Neon Module - Polar™ White
- MD023WH DP Switch With Neon Module - Click® White

Ingot 20A DP Switch Modules With Neon (Twin Width)

- MD023AB DP Switch With Neon Module - Antique Brass
- MD023BN DP Switch With Neon Module - Black Nickel
- MD023BR DP Switch With Neon Module - Polished Brass
- MD023BS DP Switch With Neon Module - Brushed Stainless
- MD023CH DP Switch With Neon Module - Polished Chrome
- MD023PN DP Switch With Neon Module - Pearl Nickel
- MD023SB DP Switch With Neon Module - Satin Brass
- MD023SC DP Switch With Neon Module - Satin Chrome
- MD023SS DP Switch With Neon Module - Stainless Steel
- MD023MB DP Switch With Neon Module - Matt Black
- MD023BZ DP Switch With Neon Module - Matt Bronze

Standards: BS EN 60669-1
Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 41 (W) x 52.5 (H) x 22 (D)

Understanding the code:

MD - Module Style 536 - Product No BN - Module Finish WM - Legend Style




Ingot Dimmer Module Mounting Kits (Twin Width) - Dimmer Modules Not Supplied

MD150AB	Dimmer Module Mounting Kit - Antique Brass
MD150BK	Dimmer Module Mounting Kit - Black
MD150BN	Dimmer Module Mounting Kit - Black Nickel
MD150BR	Dimmer Module Mounting Kit - Polished Brass
MD150BS	Dimmer Module Mounting Kit - Brushed Stainless
MD150CH	Dimmer Module Mounting Kit - Polished Chrome
MD150PN	Dimmer Module Mounting Kit - Pearl Nickel
MD150PW	Dimmer Module Mounting Kit - Polar™ White
MD150SB	Dimmer Module Mounting Kit - Satin Brass
MD150SC	Dimmer Module Mounting Kit - Satin Chrome
MD150SS	Dimmer Module Mounting Kit - Stainless Steel
MD150WH	Dimmer Module Mounting Kit - Click® White
MD150MB	Dimmer Module Mounting Kit - Matt Black
MD150BZ	Dimmer Module Mounting Kit - Matt Bronze

Requires separate ON/OFF switch. This can also be added to the accessory ranges where shown

Standards: BS 5733
Dimensions (mm): 41 (W) x 52.5 (H) x 13.2 (D)

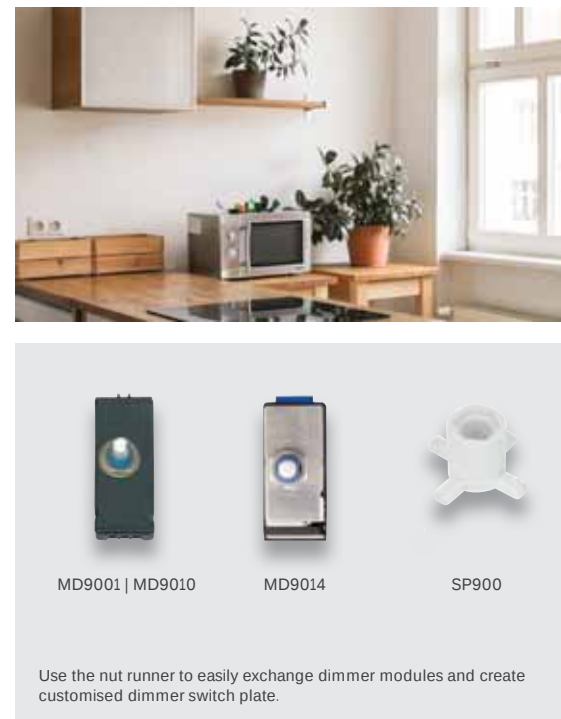


Dimmer Modules

MD9001	6A 2 Way Push On / Off (Non-Dimming) Module (25 x 62mm)
MD9010	1-10V Analogue Dimmer Module (25 x 62mm) Requires separate ON/OFF switch. This can also be added to the accessory ranges where shown.
MD9014	100W Dual Mode Dimmer Module with Trim (26.5 x 55mm) Due to the reduced height, the MD9014 is suitable for mounting directly above each other on multi-tier plates.

Dimmer M10 Nut Runner

SP900	Dimmer M10 Nut Runner Tool
-------	----------------------------

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate

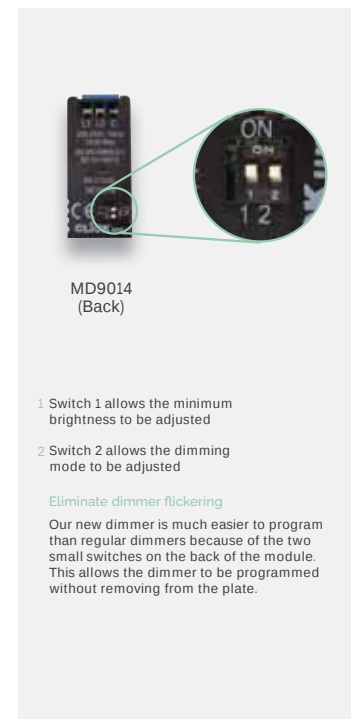

Standards: BS EN 60669-1 BS EN 55015 BS EN 61000-3-2 BS EN 61000-3-3 **9001**: BS EN 60669-1
9014: BS EN 60669 BS EN 55015 BS EN 61000
Cable Size (mm²): 2 x 1.5
Dimensions (mm): 25.5 (W) x 67 (H) x 23.2 (D) **9014**: 25 (W) x 57.5 (H) x 24.2 (D) **900**: 40 (W) x 40 (H) x 22.5 (D)
Type: **9001**: None (On & Off Only) **9010**: Analogue **9014**: Trailing & Leading Edge



MD9102AB



MD9102BR



MD9102BN


MD9102
(Back)


MD9125PN



MD9125CH



MD9125BN


MD9125
(Back)

Toggle Modules only fit in existing toggle plates.

10AX 2 Way Toggle Switch Modules

MD9102AB	2 Way Toggle Switch Module - Antique Brass
MD9102BN	2 Way Toggle Switch Module - Black Nickel
MD9102BR	2 Way Toggle Switch Module - Polished Brass
MD9102CH	2 Way Toggle Switch Module - Polished Chrome
MD9102PN	2 Way Toggle Switch Module - Pearl Nickel
MD9102MB	2 Way Toggle Switch Module - Matt Black
MD9102BZ	2 Way Toggle Switch Module - Matt Bronze

10AX Intermediate Toggle Switch Modules

MD9125AB	Intermediate Toggle Switch Module - Antique Brass
MD9125BN	Intermediate Toggle Switch Module - Black Nickel
MD9125BR	Intermediate Toggle Switch Module - Polished Brass
MD9125CH	Intermediate Toggle Switch Module - Polished Chrome
MD9125PN	Intermediate Toggle Switch Module - Pearl Nickel
MD9125MB	Intermediate Toggle Switch Module - Matt Black
MD9125BZ	Intermediate Toggle Switch Module - Matt Bronze

Standards: BS EN 60669-1

Cable Size (mm²): 4 x 1.5 or 2 x 2.5

Dimensions (mm): 25 (W) x 62 (H) x 22 (D)

Plates & Modules





Solutions for all manner of Media Cabling Problems

The modern home is now more than a mere home. It doubles up occasionally as a cinema, concert hall, meeting venue and computer room etc. Each of these functions brings with it its own **unique requirements in terms of the provision of necessary services** such as telephone or satellite sockets etc.

Even in recent memory designers and builders did not think beyond providing a perfunctory level of electrical switches, sockets and pendant light fittings in a new home. Nowadays, as well as providing an ever increasing number of these items, provision must be made for the myriad different electrical and electronic products which proliferate our homes.

Traditionally, products such as telephone and TV coaxial sockets etc. have all been supplied built into a standard size wall plate. The environment in today's office and home however requires a number of services to be provided to a specific work station or convenient access point. The most flexible and efficient means of doing this is the use of modules on a multiple aperture plate.

The New Media™ range illustrated in the following pages encompasses a wide range of media and power modules, providing the designer and installer a host of solutions for all manner of media cabling problems.




20 Year Warranty

All New Media™ plates are covered by our 20 year warranty against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.


New Media™ plates are available in a variety of 11 distinctive quality finishes: Matt Black (only available with black inserts), Antique Brass*, Polished Brass, Polished Chrome, Satin Chrome*, Satin Brass*, Black Nickel, Pearl Nickel, Brushed Stainless*, Stainless Steel and Polar White.



Matt Black
(MB)




Antique Brass
(AB)




Polished Brass
(PB)



Polished Chrome
(CH)




Satin Chrome
(SC)



Satin Brass
(SB)



Black Nickel
(BN)



Pearl Nickel
(PN)



Brushed Stainless
(BS)



Stainless Steel
(SS)



Polar White
(PW)

New Media™ unique product codes

When ordering any New Media™ products, please specify the required finish by following the simple code structure as demonstrated here.

MP

Plate Style

608

Product Number

SC

Plate Finish

BK

Insert Finish
(if applicable)

Contents

New Media™ Plates	K4
Yoke & Back Boxes	K12
Deco Plus® Unfurnished Plates	K13
Deco® Unfurnished Plates	K14
Define® Unfurnished Plates	K15
Definity™ Unfurnished Plates	K16
Mode® Unfurnished Plates	K17
Part M™ Unfurnished Plates	K17
Polar™ Unfurnished Plates	K17
Metal Clad Unfurnished Plates	K18
New Media™ Modules	K19
Typical Sky+ Installation	K28
Typical Sky+ HD Installation	K29
Technical Details	K30

New Media™ Plates

The brief given to our designers charged with the task of developing the **New Media™** range was to produce a comprehensive yet flexible and user friendly 'system' which enables the installer to easily create topical media and power cabling solutions.

All of the modules featured in this brochure are of the standard euro grid configuration based on 1 aperture modules of 25 x 50mm. Mounting plates are available as wall or floor plates and can accommodate 1 - 16 modules according to requirements.

Instead of numerous unsightly individual sockets, a single **New Media™** plate can be used at a convenient point to bring together any combination of media modules. The individual modules are available in black, white or grey finishes and are suitable for mounting on blank plates from selected accessory ranges, namely the Polar™ and Mode® moulded accessory ranges, the Click® metal clad range plus the Deco Plus®, Deco®, Define® and Definity™ decorative metal ranges.

New Media™ Plates



The furnished plates illustrated here contain 6 x 1 aperture and 1 x 2 aperture media modules (left) and 4 x 2 aperture 13A socket outlet modules (right).



MP508



MP608

Small Unfurnished Front Plates - 8 Apertures Requires MP520 flush back box and MP510 Yoke. see page K12.

MP508BR Small New Media™ Unfurnished Front Plate - 8 Apertures - Polished Brass
MP508SB Small New Media™ Unfurnished Front Plate - 8 Apertures - Satin Brass

Small New Media™ Unfurnished Front Plate & Yoke - 8 Apertures

CMA608 Small New Media™ Unfurnished Front Plate & Yoke - 8 Apertures - White
MP608** Small New Media™ Unfurnished Front Plate & Yoke - 8 Apertures

Standards: BS 5733

Back Box Depth (mm): MP520 (47)

Dimensions (mm): 254 (W) x 91 (H) x 9 (D), **CMA608:** 248 (W) x 86 (H) x 9.5 (D)

Understanding the code:

MP - Plate Style **508** - Product No. **BR** - Insert Colour. **AB** Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **PN** Pearl Nickel, **BS** Brushed Stainless, **SS** Stainless Steel, **MB** Matt Black.



MP516



MP616



The furnished plate illustrated above contains 8 single New Media™ modules (top row) and 4 twin width socket outlet modules (bottom row).

MP516 - The yoke 'MP510' (x2) is required to mount the media modules into prior to assembling the frontplate, see page K12.

Back box MP525 or MP535 is required, see page K12.

Large Unfurnished Front Plates - 2 x 8 Apertures

MP516AB	Large New Media™ Unfurnished Front Plate - 2 x 8 Apertures - Antique Brass
MP516BR	Large New Media™ Unfurnished Front Plate - 2 x 8 Apertures - Polished Brass
MP516BS	Large New Media™ Unfurnished Front Plate - 2 x 8 Apertures - Brushed Stainless
MP516CH	Large New Media™ Unfurnished Front Plate - 2 x 8 Apertures - Polished Chrome
MP516PN	Large New Media™ Unfurnished Front Plate - 2 x 8 Apertures - Pearl Nickel
MP516SS	Large New Media™ Unfurnished Front Plate - 2 x 8 Apertures - Stainless Steel

Large New Media™ Unfurnished Front Plate & Yoke - 2 x 8 Apertures

CMA616	Large New Media™ Unfurnished Front Plate & Yokes - 2 x 8 Apertures - White
MP616**	Large New Media™ Unfurnished Front Plate & Yoke - 2 x 8 Apertures

Standards: BS 5733

Back Box Depth (mm): MP535 (35) Or MP525 (47)

Dimensions (mm): 250 (W) x 216 (H) x 8 (D) **616:** 248 (W) x 214 (H) x 9.5 (D)

Understanding the code:

MP - Plate Style **516** - Product No. **AB** - Plate Finish. **AB** Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **PN** Pearl Nickel, **BS** Brushed Stainless, **SS** Stainless Steel, **MB** Matt Black.



MP603SCBK




MP603CHWH

Half New Media Semi-Modular Part Furnished Plate

CMA603	Half New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 3 Apertures
MP603CHWH	Half New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 3 Apertures
MP603SCWH	Half New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 3 Apertures
MP603CHBK	Half New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 3 Apertures
MP603MBBK	Half New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 3 Apertures
MP603SBBK	Half New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 3 Apertures
MP603SCBK	Half New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 3 Apertures

Supplied with 2 x 13A switched sockets. Back box MP520 required.

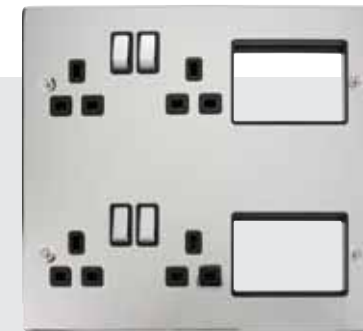

MP606CHBK



MP606SCWH

Product is supplied with 4 x 13A DP switched sockets. Back box MP525 or MP535 required, see following page.

2 Tier Semi-Modular Unfurnished Plates

CMA606	Large New Media™ Part Furnished Front Plate - 4 x 13A DP Switched Sockets & 2 x 3 Apertures
MP606CHBK	Large New Media™ Part Furnished Front Plate - 4 x 13A DP Switched Sockets & 2 x 3 Apertures
MP606CHWH	Large New Media™ Part Furnished Front Plate - 4 x 13A DP Switched Sockets & 2 x 3 Apertures
MP606SCBK	Large New Media™ Part Furnished Front Plate - 4 x 13A DP Switched Sockets & 2 x 3 Apertures
MP606SCWH	Large New Media™ Part Furnished Front Plate - 4 x 13A DP Switched Sockets & 2 x 3 Apertures
MP606MBBK	Large New Media™ Part Furnished Front Plate - 4 x 13A DP Switched Sockets & 2 x 3 Apertures

Standards: BS 1363-2

Back Box Depth (mm): 603: MP520 (47) **606:** MP535 (35) Or MP525 (47) **Cable Size (mm²):** 3 x 2.5 or 2 x 4

Dimensions (mm): 603: 250 (W) x 86 (H) x 8 (D) **606:** 250 (W) x 216 (H) x 8 (D)

Understanding the code:

MP - Plate Style **603** - Product No. **CH** - Plate Finish. **BK** - Insert Finish. **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **PW** Polar White, **MB** Matt Black.



DPSC604BK



DPCH684WH

Product is supplied with 2 x 13A DP switched sockets. Back box WA512 required.



New Media Semi-Modular Part Furnished Plates - Deco Plus®

DPSC604BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
DPSC604WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
DPCH604BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
DPCH604WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
DPSS604BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
DPSS604WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
DPSC684BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
DPSC684WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
DPCH684BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
DPCH684WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
DPSS684BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
DPSS684WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures

Standards: **604:** BS 1363-2 **684:** BS 1363-2 EN IEC 62368-1 EN IEC 62368-3 EN IEC 62680-1-3
Back Box Depth (mm): WA512 (47) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 148 (W) x 148 (H) x 8 (D)

Understanding the code:

DP - Plate Style **SC** - Plate Finish **604** - Product No. **BK** - Insert Finish.
CH Polished Chrome, **SC** Satin Chrome, **SS** Stainless Steel.



VPCH604BK



VPSS684WH

Product is supplied with 2 x 13A DP switched sockets. Back box WA512 required.



New Media Semi-Modular Part Furnished Plates - Deco®

VPSC604BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
VPSC604WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
VPCH604BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
VPCH604WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
VPSS604BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
VPSS604WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
VPSC684BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
VPSC684WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
VPCH684BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
VPCH684WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
VPSS684BK	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
VPSS684WH	New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures

Standards: **604:** BS 1363-2 **684:** BS 1363-2 EN IEC 62368-1 EN IEC 62368-3 EN IEC 62680-1-3
Back Box Depth (mm): WA512 (47) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 148 (W) x 148 (H) x 8 (D)

Understanding the code:

VP - Plate Style **SC** - Plate Finish **604** - Product No. **BK** - Insert Finish.
CH Polished Chrome, **SC** Satin Chrome, **SS** Stainless Steel.



CMA604



CMA684

Product is supplied with 2 x 13A DP switched sockets. Back box WA512 required.

MODE™

New Media Semi-Modular Part Furnished Plates - Mode®

- CMA604** New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
- CMA684** New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures

Standards: BS 1363-2 **684:** BS 1363-2 EN IEC 62368-1 EN IEC 62368-3 EN IEC 62680-1-3
Back Box Depth (mm): WA512 (47) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 146 (W) x 146 (H) x 9 (D)



SFBS604BK



SFCH684PW

Product is supplied with 2 x 13A DP switched sockets. Back box WA512 required.

definity™


New Media Semi-Modular Part Furnished Plates - Definity™

- SFBS604BK** New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
- SFBS604PW** New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
- SFCH604BK** New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
- SFCH604PW** New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
- SFSS604BK** New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
- SFSS604PW** New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures
- SFBS684BK** New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
- SFBS684PW** New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
- SFCH684BK** New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
- SFCH684PW** New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
- SFSS684BK** New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures
- SFSS684PW** New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures

Standards: 604: BS 1363-2 **684:** BS 1363-2 EN IEC 62368-1 EN IEC 62368-3 EN IEC 62680-1-3
Back Box Depth (mm): WA512 (47) **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 148 (W) x 148 (H) x 8 (D)

Understanding the code:
SF - Plate Style **BS** - Plate Finish **604** - Product No. **BK** - Insert Finish.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel.

K12



MP510



MP520



MP525 | MP535

Yoke

MP510 New Media™ Yoke - 8 Apertures

Divider Plates

MP521 Divider Plate 47mm Deep for MP520 (76mm x 44mm)

MP526 Divider Plate 47mm Deep for MP525 (93mm x 44mm)

MP536 Divider Plate 35mm Deep for MP535

Back Boxes

MP520 47mm Deep New Media™ Back Box - 8 Apertures

MP525 47mm Deep New Media™ Back Box With Central Divider - 2 x 8 Apertures

MP535 35mm Deep New Media™ Back Box With Central Divider - 2 x 8 Apertures

Galvanised steel back boxes supplied for flush mounting of Media Plates. Mounting yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals. Divider plates can be installed as necessary in order to screen sensitive modules.

Standards: BS 5733
Cutout (mm): **520:** 225 (W) x 75 (H) **525 535:** 225 (W) x 194 (H)
Dimensions (mm): **510:** 238 (W) x 75 (H) x 13 (D) **521:** 76 (W) x 44 (H) x 1 (D) **526:** 93 (W) x 44 (H) x 1 (D)
536: 93 (W) x 34 (H) x 1 (D) **520:** 225 (W) x 75 (H) x 47 (D) **525:** 225 (W) x 194 (H) x 47 (D) **535:** 225 (W) x 194 (H) x 35 (D)


K13



DPCH310



DPSB311

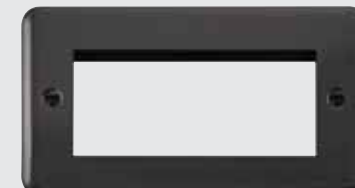

DPBN312

deco
PLUS

Unfurnished Plates - New Media™

310 1 Gang New Media™ Unfurnished Plate - 1 Aperture

311 1 Gang New Media™ Unfurnished Plate - 2 Apertures

312 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Standards: BS 5733
Back Box Depth (mm): Dependent On Modules Fitted
Dimensions (mm): **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D)

Understanding the code:

DP - Plate Style **CH** - Plate Finish **310** - Product No.

AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **MB** Matt Black



Unfurnished Plates - New Media™

- 310** 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- 311** 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- 312** 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Standards: BS 5733
Back Box Depth (mm): Dependent On Modules Fitted
Dimensions (mm): **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D)

Understanding the code:
VP - Plate Style **AB** - Plate Finish **310** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **MB** Matt Black.



Unfurnished Plates - New Media™

- 310** 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- 311** 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- 312** 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Standards: BS 5733
Back Box Depth (mm): Dependent On Modules Fitted
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 1.3 (D) **2 Gang:** 146 (W) x 88 (H) x 1.3 (D)

Understanding the code:
FP - Plate Style **BS** - Plate Finish **310** - Product No. **BK** - Insert Colour.
BS Brushed Stainless, **BN** Black Nickel, **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



New Media™ Unfurnished Plate Inserts

- SIN310BK** 1 Gang New Media™ Unfurnished Plate Insert - 1 Aperture
- SIN311BK** 1 Gang New Media™ Unfurnished Plate Insert - 2 Apertures
- SIN312BK** 2 Gang New Media™ Unfurnished Plate Insert - 4 Apertures

New Media™ Cover Plates

- SCP310** 1 Gang New Media™ Cover Plate - 1 Aperture
- SCP311** 1 Gang New Media™ Cover Plate - 2 Apertures
- SCP312** 2 Gang New Media™ Cover Plate - 4 Apertures

Standards: Inserts: BS 5733

Back Box Depth (mm): Dependent On Modules Fitted

Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 4 (D) 2 Gang: 146 (W) x 86 (H) x 4 (D)


Understanding the code:

SIN - Insert Prefix **311** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).

SCP - Definity™ Cover Plate Prefix **311** - Product No **SS** - Plate Colour. Definity™ plates are coated stainless steel.

AB Antique Brass, **CH** Chrome, **SS** Stainless Steel, **BS** Brushed Stainless, **PW** Polar White, **BK** Matt Black, **BZ** Matt Bronze,

MW Metal White, **RD** Red & **MB** Metal Black.

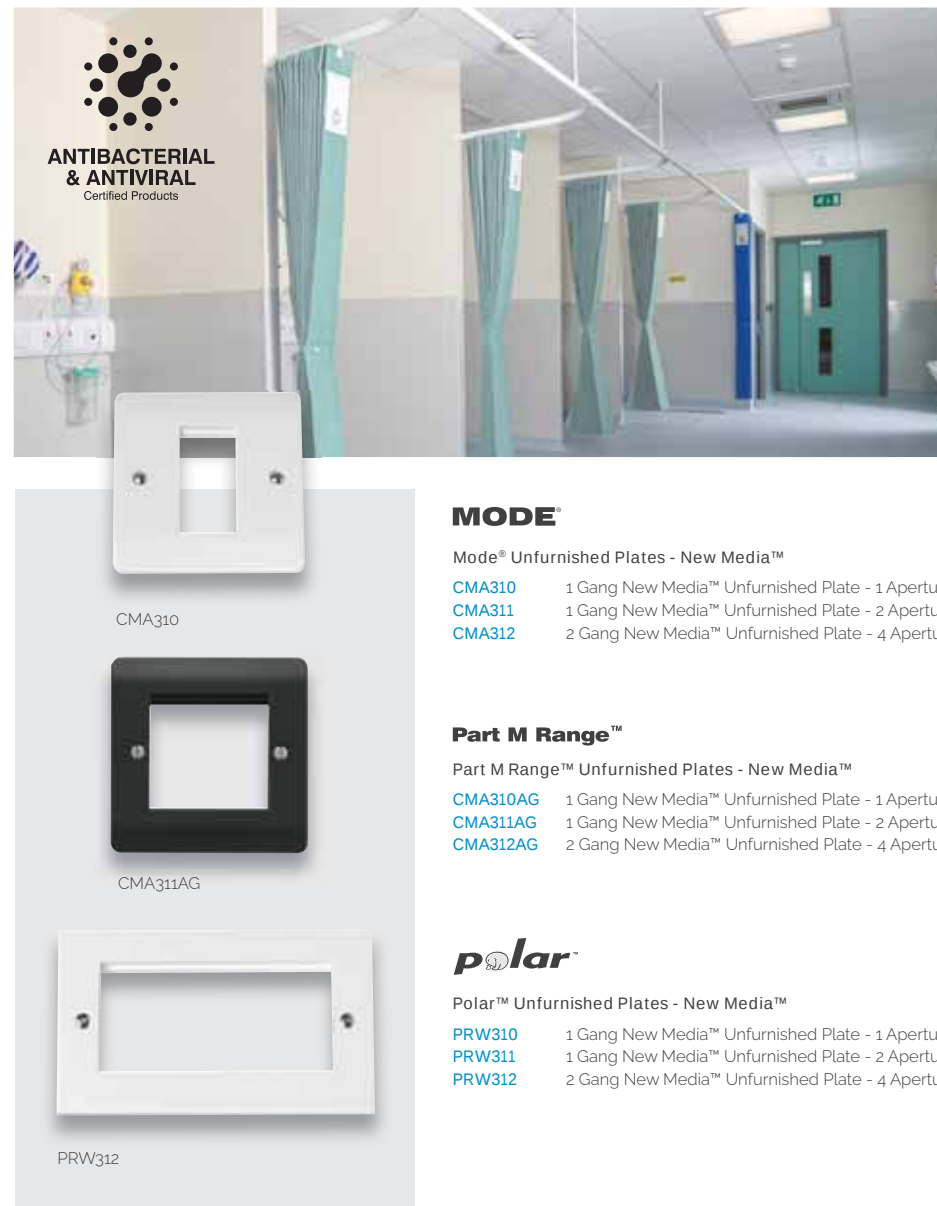

MODE®

Mode® Unfurnished Plates - New Media™

- CMA310** 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- CMA311** 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- CMA312** 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Part M Range™

Part M Range™ Unfurnished Plates - New Media™

- CMA310AG** 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- CMA311AG** 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- CMA312AG** 2 Gang New Media™ Unfurnished Plate - 4 Apertures

polar™

Polar™ Unfurnished Plates - New Media™

- PRW310** 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- PRW311** 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- PRW312** 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Standards: BS 5733

Back Box Depth (mm): Dependent On Modules Fitted

Dimensions (mm): Mode® & Part M™: 1 Gang: 86 (W) x 86 (H) x 9.5 (D) 2 Gang: 146 (W) x 86 (H) x 9.5 (D)

Polar™: 1 Gang: 86 (W) x 86 (H) x 11 (D) 2 Gang: 146 (W) x 86 (H) x 11 (D)


Metal Clad Unfurnished Plates

K18



Unfurnished Plates - New Media™ c / w 40mm Mounting Box

- CL311** 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- CL312** 2 Gang New Media™ Unfurnished Plate - 4 Apertures

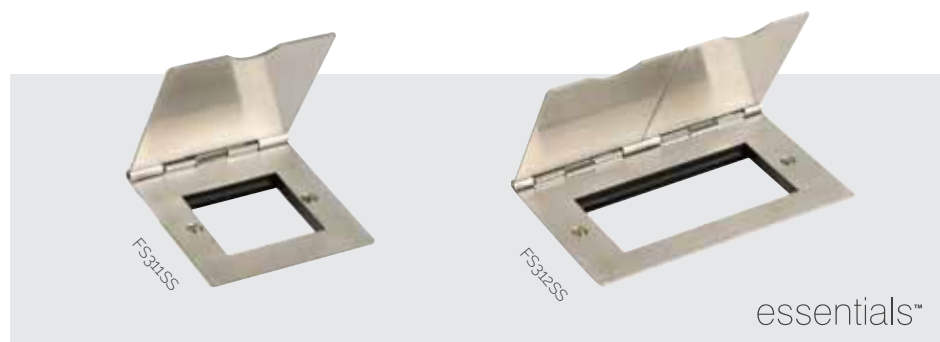

Unfurnished Floor Plates - For Use With New Media™ Modules

- FS311SS** 1 Gang New Media™ Unfurnished Floor Plate - 2 Apertures
- FS312SS** 2 Gang New Media™ Unfurnished Floor Plate - 4 Apertures

Standards: BS 5733

Back Box Depth (mm): 40

Dimensions (mm): **CL311:** 80 (W) x 80 (H) x 42 (D) **CL312:** 140 (W) x 80 (H) x 42 (D) **FS311SS:** 86 (W) x 93 (D) x 5 (H)

FS312SS: 146 (W) x 93 (D) x 5 (H)




2 Year Warranty

All New Media™ modules are covered by our 2 year warranty against any fault in materials or manufacture experienced at any time within 2 years of the date of supply.

New Media™ Modules

The New Media™ modules offer a flexible build solution to a host of individual media transfer requirements. The clip fit grid modules are simple to install in their blank mounting plates.

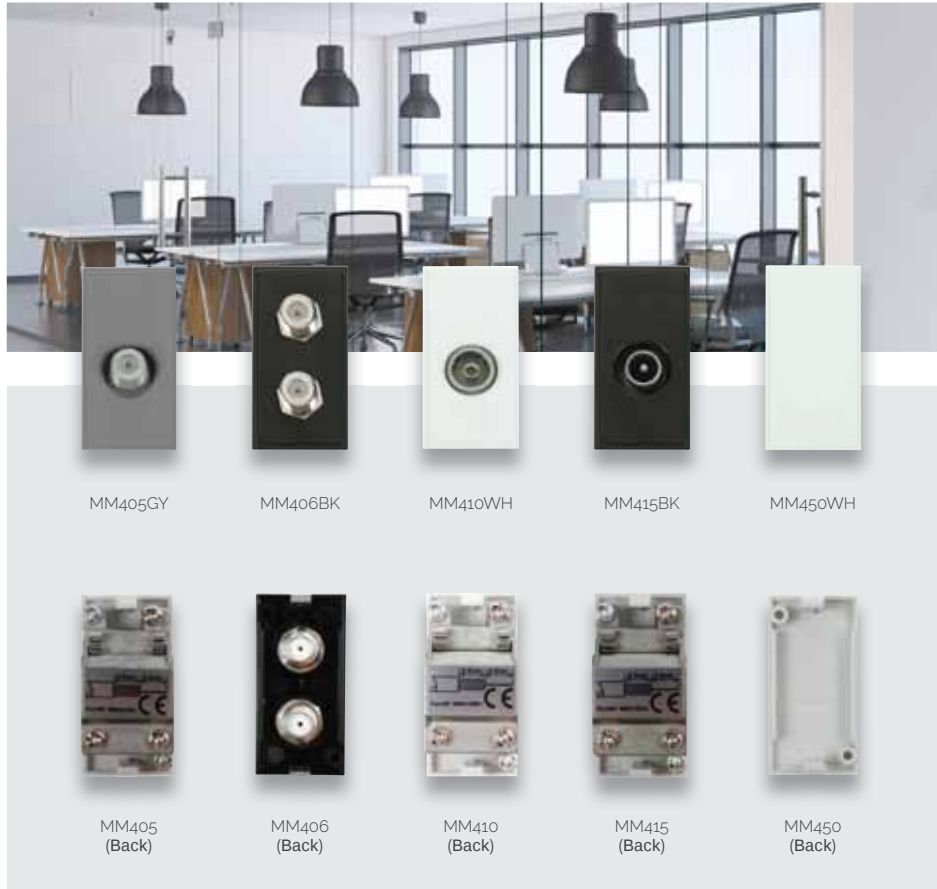

TV / Satellite Modules - Single Width (25mm x 50mm)

MM405BK Single Female Satellite Module - Black
MM405WH Single Female Satellite Module - White
MM405GY Single Female Satellite Module - Grey

MM406BK Twin Female Satellite Module (F to F Connection) - Black
MM406WH Twin Female Satellite Module (F to F Connection) - White
MM406GY Twin Female Satellite Module (F to F Connection) - Grey

MM410BK Single Female Coaxial Module - Black
MM410WH Single Female Coaxial Module - White
MM410GY Single Female Coaxial Module - Grey

MM415BK Single Male Coaxial Module - Black
MM415WH Single Male Coaxial Module - White
MM415GY Single Male Coaxial Module - Grey

MM450BK Blank Module - Black
MM450WH Blank Module - White
MM450GY Blank Module - Grey

Standards: 450: BS 5733
Dimensions (mm): 405: 25 (W) x 50 (H) x 23 (D) 406: 25 (W) x 50 (H) x 15 (D) 410 415: 25 (W) x 50 (H) x 23.4 (D)
 450: 25 (W) x 50 (H) x 14 (D)



All diplexed, triplexed and quad modules require installation of a signal combining distribution amplifier. Not suitable for use in the Republic of Ireland.
 The range of diplexed, triplexed and quad modules are not compatible with 'Sky Q'.

Media Modules - Twin Width (50mm x 50mm)

MM420BK Diplexed TV And Radio Module - Black
MM420WH Diplexed TV And Radio Module - White
MM420GY Diplexed TV And Radio Module - Grey

MM430BK Triplexed TV, Radio & Satellite Module - Black
MM430WH Triplexed TV, Radio & Satellite Module - White
MM430GY Triplexed TV, Radio & Satellite Module - Grey

MM440BK Quad TV, Radio, Sat 1 & Sat 2 Module - Black
MM440WH Quad TV, Radio, Sat 1 & Sat 2 Module - White
MM440GY Quad TV, Radio, Sat 1 & Sat 2 Module - Grey

Dimensions (mm): 50 (W) x 50 (H) x 31.3 (D)

TV / Satellite Modules - Twin Width (50mm x 50mm)

MM425BK Diplexed TV And Satellite Module - Black
MM425WH Diplexed TV And Satellite Module - White
MM425GY Diplexed TV And Satellite Module - Grey



Telephone / Data Modules - Single Width (25mm x 50mm)

MM460BK	Telephone Master Module - Black	MM480BK	RJ45 Cat-5e Module - Black
MM460WH	Telephone Master Module - White	MM480WH	RJ45 Cat-5e Module - White
MM460GY	Telephone Master Module - Grey	MM480GY	RJ45 Cat-5e Module - Grey
MM465BK	Telephone Secondary Module - Black	MM485BK	RJ45 Cat-6 Module - Black
MM465WH	Telephone Secondary Module - White	MM485WH	RJ45 Cat-6 Module - White
MM465GY	Telephone Secondary Module - Grey	MM485GY	RJ45 Cat-6 Module - Grey
MM470BK	RJ11 Module - Black		
MM470WH	RJ11 Module - White		
MM470GY	RJ11 Module - Grey		

Dimensions (mm): **460 465:** 25 (W) x 50 (H) x 20.2 (D) **470:** 25 (W) x 50 (H) x 17.2 (D) **480 485:** 25 (W) x 50 (H) x 18 (D)



Switch Modules - Single Width (25mm x 50mm)

MM002BK	10AX 2 Way Switch Module - Black	MM022BK	20A DP Switch Module - Black
MM002WH	10AX 2 Way Switch Module - White	MM022WH	20A DP Switch Module - White
MM025BK	10AX Intermediate Switch Module - Black	MM023BK	20A DP Switch With Neon Module - Black
MM025WH	10AX Intermediate Switch Module - White	MM023WH	20A DP Switch With Neon Module - White

Neon positioned on top of rocker

13A Fused FCU Modules - Single Width (25mm x 50mm)

MM047BK	13A Fused FCU Module - Black
MM047WH	13A Fused FCU Module - White

Standards: BS EN 60669-1 **047:** BS 1363-4 BS 1362
Cable Size (mm²): **022 023:** 3 x 2.5 or 2 x 4 **025 002 047:** 4 x 1.5 or 3 x 2.5
Dimensions (mm): 25 (W) x 50 (H) x 22 (D) **047:** 25 (W) x 50 (H) x 24.7 (D)




MM010BK

MM020WH



MM033WH

MM030BK



MM038WH



MM515WH

MM586BK

Socket Outlet Modules - Twin Width (50mm x 50mm)

MM010BK 13A UK Socket Module - Black

MM010WH 13A UK Socket Module - White

MM020BK 16A European Schuko Socket Module - Black

MM020WH 16A European Schuko Socket Module - White

If using with metal clad plates CL311 and CL312, the 40mm deep back boxes supplied will need to be replaced with 50mm deep, CL087 (1 gang) or CL088 (2 gang).

MM030BK 16A 110V US Socket Module - Black

MM030WH 16A 110V US Socket Module - White

MM033BK 15A Round Pin Socket Module - Black

MM033WH 15A Round Pin Socket Module - White

MM038BK 5A Round Pin Socket Module - Black

MM038WH 5A Round Pin Socket Module - White

USB Charging Modules - Single Width (25mm x 50mm)

MM515BK 2A USB Charging Module - Black

MM515WH 2A USB Charging Module - White

MM586BK 2A "A" & 3A "C" USB Dual Charging Module - Black

MM586GY 2A "A" & 3A "C" USB Dual Charging Module - Grey

MM586WH 2A "A" & 3A "C" USB Dual Charging Module - White

Standards: 010: BS 1363-2 020: IEC 60884 030: UL 498 033 038: BS 546
515: BS EN 60950-1 BS EN 61000-6-1 586: BS IEC 62368-1, BS EN 61000-6-1, BS EN 61000-6-3
Back Box Depth (mm): 47 **Cable Size (mm²):** 3 x 2.5 or 2 x 4 038: 4 x 1.5 or 3 x 2.5 515 586: 2 x 1.5
Dimensions (mm): 010: 50 (W) x 50 (H) x 25.6 (D) 020: 50 (W) x 50 (H) x 40.1 (D) 030: 50 (W) x 50 (H) x 25.5 (D)
033: 50 (W) x 50 (H) x 41 (D) 038: 50 (W) x 50 (H) x 27.1 (D) 515 586: 25 (W) x 55.7 (H) x 37 (D)



LED Euromods - Twin Width (50mm x 50mm)

MM1001CW 230V 1W LED Euromod - Cool White


MM1001WW 230V 1W LED Euromod - Warm White

Pre-wired with 110mm flylead.



MM490BK

MM490 (Back)

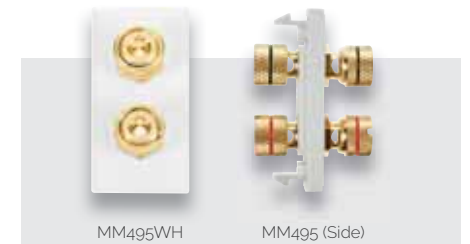

MM495WH

MM495 (Side)

Speaker Modules - Single Width (25mm x 50mm)

MM490BK RCA/Phono Module (2 Outlets) - Black


MM490WH RCA/Phono Module (2 Outlets) - White

MM490GY RCA/Phono Module (2 Outlets) - Grey

MM495BK Loudspeaker Module (2 Outlets) - Black

MM495WH Loudspeaker Module (2 Outlets) - White

MM495GY Loudspeaker Module (2 Outlets) - Grey

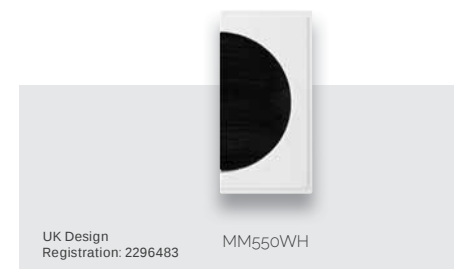

UK Design
Registration: 2296483

MM550WH



MM501GY

HDMI Outlet with Flexible
Connection (80mm Long)

Brush Modules - Single Width (25mm x 50mm)

MM550BK Single Brush Module - Black (Black Bristles)

MM550WH Single Brush Module - White (Black Bristles)

MM550WHWH Single Brush Module - White (White Bristles)


HDMI Modules - Single Width (25mm x 50mm)

MM501BK HDMI V2.0 With Fly-Lead Module - Black

MM501WH HDMI V2.0 With Fly-Lead Module - White

MM501GY HDMI V2.0 With Fly-Lead Module - Grey

Standards: 1001: BS EN 60598-1 BS EN 60598-2-2 BS EN 55015 BS EN 61547 & BS PD IEC/TR 62778 BS EN 61000-3-2 & BS EN 61000-3-3 550: BS 5733
Dimensions (mm): 490: 25 (W) x 50 (H) x 18.3 (D) 495: 25 (W) x 50 (H) x 19.3 (D) 501: 25 (W) x 50 (H) x 28.2 (D)
550: 25 (W) x 50 (H) x 12.6 (D) 1001: 50 (W) x 50 (H) x 30 (D)

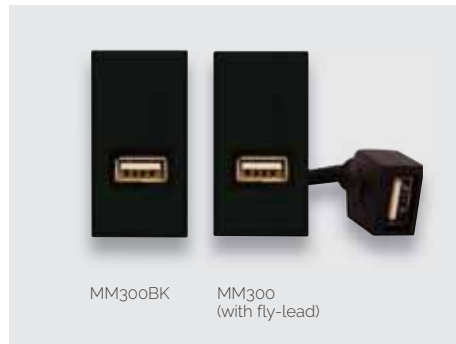

Media Modules - Single Width (25mm x 50mm)

- MM300BK** USB Throughput With Fly-Lead Module - Black
- MM300WH** USB Throughput With Fly-Lead Module - White
- MM300GY** USB Throughput With Fly-Lead Module - Grey



Media Modules - Single Width (25mm x 50mm)

- MM491BK** Triple RCA Module (With Screw Terminals) - Black
- MM491WH** Triple RCA Module (With Screw Terminals) - White
- MM491GY** Triple RCA Module (With Screw Terminals) - Grey



- MM305BK** VGA With Fly-Lead Module - Black
- MM305WH** VGA With Fly-Lead Module - White
- MM305GY** VGA With Fly-Lead Module - Grey



- MM496BK** 3.5mm Audio Jack With Fly-Lead Module - Black
- MM496WH** 3.5mm Audio Jack With Fly-Lead Module - White
- MM496GY** 3.5mm Audio Jack With Fly-Lead Module - Grey

Dimensions (mm): 300: 25 (W) x 50 (H) x 41 (D) 305: 25 (W) x 50 (H) x 50 (D)
491: 25 (W) x 50 (H) x 18.3 (D) 496: 25 (W) x 50 (H) x 38 (D)

Touch & Indicator Modules - Twin Width (50mm x 50mm)

- MM602BK** Hotel Touch & Indicator Modules - Black
- MM602WH** Hotel Touch & Indicator Modules - White

Both Touch panel and Indicator panel supplied.
Both panels require the (311 - 2 aperture) unfurnished plates or (312 - 4 aperture) unfurnished plates if mounting with additional New Media modules.

Hotel Key Card Switch Module - Twin Width (50mm x 50mm)

- MM620BK** 10A/6AX Hotel Key Card Timer Switch (Mechanical) Module Only - Black

Blue LED illuminates when the key card is removed and the exit time has elapsed.
Select cover plate below:



Full item requires (MM620BK) switch module, (311) unfurnished plate and (SP620) hotel key card cover plate, see listed products below:

Hotel Key Card Switch Module Covers

- SP620BK** Black
- SP620MTBK** Black - Matt Black
- SP620BKAB** Black - Antique Brass
- SP620BKBN** Black - Black Nickel
- SP620BKBR** Black - Polished Brass
- SP620BKBS** Black - Brushed Stainless
- SP620BKCH** Black - Polished Chrome
- SP620BKPN** Black - Pearl Nickel
- SP620BKSB** Black - Satin Brass
- SP620BKSC** Black - Satin Chrome
- SP620BKSS** Black - Stainless Steel


Hotel Key Card Switch Module Covers

- SP620PW** White - White (Metal)
- SP620WH** White - White (Plastic)
- SP620WHBR** White - Polished Brass
- SP620WHBS** White - Brushed Stainless
- SP620WHCH** White - Polished Chrome
- SP620WHPN** White - Pearl Nickel
- SP620WHSB** White - Satin Brass
- SP620WHSC** White - Satin Chrome
- SP620WHSS** White - Stainless Steel

Please note requires mounting plate **311 see from page K13 to page K18 or for **31102, please see GridPro® section.
Requires the MM620BK key card module.

Standards: MM602: BS 5733 BS EN 60669-2-1 MM620: BS EN 60669-1 BS EN 60669-2-3
Cable Size (mm²): 2 x 1.5 **MM602:** 1.5 **Time setting:** 10 seconds to 5 minutes
Dimensions (mm): MM602: 50 (W) x 50 (H) x 33 (D) MM620: 50 (W) x 50 (H) x 40 (D) SP620: 61 (W) x 52 (H) x 20.5 (D)
Key card not included. Accepts standard room cards: 85.6 x 53.98mm



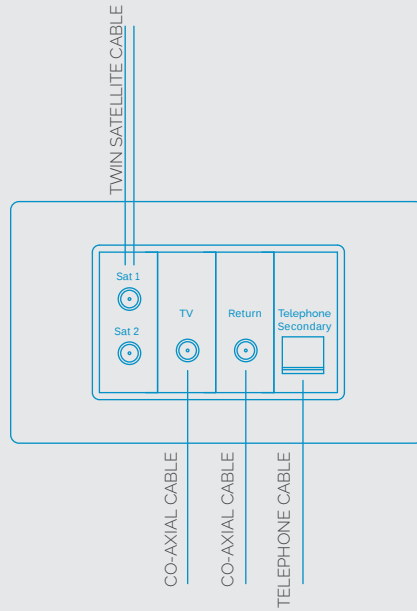


Here, the input cables from the satellite dish and the TV aerial are connected directly to the rear of each module.

The return module is provided to allow the Sky signal to be shared throughout the property using a suitable distribution amplifier.

The use of a secondary telephone connection allows for easy connection between the Sky box and the telephone line.

Products Used For This Configuration:

- 1 x **312 Media Plate
- 1 x MM406 Twin Satellite Module
- 1 x MM415 Co-axial Module
- 1 x MM410 Co-axial Module
- 1 x MM465 Telephone Secondary Module

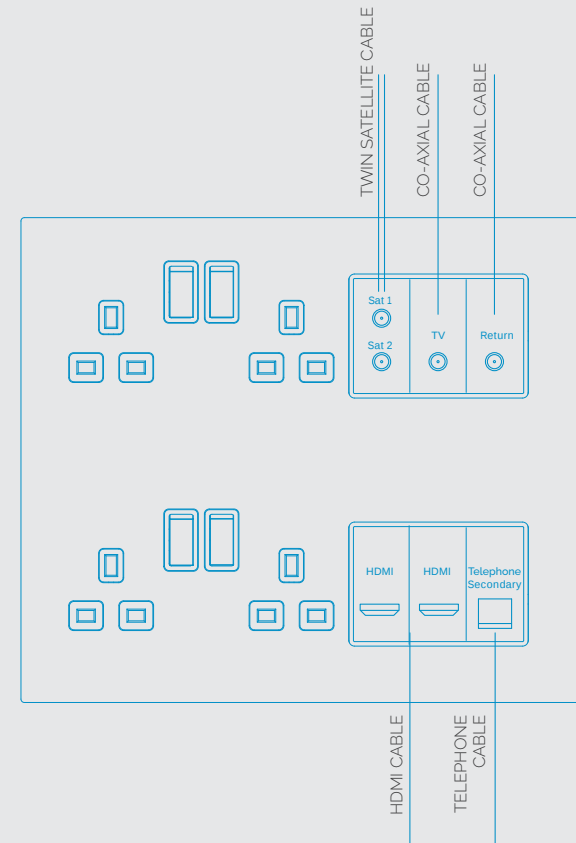

Here, the input cables from the satellite dish and the TV aerial are connected directly to the rear of each module.

The return module is provided to allow the Sky signal to be shared throughout the property using a suitable distribution amplifier.

The use of a secondary telephone connection allows for easy connection between the Sky box and the telephone line.

An HDMI module is provided to facilitate a high definition connection between the Sky box and television.

K30

MM405			Single 'F' Satellite
Connection	Frequency	Insertion Loss (dB) (Typical)	
In to Out	5 to 2300 MHz	1.6	
			Power pass to connection
MM410			Single IEC Female
Connection	Frequency	Insertion Loss (dB) (Typical)	
In to Out	5 to 862 MHz	0.3	
			Power pass to connection
MM415			Single IEC Male
Connection	Frequency	Insertion Loss (dB) (Typical)	
In to Out	5 to 862 MHz	0.3	
			Power pass to connection
MM420			Diplexed TV & Radio
Connection	Frequency	Insertion Loss (dB) (Typical)	
In to Radio	87.5 to 230 MHz	2.0	
In to TV	47 to 68 MHz	1.5	
In to TV	254 to 862 MHz	2.0	
			Power pass to TV
MM425			Diplexed TV & Satellite
Connection	Frequency	Insertion Loss (dB) (Typical)	
In to TV	47 to 862MHz	2.0	
In to Satellite	950 to 2150 MHz	2.5	
In to Satellite	2150 to 2400 MHz	3.0	
			Power pass to satellite
MM430			Triplexed TV, Radio & Satellite
Connection	Frequency	Insertion Loss (dB) (Typical)	
In to Radio	87.5 to 230MHz	3.0	
In to TV	47 to 68MHz	2.0	
In to TV	254 to 862MHz	2.0	
In to Satellite	950 to 2300 MHz	3.0	
			Power pass to satellite
MM440			Quad TV, Radio, Satellite 1 & Satellite 2
Connection	Frequency	Insertion Loss (dB) (Typical)	
In to Radio	87.5 to 230MHz	3.0	
In to TV	470 to 862MHz	2.5	
In to Satellite 1	950 to 2300 MHz	3.0	
In to Satellite 2	25 to 2400 MHz	1.5	
			Power pass to satellite 1 & satellite 2

All diplexed, triplexed and quad modules require installation of a signal combining distribution amplifier. Not suitable for use in the Republic of Ireland.

The range of diplexed, triplexed and quad modules are not compatible with 'Sky Q'.

Stylish Electrical Accessories





The Modern Domestic Wiring Solution

Moulded white accessories are often described as utilitarian, ie. useful or practical without being attractive. This is certainly not the case with the Curva® range of smooth profile accessories.

In creating the modern, aesthetically pleasing and ergonomic design of the Curva® range we did not lose sight of the need to produce a true value for money product offering the utmost appeal to installers and end users alike.

Only the best quality raw materials were used in producing this durable, attractive and modern range of accessories which will adorn the walls of all manner of buildings for years to come.



Antiviral & Antibacterial Certified

Curva® plates are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases.

Curva® plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses.

After a contact period of 4 hours, Curva® was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.


Contents

Switches	L4
Power Sockets	L7
Fused Connection Units	L9
Control Switches	L10
Shaver Socket & Blank Plates	L12
TV, Telephone & Satellite	L13
Pattress Boxes	L16
Back Boxes	L17



10 Year Warranty

All Curva® products are covered by our 10 year warranty against any fault in materials or manufacture experienced at any time within 10 years of the date of supply.

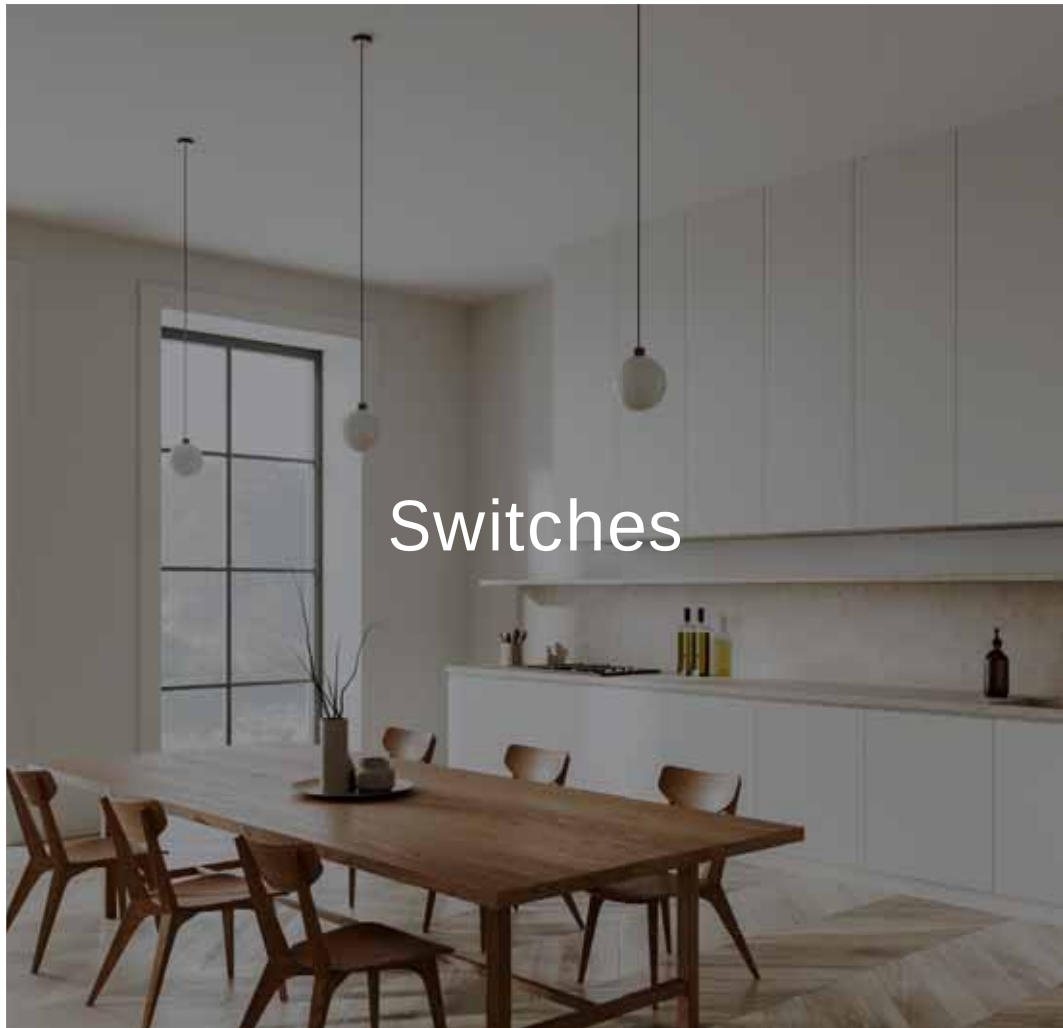

Switches

The range of Curva® switches described in the following pages has been developed to offer a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...

Switches



Plates Switches

CCA010	10AX 1 Gang 1 Way Plate Switch	CCA019	10AX 4 Gang 2 Way Plate Switch
CCA011	10AX 1 Gang 2 Way Plate Switch	CCA025	10AX 1 Gang Intermediate Plate Switch
CCA012	10AX 2 Gang 2 Way Plate Switch	CCA027	10AX 1 Gang 1 Way Retractive 'Bell' Switch
CCA013	10AX 3 Gang 2 Way Plate Switch	CCA105	10AX 6 Gang 2 Way Plate Switch


Standards: BS EN 60669-1
 Back Box Depth (mm): 16 019 105: 25
 Cable Size (mm²): 4 x 1.5 or 2 x 2.5
 Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 9.5 (D) 2 Gang: 146 (W) x 86 (H) x 9.5 (D)

Dimmer Modules

- MD9001** 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
MD9010 1-10V Analogue Dimmer Module (25 x 62mm)
MD9014 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

Dimmer M10 Nut Runner

SP900 Dimmer M10 Nut Runner Tool
 Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate

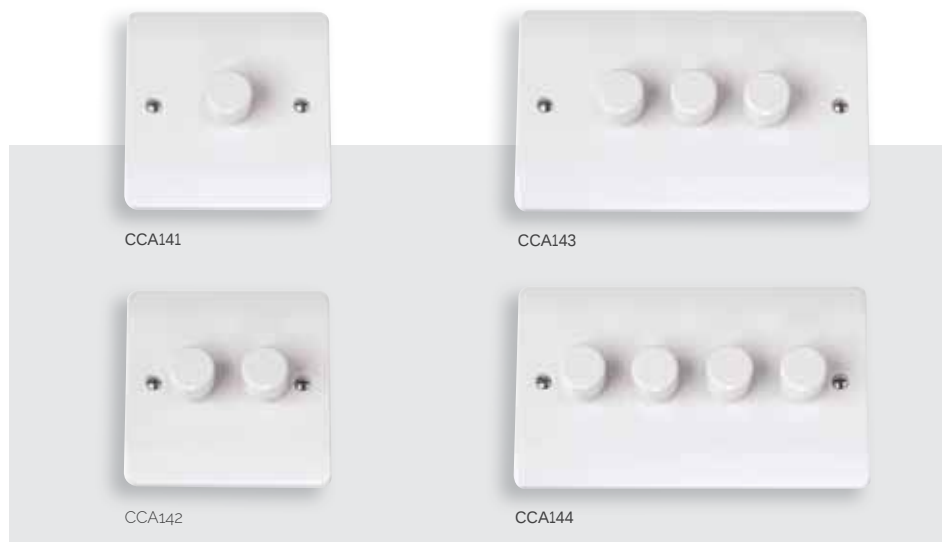

MINIGRID® Interchangeable modules available on page J37.

Dimmer Switches (Leading Edge)

- | | | | |
|---------------|----------------------------------|---------------|----------------------------------|
| CCA141 | 1 Gang 2 Way 250Va Dimmer Switch | CCA143 | 3 Gang 2 Way 250Va Dimmer Switch |
| CCA142 | 2 Gang 2 Way 250Va Dimmer Switch | CCA144 | 4 Gang 2 Way 250Va Dimmer Switch |


We recommend the use of branded halogen lamps with all Curva® leading edge dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed for use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact the Click® Technical support team.

Standards: BS EN 60669-1 & BS EN 55015 BS EN 61000-3-2 & BS EN 61000-3-3 BS EN 61000-4-2 & BS EN 61000-4-3 BS EN 61000-4-4 & BS EN 61000-4-5 BS EN 61000-4-6 & BS EN 61000-4-11
Type: Leading Edge
Back Box Depth (mm): 25 **Cable Size (mm²):** 2 x 1.5
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 9.5 (D) 2 Gang: 146 (W) x 86 (H) x 9.5 (D)



All Curva® 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety. The provision of a large earth terminal on sockets and fused connection units as standard, greatly facilitates wiring and installation.

The Curva® range offers a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...

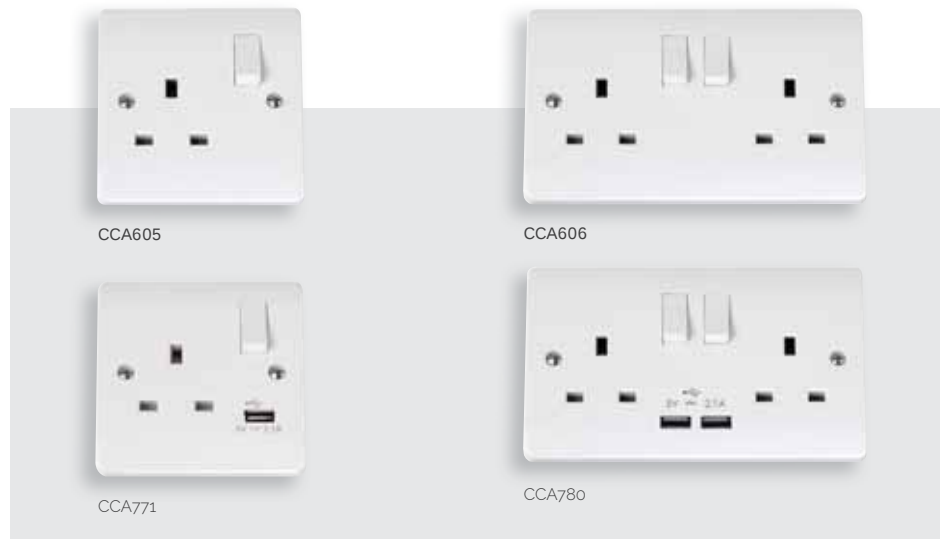

Switched Socket Outlets

CCA605 13A 1 Gang Switched Socket
CCA606 13A 2 Gang Switched Socket

Switched Sockets With USB Outlets


CCA771 13A 1 Gang Switched Socket With 2.1A USB Outlet
CCA780 13A 2 Gang Switched Socket With 2 X USB Outlets (Total Output 2.1A)



Round Pin Socket Outlets

CCA038 5A Round Pin Socket
CCA039 2A Round Pin Socket

Standards: 038 039: BS 546 605 606 771: BS 1363-2: 2016 +A1: 2018 780: BS EN 60950-1 BS 1363-2, BS 5733 BS EN 61000-6-1 BS EN IEC 61204-3 BS EN 61000-6-3 771: BS EN IEC 62368-1 BS EN 62680-1-1
Back Box Depth (mm): 25 771: 35
Cable Size (mm²): 3 x 2.5 or 2 x 4 038: 4 x 1.5 or 3 x 2.5 039: 3 x 1.5
Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 9.5 (D) 2 Gang: 146 (W) x 86 (H) x 9.5 (D)

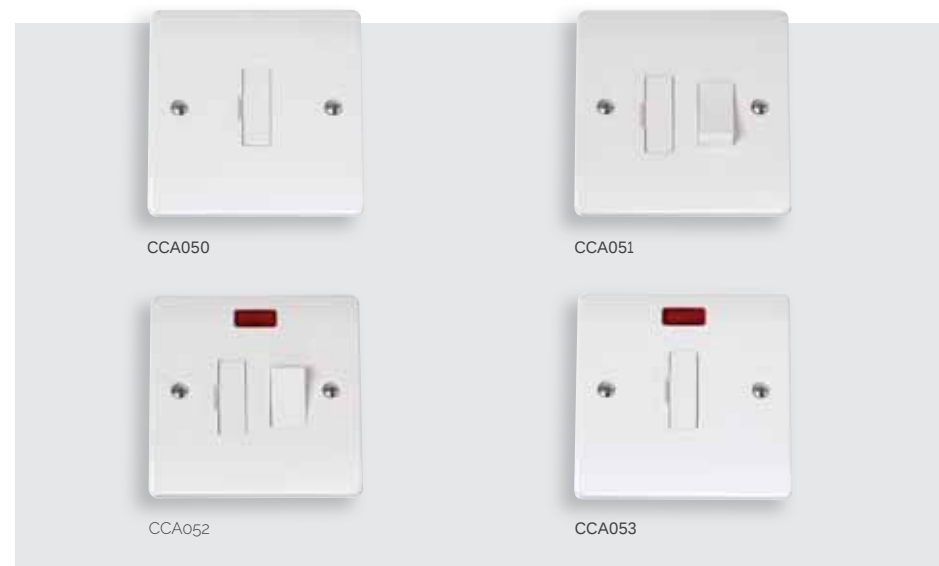

Fused Connection Units With Optional Flex Outlet Through Front

CCA050 13A Fused Connection Unit
CCA051 13A DP Switched Fused Connection Unit
CCA052 13A DP Switched Fused Connection Unit With Neon
CCA053 13A Fused Connection Unit With Neon

Standards: BS 1363-4 BS 1362
Back Box Depth (mm): 25
Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 86 (W) x 86 (H) x 9.5 (D)



Fan Isolation Switch

CCA020 10A 3 Pole Fan Isolation Switch
CCA021 10A 3 Pole Isolation Switch

20A DP Sink / Bath Switch

CCA024 20A DP Sink/Bath Switch With Neon



20A Control Switches With Optional Flex Outlet

CCA022 20A DP Switch
CCA023 20A DP Switch With Neon

CCA040 20A DP 'Water Heater' Switch
CCA042 20A DP 'Water Heater' Switch With Neon

Standards: BS EN 60669-1 **020 021:** BS EN 60669-2-4
Back Box Depth (mm): 25 **020 021:** 16
Cable Size (mm²): 3 x 2.5 **020 021:** 4 x 1.5 or 2 x 2.5
Dimensions (mm): 86 (W) x 86 (H) x 9.5 (D)




45A Switches And Socket Outlets

CCA200 45A 1 Gang DP Switch
CCA201 45A 1 Gang DP Switch With Neon

CCA202 45A 2 Gang DP Switch
CCA203 45A 2 Gang DP Switch With Neon

CCA204 45A 2 Gang DP Switch With 13A DP Switched Socket
CCA205 45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669-1 **204 205:** BS 4177
Back Box Depth (mm): 35
Cable Size (mm²): 1 x 16
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D) **202 203:** 86 (W) x 146 (H) x 9.5 (D)

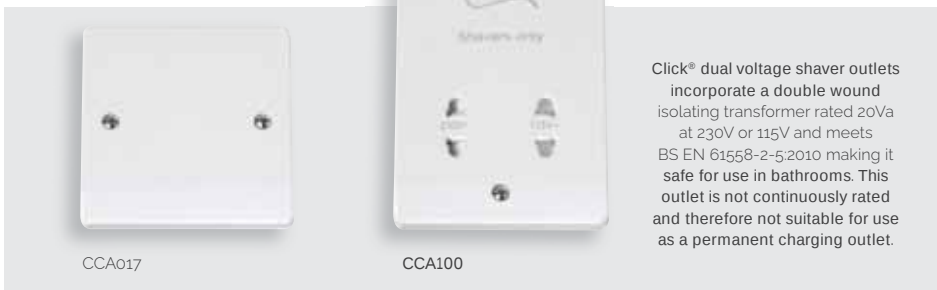

Flex Outlet Plates

CCA017 20A Flex Outlet Plate

Dual Voltage Shaver Socket Outlet

CCA100 115/230V Dual Voltage Shaver Socket




Blank Plates

CCA060 1 Gang Blank Plate

CCA061 2 Gang Blank Plate

Standards: BS 5733 **100:** BS EN IEC 61558-1 BS EN 61558-2-5
Back Box Depth (mm): 16 **061:** 25 **100:** 47
Cable Size (mm²): **100:** 2 x 1.5 or 1 x 2.5 **017:** 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang:** 86 (W) x 86 (H) x 9.5 (D) **2 Gang:** 146 (W) x 86 (H) x 9.5 (D) **100:** 86 (W) x 146 (H) x 9.5 (D)

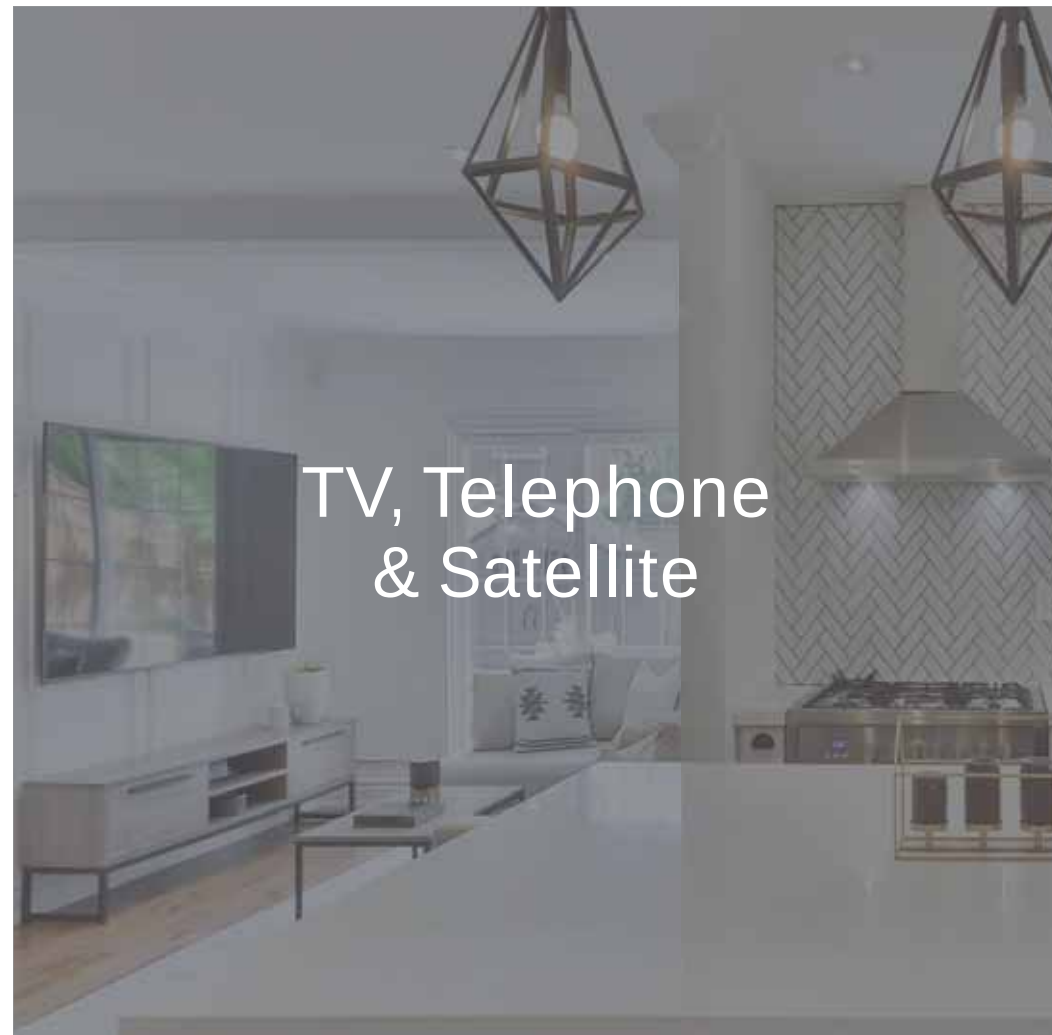

Providing the means to facilitate the connection of modern communications equipment is as important today as it is to provide the electrical power to operate them.



Telephone Outlets

- CCA119 Single Telephone Outlet - Master
- CCA122 Twin Telephone Outlet - Master
- CCA124 Single Telephone Outlet - Secondary
- CCA127 Twin Telephone Outlet - Secondary

Twin outlets are 2 separate sockets and not internally linked together.



RJ11 Telephone Outlet

- CCA115 Single RJ11 (Irish/US) Outlet

Back Box Depth (mm): 16 115: 35
Termination Type: IDC 115: Screw
Dimensions (mm): 86 (W) x 86 (H) x 9.5 (D)




Non-isolated Coaxial Outlets (Unshielded)

- CCA065 Single Coaxial Outlet
- CCA066 Twin Coaxial Outlet

Isolated Coaxial Outlets (Unshielded)

- CCA158 Single Isolated Coaxial Outlet
- CCA159 Twin Isolated Coaxial Outlet

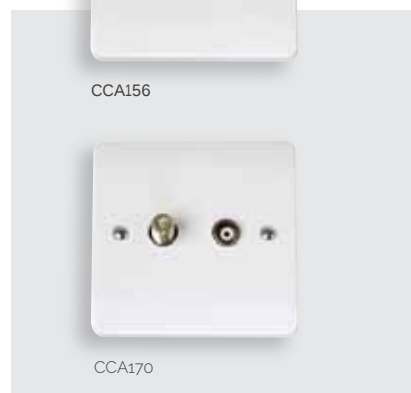

Satellite Outlets (Unshielded)

- CCA156 Non-isolated Single Satellite Outlet
- CCA157 Isolated Satellite & Isolated Coaxial Outlet
- CCA170 Non-isolated Satellite & Non-isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Back Box Depth (mm): 16
Dimensions (mm): 86 (W) x 86 (H) x 9.5 (D)



Moulded Pattress Boxes

- CCA080 1 Gang 16mm Deep Pattress Box With Earth Terminal
- CCA081 1 Gang 25mm Deep Pattress Box
- CCA082 2 Gang 25mm Deep Pattress Box
- CCA083 1 Gang 35mm Deep Pattress Box
- CCA084 2 Gang 35mm Deep Pattress Box
- CCA085 1 Gang 47mm Deep Pattress Box With Earth Terminal
- CCA086 2 Gang 47mm Deep Pattress Box Fitted With Cable Restraint & Earth Terminal

Standards: BS 4662
Dimensions (mm): 080: 87 (W) x 87 (H) x 20 (D) 081: 87 (W) x 87 (H) x 30 (D) 082: 147 (W) x 87 (H) x 30 (D)
 083: 87 (W) x 87 (H) x 40 (D) 084: 147 (W) x 87 (H) x 40 (D) 085: 87 (W) x 87 (H) x 52 (D) 086: 147 (W) x 87 (H) x 52 (D)



Galvanised Steel Back Boxes

- WA092 1 Gang 16mm Deep Galvanised Steel K.O. Box
- WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box
- WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box
- WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box
- WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box
- WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box
- WA098 2 Gang 47mm Deep Galvanised Steel K.O. Box
- WA099 1 + 1 35mm Deep Dual Accessory Box
- WA102 1 + 2 35mm Deep Dual Accessory Box

FlameGuard® Dry Lining Boxes

- WA4135 1 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4235 2 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4147 1 Gang 47mm Deep FlameGuard® Dry Lining Box
- WA4247 2 Gang 47mm Deep FlameGuard® Dry Lining Box

Dry Lining Boxes (Sprung Fixing Lugs)

- WA087SF 1 Gang 35mm Deep Dry Lining Box
- WA088SF 2 Gang 35mm Deep Dry Lining Box
- WA106SF 1 Gang 47mm Deep Dry Lining Box
- WA107SF 2 Gang 47mm Deep Dry Lining Box

Dry Lining Boxes

- WA087P 1 Gang 35mm Deep Dry Lining Box
- WA087PBK 1 Gang 35mm Deep Dry Lining Box
- WA088P 2 Gang 35mm Deep Dry Lining Box
- WA088PBK 2 Gang 35mm Deep Dry Lining Box
- WA106P 1 Gang 47mm Deep Dry Lining Box
- WA106PBK 1 Gang 47mm Deep Dry Lining Box
- WA107P 2 Gang 47mm Deep Dry Lining Box
- WA107PBK 2 Gang 47mm Deep Dry Lining Box
- WA108P Round Ceiling 34mm Deep Dry Lining Box

Ezylink' Dry Lining Boxes

- GA100 'Ezylink' Dry Lining Box Connector
 - GA100BK 'Ezylink' Dry Lining Box Connector
- Suitable for use with WA087P, WA088P, WA106P & WA107P.

essentials™

For the complete range of back boxes see Essentials™ page M4.

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards. Fire: BS EN 1364-1 Acoustic: BS EN ISO 140-2. Complies with Building Regulations Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.

L18

essentials™

Essential Products for any Installation




essentials™

The Essentials™ product group is just that – ESSENTIAL

In addition to the long established Click® brand of moulded electrical accessory products we have developed and introduced additional accessory ranges, namely Polar™, Curva® & Mode®, as well as decorative metal ranges.

Whilst each of these ranges are unique in their own right, the plate accessory is only part of the complete wiring solution. Hence our range of Essentials™ illustrated herein.

The Essentials™ group of products comprises those items that you will find in a wide variety of installations. Products such as junction boxes, flush mounted switch and socket boxes.

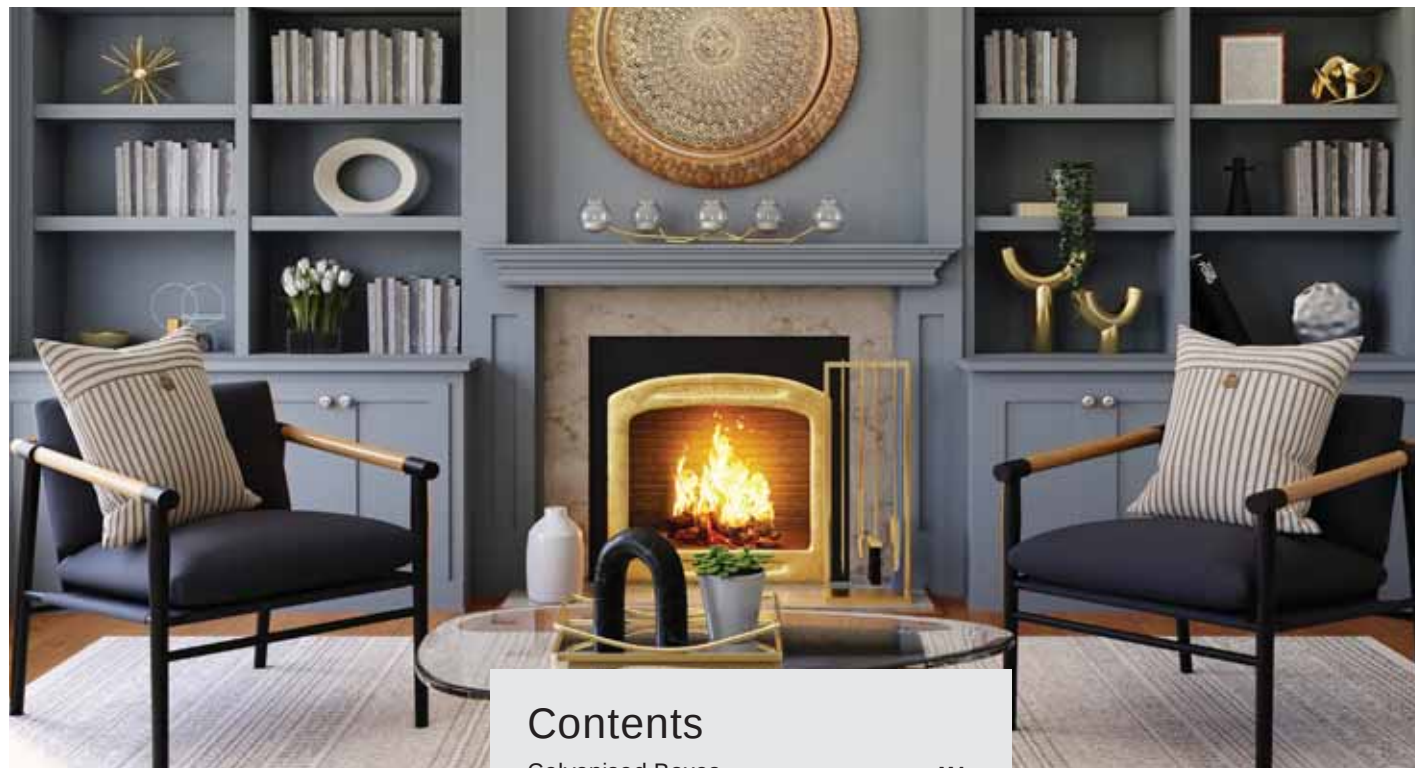

Contents

Galvanised Boxes	M4
Dry Lining Boxes	M7
Longer Fixing Screws	M9
IP66 Weatherproof Accessories	M10
Metal Clad Accessories	M19
Red Accessories	M34
Floor Accessories	M36
Ceiling Accessories	M37
Adaptors & Extension Sockets	M41
Junction & Link Boxes	M42
Connection & Flex Outlet Plates	M44
Fused Main Switch	M45
Rewirable Plug Tops	M46
Plug Top Fuses	M47
Equipotential Bonding Busbar	M48



M4



WA092



WA093

WA094

WA095

WA096

WA097

WA098

Galvanised Steel Back Boxes

WA092 1 Gang 16mm Deep Galvanised Steel K.O. Box

WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box

WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box

WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box

WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box

WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box

WA098 2 Gang 47mm Deep Galvanised Steel K.O. Box

WA191 1 Gang Panel Mounting Gasket - Metal

WA192 2 Gang Panel Mounting Gasket - Metal

Standards: BS 4662

Dimensions (mm): **092:** 70 (W) x 70 (H) x 16 (D) **093:** 70 (W) x 70 (H) x 25 (D) **094:** 135 (W) x 70 (H) x 25 (D)

095: 70 (W) x 70 (H) x 35 (D) **096:** 135 (W) x 70 (H) x 35 (D) **097:** 70 (W) x 70 (H) x 47 (D) **098:** 135 (W) x 70 (H) x 47 (D)

191: 86 (W) x 86 (H) x 6.5 (D) **192:** 146 (W) x 86 (H) x 6.5 (D)

M5



WA671

WA672

WA571

WA572



WA099 | WA370

WA102 | WA375

Galvanised Steel Back Boxes

WA099 1 + 1 35mm Deep Dual Accessory Box

WA102 1 + 2 35mm Deep Dual Accessory Box

WA370 1 + 1 35mm Deep Dual Accessory Box (Deco® Range Only)

WA375 1 + 2 35mm Deep Dual Accessory Box (Deco® Range Only)

WA671 1 Gang 25mm Deep Architrave Box With 60.3mm Hole Centres

WA672 2 Gang 25mm Deep Architrave Box With 120.6mm Hole Centres

WA571 1 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco® Range Only)

WA572 2 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco® Range Only)

Standards: BS 4662 (excluding 571 572)

Cutout sizes (mm): **099:** 158 x 74 **102:** 220 x 74 **370:** 168 x 74 **375:** 228 x 74

571: 87 x 34 x 25 **572:** 148 x 34 x 25 **671:** 73 x 30 x 25 **672:** 135 x 30 x 25

Dimensions (mm): **099:** 158 (W) x 74 (H) x 35 (D) **102:** 220 (W) x 74 (H) x 35 (D) **370:** 168 (W) x 74 (H) x 35 (D) **375:** 228 (W) x 74 (H) x 35 (D)

571: 34 (W) x 87 (H) x 25 (D) **572:** 34 (W) x 148 (H) x 25 (D) **671:** 30 (W) x 73 (H) x 25 (D) **672:** 30 (W) x 135 (H) x 25 (D)



Galvanised Steel Back Boxes

- WA512 2 Tier 47mm Deep K.O. Box
WA518 3 Tier 47mm Deep K.O. Box

GridPro® Flush Mounted Back Boxes

- WA20518 18 Gang GridPro® Flush Mounted Back Box - 56mm Deep
WA20524 24 Gang GridPro® Flush Mounted Back Box - 56mm Deep

Galvanised steel back boxes supplied for flush mounting of the large MiniGrid® plates. Mounting Yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.

Standards: BS 4662
Knockouts (mm): **512:** 7 x Ø20, 3 x Ø25 **518:** 8 x Ø20, 4 x Ø25 **20518 20524:** 10 x Ø20, 6 x Ø25
Dimensions (mm): **512:** 137 (W) x 137 (H) x 47 (D) **518:** 137 (W) x 197 (H) x 47 (D) **20518:** 185 (W) x 197 (H) x 56 (D) **20524:** 185 (W) x 255 (H) x 56 (D)



Dry Lining Boxes

- WA087P 1 Gang 35mm Deep Dry Lining Box
WA087PBK 1 Gang 35mm Deep Dry Lining Box
WA088P 2 Gang 35mm Deep Dry Lining Box
WA088PBK 2 Gang 35mm Deep Dry Lining Box
WA106P 1 Gang 47mm Deep Dry Lining Box
WA106PBK 1 Gang 47mm Deep Dry Lining Box
WA107P 2 Gang 47mm Deep Dry Lining Box
WA107PBK 2 Gang 47mm Deep Dry Lining Box
WA108P Round Ceiling 34mm Deep Dry Lining Box

Dry Lining Boxes (Sprung Fixing Lugs)

- WA087SF 1 Gang 35mm Deep Dry Lining Box
WA088SF 2 Gang 35mm Deep Dry Lining Box
WA106SF 1 Gang 47mm Deep Dry Lining Box
WA107SF 2 Gang 47mm Deep Dry Lining Box

'Ezylink' Dry Lining Box Connector

- GA100 'Ezylink' Dry Lining Box Connector
GA100BK 'Ezylink' Dry Lining Box Connector

Suitable for use with WA087P, WA088P, WA106P & WA107P.
Simply connects any combination of Click® dry lining boxes to provide the neatest installation of cavity boxes possible.

Standards: BS 5733 BS 4662 (where applicable)
Cutout sizes (mm): **1 Gang:** 75 (W) x 75 (H) **2 Gang:** 135 (W) x 75 (H) **WA108P:** 65 (Dia)
Dimensions (mm): **1 Gang:** 83 (W) x 83 (H) x 35 (D) **2 Gang:** 143 (W) x 83 (H) x 35 (D) **WA108P:** 78 (Dia) x 35
GA100: 34 (W) x 17 (D) x 84 (H)



FlameGuard® Dry Lining Boxes


WA4135	1 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4147	1 Gang 47mm Deep FlameGuard® Dry Lining Box
WA4235	2 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4247	2 Gang 47mm Deep FlameGuard® Dry Lining Box



The intumescent layer within the box expands as the temperature increases filling the metal box cavity.

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards. Fire: BS EN 1364-1 Acoustic: BS EN ISO 140-2. Complies with Building Regulations Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.

Standards: BS 4662 BS EN 1364-1 BS EN ISO 10140-2
Cutout sizes (mm): **1 Gang:** 73 (W) x 73 (H) **2 Gang:** 132 (W) x 73 (H)
Dimensions (mm): **1 Gang:** 82 (W) x 82 (H) x 35 (D) **2 Gang:** 142 (W) x 82 (H) x 47 (D)

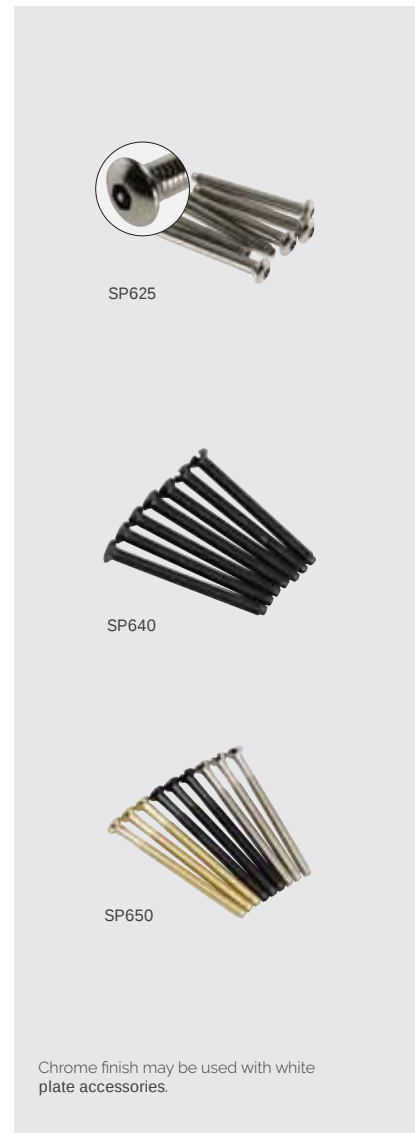

Security Screws

SP622	Define® M3.5 Security Screw 22mm Long (Bag 100)
SP623	Standard M3.5 Security Screw 50mm Long (Bag 100)
SP625	Standard M3.5 Security Screw 25mm Long (Bag 100)

Require 2mm security allen key/driver.

Longer Fixing Screws

SP640	Define® M3.5 Dia. 40mm Long Screws (Bag 100)
-------	--

Screws available in Black Nickel (BN) and Chrome (CH).

SP650	Standard M3.5 Dia. 50mm Long Screws (Bag 100)
-------	---

Screws available in Brass (BR), Chrome (CH), Black Nickel (BN) & Matt Black (MB). Suffix code with preferred finish.

SP675	Standard M3.5 Dia. 75mm Long Screws (Bag 100)
-------	---

Screws available in Brass (BR), Chrome (CH), Black Nickel (BN) & Matt Black (MB). Suffix code with preferred finish.

Chrome finish may be used with white plate accessories.

Standards: ISO 2010

Understanding the code:

Longer Fixing Screws available in **BR** Brass, **CH** Chrome, **MB** Matt Black and **BN** Black Nickel finishes. Suffix code with preferred finish.



20 Year Warranty

All Aquip66® products are covered by our 20 year warranty against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.

IP66 Weatherproof Sockets & Switches

Aquip⁶⁶

A comprehensive selection of weatherproof electrical accessory products are featured in the following pages. The polycarbonate construction makes the Aquip66® range a durable and long lasting heavy duty range of products.

All switch products are of modular construction allowing the installer total freedom in designing customised switching solutions according to on-site requirements.

All socket outlets are tested and approved to BS1363. Unfurnished enclosures are available for use in conjunction with our extensive range of MiniGrid® & GridPro® modules.



OA411AGU | OA401AGU

OA412AGU | OA402AGU

**MINIGRID®**

10A Switch Modules
MiniGrid® switch modules are 10A rated so and feature a simply single screw installation.
Single Screw Feature
Easily and quickly mount modules onto unfurnished yokes by means of a simple single screw fixing.

IP66 Weatherproof Switches

OA411AGU 1 Gang 10AX 2 Way IP66 MiniGrid® Weatherproof Switch

Fitted with a 2-way MiniGrid® module

OA412AGU 2 Gang 10AX 2 Way IP66 MiniGrid® Weatherproof Switch

Fitted with 2 x 2-way MiniGrid® modules

IP66 Weatherproof Unfurnished Switch Enclosures - MiniGrid®

OA401AGU 1 Gang IP66 Unfurnished Weathproof Switch With MiniGrid® Yokes

Modules supplied separately

OA402AGU 2 Gang IP66 Unfurnished Weathproof Switch With MiniGrid® Yokes

Modules supplied separately

Standards: **401 402:** BS 5733 BS EN 60529 **411 412:** BS EN 60669-1 BS EN 60529
Cable Size (mm²): **411 412:** 4 x 1.5 or 2 x 2.5 Knockouts (mm): 20mm
Dimensions (mm): 91 (W) x 106 (H) x 72.5 (D)



OA20021AG | OA20401AG

OA20022AG | OA20402AG

**GRIDPRO®**

20A Switch Modules
GridPro® switch modules are 20A rated so they are ideal for both domestic and commercial applications.
Screw Attachment Feature
Allows easy removal and assembly of the module onto a grid Yoke.

IP66 Weatherproof Switches

OA20021AG 1 Gang 20AX 2 Way IP66 GridPro® Weatherproof Switch

Fitted with a 2-way MiniGrid® module

OA20022AG 2 Gang 20AX 2 Way IP66 GridPro® Weatherproof Switch

Fitted with 2 x 2-way MiniGrid® modules

IP66 Weatherproof Unfurnished Switch Enclosures - GridPro®

OA20401AG 1 Gang IP66 Unfurnished Weathproof Switch With GridPro® Yokes

Modules supplied separately

OA20402AG 2 Gang IP66 Unfurnished Weathproof Switch With GridPro® Yokes

Modules supplied separately

Standards: **20401 20402:** BS 5733 BS EN 60529 **20021 20022:** BS EN 60669-1 BS EN 60529
Cable Size (mm²): **20021 20022:** 3 x 2.5 or 1 x 4
Dimensions (mm): 91 (W) x 106 (H) x 72.5 (D)

M14



IP66 Weatherproof Switched Socket Outlets

- OA035AG 1 Gang 13A DP IP66 Weatherproof Switched Socket
Fitted with a 1 gang Mode® anthracite grey switched socket
- OA036AG 2 Gang 13A DP IP66 Weatherproof Switched Socket (Twin Earth)
Fitted with a 2 gang Mode® anthracite grey switched socket

Standards: BS 1363-2 BS EN 60529
Knockouts (mm): 20mm (Socket) Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang:** 87 (W) x 158 (H) x 90 (D) **2 Gang:** 158 (W) x 158 (H) x 90 (D)

M15



IP66 Weatherproof Unfurnished Wiring Accessory Enclosures

- OA501AG 1 Gang IP66 Unfurnished Weatherproof Wiring
Accessory Enclosure
Accepts standard 1 gang wiring accessories
(supplied separately)
- OA502AG 2 Gang IP66 Unfurnished Weatherproof Wiring
Accessory Enclosure
Accepts standard 2 gang wiring accessories
(supplied separately)

Recess Kits

- OA2RKAG Recess Mounting Kit For 2 Gang IP66 Weatherproof
Unfurnished Unit
Suitable for use with 2 gang weatherproof wiring
accessory enclosures

Standards: BS 5733 BS EN 60529
Knockouts (mm): 20mm (Socket)
Dimensions (mm): **1 Gang:** 87 (W) x 158 (H) x 90 (D) **2 Gang:** 158 (W) x 158 (H) x 90 (D)





IP66 Weatherproof Switched Socket Outlets

OARCDP036 2 Gang 13A IP66 Weatherproof Passive RCD Switched Socket (Twin Earth)
Fitted with a 2 gang Mode® white RCD switched socket



IP66 Weatherproof Switched Socket Outlets

OA835T 1 Gang 13A DP IP66 Weatherproof Switched Socket With Neon - Semi-Transparent Cover
Fitted with a 1 gang Mode® anthracite grey switched socket with neon

OA840T 2 Gang 13A DP IP66 Weatherproof Switched Socket Outboard Rockers With Neons - Semi-Transparent Cover
Fitted with a 2 gang Mode® anthracite grey switched socket outboard rockers with neons

Standards: BS 1363-2 BS EN 60529 **036:** BS 1363-2 IEC 62640 BS 7288 BS EN 60529 IEC 61000-6-1 & IEC 61000-6-3
Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang:** 87 (W) x 158 (H) x 90 (D) **2 Gang:** 158 (W) x 158 (H) x 90 (D)



IP66 Weatherproof Fused Connection Units - with Neon

OA652T 13A DP IP66 Weatherproof Fused Connection Unit - Semi-Transparent Cover
Fitted with a 1 gang Mode® anthracite grey fused switched Connection unit with neon

OA652AG 13A DP IP66 Weatherproof Fused Connection Unit
Fitted with a 1 gang Mode® anthracite grey fused switched Connection unit with neon

IP66 Weatherproof Fused Connection Units - with LED

OA2652T 13A DP IP66 Weatherproof Fused Connection Unit - Semi-Transparent Cover
Fitted with a 1 gang Mode® anthracite grey fused switched Connection unit with LED

OA2652AG 13A DP IP66 Weatherproof Fused Connection Unit
Fitted with a 1 gang Mode® anthracite grey fused switched Connection unit with LED

Standards: BS 1363-4 BS 1362 BS EN 60529
Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 87 (W) x 158 (H) x 90 (D)

Features & Benefits

Aquip⁶⁶

Robust Construction

- Polycarbonate construction
- High impact resistance
- UV protected against fading
- Ergonomic Design
- Smooth operation of switches
- Neutral modern design suitable for most locations
- Flexible rubber base allows for mounting on most types of uneven surfaces

Multiple Gland Entry Position

- Multiple Knockouts (20mm) for entry from all angles

Weatherproof - IP66

- Offers high level of protection against ingress of water jets and dust

Multiple Switch Configurations

- Designed to fit switched MiniGrid® or GridPro® Modules (depending on which yoke purchased).



MINIGRID®

10A Switch Modules

MiniGrid® switch modules are 10A rated so and feature a simply single screw installation.

Single Screw Feature

Easily and quickly mount modules onto unfurnished yokes by means of a simple single screw fixing.



GRIDPRO®

20A Switch Modules

GridPro® switch modules are 20A rated so they are ideal for both domestic and commercial applications.

Screw Attachment Feature

Allows easy removal and assembly of the module onto a grid Yoke.



20 Year Warranty

All Metal Clad products are covered by our 20 year warranty against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.

Metal Clad Accessories



The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates.

A comprehensive selection of Metal Clad electrical accessory products are featured in the following pages. Electrophoretically coated plates and back boxes provide a durable and long lasting heavy duty finish to this attractive range of products.

All switch products are of modular construction allowing the installer total freedom in designing customised switching solutions according to on-site needs.

All socket outlets and spurs are tested and approved to BS1363.

Unfurnished plates and mounting boxes are available for use in conjunction with our range of MiniGrid® and New Media® modules.

M20




Plates Switches - MiniGrid® c / w 40mm Mounting Box

CL010	10AX 1 Gang 1 Way Plate Switch
CL011	10AX 1 Gang 2 Way Plate Switch
CL011B	10AX 1 Gang 2 Way Plate Switch (No Knockouts)
CL012	10AX 2 Gang 2 Way Plate Switch
CL012B	10AX 2 Gang 2 Way Plate Switch (No Knockouts)
CL013	10AX 3 Gang 2 Way Plate Switch
CL019	10AX 4 Gang 2 Way Plate Switch
CL105	10AX 6 Gang 2 Way Plate Switch
CL025	10AX 1 Gang Intermediate Switch

Interchangeable with WH coloured MiniGrid® modules

Standards: BS EN 60669-1
Back Box Depth (mm): 40 Cable Size (mm²): 4 x 1.5 or 2 x 2.5 Knockouts (mm): 20mm
Dimensions (mm): **1 Gang:** 80 (W) x 80 (H) x 42 (D) **2 Gang:** 140 (W) x 80 (H) x 42 (D)

M21

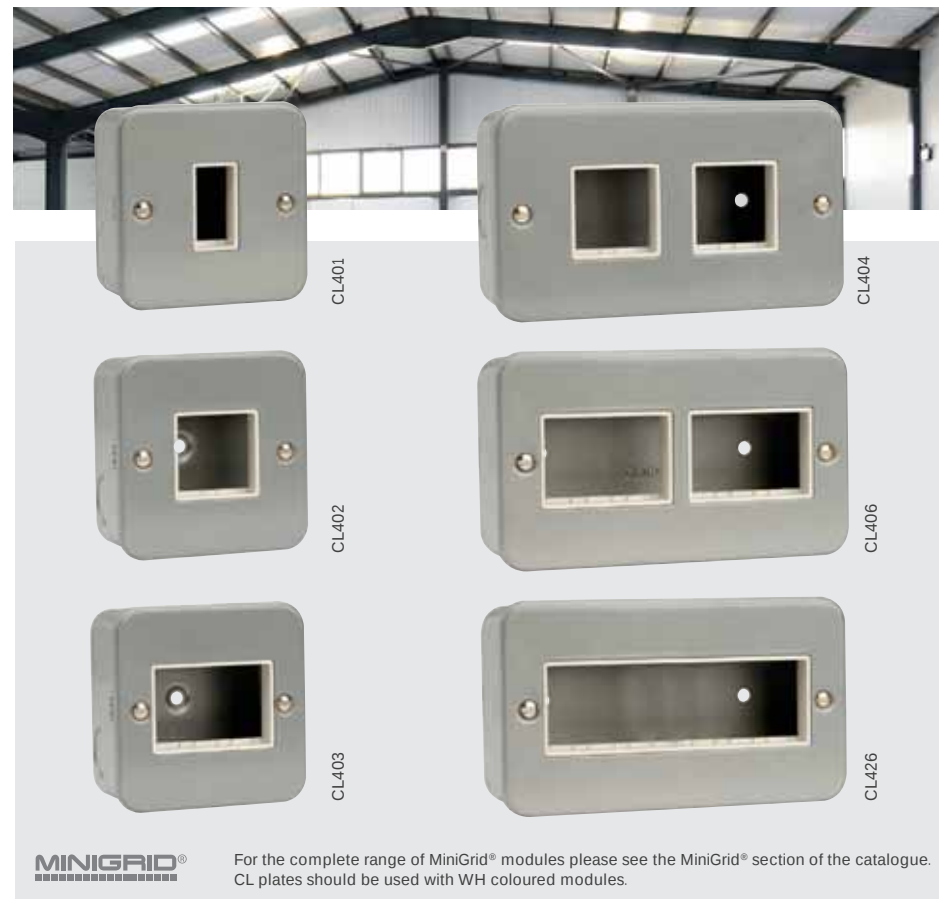

Unfurnished Plates - MiniGrid® c / w 40mm Mounting Box

CL401	1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
CL402	1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
CL403	1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
CL404	2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
CL406	2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
CL426	2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures

Standards: BS 5733 Back Box Depth (mm): 40 Knockouts (mm): 20mm
Dimensions (mm): **1 Gang:** 80 (W) x 80 (H) x 42 (D) **2 Gang:** 140 (W) x 80 (H) x 42 (D)



2 Tier Unfurnished Plates - MiniGrid® c / w 40mm Mounting Box

CL512 2 Tier MiniGrid® Unfurnished Plate - 12 Apertures - Metal Clad

2 x GR100 Yokes required, see page J7. When using dimmer mounting kit, 50mm deep back box required, see page M32

3 Tier Unfurnished Plates - MiniGrid® c / w 40mm Mounting Box

CL518 3 Tier MiniGrid® Unfurnished Plate - 18 Apertures - Metal Clad

3 x GR100 Yokes required, see page J7. When using dimmer mounting kit, 50mm deep back box required, see page M32

Standards: BS 5733 Back Box Depth (mm): 40 Knockouts (mm): 20mm
Dimensions (mm): **1 Gang:** 80 (W) x 80 (H) x 42 (D) **2 Gang:** 140 (W) x 80 (H) x 42 (D)
512: 148 (W) x 148 (H) x 42 (D) **518:** 148 (W) x 207 (H) x 42 (D)



Switched Safety Shutter Socket Outlets c / w 40mm Mounting Box

CL1035 13A 1 Gang DP Switched Socket

CL1035B 13A 1 Gang DP Switched Socket (No Knockouts)

CL1835 13A 1 Gang DP Switched Socket With Neon

CL1835B 13A 1 Gang DP Switched Socket With Neon (No Knockouts)

CL1036 13A 2 Gang DP Switched Socket (Twin Earth)

CL1036B 13A 2 Gang DP Clean Earth Switched Socket (Twin Earth) (No Knockouts)

CL1840 13A 2 Gang DP Switched Socket With Outboard Rockers & Neons (Twin Earth)

CL1840B 13A 2 Gang DP Switched Socket With Outboard Rockers & Neons (Twin Earth) (No Knockouts)


Safety Shuttered Sockets listed above are only available for sale in the Republic of Ireland.

Standards: BS 1363-2
Back Box Depth (mm): 40 Cable Size (mm²): 3 x 2.5 or 2 x 4 Knockouts (mm): 20mm
Dimensions (mm): **1 Gang:** 80 (W) x 80 (H) x 42 (D) **2 Gang:** 140 (W) x 80 (H) x 42 (D)



Switched Socket Outlets c / w 40mm Mounting Box

- CL035 13A 1 Gang DP Switched Socket
- CL035B 13A 1 Gang DP Switched Socket (No Knockouts)
- CL036 13A 2 Gang DP Switched Socket (Twin Earth)
- CL036B 13A 2 Gang DP Switched Socket (Twin Earth) (No Knockouts)
- CL835 13A 1 Gang Switched Socket With Neon Rocker
- CL840 13A 2 Gang Switched Socket With Outboard Neon Rockers (Twin Earth)

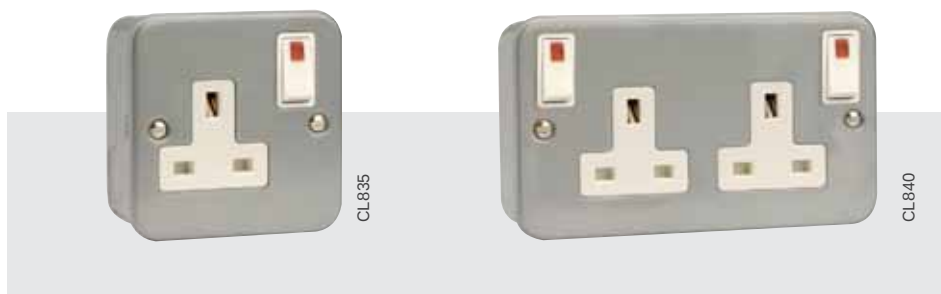

Switched Socket Outlets c / w 40mm Mounting Box

- CL1836 13A 2 Gang DP Switched Socket With Outboard Rockers (Twin Earth)
- CL1836B 13A 2 Gang DP Switched Socket With Outboard Rockers (Twin Earth) (No Knockouts)

Standards: BS 1363-2
Back Box Depth (mm): 40 Cable Size (mm²): 3 x 2.5 or 2 x 4 Knockouts (mm): 20mm
Dimensions (mm): **1 Gang:** 80 (W) x 80 (H) x 42 (D) **2 Gang:** 140 (W) x 80 (H) x 42 (D)



Switched Sockets With USB Outlets c / w 40mm Mounting Box

- CL771U 13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
- CL780 13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)



Switched Sockets With USB Outlets c / w 40mm Mounting Box

- CL785 13A 1 Gang Switched Socket Outlet With Type A & C USB (4A) Outlets (Twin Earth)
- CL786 13A 2 Gang Switched Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)

Standards: BS 1363-2 BS 1363-2: 2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1
Back Box Depth (mm): 40 Cable Size (mm²): 3 x 2.5 or 2 x 4 Knockouts (mm): 20mm
Dimensions (mm): **1 Gang:** 80 (W) x 80 (H) x 42 (D) **2 Gang:** 140 (W) x 80 (H) x 42 (D)



Unswitched Socket Outlet c / w 40mm Mounting Box

CL030 13A 1 Gang Unswitched Socket

CL032 13A 2 Gang Unswitched Socket (Twin Earth)



Lockable Switches c / w 40mm Mounting Box

CL660 20A Double Pole Key Lockable Switch

CL660B 20A Double Pole Key Lockable Switch (No Knockouts)

Lockable Socket Outlets c / w 40mm Mounting Box

CL675 13A 1 Gang DP Key Lockable Socket With Neon

CL675B 13A 1 Gang DP Key Lockable Socket With Neon (No Knockouts)

Standards: BS 1363-2 **660 660B 675 675B**: BS EN 60669-1
Back Box Depth (mm): 40 Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang**: 80 (W) x 80 (H) x 42 (D) **2 Gang**: 140 (W) x 80 (H) x 42 (D)



Fused Connection Units With Optional Flex Outlet c / w 40mm Mounting Box

CL049 3A Fused Connection Unit

CL050 13A Fused Connection Unit

CL051 13A DP Switched Fused Connection Unit

CL051B 13A DP Switched Fused Connection Unit (No Knockouts)



Fused Connection Units With Optional Flex Outlet c / w 40mm Mounting Box

CL052 13A DP Switched Fused Connection Unit With Neon

CL053 13A Fused Connection Unit With Neon

CL1252 13A DP Key Operation Fused Connection Unit With Neon & Lockable Fuse Drawer

Standards: BS EN 60669-1 **Fused Connection Units**: BS 1363-4 BS 1362
Back Box Depth (mm): 40 **45A**: 50
Cable Size (mm²): 3 x 2.5 or 2 x 4 **049**: 4 x 2.5 or 2 x 4 **45A**: 1 x 16 Knockouts (mm): 20mm
Dimensions (mm): **1 Gang**: 80 (W) x 80 (H) x 42 (D) **2 Gang**: 140 (W) x 80 (H) x 42 (D) **200 201**: 80 (W) x 80 (H) x 52 (D)
202 203: 80 (W) x 140 (H) x 52 (D)

M28



CL200



CL201

45A Switches c / w 50mm Mounting Box

CL200 45A 1 Gang DP Switch

CL201 45A 1 Gang DP Switch With Neon



CL202



CL203

45A Switches c / w 50mm Mounting Box

CL202 45A 2 Gang DP Switch

CL203 45A 2 Gang DP Switch With Neon

Standards: BS EN 60669-1 BS 1363-4 BS 1362
Back Box Depth (mm): 50 Cable Size (mm²): 1 x 16 Knockouts (mm): 20mm
Dimensions (mm): **200 201:** 80 (W) x 80 (H) x 52 (D) **202 203:** 80 (W) x 140 (H) x 52 (D)

M29



CLRCDP036

RCD Socket Outlets c / w 40mm Mounting Box

CLRCDP036 13A 2 Gang Passive RCD Switched Socket Outlet (Twin Earth)



CL022



CL023

20A Control Switches with Optional Flex Outlet c / w 40mm Mounting Box

CL022 20A DP Switch

CL023 20A DP Switch With Neon

Standards: BS EN 60669-1
RCD: BS 1363-2 IEC 62640 BS 7288 SASO 2203 IEC 61000-6-1 & IEC 61000-6-3
Back Box Depth (mm): 40 Cable Size (mm²): 3 x 2.5 or 2 x 4 Knockouts (mm): 20mm
Dimensions (mm): **1 Gang:** 80 (W) x 80 (H) x 42 (D) **2 Gang:** 140 (W) x 80 (H) x 42 (D)

M30




Blank Plates

CL060	1 Gang Blank Plate
CL061	2 Gang Blank Plate

Standards: BS 5733
 Dimensions (mm): **060:** 80 (W) x 80 (H) x 4 (D) **061:** 140 (W) x 80 (H) x 4 (D)

M31

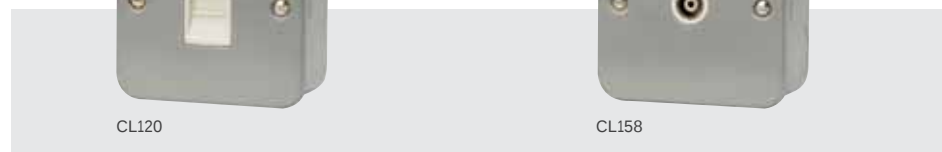

Telephone & Coaxial Socket Outlets c / w 40mm Mounting Box

CL120	Single Telephone Outlet - Master
CL158	Single Isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.



Unfurnished Plates - New Media™ c / w 40mm Mounting Box

CL311	1 Gang New Media™ Unfurnished Plate - 2 Apertures
CL312	2 Gang New Media™ Unfurnished Plate - 4 Apertures

Standards: BS 5733
 Back Box Depth (mm): 40
 Knockouts (mm): 20mm
 Dimensions (mm): **1 Gang:** 80 (W) x 80 (H) x 42 (D) **2 Gang:** 140 (W) x 80 (H) x 42 (D)

M32



Mounting Boxes

- CL083 1 Gang 40mm Deep Mounting Box
- CL084 2 Gang 40mm Deep Mounting Box
- CL085 1 Gang 40mm Deep Mounting Box (No Knockouts)
- CL086 2 Gang 40mm Deep Mounting Box (No Knockouts)
- CL087 1 Gang 50mm Deep Mounting Box
- CL088 2 Gang 50mm Deep Mounting Box
- CL089 2 Gang 50mm Deep 2 Tier Mounting Box
- CL089B 2 Gang 50mm Deep 2 Tier Mounting Box (No Knockouts)
- CL090 2 Gang 50mm Deep 3 Tier Mounting Box
- CL090B 2 Gang 50mm Deep 3 Tier Mounting Box (No Knockouts)

Standards: BS 4662 **089 089B 090 090B**: BS 5733
 Dimensions (mm): **083 085**: 76 (W) x 76 (H) x 40 (D) **084 086**: 136 (W) x 76 (H) x 40 (D) **087**: 76 (W) x 76 (H) x 50 (D) **088**: 136 (W) x 76 (H) x 50 (D)
089: 137 (W) x 136 (H) x 50 (D) **090**: 137 (W) x 196 (H) x 50 (D)



Red Accessories & Floor Accessories



The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates.

A selected range of special purpose
moulded & Stainless Steel accessories.



WA037RD



WA179



WA180

Socket Outlets

- WA037RD 13A 2 Gang DP Switched Socket Clean Earth
WA179 13A 2 Gang Unswitched Socket (Twin Earth)
WA180 13A 2 Gang DP Switched Socket (Twin Earth)



WA081RD



WA185

Moulded Surface Pattress Boxes - Urea

- WA081RD 1 Gang 25mm Deep Surface Pattress Box
WA185 2 Gang 25mm Deep Surface Pattress Box

Standards: BS 4662 **13A**: BS 1363-2
Back Box Depth (mm): **13A**: 25 Cable Size (mm²): **13A**: 3 x 2.5 or 2 x 4
Dimensions (mm): **081**: 87 (W) x 87 (W) x 30 (D) **2 Gang**: 146 (W) x 86 (H) x 11 (D) **185**: 147 (W) x 87 (W) x 30 (D)



WA049RD

WA056RD

Fused Connection Units


- WA049RD 3A Fused Connection Unit
WA056RD 3A DP Switched Fused Connection Unit



WA401RD



WA403RD



WA402RD

MINIGRID®

For the complete range of compatible modules, see the dedicated MiniGrid® section, page J18.

Unfurnished Plates - MiniGrid®

- WA401RD 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
WA402RD 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
WA403RD 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures

Standards: BS 5733 **049 056**: BS 1363-4 BS 1362
Back Box Depth (mm): Dependent On Module Fitted **049 056**: 25 Cable Size (mm²): **049 056**: 4 x 2.5 or 2 x 4
Dimensions (mm): 86 (W) x 86 (H) x 11 (D)

M36



13A Floor socket outlets BS Kitemark Approved

Floor Socket Outlets

FS030SS 13A 1 Gang Floor Socket
FS032SS 13A 2 Gang Floor Socket



Unfurnished Floor Plates - For Use With New Media™ Modules

FS311SS 1 Gang New Media™ Unfurnished Floor Plate - 2 Apertures
FS312SS 2 Gang New Media™ Unfurnished Floor Plate - 4 Apertures

Standards: **030 032:** BS 1363-2 **311 312:** BS 5733
Back Box Depth (mm): **030 032:** 35 **311 312:** Dependent On Modules Fitted
Cable Size (mm²): **030 032:** 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang:** 86 (W) x 93 (D) x 5 (H) **2 Gang:** 146 (W) x 93 (D) x 5 (H)

M37



Pull Cord Switches

PRW213 50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon & Pattress
(Twin Terminal Screws) C / W Pattress

PRW213



Pull Cord Switches

PRW208 10A 3 Pole Fan Isolation Pull Cord Switch
PRW210 45A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
PRW211 50A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
(Twin Terminal Screws)

Decorative covers available for PRC210, see overleaf



Pull Cord Switches

PRC009 10AX 2 Way Ceiling Pull Cord Switch
PRC210 10AX 2 Way Pull Cord Switch
PRC216 16A DP Pull Cord Switch With Neon

Standards: BS EN 60669-1
Cable Size (mm²): **211 213:** 1 x 25 **009 208 PRC210 216:** 2 x 1.5 or 1 x 2.5 **PRW210:** 1 x 6
Dimensions (mm): **009:** 76 (Dia) x 51.5 (Dia) x 42 (D) **208 PRW210 211:** 86 (W) x 86 (H) x 43 (D)
213: 100 (Dia) x 77 (D)

M38



CV210CH

PRC210 + CV210CH

Pull Cord Switches

CV210CH Polished Chrome Cover for PRC210
CV210SC Satin Chrome Cover for PRC210



PRC1440

PRC1440RD

Pendant Sets & Ceiling Rose

PRC1440 6A 4 Pin Quick-Connect Ceiling Rose, Plug & Cover
PRC1440RD 6A 4 Pin Quick-Connect Ceiling Rose, Plug & Cover - Red

Standards: **1440**: BS 6972 BS 5733 **210**: BS 5733
Cable Size (mm²): 2 x 1.5
Dimensions (mm): **210**: 76 (Dia) x 44 (D) **1440**: 70 (Dia) x 43 (D)

M39



PRC006

PRC008

PRC1015

PRC017

PRC1031 | PRC1033



T2 Batten Lampholders

PRC006 T2 BC Batten Lampholder Straight Skirt
PRC007 T2 BC Batten Lampholder H.O. Skirt
PRC008 T2 BC Angled Batten Lampholder Straight Skirt

T2 Loop-In Batten Lampholders

PRC015 T2 BC Loop-In Batten Lampholder With Straight Skirt
PRC016 T2 BC Loop-In Batten Lampholder With H.O. Skirt
PRC017 T2 BC Loop-In Angled Batten Lampholder With H.O. Skirt

Safety Batten Lampholders

PRC1015 T2 BC Loop-In Batten Safety Lampholder With Straight Skirt

Pendant Sets & Ceiling Rose

PRC031 6" T2 BC Ceiling Pendant Set
PRC033 9" T2 BC Ceiling Pendant Set
PRC038 6" T2 BC TRS Pendant Set

Safety Pendant Sets & Ceiling Rose

PRC1031 6" T2 BC Ceiling Safety Pendant Set
PRC1033 9" T2 BC Ceiling Safety Pendant Set

For our full range of wiring accessories, see the Curva®, Polar™ and Mode® sections of this catalogue.

Standards: BS EN 61184 BS 67 **Batten**: BS EN 61184 **1031 1033**: BS EN 61184 BS EN IEC 60598-2-1 BS 67 Cable Size (mm²): 2 x 1.5
Dimensions (mm): **031 033 038**: 86 (Dia) x 30 **1031 1033**: 86 (Dia) x 30 **006**: 65 (Dia) x 62
007: 65 (Dia) x 66 **008**: 65 (Dia) x 62 **015**: 86 (Dia) x 74 **016**: 86 (Dia) x 80 **017**: 86 (Dia) x 94

M40



T2 Push-Bar Lampholders

- PRC005 T2 BC ½" Thread Entry Cord Grip Switched Lampholder Straight Skirt
PRC012 T2 BC 10mm Thread Entry Cord Grip Switched Lampholder Straight Skirt
Lampholder with straight skirt and push-bar

PRC005 | 012



Pendant Sets & Ceiling Rose

- PRC001 Ceiling Rose Fitted With Clear Polycarbonate Base
PRC029 6" T2 Pendant Set Without Rose



T2 Lampholders

- PRC003 T2, BC Cord Grip Pendant Lampholder
PRC020 T2 BC Cord Grip TRS Lampholder
PRC004 T2 BC ½" Thread Entry Cord Grip Lampholder Straight Skirt
PRC011 T2 BC 10mm Thread Entry Cord Grip Lampholder Straight Skirt

Standards: BS EN 61184 **001**: BS 67 Cable Size (mm²): 0.75 **001**: 2 x 1.5
Dimensions (mm): **001**: 86 (Dia) x 30 **005 012**: 44 (Dia) x 87 **003**: 36 (Dia) x 56 **004 011**: 36 (Dia) x 58 **020 029**: 51 (Dia) x 84

M41



Extension Sockets And Leads

- ES001 13A 1 Gang Trailing Socket With Neon
ES002 13A 2 Gang Trailing Socket With Neon
ES003 13A 4 Gang Trailing Socket With Neon
ES008 13A 3 Gang Trailing Socket With Neon



Multiplugs And Adaptors

- PA040 1 Amp Fused Shaver Adaptor - White
PA041A 13A 2 Way Resilient Adaptor - White
PA042A 13A Fused 3 Way Adaptor - White

Standards: BS 1363-2 **040**: BS 1363 BS 646 **041**: BS 1363/A **042**: BS 1363/A BS 1362
Dimensions (mm): **001**: 96 (W) x 62 (D) x 27 (H) **002**: 150 (W) x 62 (D) x 27 (H) **003**: 258 (W) x 62 (D) x 27 (H)
008: 200 (W) x 62 (D) x 27 (H) **040**: 49 (W) x 25.5 (D) x 50 (H) **041**: 50 (W) x 48.5 (D) x 50 (H) **042**: 50 (W) x 48.5 (D) x 68 (H)

M42



Junction Boxes - White

- WA070 5A Junction Box Selective Entry 4 Terminal
- WA071 20A Junction Box Selective Entry 4 Terminal
- WA072 30A Junction Box Selective Entry 3 Terminal
- WA073 20A Junction Box Selective Entry 6 Terminal
- WA074 20A Junction Box 58mm Diameter 4 Terminal

Junction Boxes - Brown

- WA075 5A Junction Box Selective Entry 4 Terminal
- WA076 20A Junction Box Selective Entry 4 Terminal
- WA077 30A Junction Box Selective Entry 3 Terminal
- WA078 20A Junction Box Selective Entry 6 Terminal
- WA079 20A Junction Box 58mm Diameter 4 Terminal

Standards: BS EN 60670-1 BS EN 60670-22
Cable Size (mm²): **070 075:** 2 x 1.5 **071 076:** 4 x 1.5 **072 077:** 2 x 4 **073 078:** 4 x 1.5 **074 079:** 4 x 1.5
Dimensions (mm): **070 075:** 60 (Dia) x 23 **071 076:** 80 (Dia) x 30 **072 077:** 90 (Dia) x 35 **073 078:** 86 (Dia) x 30
074 079: 55 (Dia) x 25

M43



Junction Boxes

- WA220 60A Junction Box 3 Terminal - White
 - WA222 60A Junction Box 3 Terminal - Brown
- UK Design Registration No. 3009706

- WA227 100A 1 Pole 5 x 35mm² Link Box - Black
- WA228 100A 2 Pole 5 x 35mm² Link Box - Black

Standards: BS 5733
Cable Size (mm²): **227 228:** 1 x 35 **220 222:** 1 x 25
Dimensions (mm): **220 222:** 153 (W) x 91 (D) x 35 (H) **227:** 66 (W) x 49 (D) x 34 (H) **228:** 115 (W) x 65 (D) x 55 (H)

M44



45A Cooker Connection Plates

CMA215 45A 1 Gang Cooker Connection Plate
PRW215 45A 1 Gang Cooker Connection Plate
UK Design Registration No. 3015175

PRW217 45A Easyfit Dual Appliance Outlet Plate
UK Design Registration No. 3015175
Utilises standard 1 gang back box 25mm deep minimum.

Pattress Box for PRW217 - Urea

PRW218 35mm Deep Pattress Box For Use With PRW217

Standards: BS 5733
Back Box Depth (mm): 35 **217**: 25 Cable Size (mm²): **215**: 2 x 10 **217**: 1 x 10
Dimensions (mm): **215**: 86 (W) x 86 (H) x 22.5 (D) **217**: 85 (W) x 130 (H) x 27 (D) **218**: 85 (W) x 130 (H) x 37.5 (D)

M45



Rating	Fuse Manufacturer			
	Bussmann	Lawson	MEM	GE
40A	40KR85	ME40	404R	RHF40
45A	45KR85	ME45	454R	-
50A	50KR85	ME50	504R	RHF50
60A	60KR85	ME60	604R	RHF60
70A	70KR85	ME70	-	-
80A	80KR85	ME80	804R	RHF80
100A	100KR85	ME100	-	-

80A and 100A variants are supplied with an 80A Bussmann fuse as standard. However, the following fuses will fit:

Fused Main Switch

DB700 80A Fused Main Switch (80A HRC Fuse Fitted)
DB701 80A Fused Main Switch (80A HRC Fuse Fitted) - Lockable
DB750 100A Fused Main Switch (80A HRC Fuse Fitted)
DB751 100A Fused Main Switch (80A HRC Fuse Fitted) - Lockable
DB981 Elongated Cable Shroud (Packaged Individually)

Standards: **700 701 750 751**: BS 60947 3
Cable Size (mm²): **700 701**: 25 & 16 **750 751 791 981**: 35 & 25
Dimensions (mm): **700 701**: 127.5 (W) x 53.5 (D) x 80.5 (H) **750 751**: 133 (W) x 60 (D) x 101 (H) **981**: 80 (W) x 90 (D) x 45 (H)

M46



Round Pin Unfused Plug Tops

PA165	2A Round Pin Plug - White
PA175	2A Round Pin Plug - Black
PA166	5A Round Pin Plug - White
PA167	15A Round Pin Plug - White
PA176	5A Round Pin Plug - Black
PA177	15A Round Pin Plug - Black

13A UK Fast Grip Resilient Plug Tops (BS1363 / A)

PA301	13A Plug Top (13A Fused) Fast Grip - White
PA302	13A Plug Top (3A Fused) Fast Grip - White
PA303	13A Plug Top (5A Fused) Fast Grip - White
PA310	13A Plug Top (13A Fused) Fast Grip - Black
PA311	13A Plug Top (3A Fused) Fast Grip - Black
PA312	13A Plug Top (5A Fused) Fast Grip - Black
PA340TR	13A Plug Top (13A Fused) Fast Grip - Transparent

13A UK Bar Grip Resilient Plug Tops (BS1363 / A)

PA320	13A Plug Top (13A Fused) Bar Grip - White
PA321	13A Plug Top (3A Fused) Bar Grip - White
PA322	13A Plug Top (5A Fused) Bar Grip - White
PA330	13A Plug Top (13A Fused) Bar Grip - Black
PA331	13A Plug Top (3A Fused) Bar Grip - Black
PA332	13A Plug Top (5A Fused) Bar Grip - Black


Non-Standard Resilient Plug Tops (BS1363 / A)

PA380RD	13A Fused Non-Standard Plug - Red
PA380WH	13A Fused Non-Standard Plug - White

For use with non-standard Click® Mode® sockets CMA935 and CMA936, see page F18.

Standards: BS 1363 / A BS 1362 Round Pin: BS 546 Cable Size (mm²): 1.5
Dimensions (mm): 49.5 (W) x 21 (D) x 49.5 (H) **165**: 32 (W) x 18.5 (D) x 30.5 (H) **175**: 32 (W) x 30.5 (D) x 18.5 (H)
166 **176**: 41 (W) x 19.5 (D) x 45 (H) **167** **177**: 52.5 (W) x 23 (D) x 52 (H)

M47

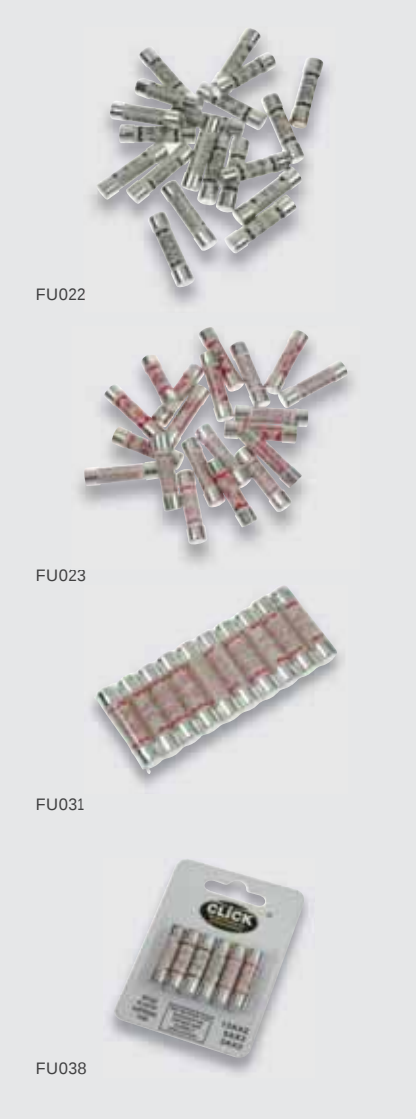

BS 1362 Approved Plug Top Fuses (Bulk Packed)

FU021	13A Cartridge Fuse (Bulk Bag of 1000 Pcs)
FU022	5A Cartridge Fuse (Bulk Bag of 1000 Pcs)
FU023	3A Cartridge Fuse (Bulk Bag of 1000 Pcs)

BS 1362 Approved Plug Top Fuses (Boxed)

FU030	Box of 100 13A Fuses (10 X Sachets of 10)
FU031	Box of 100 3A Fuses (10 X Sachets of 10)
FU032	Box of 100 5A Fuses (10 X Sachets of 10)

BS 1362 Approved Plug Top Fuses (Carded)

FU035	Card of 4 X 13A Fuses
FU036	Card of 4 X 3A Fuses
FU037	Card of 4 X 5A Fuses
FU038	Card of 6 X Assorted Fuses (2 X 13A, 2 X 5A & 2 X 3A)

Standards: BS 1362

M48



Recess Mounting

- EBB118R 18 Way Recess Mounted EBB
- EBB118S 18 Way Surface Mounted EBB

- EBB240R 40 Way Recess Mounted EBB
- EBB240S 40 Way Surface Mounted EBB

Also see Supplementary Equipotential Bonding Connection Points on page F16

Standards: BS EN 61439-1 HTM06-01 IEC 60364-7-710 BS 7671
Dimensions (mm): 118R: 253 (W) x 253 (H) x 5.2 (D) 240R: 255 (W) x 412 (H) x 5.2 (D)
118S: 240.4 (W) x 240.5 (H) x 5.2 (D) 240S: 240.4 (W) x 397.4 (H) x 5.2 (D)



Simple Connectivity & Control






Simple Connectivity & Control

With the emphasis now on flexibility and ease of installation many building design projects are now focussing on products and services that can adapt to changing legislation, energy efficiency and the ever changing needs of the client.

The lighting management system is a new range of additional products to the existing Flow™ range and has been designed specifically to help contractors create more complex lighting installations quickly, easily and safely. It features a number of new products that allow the quick connection, configuration and re-configuration of circuits, primarily intended for lighting.

Flexibility is important as requirements can change and the ability to adapt to these changes quickly and economically is seen as an advantage. The development of this range has evolved as a result of demand from our customers.

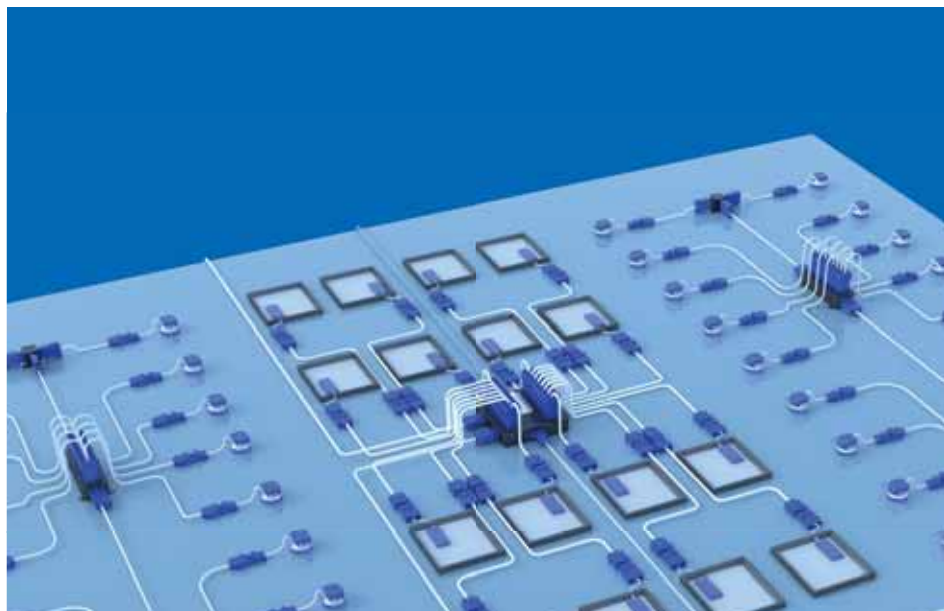

Contents

Lighting Management Boxes	N4
Switch Adaptors, Splitters & Hub	N5
Flow™ Connectors	N6
Flow™ Extension Cables	N9
Ceiling Accessories	N10



20 Year Warranty

All Flow™ products are covered by our 20 year warranty against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.



CT1008



CT1016



SP1016



Lighting Management Boxes

- CT1016** 20A 16 Way Lighting Management Box
- CT1008** 20A 8 Way Distribution Box
- SP1016** Mounting Tray For CT1016 & CT1008

Standards: BS 8488 BS EN 61535 BS 5733
Dimensions (mm): **CT1016:** 264 (W) x 269 (H) x 69 (D) **CT1008:** 52 (W) x 240 (H) x 77.5 (D) **SP1016:** 280 (W) x 220 (H) x 60 (D)



Easily adds a switched live into a Flow™ circuit

In-line Switch Adaptors

CT1300 250V 20A 3 Pole Flow™ Switch Adaptor with pre-wired earth and neutral links

CT2300 250V 20A 4 Pole Flow™ Switch Adaptor with pre-wired earth and neutral links



CT300



CT350




CT355

4 Pole Hubs & Splitters

- CT300** 250V 20A 4 Pole (1 in 3 Out) Hub Junction Box
- CT350** 250V 20A 4 Pole (1 in 2 Out) Splitter
- CT355** 250V 20A 4 Pole (1 in 2 Out) Compact Splitter

Standards: BS 8488 BS EN 61535 BS 5733
Dimensions (mm): **1300:** 78 (W) x 85 (D) x 25 (H) **2300:** 89 (W) x 85 (D) x 24 (H) **300:** 82 (W) x 82 (D) x 55 (H) **350:** 84.5 (W) x 70 (D) x 25 (H) **355:** 52 (W) x 47 (D) x 40 (H)

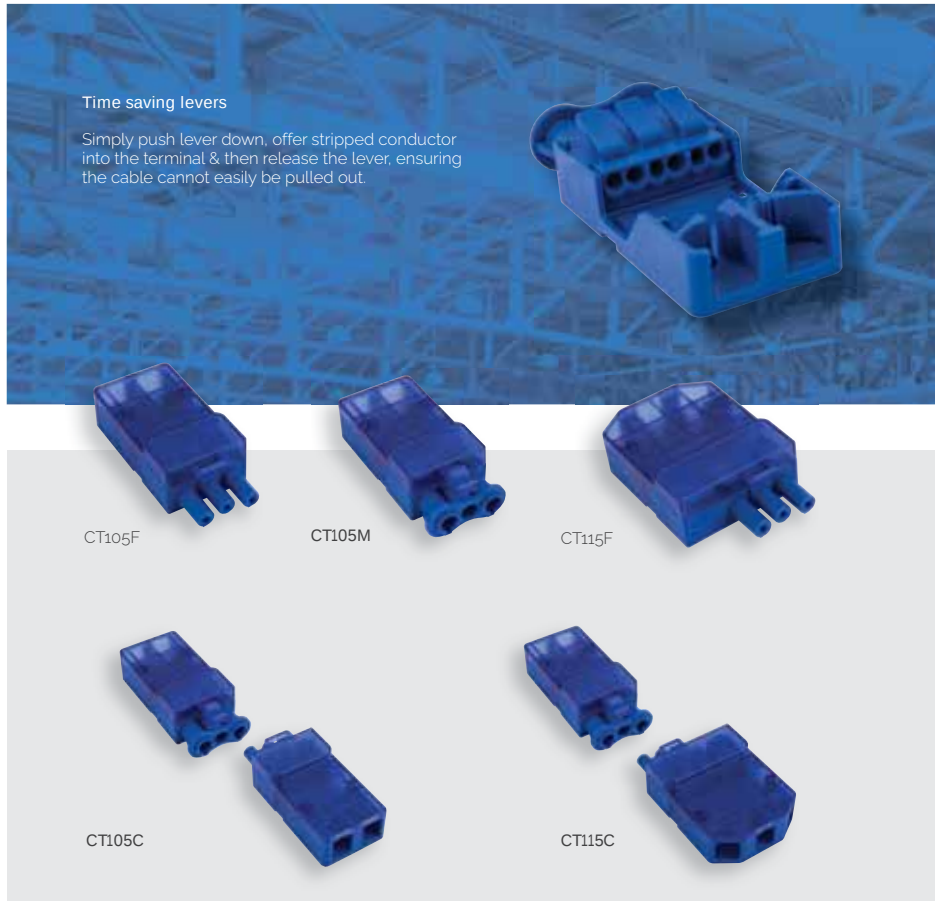

3 Pole Flow™ Push Fit Connectors

- CT105C** 250V 20A 3 Pole Complete Push Fit Connector (CT105M & CT105F)
- CT105F** 250V 20A 3 Pole Female Push Fit Connector
- CT105M** 250V 20A 3 Pole Male Push Fit Connector
- CT115C** 250V 20A 3 Pole Complete Push Fit Connector With Loop (CT105M & CT115F)
- CT115F** 250V 20A 3 Pole Female Push Fit Connector With Loop

Standards: BS EN 61535
Cable Size (mm²): 2.5 (Max.)
Dimensions (mm): 105C: 142 x 36 x 24 105M: 79 (W) x 36 (D) x 24 (H) 105F: 79 (W) x 36 (D) x 23 (H)
 115C: 142 x 51 x 24 115F: 79 (W) x 51 (D) x 23 (H)



4 Pole Flow™ Push Fit Connectors

- CT205C** 250V 20A 4 Pole Complete Push Fit Connector (CT205M & CT205F)
- CT205F** 250V 20A 4 Pole Female Push Fit Connector
- CT205M** 250V 20A 4 Pole Male Push Fit Connector
- CT215C** 250V 20A 4 Pole Complete Push Fit Connector With Loop (CT205M & CT215F)
- CT215F** 250V 20A 4 Pole Female Push Fit Connector With Loop

Standards: BS EN 61535
Cable Size (mm²): 2.5 (Max.)
Dimensions (mm): 205C: 142 x 47 x 24 205M: 79 (W) x 47 (D) x 24 (H) 205F: 79 (W) x 47 (D) x 23 (H)
 215C: 142 x 62 x 24 215F: 79 (W) x 62 (D) x 23 (H)

N8



CT101C




CT102C



CT103C



CT202C

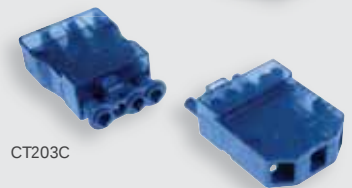

CT203C

3 Pole Flow™ Connectors

CT101C 250V 20A 3 Pole Flow™ Connector

CT102C 250V 20A 3 Pole Flow™ Connector Screw-Down Cord Grip

CT103C 250V 20A 3 Pole Flow™ Connector Fast-Fit Cord Grip



CT103M

CT103M 250V 20A 3 Pole Flow™ Fast-Fit Cord Grip (Male Connector Only)

4 Pole Flow™ Connectors

CT202C 250V 20A 4 Pole Flow™ Connector Screw-Down Cord Grip

CT203C 250V 20A 4 Pole Flow™ Connector Fast-Fit Cord Grip



CT203M

CT203M 250V 20A 4 Pole Flow™ Fast-Fit Cord Grip (Male Connector Only)

Standards: BS EN 61535 BS 5733 **101C:** BS 5733

Cable Size (mm²): Solid: 3 x 2.5 Flex: 3 x 1.5

Dimensions (mm): **101C:** 105 x 40 x 23 **102C:** 105 x 50 x 23 **103C:** 135 x 50 x 25 **103M:** 73 (W) x 50 (D) x 25 (H)

202C: 105 x 50 x 23 **203C:** 135 x 49 x 23 **203M:** 73 (W) x 50 (D) x 25 (H)

N9



CT802



CT803



CT805



CT845

Low Smoke Zero Halogen

Flow™ Pre-Wired LSZH Cables

CT732 6A 3 Pole 0.75mm LSZH To FE 2m

CT733 6A 3 Pole 0.75mm LSZH To FE 3m

CT735 6A 3 Pole 0.75mm LSZH To FE 5m

CT742 6A 4 Pole 0.75mm LSZH To FE 2m

CT743 6A 4 Pole 0.75mm LSZH To FE 3m

CT745 6A 4 Pole 0.75mm LSZH To FE 5m

Flow™ Extension PVC Cables

CT802 6A 4 Pole Flow™ Extension Cable - 2 Metre

CT803 6A 4 Pole Flow™ Extension Cable - 3 Metre

CT805 6A 4 Pole Flow™ Extension Cable - 5 Metre

Flow™ Extension LSZH Cables

CT845 20A 4 Pole 2.5mm Male To Female LSZH 5m

Standards: BS EN 61535 BS 5733 BS EN 50525-3-11

Cable Size (mm²): 4 x 0.75 **CT845:** 4 x 2.5

Dimensions (mm): Will pass through a 55mm hole

N10



Flow™ Ceiling Rose & Cover

CT1400 250V 20A 4 Pole Flow™ Ceiling Rose (Without Cover)

CT1401 CT1400 Ceiling Rose Cover

(When rose cover fitted, not suitable for use with CT103, CT203 or Push Fit Connectors)

Quick Connect Ceiling Roses

PRC1440 6A 4 Pin Quick-Connect Ceiling Rose, Plug & Cover

PRC1440RD 6A 4 Pin Quick-Connect Ceiling Rose, Plug & Cover - Red

Standards: 1400: BS 8488 BS EN 61535 BS 5733 1401: BS 5733 1440: BS 6972 BS 5733

Cable Size (mm²): 1400: Solid: 3 x 2.5 Flex: 3 x 1.5 1440: 2 x 1.5

Dimensions (mm): CT1400: 85 (Dia) x 35 CT1401: 85 (Dia) x 65 1440: 70 (Dia) x 43 (D)

Index



Wiring Accessories Index

CMA311	F34,K17	CMA736	F19	CT105C	N6
CMA31102	I128	CMA736AG	H13	CT105F	N6
CMA311AG	H19,K17	CMA771U	F19	CT105M	N6
CMA312	F34,K17	CMA771UAG	H14	CT115C	N6
CMA312AG	H19,K17	CMA780	F19	CT115F	N6
CMA401	F7,J13	CMA780AG	H14	CT1300	N5
CMA401AG	H8,J13	CMA785	F19	CT1400	N10
CMA402	F7,J13	CMA785AG	H14	CT1401	N10
CMA402AG	H8,J13	CMA786	F19	CT202C	N8
CMA403	F7,J13	CMA786AG	H14	CT203C	N8
CMA403AG	H8,J13	CMA811	F5	CT203M	N8
CMA404	F7,J13	CMA811AG	H7	CT205C	N7
CMA404AG	H8,J13	CMA812	F5	CT205F	N7
CMA406	F7,J13	CMA812AG	H7	CT205M	N7
CMA426	F7,J13	CMA813	F5	CT215C	N7
CMA426AG	H8,J13	CMA813AG	H7	CT215F	N7
CMA432	F7,J13	CMA825	F5	CT2300	N5
CMA500	F26	CMA825AG	H7	CT300	N5
CMA500AG	H15	CMA828	F5	CT350	N5
CMA501	F26	CMA828AG	H7	CT355	N5
CMA501AG	H15	CMA835AG	H12	CT732	N9
CMA502	F26	CMA836	F14	CT733	N9
CMA503	F26	CMA836AG	H12	CT735	N9
CMA503AG	H15	CMA836PWGR	F16	CT742	N9
CMA504	F26	CMA836PWRD	F16	CT743	N9
CMA504AG	H15	CMA840	F14	CT745	N9
CMA505	F26	CMA840AG	H12	CT802	N9
CMA603	K7	CMA9014	F5	CT803	N9
CMA604	K10	CMA935	F18	CT805	N9
CMA606	K7	CMA936	F18	CT845	N9
CMA608	K5	CMAECP1	F16	CV210CH	M38
CMA612	F8,J5	CMAECP2	F16	CV210SC	M38
CMA616	K6	CMARCDP036	F15		
CMA618	F8,J6	CSK001	A34		
CMA622	F22	CSK002	A29		
CMA623	F22	CSK003	A29		
CMA630	F14	CSP010	A11		
CMA630BL	F17	CSP020	A17		
CMA632BL	F17	CSP031	A20		
CMA635	F14	CSP032	A18		
CMA635BL	F17	CSP033	A19		
CMA637BL	F17	CSP041	A21		
CMA649	F20	CSP042	A21		
CMA650	F20	CSP043	A21		
CMA650AG	H16	CSP051	A22		
CMA651	F20	CSP052	A22		
CMA651AG	H16	CSP060	A34		
CMA652	F20	CSP071	A13		
CMA652AG	H16	CSPGM2075BK	A16		
CMA653	F20	CSPGM2075PW	A16		
CMA653AG	H16	CT1008	N4		
CMA660	F22	CT1016	N4		
CMA675	F18	CT101C	N8		
CMA684	K10	CT102C	N8		
CMA735	F19	CT103C	N8		
CMA735AG	H13	CT103M	N8		

D

DB700	M45
DB701	M45
DB750	M45
DB751	M45
DB981	M45
DP095BK	A32,B34
DP095GY	A32,B34
DP095WH	A32,B34
DP096BK	A32,B34
DP096GY	A32,B34
DP096WH	A32,B34
DPAB024BK	B24
DPAB038BK	B22
DPAB039BK	B22
DPAB060	B24
DPAB061	B24
DPAB065BK	B31
DPAB066BK	B31
DPAB100BK	B24
DPAB115BK	B30

Wiring Accessories Index

DPAB120BK	B30	DPAB500BK	B27	DPBN164	B14
DPAB121BK	B30	DPAB501BK	B27	DPBN170BK	B31
DPAB125BK	B30	DPAB502BK	B27	DPBN1836BK	B22
DPAB126BK	B30	DPAB503BK	B27	DPBN185	B15
DPAB140PL	B15	DPAB504BK	B27	DPBN186	B15
DPAB152PL	B15	DPAB505BK	B27	DPBN20401	I93
DPAB1535BK	B22	DPAB512	B18,J8	DPBN20402	I93
DPAB1536BK	B22	DPAB518	B18,J8	DPBN20403	I94
DPAB153PL	B15	DPAB520BK	B26	DPBN20404	I94
DPAB154PL	B15	DPAB522BK	B26	DPBN20506	I96
DPAB156BK	B31	DPAB523BK	B26	DPBN20508	I96
DPAB157BK	B31	DPAB535BK	B22	DPBN20509	I97
DPAB158BK	B31	DPAB536BK	B22	DPBN20512	I97
DPAB159BK	B31	DPAB550BK	B25	DPBN20518	I98
DPAB161	B14	DPAB551BK	B25	DPBN20524	I99
DPAB162	B14	DPAB552BK	B25	DPBN30535BK	A24
DPAB163	B14	DPAB553BK	B25	DPBN30536BK	A24
DPAB164	B14	DPAB571UBK	B23	DPBN310	B33,K13
DPAB170BK	B31	DPAB580BK	B23	DPBN311	B33,K13
DPAB1836BK	B22	DPAB585BK	B23	DPBN31102	I95
DPAB185	B15	DPAB586BK	B23	DPBN312	B33,K13
DPAB186	B15	DPAB655BK	B28	DPBN401BK	B11,J9
DPAB20401	I93	DPAB660	B28	DPBN402BK	B11,J9
DPAB20402	I93	DPAB722BK	B26	DPBN403BK	B11,J9
DPAB20403	I94	DPAB723BK	B26	DPBN404BK	B11,J9
DPAB20404	I94	DPAB750BK	B25	DPBN406BK	B11,J9
DPAB20506	I96	DPAB751BK	B25	DPBN411BK	B10
DPAB20508	I96	DPAB752BK	B25	DPBN412BK	B10
DPAB20509	I97	DPAB753BK	B25	DPBN413BK	B10
DPAB20512	I97	DPAB836BK	B22	DPBN414BK	B10
DPAB20518	I98	DPBN024BK	B24	DPBN416BK	B10
DPAB20524	I99	DPBN038BK	B22	DPBN421	B13
DPAB30535BK	A24	DPBN039BK	B22	DPBN422	B13
DPAB30536BK	A24	DPBN060	B24	DPBN423	B13
DPAB310	B33,K13	DPBN061	B24	DPBN424	B13
DPAB311	B33,K13	DPBN065BK	B31	DPBN425BK	B10
DPAB31102	I95	DPBN066BK	B31	DPBN426BK	B11,J9
DPAB312	B33,K13	DPBN100BK	B24	DPBN471BK	B11,J9
DPAB401BK	B11,J9	DPBN115BK	B30	DPBN472BK	B11,J9
DPAB402BK	B11,J9	DPBN120BK	B30	DPBN500BK	B27
DPAB403BK	B11,J9	DPBN121BK	B30	DPBN501BK	B27
DPAB404BK	B11,J9	DPBN125BK	B30	DPBN502BK	B27
DPAB406BK	B11,J9	DPBN126BK	B30	DPBN503BK	B27
DPAB411BK	B10	DPBN140PL	B15	DPBN504BK	B27
DPAB412BK	B10	DPBN152PL	B15	DPBN505BK	B27
DPAB413BK	B10	DPBN1535BK	B22	DPBN512	B18,J8
DPAB414BK	B10	DPBN1536BK	B22	DPBN518	B18,J8
DPAB416BK	B10	DPBN153PL	B15	DPBN520BK	B26
DPAB421	B13	DPBN154PL	B15	DPBN522BK	B26
DPAB422	B13	DPBN156BK	B31	DPBN523BK	B26
DPAB423	B13	DPBN157BK	B31	DPBN535BK	B22
DPAB424	B13	DPBN158BK	B31	DPBN536BK	B22
DPAB425BK	B10	DPBN159BK	B31	DPBN550BK	B25
DPAB426BK	B11,J9	DPBN161	B14	DPBN551BK	B25
DPAB471BK	B11,J9	DPBN162	B14	DPBN552BK	B25
DPAB472BK	B11,J9	DPBN163	B14	DPBN553BK	B25

A4

A5

Wiring Accessories Index

A6

DPBN571UBK	B23	DPBR164	B14	DPBR472WH	B11,J9
DPBN580BK	B23	DPBR170BK	B31	DPBR500BK	B27
DPBN585BK	B23	DPBR170WH	B31	DPBR500WH	B27
DPBN586BK	B23	DPBR1836BK	B22	DPBR501BK	B27
DPBN655BK	B28	DPBR1836WH	B22	DPBR501WH	B27
DPBN660	B28	DPBR185	B15	DPBR502BK	B27
DPBN722BK	B26	DPBR186	B15	DPBR502WH	B27
DPBN723BK	B26	DPBR20401	I93	DPBR503BK	B27
DPBN750BK	B25	DPBR20402	I93	DPBR503WH	B27
DPBN751BK	B25	DPBR20403	I94	DPBR504BK	B27
DPBN752BK	B25	DPBR20404	I94	DPBR504WH	B27
DPBN753BK	B25	DPBR20506	I96	DPBR505BK	B27
DPBN836BK	B22	DPBR20508	I96	DPBR505WH	B27
DPBR024BK	B24	DPBR20509	I97	DPBR512	B18,J8
DPBR024WH	B24	DPBR20512	I97	DPBR518	B18,J8
DPBR038BK	B22	DPBR20518	I98	DPBR520BK	B26
DPBR038WH	B22	DPBR20524	I99	DPBR520WH	B26
DPBR039BK	B22	DPBR30535BK	A24	DPBR522BK	B26
DPBR039WH	B22	DPBR30535WH	A24	DPBR522WH	B26
DPBR060	B24	DPBR30536BK	A24	DPBR523BK	B26
DPBR061	B24	DPBR30536WH	A24	DPBR523WH	B26
DPBR065BK	B31	DPBR310	B33,K13	DPBR535BK	B22
DPBR065WH	B31	DPBR311	B33,K13	DPBR535WH	B22
DPBR066BK	B31	DPBR31102	I95	DPBR536BK	B22
DPBR066WH	B31	DPBR312	B33,K13	DPBR536WH	B22
DPBR100BK	B24	DPBR401BK	B11,J9	DPBR550BK	B25
DPBR100WH	B24	DPBR401WH	B11,J9	DPBR550WH	B25
DPBR115BK	B30	DPBR402BK	B11,J9	DPBR551BK	B25
DPBR115WH	B30	DPBR402WH	B11,J9	DPBR551WH	B25
DPBR120BK	B30	DPBR403BK	B11,J9	DPBR552BK	B25
DPBR120WH	B30	DPBR403WH	B11,J9	DPBR552WH	B25
DPBR121BK	B30	DPBR404BK	B11,J9	DPBR553BK	B25
DPBR121WH	B30	DPBR404WH	B11,J9	DPBR553WH	B25
DPBR125BK	B30	DPBR406BK	B11,J9	DPBR571UBK	B23
DPBR125WH	B30	DPBR406WH	B11,J9	DPBR571UWH	B23
DPBR126BK	B30	DPBR411BK	B10	DPBR580BK	B23
DPBR126WH	B30	DPBR411WH	B10	DPBR580WH	B23
DPBR140PL	B15	DPBR412BK	B10	DPBR585BK	B23
DPBR152PL	B15	DPBR412WH	B10	DPBR585WH	B23
DPBR1535BK	B22	DPBR413BK	B10	DPBR586BK	B23
DPBR1535WH	B22	DPBR413WH	B10	DPBR586WH	B23
DPBR1536BK	B22	DPBR414BK	B10	DPBR655BK	B28
DPBR1536WH	B22	DPBR414WH	B10	DPBR655WH	B28
DPBR153PL	B15	DPBR416BK	B10	DPBR660	B28
DPBR154PL	B15	DPBR416WH	B10	DPBR722BK	B26
DPBR156BK	B31	DPBR421	B13	DPBR722WH	B26
DPBR156WH	B31	DPBR422	B13	DPBR723BK	B26
DPBR157BK	B31	DPBR423	B13	DPBR723WH	B26
DPBR157WH	B31	DPBR424	B13	DPBR750BK	B25
DPBR158BK	B31	DPBR425BK	B10	DPBR750WH	B25
DPBR158WH	B31	DPBR425WH	B10	DPBR751BK	B25
DPBR159BK	B31	DPBR426BK	B11,J9	DPBR751WH	B25
DPBR159WH	B31	DPBR426WH	B11,J9	DPBR752BK	B25
DPBR161	B14	DPBR471BK	B11,J9	DPBR752WH	B25
DPBR162	B14	DPBR471WH	B11,J9	DPBR753BK	B25
DPBR163	B14	DPBR472BK	B11,J9	DPBR753WH	B25

Wiring Accessories Index

A7

DPBR836BK	B22	DPCH20506	I96	DPCH505BK	B27
DPBR836WH	B22	DPCH20508	I96	DPCH505WH	B27
DPCH024BK	B24	DPCH20509	I97	DPCH512	B18,J8
DPCH024WH	B24	DPCH20512	I97	DPCH518	B18,J8
DPCH038BK	B22	DPCH20518	I98	DPCH520BK	B26
DPCH038WH	B22	DPCH20524	I99	DPCH520WH	B26
DPCH039BK	B22	DPCH30535BK	A24	DPCH522BK	B26
DPCH039WH	B22	DPCH30535WH	A24	DPCH522WH	B26
DPCH060	B24	DPCH30536BK	A24	DPCH523BK	B26
DPCH061	B24	DPCH30536WH	A24	DPCH523WH	B26
DPCH065BK	B31	DPCH310	B33,K13	DPCH535BK	B22
DPCH065WH	B31	DPCH311	B33,K13	DPCH535WH	B22
DPCH066BK	B31	DPCH31102	I95	DPCH536BK	B22
DPCH066WH	B31	DPCH312	B33,K13	DPCH536WH	B22
DPCH100BK	B24	DPCH401BK	B11,J9	DPCH550BK	B25
DPCH100WH	B24	DPCH401WH	B11,J9	DPCH550WH	B25
DPCH115BK	B30	DPCH402BK	B11,J9	DPCH551BK	B25
DPCH115WH	B30	DPCH402WH	B11,J9	DPCH551WH	B25
DPCH120BK	B30	DPCH403BK	B11,J9	DPCH552BK	B25
DPCH120WH	B30	DPCH403WH	B11,J9	DPCH552WH	B25
DPCH121BK	B30	DPCH404BK	B11,J9	DPCH553BK	B25
DPCH121WH	B30	DPCH404WH	B11,J9	DPCH553WH	B25
DPCH125BK	B30	DPCH406BK	B11,J9	DPCH571UBK	B23
DPCH125WH	B30	DPCH406WH	B11,J9	DPCH571UWH	B23
DPCH126BK	B30	DPCH411BK	B10	DPCH580BK	B23
DPCH126WH	B30	DPCH411WH	B10	DPCH580WH	B23
DPCH140PL	B15	DPCH412BK	B10	DPCH585BK	B23
DPCH152PL	B15	DPCH412WH	B10	DPCH585WH	B23
DPCH1535BK	B22	DPCH413BK	B10	DPCH586BK	B23
DPCH1535WH	B22	DPCH413WH	B10	DPCH586WH	B23
DPCH1536BK	B22	DPCH414BK	B10	DPCH604BK	K8
DPCH1536WH	B22	DPCH414WH	B10	DPCH604WH	K8
DPCH153PL	B15	DPCH416BK	B10	DPCH655BK	B28
DPCH154PL	B15	DPCH416WH	B10	DPCH655WH	B28
DPCH156BK	B31	DPCH421	B13	DPCH660	B28
DPCH156WH	B31	DPCH422	B13	DPCH684BK	K8
DPCH157BK	B31	DPCH423	B13	DPCH684WH	K8
DPCH157WH	B31	DPCH424	B13	DPCH722BK	B26
DPCH158BK	B31	DPCH425BK	B10	DPCH722WH	B26
DPCH158WH	B31	DPCH425WH	B10	DPCH723BK	B26
DPCH159BK	B31	DPCH426BK	B11,J9	DPCH723WH	B26
DPCH159WH	B31	DPCH426WH	B11,J9	DPCH750BK	B25
DPCH161	B14	DPCH471BK	B11,J9	DPCH750WH	B25
DPCH162	B14	DPCH471WH	B11,J9	DPCH751BK	B25
DPCH163	B14	DPCH472BK	B11,J9	DPCH751WH	B25
DPCH164	B14	DPCH472WH	B11,J9	DPCH752BK	B25
DPCH170BK	B31	DPCH500BK	B27	DPCH752WH	B25
DPCH170WH	B31	DPCH500WH	B27	DPCH753BK	B25
DPCH1836BK	B22	DPCH501BK	B27	DPCH753WH	B25
DPCH1836WH	B22	DPCH501WH	B27	DPCH836BK	B22
DPCH185	B15	DPCH502BK	B27	DPCH836WH	B22
DPCH186	B15	DPCH502WH	B27	DPMB024BK	B24
DPCH20401	I93	DPCH503BK	B27	DPMB038BK	B22
DPCH20402	I93	DPCH503WH	B27	DPMB039BK	B22
DPCH20403	I94	DPCH504BK	B27	DPMB060	B24
DPCH20404	I94	DPCH504WH	B27	DPMB061	B24

Wiring Accessories Index

A8

DPMB065BK	B31	DPMB471BK	B11,J9	DPSB140PL	B15
DPMB066BK	B31	DPMB472BK	B11,J9	DPSB152PL	B15
DPMB100BK	B24	DPMB500BK	B27	DPSB1535BK	B22
DPMB115BK	B30	DPMB501BK	B27	DPSB1535WH	B22
DPMB120BK	B30	DPMB502BK	B27	DPSB1536BK	B22
DPMB121BK	B30	DPMB503BK	B27	DPSB1536WH	B22
DPMB125BK	B30	DPMB504BK	B27	DPSB153PL	B15
DPMB126BK	B30	DPMB505BK	B27	DPSB154PL	B15
DPMB140PL	B15	DPMB512	B18,J8	DPSB156BK	B31
DPMB152PL	B15	DPMB518	B18,J8	DPSB156WH	B31
DPMB1535BK	B22	DPMB520BK	B26	DPSB157BK	B31
DPMB1536BK	B22	DPMB522BK	B26	DPSB157WH	B31
DPMB153PL	B15	DPMB523BK	B26	DPSB158BK	B31
DPMB154PL	B15	DPMB535BK	B22	DPSB158WH	B31
DPMB156BK	B31	DPMB536BK	B22	DPSB159BK	B31
DPMB157BK	B31	DPMB500BK	B25	DPSB159WH	B31
DPMB158BK	B31	DPMB551BK	B25	DPSB161	B14
DPMB159BK	B31	DPMB552BK	B25	DPSB162	B14
DPMB161	B14	DPMB553BK	B25	DPSB163	B14
DPMB162	B14	DPMB571UBK	B23	DPSB164	B14
DPMB163	B14	DPMB580BK	B23	DPSB170BK	B31
DPMB164	B14	DPMB585BK	B23	DPSB170WH	B31
DPMB170BK	B31	DPMB586BK	B23	DPSB1836BK	B22
DPMB1836BK	B22	DPMB655BK	B28	DPSB1836WH	B22
DPMB20401	I93	DPMB660	B28	DPSB185	B15
DPMB20402	I93	DPMB722BK	B26	DPSB186	B15
DPMB20403	I94	DPMB723BK	B26	DPSB20401	I93
DPMB20404	I94	DPMB750BK	B25	DPSB20402	I93
DPMB20506	I96	DPMB751BK	B25	DPSB20403	I94
DPMB20508	I96	DPMB752BK	B25	DPSB20404	I94
DPMB20509	I97	DPMB753BK	B25	DPSB20506	I96
DPMB20512	I97	DPMB836BK	B22	DPSB20508	I96
DPMB20518	I98	DPSB024BK	B24	DPSB20509	I97
DPMB20524	I99	DPSB024WH	B24	DPSB20512	I97
DPMB30535BK	A24	DPSB038BK	B22	DPSB20518	I98
DPMB30536BK	A24	DPSB038WH	B22	DPSB20524	I99
DPMB310	B33,K13	DPSB039BK	B22	DPSB20524	I99
DPMB311	B33,K13	DPSB039WH	B22	DPSB20524	I99
DPMB31102	I95	DPSB060	B24	DPSB20524	I99
DPMB312	B33,K13	DPSB061	B24	DPSB20524	I99
DPMB401BK	B11,J9	DPSB065BK	B31	DPSB20524	I99
DPMB402BK	B11,J9	DPSB065WH	B31	DPSB20524	I99
DPMB403BK	B11,J9	DPSB066BK	B31	DPSB20524	I99
DPMB404BK	B11,J9	DPSB066WH	B31	DPSB20524	I99
DPMB406BK	B11,J9	DPSB100BK	B24	DPSB20524	I99
DPMB411BK	B10	DPSB100WH	B24	DPSB20524	I99
DPMB412BK	B10	DPSB115BK	B30	DPSB20524	I99
DPMB413BK	B10	DPSB115WH	B30	DPSB20524	I99
DPMB414BK	B10	DPSB120BK	B30	DPSB20524	I99
DPMB416BK	B10	DPSB120WH	B30	DPSB20524	I99
DPMB421	B13	DPSB121BK	B30	DPSB20524	I99
DPMB422	B13	DPSB121WH	B30	DPSB20524	I99
DPMB423	B13	DPSB125BK	B30	DPSB20524	I99
DPMB424	B13	DPSB125WH	B30	DPSB20524	I99
DPMB425BK	B10	DPSB126BK	B30	DPSB20524	I99
DPMB426BK	B11,J9	DPSB126WH	B30	DPSB20524	I99

Wiring Accessories Index

A9

DPSB412BK	B10	DPSB585BK	B23	DPSC156WH	B31
DPSB412WH	B10	DPSB585WH	B23	DPSC157BK	B31
DPSB413BK	B10	DPSB586BK	B23	DPSC157WH	B31
DPSB413WH	B10	DPSB586WH	B23	DPSC158BK	B31
DPSB414BK	B10	DPSB655BK	B28	DPSC158WH	B31
DPSB414WH	B10	DPSB655WH	B28	DPSC159BK	B31
DPSB416BK	B10	DPSB660	B28	DPSC159WH	B31
DPSB416WH	B10	DPSB722BK	B26	DPSC161	B14
DPSB421	B13	DPSB722WH	B26	DPSC162	B14
DPSB422	B13	DPSB723BK	B26	DPSC163	B14
DPSB423	B13	DPSB723WH	B26	DPSC164	B14
DPSB424	B13	DPSB750BK	B25	DPSC170BK	B31
DPSB425BK	B10	DPSB750WH	B25	DPSC170WH	B31
DPSB425WH	B10	DPSB751BK	B25	DPSC1836BK	B22
DPSB426BK	B11,J9	DPSB751WH	B25	DPSC1836WH	B22
DPSB426WH	B11,J9	DPSB752BK	B25	DPSC185	B15
DPSB471BK	B11,J9	DPSB752WH	B25	DPSC186	B15
DPSB471WH	B11,J9	DPSB753BK	B25	DPSC20401	I93
DPSB472BK	B11,J9	DPSB753WH	B25	DPSC20402	I93
DPSB472WH	B11,J9	DPSB836BK	B22	DPSC20403	I94
DPSB500BK	B27	DPSB836WH	B22	DPSC20404	I94
DPSB500WH	B27	DPSC024BK	B24	DPSC20506	I96
DPSB501BK	B27	DPSC024WH	B24	DPSC20508	I96
DPSB501WH	B27	DPSC038BK	B22	DPSC20509	I97
DPSB502BK	B27	DPSC038GY	B22	DPSC20512	I97
DPSB502WH	B27	DPSC038WH	B22	DPSC20518	I98
DPSB503BK	B27	DPSC039BK	B22	DPSC20524	I99
DPSB503WH	B27	DPSC039WH	B22	DPSC30535BK	A24
DPSB504BK	B27	DPSC060	B24	DPSC30535GY	A24
DPSB504WH	B27	DPSC061	B24	DPSC30535WH	A24
DPSB505BK	B27	DPSC065BK	B31	DPSC30536BK	A24
DPSB505WH	B27	DPSC065WH	B31	DPSC30536GY	A24
DPSB512	B18,J8	DPSC066BK	B31	DPSC30536WH	A24
DPSB518	B18,J8	DPSC066WH	B31	DPSC310	B33,K13
DPSB520BK	B26	DPSC100BK	B24	DPSC311	B33,K13
DPSB520WH	B26	DPSC100GY	B24	DPSC31102	I95
DPSB522BK	B26	DPSC100WH	B24	DPSC312	B33,K13
DPSB522WH	B26	DPSC115BK	B30	DPSC401BK	B11,J9
DPSB523BK	B26	DPSC115WH	B30	DPSC401GY	B11,J9
DPSB523WH	B26	DPSC120BK	B30	DPSC401WH	B11,J9
DPSB535BK	B22	DPSC120WH	B30	DPSC402BK	B11,J9
DPSB535WH	B22	DPSC121BK	B30	DPSC402GY	B11,J9
DPSB536BK	B22	DPSC121WH	B30	DPSC402WH	B11,J9
DPSB536WH	B22	DPSC125BK	B30	DPSC403BK	B11,J9
DPSB550BK	B25	DPSC125WH	B30	DPSC403GY	B11,J9
DPSB550WH	B25	DPSC126BK	B30	DPSC403WH	B11,J9
DPSB551BK	B25	DPSC126WH	B30	DPSC404BK	B11,J9
DPSB551WH	B25	DPSC140PL	B15	DPSC404GY	B11,J9
DPSB552BK	B25	DPSC152PL	B15	DPSC404WH	B11,J9
DPSB552WH	B25	DPSC1535BK	B22	DPSC406BK	B11,J9
DPSB553BK	B25	DPSC1535WH	B22	DPSC406GY	B11,J9
DPSB553WH	B25	DPSC1536BK	B22	DPSC406WH	B11,J9
DPSB571UBK	B23	DPSC1536WH	B22	DPSC411BK	B10
DPSB571UWH	B23	DPSC153PL	B15	DPSC411GY	B10
DPSB580BK	B23	DPSC154PL	B15	DPSC411WH	B10
DPSB580WH	B23	DPSC156BK	B31	DPSC412BK	B10

Wiring Accessories Index

DPSC412GY	B10	DPSC530BK	B22	DPSC752WH	B25
DPSC412WH	B10	DPSC530WH	B22	DPSC753BK	B25
DPSC413BK	B10	DPSC532BK	B22	DPSC753GY	B25
DPSC413GY	B10	DPSC532WH	B22	DPSC753WH	B25
DPSC413WH	B10	DPSC535BK	B22	DPSC836BK	B22
DPSC414BK	B10	DPSC535GY	B22	DPSC836WH	B22
DPSC414GY	B10	DPSC535WH	B22	DPSS024BK	B24
DPSC414WH	B10	DPSC536BK	B22	DPSS024WH	B24
DPSC416BK	B10	DPSC536GY	B22	DPSS038BK	B22
DPSC416GY	B10	DPSC536WH	B22	DPSS038GY	B22
DPSC416WH	B10	DPSC550BK	B25	DPSS038WH	B22
DPSC421	B13	DPSC550GY	B25	DPSS039BK	B22
DPSC422	B13	DPSC550WH	B25	DPSS039WH	B22
DPSC423	B13	DPSC551BK	B25	DPSS060	B24
DPSC424	B13	DPSC551GY	B25	DPSS061	B24
DPSC425BK	B10	DPSC551WH	B25	DPSS065BK	B31
DPSC425GY	B10	DPSC552BK	B25	DPSS065WH	B31
DPSC425WH	B10	DPSC552GY	B25	DPSS066BK	B31
DPSC426BK	B11,J9	DPSC552WH	B25	DPSS066WH	B31
DPSC426GY	B11,J9	DPSC553BK	B25	DPSS100BK	B24
DPSC426WH	B11,J9	DPSC553GY	B25	DPSS100GY	B24
DPSC471BK	B11,J9	DPSC553WH	B25	DPSS100WH	B24
DPSC471GY	B11,J9	DPSC571UBK	B23	DPSS115BK	B30
DPSC471WH	B11,J9	DPSC571UGY	B23	DPSS115WH	B30
DPSC472BK	B11,J9	DPSC571UWH	B23	DPSS120BK	B30
DPSC472GY	B11,J9	DPSC580BK	B23	DPSS120WH	B30
DPSC472WH	B11,J9	DPSC580GY	B23	DPSS121BK	B30
DPSC500BK	B27	DPSC580WH	B23	DPSS121WH	B30
DPSC500GY	B27	DPSC585BK	B23	DPSS125BK	B30
DPSC500WH	B27	DPSC585GY	B23	DPSS125WH	B30
DPSC501BK	B27	DPSC585WH	B23	DPSS126BK	B30
DPSC501GY	B27	DPSC586BK	B23	DPSS126WH	B30
DPSC501WH	B27	DPSC586GY	B23	DPSS140PL	B15
DPSC502BK	B27	DPSC586WH	B23	DPSS152PL	B15
DPSC502GY	B27	DPSC604BK	K8	DPSS1535BK	B22
DPSC502WH	B27	DPSC604WH	K8	DPSS1535WH	B22
DPSC503BK	B27	DPSC655BK	B28	DPSS1536BK	B22
DPSC503GY	B27	DPSC655GY	B28	DPSS1536WH	B22
DPSC503WH	B27	DPSC655WH	B28	DPSS153PL	B15
DPSC504BK	B27	DPSC660	B28	DPSS154PL	B15
DPSC504GY	B27	DPSC684BK	K8	DPSS156BK	B31
DPSC504WH	B27	DPSC684WH	K8	DPSS156WH	B31
DPSC505BK	B27	DPSC722BK	B26	DPSS157BK	B31
DPSC505GY	B27	DPSC722GY	B26	DPSS157WH	B31
DPSC505WH	B27	DPSC722WH	B26	DPSS158BK	B31
DPSC512	B18,J8	DPSC723BK	B26	DPSS158WH	B31
DPSC518	B18,J8	DPSC723GY	B26	DPSS159BK	B31
DPSC520BK	B26	DPSC723WH	B26	DPSS159WH	B31
DPSC520GY	B26	DPSC750BK	B25	DPSS161	B14
DPSC520WH	B26	DPSC750GY	B25	DPSS162	B14
DPSC522BK	B26	DPSC750WH	B25	DPSS163	B14
DPSC522GY	B26	DPSC751BK	B25	DPSS164	B14
DPSC522WH	B26	DPSC751GY	B25	DPSS170BK	B31
DPSC523BK	B26	DPSC751WH	B25	DPSS170WH	B31
DPSC523GY	B26	DPSC752BK	B25	DPSS1836BK	B22
DPSC523WH	B26	DPSC752GY	B25	DPSS1836WH	B22

Wiring Accessories Index

DPSS185	B15	DPSS425BK	B10	DPSS551WH	B25
DPSS186	B15	DPSS425GY	B10	DPSS552BK	B25
DPSS20401	I93	DPSS425WH	B10	DPSS552GY	B25
DPSS20402	I93	DPSS426BK	B11,J9	DPSS552WH	B25
DPSS20403	I94	DPSS426GY	B11,J9	DPSS553BK	B25
DPSS20404	I94	DPSS426WH	B11,J9	DPSS553GY	B25
DPSS20506	I96	DPSS471BK	B11,J9	DPSS553WH	B25
DPSS20508	I96	DPSS471GY	B11,J9	DPSS571UBK	B23
DPSS20509	I97	DPSS471WH	B11,J9	DPSS571UGY	B23
DPSS20512	I97	DPSS472BK	B11,J9	DPSS571UWH	B23
DPSS20518	I98	DPSS472GY	B11,J9	DPSS580BK	B23
DPSS20524	I99	DPSS472WH	B11,J9	DPSS580GY	B23
DPSS30535BK	A24	DPSS500BK	B27	DPSS580WH	B23
DPSS30535GY	A24	DPSS500GY	B27	DPSS585BK	B23
DPSS30535WH	A24	DPSS500WH	B27	DPSS585GY	B23
DPSS30536BK	A24	DPSS501BK	B27	DPSS585WH	B23
DPSS30536GY	A24	DPSS501GY	B27	DPSS586BK	B23
DPSS30536WH	A24	DPSS501WH	B27	DPSS586GY	B23
DPSS310	B33,K13	DPSS502BK	B27	DPSS586WH	B23
DPSS311	B33,K13	DPSS502GY	B27	DPSS604BK	K8
DPSS31102	I95	DPSS502WH	B27	DPSS604WH	K8
DPSS312	B33,K13	DPSS503BK	B27	DPSS655BK	B28
DPSS401BK	B11,J9	DPSS503GY	B27	DPSS655GY	B28
DPSS401GY	B11,J9	DPSS503WH	B27	DPSS655WH	B28
DPSS401WH	B11,J9	DPSS504BK	B27	DPSS660	B28
DPSS402BK	B11,J9	DPSS504GY	B27	DPSS684BK	K8
DPSS402GY	B11,J9	DPSS504WH	B27	DPSS684WH	K8
DPSS402WH	B11,J9	DPSS505BK	B27	DPSS722BK	B26
DPSS403BK	B11,J9	DPSS505GY	B27	DPSS722GY	B26
DPSS403GY	B11,J9	DPSS505WH	B27	DPSS722WH	B26
DPSS403WH	B11,J9	DPSS512	B18,J8	DPSS723BK	B26
DPSS404BK	B11,J9	DPSS518	B18,J8	DPSS723GY	B26
DPSS404GY	B11,J9	DPSS520BK	B26	DPSS723WH	B26
DPSS404WH	B11,J9	DPSS520GY	B26	DPSS750BK	B25
DPSS406BK	B11,J9	DPSS520WH	B26	DPSS750GY	B25
DPSS406GY	B11,J9	DPSS522BK	B26	DPSS750WH	B25
DPSS406WH	B11,J9	DPSS522GY	B26	DPSS751BK	B25
DPSS411BK	B10	DPSS522WH	B26	DPSS751GY	B25
DPSS411GY	B10	DPSS523BK	B26	DPSS751WH	B25
DPSS411WH	B10	DPSS523GY	B26	DPSS752BK	B25
DPSS412BK	B10	DPSS523WH	B26	DPSS752GY	B25
DPSS412GY	B10	DPSS530BK	B22	DPSS752WH	B25
DPSS412WH	B10	DPSS530WH	B22	DPSS753BK	B25
DPSS413BK	B10	DPSS532BK	B22	DPSS753GY	B25
DPSS413GY	B10	DPSS532WH	B22	DPSS753WH	B25
DPSS413WH	B10	DPSS535BK	B22	DPSS836BK	B22
DPSS414BK	B10	DPSS535GY	B22	DPSS836WH	B22
DPSS414GY	B10	DPSS535WH	B22		
DPSS414WH	B10	DPSS536BK	B22		
DPSS416BK	B10	DPSS536GY	B22		
DPSS416WH	B10	DPSS536WH	B22		
DPSS421	B13	DPSS550BK	B25		
DPSS422	B13	DPSS550GY	B25		
DPSS423	B13	DPSS550WH	B25		
DPSS424	B13	DPSS551BK	B25		
DPSS425	B13	DPSS551GY	B25		

E

EBB118R	M48
EBB118S	M48
EBB240R	M48
EBB240S	M48
ES001	M41

A10

A11

Wiring Accessories Index

ES002	M41	FPBN401BK	D6,J11	FPBS115WH	D20
ES003	M41	FPBN402BK	D6,J11	FPBS120BK	D20
ES008	M41	FPBN403BK	D6,J11	FPBS120WH	D20
		FPBN404BK	D6,J11	FPBS121BK	D20
		FPBN406BK	D6,J11	FPBS121WH	D20
		FPBN411BK	D5	FPBS125BK	D20
		FPBN412BK	D5	FPBS125WH	D20
FPBN038BK	D12	FPBN413BK	D5	FPBS126BK	D20
FPBN039BK	D12	FPBN414BK	D5	FPBS126WH	D20
FPBN060	D17	FPBN416BK	D5	FPBS140PL	D8
FPBN061	D17	FPBN421	D9	FPBS152PL	D8
FPBN065BK	D21	FPBN422	D9	FPBS1535BK	D11
FPBN066BK	D21	FPBN423	D9	FPBS1535WH	D11
FPBN100BK	D17	FPBN424	D9	FPBS1536BK	D11
FPBN115BK	D20	FPBN425BK	D5	FPBS1536WH	D11
FPBN120BK	D20	FPBN426BK	D6,J11	FPBS153PL	D8
FPBN121BK	D20	FPBN500BK	D15	FPBS154PL	D8
FPBN125BK	D20	FPBN501BK	D15	FPBS156BK	D21
FPBN126BK	D20	FPBN502BK	D15	FPBS156WH	D21
FPBN140PL	D8	FPBN503BK	D15	FPBS157BK	D21
FPBN152PL	D8	FPBN504BK	D15	FPBS157WH	D21
FPBN1535BK	D11	FPBN505BK	D15	FPBS158BK	D21
FPBN1536BK	D11	FPBN520BK	D16	FPBS158WH	D21
FPBN153PL	D8	FPBN522BK	D16	FPBS159BK	D21
FPBN154PL	D8	FPBN523BK	D16	FPBS159WH	D21
FPBN156BK	D21	FPBN535BK	D11	FPBS161	D7
FPBN157BK	D21	FPBN536BK	D11	FPBS162	D7
FPBN158BK	D21	FPBN550BK	D13	FPBS163	D7
FPBN159BK	D21	FPBN551BK	D13	FPBS164	D7
FPBN161	D7	FPBN552BK	D13	FPBS1836BK	D11
FPBN162	D7	FPBN553BK	D13	FPBS1836WH	D11
FPBN163	D7	FPBS571UBK	D12	FPBS185	D8
FPBN164	D7	FPBN580BK	D12	FPBS186	D8
FPBN1836BK	D11	FPBN585BK	D12	FPBS200BK	D14
FPBN185	D8	FPBN586BK	D12	FPBS200WH	D14
FPBN186	D8	FPBN655BK	D12	FPBS201BK	D14
FPBN200BK	D14	FPBN660	D16	FPBS201WH	D14
FPBN201BK	D14	FPBN722BK	D16	FPBS202BK	D14
FPBN202BK	D14	FPBN723BK	D16	FPBS202WH	D14
FPBN203BK	D14	FPBN750BK	D13	FPBS203BK	D14
FPBN20401	I112	FPBN751BK	D13	FPBS203WH	D14
FPBN20402	I112	FPBN752BK	D13	FPBS20401	I112
FPBN20403	I113	FPBN753BK	D13	FPBS20402	I112
FPBN20404	I113	FPBS038BK	D12	FPBS20403	I113
FPBN204BK	D14	FPBS038WH	D12	FPBS20404	I113
FPBN20506	I115	FPBS039BK	D12	FPBS204BK	D14
FPBN20508	I115	FPBS039WH	D12	FPBS204BK	D14
FPBN20509	I116	FPBS060	D17	FPBS204WH	D14
FPBN20512	I116	FPBS061	D17	FPBS20506	I115
FPBN20518	I117	FPBS065BK	D21	FPBS20508	I115
FPBN20524	I118	FPBS065WH	D21	FPBS20509	I116
FPBN205BK	D14	FPBS066BK	D21	FPBS20512	I116
FPBN310	D22,K15	FPBS066WH	D21	FPBS20518	I117
FPBN311	D22,K15	FPBS100BK	D17	FPBS20524	I118
FPBN31102	I114	FPBS100WH	D17	FPBS205BK	D14
FPBN312	D22,K15	FPBS115BK	D20	FPBS205WH	D14
				FPBS310	D22,K15

Wiring Accessories Index

FPBS311	D22,K15	FPBS551WH	D13	FPCH153PL	D8
FPBS31102	I114	FPBS552BK	D13	FPCH154PL	D8
FPBS312	D22,K15	FPBS552WH	D13	FPCH156BK	D21
FPBS401BK	D6,J11	FPBS553BK	D13	FPCH156WH	D21
FPBS401WH	D6,J11	FPBS553WH	D13	FPCH157BK	D21
FPBS402BK	D6,J11	FPBS571UBK	D12	FPCH157WH	D21
FPBS402WH	D6,J11	FPBS571UWH	D12	FPCH158BK	D21
FPBS403BK	D6,J11	FPBS580BK	D12	FPCH158WH	D21
FPBS403WH	D6,J11	FPBS580WH	D12	FPCH159BK	D21
FPBS404BK	D6,J11	FPBS585BK	D12	FPCH159WH	D21
FPBS404WH	D6,J11	FPBS585WH	D12	FPCH161	D7
FPBS406BK	D6,J11	FPBS586BK	D12	FPCH162	D7
FPBS406WH	D6,J11	FPBS586WH	D12	FPCH163	D7
FPBS411BK	D5	FPBS655BK	D12	FPCH164	D7
FPBS411WH	D5	FPBS655WH	D12	FPCH1836BK	D11
FPBS412BK	D5	FPBS660	D16	FPCH1836WH	D11
FPBS412WH	D5	FPBS722BK	D16	FPCH185	D8
FPBS413BK	D5	FPBS722WH	D16	FPCH186	D8
FPBS413WH	D5	FPBS723BK	D16	FPCH200BK	D14
FPBS414BK	D5	FPBS723WH	D16	FPCH200WH	D14
FPBS414WH	D5	FPBS750BK	D13	FPCH201BK	D14
FPBS416BK	D5	FPBS750WH	D13	FPCH201WH	D14
FPBS416WH	D5	FPBS751BK	D13	FPCH202BK	D14
FPBS421	D9	FPBS751WH	D13	FPCH202WH	D14
FPBS422	D9	FPBS752BK	D13	FPCH203BK	D14
FPBS423	D9	FPBS752WH	D13	FPCH203WH	D14
FPBS424	D9	FPBS753BK	D13	FPCH20401	I112
FPBS425BK	D5	FPBS753WH	D13	FPCH20402	I112
FPBS425WH	D5	FPCH038BK	D12	FPCH20403	I113
FPBS426BK	D6,J11	FPCH038WH	D12	FPCH20404	I113
FPBS426WH	D6,J11	FPCH039BK	D12	FPCH204BK	D14
FPBS500BK	D15	FPCH039WH	D12	FPCH204WH	D14
FPBS501BK	D15	FPCH060	D17	FPCH20506	I115
FPBS501WH	D15	FPCH061	D17	FPCH20508	I115
FPBS502BK	D15	FPCH065BK	D21	FPCH20509	I116
FPBS502WH	D15	FPCH065WH	D21	FPCH20512	I116
FPBS503BK	D15	FPCH066BK	D21	FPCH20518	I117
FPBS503WH	D15	FPCH066WH	D21	FPCH20524	I118
FPBS504BK	D15	FPCH100BK	D17	FPCH205BK	D14
FPBS504WH	D15	FPCH100WH	D17	FPCH205WH	D14
FPBS505BK	D15	FPCH115BK	D20	FPCH310	D22,K15
FPBS505WH	D15	FPCH115WH	D20	FPCH311	D22,K15
FPBS505WH	D15	FPCH120BK	D20	FPCH31102	I114
FPBS520BK	D16	FPCH120WH	D20	FPCH312	D22,K15
FPBS520WH	D16	FPCH121BK	D20	FPCH401BK	D6,J11
FPBS522BK	D16	FPCH121WH	D20	FPCH401WH	D6,J11
FPBS522WH	D16	FPCH125BK	D20	FPCH402BK	D6,J11
FPBS523BK	D16	FPCH125WH	D20	FPCH402WH	D6,J11
FPBS523WH	D16	FPCH126BK	D20	FPCH403BK	D6,J11
FPBS535BK	D11	FPCH126WH	D20	FPCH403WH	D6,J11
FPBS535WH	D11	FPCH140PL	D8	FPCH404BK	D6,J11
FPBS536BK	D11	FPCH152PL	D8	FPCH404WH	D6,J11
FPBS536WH	D11	FPCH1535BK	D11	FPCH406BK	D6,J11
FPBS550BK	D13	FPCH1535WH	D11	FPCH406WH	D6,J11
FPBS550WH	D13	FPCH1536BK	D11	FPCH411BK	D5
FPBS551BK	D13	FPCH1536WH	D11	FPCH411WH	D5

Wiring Accessories Index

Wiring Accessories Index

A14

FPCH412BK	D5	FPCH660	D16	FPPN1836WH	D11
FPCH412WH	D5	FPCH722BK	D16	FPPN185	D8
FPCH413BK	D5	FPCH722WH	D16	FPPN186	D8
FPCH413WH	D5	FPCH723BK	D16	FPPN200BK	D14
FPCH414BK	D5	FPCH723WH	D16	FPPN200WH	D14
FPCH414WH	D5	FPCH750BK	D13	FPPN201BK	D14
FPCH416BK	D5	FPCH750WH	D13	FPPN201WH	D14
FPCH416WH	D5	FPCH751BK	D13	FPPN202BK	D14
FPCH421	D9	FPCH751WH	D13	FPPN202WH	D14
FPCH422	D9	FPCH752BK	D13	FPPN203BK	D14
FPCH423	D9	FPCH752WH	D13	FPPN203WH	D14
FPCH424	D9	FPCH753BK	D13	FPPN20401	I112
FPCH425BK	D5	FPCH753WH	D13	FPPN20402	I112
FPCH425WH	D5	FPPN038BK	D12	FPPN20403	I113
FPCH426BK	D6,J11	FPPN038WH	D12	FPPN20404	I113
FPCH426WH	D6,J11	FPPN039BK	D12	FPPN204BK	D14
FPCH500BK	D15	FPPN039WH	D12	FPPN204WH	D14
FPCH500WH	D15	FPPN060	D17	FPPN20506	I115
FPCH501BK	D15	FPPN061	D17	FPPN20508	I115
FPCH501WH	D15	FPPN065BK	D21	FPPN20509	I116
FPCH502BK	D15	FPPN065WH	D21	FPPN20512	I116
FPCH502WH	D15	FPPN066BK	D21	FPPN20518	I117
FPCH503BK	D15	FPPN066WH	D21	FPPN20524	I118
FPCH503WH	D15	FPPN100BK	D17	FPPN205BK	D14
FPCH504BK	D15	FPPN100WH	D17	FPPN205WH	D14
FPCH504WH	D15	FPPN115BK	D20	FPPN310	D22,K15
FPCH505BK	D15	FPPN115WH	D20	FPPN311	D22,K15
FPCH505WH	D15	FPPN120BK	D20	FPPN31102	I114
FPCH520BK	D16	FPPN120WH	D20	FPPN312	D22,K15
FPCH520WH	D16	FPPN121BK	D20	FPPN401BK	D6,J11
FPCH522BK	D16	FPPN121WH	D20	FPPN401WH	D6,J11
FPCH522WH	D16	FPPN125BK	D20	FPPN402BK	D6,J11
FPCH523BK	D16	FPPN125WH	D20	FPPN402WH	D6,J11
FPCH523WH	D16	FPPN126BK	D20	FPPN403BK	D6,J11
FPCH535BK	D11	FPPN126WH	D20	FPPN403WH	D6,J11
FPCH535WH	D11	FPPN140PL	D8	FPPN404BK	D6,J11
FPCH536BK	D11	FPPN152PL	D8	FPPN404WH	D6,J11
FPCH536WH	D11	FPPN153BK	D11	FPPN406BK	D6,J11
FPCH550BK	D13	FPPN1535WH	D11	FPPN406WH	D6,J11
FPCH550WH	D13	FPPN1536BK	D11	FPPN411BK	D5
FPCH551BK	D13	FPPN1536WH	D11	FPPN411WH	D5
FPCH551WH	D13	FPPN153PL	D8	FPPN412BK	D5
FPCH552BK	D13	FPPN154PL	D8	FPPN412WH	D5
FPCH552WH	D13	FPPN156BK	D21	FPPN413BK	D5
FPCH553BK	D13	FPPN156WH	D21	FPPN413WH	D5
FPCH553WH	D13	FPPN157BK	D21	FPPN414BK	D5
FPCH571UBK	D12	FPPN157WH	D21	FPPN414WH	D5
FPCH571UWH	D12	FPPN158BK	D21	FPPN416WH	D5
FPCH580BK	D12	FPPN158WH	D21	FPPN421	D9
FPCH580WH	D12	FPPN159BK	D21	FPPN422	D9
FPCH585BK	D12	FPPN159WH	D21	FPPN423	D9
FPCH585WH	D12	FPPN161	D7	FPPN424	D9
FPCH586BK	D12	FPPN162	D7	FPPN425BK	D5
FPCH586WH	D12	FPPN163	D7	FPPN425WH	D5
FPCH655BK	D12	FPPN164	D7	FPPN426BK	D6,J11
FPCH655WH	D12	FPPN1836BK	D11		

A15

FPPN426WH	D6,J11	FPSS039BK	D12	FPSS204BK	D14
FPPN500BK	D15	FPSS039WH	D12	FPSS204WH	D14
FPPN500WH	D15	FPSS060	D17	FPSS20506	I115
FPPN501BK	D15	FPSS061	D17	FPSS20508	I115
FPPN501WH	D15	FPSS065BK	D21	FPSS20509	I116
FPPN502BK	D15	FPSS065WH	D21	FPSS20512	I116
FPPN502WH	D15	FPSS066BK	D21	FPSS20518	I117
FPPN503BK	D15	FPSS066WH	D21	FPSS20524	I118
FPPN503WH	D15	FPSS100BK	D17	FPSS205BK	D14
FPPN504BK	D15	FPSS100WH	D17	FPSS205WH	D14
FPPN504WH	D15	FPSS115BK	D20	FPSS310	D22,K15
FPPN505BK	D15	FPSS115WH	D20	FPSS311	D22,K15
FPPN505WH	D15	FPSS120BK	D20	FPSS31102	I114
FPPN520BK	D16	FPSS120WH	D20	FPSS312	D22,K15
FPPN520WH	D16	FPSS121BK	D20	FPSS401BK	D6,J11
FPPN522BK	D16	FPSS121WH	D20	FPSS401WH	D6,J11
FPPN522WH	D16	FPSS125BK	D20	FPSS402BK	D6,J11
FPPN523BK	D16	FPSS125WH	D20	FPSS402WH	D6,J11
FPPN523WH	D16	FPSS126BK	D20	FPSS403BK	D6,J11
FPPN523WH	D16	FPSS126WH	D20	FPSS403WH	D6,J11
FPPN535WH	D11	FPSS140PL	D8	FPSS404BK	D6,J11
FPPN536BK	D11	FPSS152PL	D8	FPSS404WH	D6,J11
FPPN536WH	D11	FPSS1535BK	D11	FPSS406BK	D6,J11
FPPN550BK	D13	FPSS1535WH	D11	FPSS406WH	D6,J11
FPPN550WH	D13	FPSS1536BK	D11	FPSS411BK	D5
FPPN551BK	D13	FPSS1536WH	D11	FPSS411WH	D5
FPPN551WH	D13	FPSS153PL	D8	FPSS412BK	D5
FPPN552BK	D13	FPSS154PL	D8	FPSS412WH	D5
FPPN552WH	D13	FPSS156BK	D21	FPSS413BK	D5
FPPN553BK	D13	FPSS156WH	D21	FPSS413WH	D5
FPPN553WH	D13	FPSS157BK	D21	FPSS414BK	D5
FPPN571UBK	D12	FPSS157WH	D21	FPSS414WH	D5
FPPN571UWH	D12	FPSS158BK	D21	FPSS416BK	D5
FPPN580BK	D12	FPSS158WH	D21	FPSS416WH	D5
FPPN580WH	D12	FPSS159BK	D21	FPSS421	D9
FPPN585BK	D12	FPSS159WH	D21	FPSS422	D9
FPPN585WH	D12	FPSS161	D7	FPSS423	D9
FPPN586BK	D12	FPSS162	D7	FPSS424	D9
FPPN586WH	D12	FPSS163	D7	FPSS425BK	D5
FPPN655BK	D12	FPSS164	D7	FPSS425WH	D5
FPPN655WH	D12	FPSS1836BK	D11	FPSS426BK	D6,J11
FPPN660	D16	FPSS1836WH	D11	FPSS426WH	D6,J11
FPPN722BK	D16	FPSS185	D8	FPSS500BK	D15
FPPN722WH	D16	FPSS186	D8	FPSS500WH	D15
FPPN723BK	D16	FPSS200BK	D14	FPSS501BK	D15
FPPN723WH	D16	FPSS200WH	D14	FPSS501WH	D15
FPPN750BK	D13	FPSS201BK	D14	FPSS502BK	D15
FPPN750WH	D13	FPSS201WH	D14	FPSS502WH	D15
FPPN751BK	D13	FPSS202BK	D14	FPSS503BK	D15
FPPN751WH	D13	FPSS202WH	D14	FPSS503WH	D15
FPPN752BK	D13	FPSS203BK	D14	FPSS504BK	D15
FPPN752WH	D13	FPSS203WH	D14	FPSS504WH	D15
FPPN753BK	D13	FPSS20401	I112	FPSS505BK	D15
FPPN753WH	D13	FPSS20402	I112	FPSS505WH	D15
FPSS038BK	D12	FPSS20403	I113	FPSS520BK	D16
FPSS038WH	D12	FPSS20404	I113	FPSS520WH	D16

Wiring Accessories Index

FPSS522BK	D16	G		GM1030BKCH	150
FPSS522WH	D16			GM1030BKMB	150
FPSS523BK	D16	GA100	M7	GM1030BKPN	150
FPSS523WH	D16	GA100BK	M7	GM1030BKSB	150
FPSS535BK	D11	GM050BK	186	GM1030BKSC	150
FPSS535WH	D11	GM050BKAB	186	GM1030BKSS	150
FPSS536BK	D11	GM050BKBN	186	GM1030GYBS	150
FPSS536WH	D11	GM050BKBR	186	GM1030GYSC	150
FPSS550BK	D13	GM050BKBS	186	GM1030GYSS	150
FPSS550WH	D13	GM050KBZ	186	GM1030PW	150
FPSS551BK	D13	GM050BKCH	186	GM1030PWBR	150
FPSS551WH	D13	GM050BKMB	186	GM1030PWBS	150
FPSS552BK	D13	GM050BKPN	186	GM1030PWCH	150
FPSS552WH	D13	GM050KSB	186	GM1030PWPN	150
FPSS553BK	D13	GM050BKSC	186	GM1030PWSB	150
FPSS553WH	D13	GM050BKSS	186	GM1030PWSC	150
FPSS571UBK	D12	GM050GYBS	186	GM1030PWSS	150
FPSS571UWH	D12	GM050GYSC	186	GM150BK	188
FPSS580BK	D12	GM050GYSS	186	GM150BKAB	188
FPSS580WH	D12	GM050PW	186	GM150BKBN	188
FPSS585BK	D12	GM050PWBR	186	GM150BKBR	188
FPSS585WH	D12	GM050PWBS	186	GM150BKBS	188
FPSS586BK	D12	GM050PWCH	186	GM150BKBZ	188
FPSS586WH	D12	GM050PWPN	186	GM150BKCH	188
FPSS655BK	D12	GM050PWSB	186	GM150BKMB	188
FPSS655WH	D12	GM050PWSC	186	GM150BKPN	188
FPSS660	D16	GM050PWSS	186	GM150BKSB	188
FPSS722BK	D16	GM1020BK	148	GM150BKSC	188
FPSS722WH	D16	GM1020BKAB	148	GM150BKSS	188
FPSS723BK	D16	GM1020BKBN	148	GM150GYBS	188
FPSS723WH	D16	GM1020BKBR	148	GM150GYSC	188
FPSS750BK	D13	GM1020BKBS	148	GM150GYSS	188
FPSS750WH	D13	GM1020BKCH	148	GM150PW	188
FPSS751BK	D13	GM1020BKCH	148	GM150PWBR	188
FPSS751WH	D13	GM1020BKMB	148	GM150PWBS	188
FPSS752BK	D13	GM1020BKPN	148	GM150PWCH	188
FPSS752WH	D13	GM1020BKSB	148	GM150PWPN	188
FPSS753BK	D13	GM1020BKSC	148	GM150PWSB	188
FPSS753WH	D13	GM1020BKSS	148	GM150PWSC	188
FS030SS	M36	GM1020GYBS	148	GM150PWSS	188
FS032SS	M36	GM1020GYSC	148	GM2001BK	126
FS311SS	K18,M36	GM1020GYSS	148	GM2001BKAB	126
FS312SS	K18,M36	GM1020PW	148	GM2001BKBN	126
FU021	M47	GM1020PWBR	148	GM2001BKBR	126
FU022	M47	GM1020PWBS	148	GM2001BKBS	126
FU023	M47	GM1020PWCH	148	GM2001BKCH	126
FU030	M47	GM1020PWPN	148	GM2001BKMB	126
FU031	M47	GM1020PWSB	148	GM2001BKSC	126
FU032	M47	GM1020PWSC	148	GM2001BKSS	126
FU035	M47	GM1020PWSS	148	GM2001BKPN	126
FU036	M47	GM1030BK	150	GM2001BKSB	126
FU037	M47	GM1030BKAB	150	GM2001BKSC	126
FU038	M47	GM1030BKBN	150	GM2001BKSS	126
		GM1030BKBR	150	GM2001BTBK	174
		GM1030BKBS	150	GM2001BTPW	174
		GM1030BKZ	150	GM2001GYBS	126
				GM2001GYSC	126

Wiring Accessories Index

GM2001GYSS	126	GM2003PWSB	152	GM2008PWBS	168
GM2001PW	126	GM2003PWSC	152	GM2008PWCH	168
GM2001PWBR	126	GM2003PWSS	152	GM2008PWPN	168
GM2001PWBS	126	GM2004BK	130	GM2008PWWSB	168
GM2001PWCH	126	GM2004BKAB	130	GM2008PWSC	168
GM2001PWPN	126	GM2004BKBN	130	GM2008PWSS	168
GM2001PWRD	188	GM2004BKBR	130	GM2008RTAB	172
GM2001PWSB	126	GM2004BKBS	130	GM2008RTBK	172
GM2001PWSC	126	GM2004BKZ	130	GM2008RTBN	172
GM2001PWSS	126	GM2004BKCH	130	GM2008RTBR	172
GM2002BK	128	GM2004BKMB	130	GM2008RTBS	172
GM2002BKAB	128	GM2004BKPN	130	GM2008RTBZ	172
GM2002BKBN	128	GM2004BKSB	130	GM2008RTCH	172
GM2002BKBR	128	GM2004BKSC	130	GM2008RTPN	172
GM2002BKBS	128	GM2004BKSS	130	GM2008RTPW	172
GM2002BKZ	128	GM2004GYBS	130	GM2008RTSB	172
GM2002BKCH	128	GM2004GYSC	130	GM2008RTSC	172
GM2002BKMB	128	GM2004GYSS	130	GM2008RTSS	172
GM2002BKPN	128	GM2004PW	130	GM2014BK	154
GM2002BKSB	128	GM2004PWBR	130	GM2014BKAB	154
GM2002BKSC	128	GM2004PWBS	130	GM2014BKBN	154
GM2002BKSS	128	GM2004PWCH	130	GM2014BKBR	154
GM2002BTBK	174	GM2004PWPN	130	GM2014BKBS	154
GM2002BTPW	174	GM2004PWRD	130	GM2014BKZ	154
GM2002GYBS	128	GM2004PWSB	130	GM2014BKCH	154
GM2002GYSC	128	GM2004PWSC	130	GM2014BKMB	154
GM2002GYSS	128	GM2004PWSS	130	GM2014BKPN	154
GM2002PW	128	GM2008BK	168	GM2014BKSB	154
GM2002PWBR	128	GM2008BKAB	168	GM2014BKSC	154
GM2002PWBS	128	GM2008BKBN	168	GM2014BKSS	154
GM2002PWCH	128	GM2008BKBR	168	GM2014GYBS	154
GM2002PWPN	128	GM2008BKBS	168	GM2014GYSC	154
GM2002PWRD	128	GM2008BKZ	168	GM2014GYSS	154
GM2002PWSB	128	GM2008BKCH	168	GM2014PW	154
GM2002PWSC	128	GM2008BKMB	168	GM2014PWBR	154
GM2002PWSS	128	GM2008BKPN	168	GM2014PWBS	154
GM2003BK	152	GM2008BKSB	168	GM2014PWCH	154
GM2003BKAB	152	GM2008BKSC	168	GM2014PWPN	154
GM2003BKBN	152	GM2008BKSS	168	GM2014PWSB	154
GM2003BKZ	152	GM2008GTAB	172	GM2014PWSC	154
GM2003BKCH	152	GM2008GTBK	172	GM2014PWSS	154
GM2003BKMB	152	GM2008GTBN	172	GM2017BK	166
GM2003BKPN	152	GM2008GTBR	172	GM2017BKAB	166
GM2003BKBS	152	GM2008GTBS	172	GM2017BKBN	166
GM2003BKSC	152	GM2008GTBZ	172	GM2017BKBR	166
GM2003BKSB	152	GM2008GTCH	172	GM2017BKBS	166
GM2003BKSC	152	GM2008GTPN	172	GM2017BKZ	166
GM2003BKSS	152	GM2008GTPW	172	GM2017BKCH	166
GM2003GYBS	152	GM2008GTSB	172	GM2017BKMB	166
GM2003GYSC	152	GM2008GTSC	172	GM2017BKPN	166
GM2003GYSS	152	GM2008GTSS	172	GM2017BKSB	166
GM2003PW	152	GM2008GYBS	168	GM2017BKSC	166
GM2003PWBR	152	GM2008GYSC	168	GM2017BKSS	166
GM2003PWBS	152	GM2008GYSS	168	GM2017GYBS	166
GM2003PWCH	152	GM2008PW	168	GM2017GYSC	166
GM2003PWPN	152	GM2008PWBR	168	GM2017GYSS	166

Wiring Accessories Index

GM2017PW	I66	GM2018BKBN-TD	I34	GM2018BKBZ-WD	I34
GM2017PWBR	I66	GM2018BKBN-WC	I34	GM2018BKBZ-WDR	I34
GM2017PWBS	I66	GM2018BKBN-WD	I34	GM2018BKBZ-WH	I34
GM2017PWCH	I66	GM2018BKBN-WDR	I34	GM2018BKBN-WM	I34
GM2017PWP	I66	GM2018BKBN-WH	I34	GM2018BKCH	I34
GM2017PWSB	I66	GM2018BKBN-WM	I34	GM2018BKCH-BL	I34
GM2017PWSC	I66	GM2018BKBR	I34	GM2018BKCH-CH	I34
GM2017PWSS	I66	GM2018BKBR-BL	I34	GM2018BKCH-DW	I34
GM2018BK	I34	GM2018BKBR-CH	I34	GM2018BKCH-FD	I34
GM2018BK-BL	I34	GM2018BKBR-DW	I34	GM2018BKCH-FF	I34
GM2018BK-CH	I34	GM2018BKBR-FD	I34	GM2018BKCH-FN	I34
GM2018BK-DW	I34	GM2018BKBR-FF	I34	GM2018BKCH-FZ	I34
GM2018BK-FD	I34	GM2018BKBR-FN	I34	GM2018BKCH-HB	I34
GM2018BK-FF	I34	GM2018BKBR-FZ	I34	GM2018BKCH-HT	I34
GM2018BK-FN	I34	GM2018BKBR-HB	I34	GM2018BKCH-MW	I34
GM2018BK-FZ	I34	GM2018BKBR-HT	I34	GM2018BKCH-OV	I34
GM2018BK-HB	I34	GM2018BKBR-MW	I34	GM2018BKCH-TD	I34
GM2018BK-HT	I34	GM2018BKBR-OV	I34	GM2018BKCH-WC	I34
GM2018BK-MW	I34	GM2018BKBR-TD	I34	GM2018BKCH-WD	I34
GM2018BK-OV	I34	GM2018BKBR-WC	I34	GM2018BKCH-WDR	I34
GM2018BK-TD	I34	GM2018BKBR-WD	I34	GM2018BKCH-WH	I34
GM2018BK-WC	I34	GM2018BKBR-WDR	I34	GM2018BKCH-WM	I34
GM2018BK-WD	I34	GM2018BKBR-WH	I34	GM2018BKMB	I34
GM2018BK-WDR	I34	GM2018BKBR-WM	I34	GM2018BKMB-BL	I34
GM2018BK-WH	I34	GM2018BKBS	I34	GM2018BKMB-CH	I34
GM2018BK-WM	I34	GM2018BKBS-BL	I34	GM2018BKMB-DW	I34
GM2018BKAB	I34	GM2018BKBS-CH	I34	GM2018BKMB-FD	I34
GM2018BKAB-BL	I34	GM2018BKBS-DW	I34	GM2018BKMB-FF	I34
GM2018BKAB-CH	I34	GM2018BKBS-FD	I34	GM2018BKMB-FN	I34
GM2018BKAB-DW	I34	GM2018BKBS-FF	I34	GM2018BKMB-FZ	I34
GM2018BKAB-FD	I34	GM2018BKBS-FN	I34	GM2018BKMB-HB	I34
GM2018BKAB-FF	I34	GM2018BKBS-FZ	I34	GM2018BKMB-HT	I34
GM2018BKAB-FN	I34	GM2018BKBS-HB	I34	GM2018BKMB-MW	I34
GM2018BKAB-FZ	I34	GM2018BKBS-HT	I34	GM2018BKMB-OV	I34
GM2018BKAB-HB	I34	GM2018BKBS-MW	I34	GM2018BKMB-TD	I34
GM2018BKAB-HT	I34	GM2018BKBS-OV	I34	GM2018BKMB-WC	I34
GM2018BKAB-MW	I34	GM2018BKBS-TD	I34	GM2018BKMB-WD	I34
GM2018BKAB-OV	I34	GM2018BKBS-WC	I34	GM2018BKMB-WDR	I34
GM2018BKAB-TD	I34	GM2018BKBS-WD	I34	GM2018BKMB-WH	I34
GM2018BKAB-WC	I34	GM2018BKBS-WDR	I34	GM2018BKMB-WM	I34
GM2018BKAB-WD	I34	GM2018BKBS-WH	I34	GM2018BKPN	I34
GM2018BKAB-WDR	I34	GM2018BKBS-WM	I34	GM2018BKPN-BL	I34
GM2018BKAB-WH	I34	GM2018BKBZ	I34	GM2018BKPN-CH	I34
GM2018BKAB-WM	I34	GM2018BKBZ-BL	I34	GM2018BKPN-DW	I34
GM2018BKBN	I34	GM2018BKBZ-CH	I34	GM2018BKPN-FD	I34
GM2018BKBN-BL	I34	GM2018BKBZ-DW	I34	GM2018BKPN-FF	I34
GM2018BKBN-CH	I34	GM2018BKBZ-FD	I34	GM2018BKPN-FN	I34
GM2018BKBN-DW	I34	GM2018BKBZ-FF	I34	GM2018BKPN-FZ	I34
GM2018BKBN-FD	I34	GM2018BKBZ-FN	I34	GM2018BKPN-HB	I34
GM2018BKBN-FF	I34	GM2018BKBZ-FZ	I34	GM2018BKPN-HT	I34
GM2018BKBN-FN	I34	GM2018BKBZ-HB	I34	GM2018BKPN-MW	I34
GM2018BKBN-FZ	I34	GM2018BKBZ-HT	I34	GM2018BKPN-OV	I34
GM2018BKBN-HB	I34	GM2018BKBZ-MW	I34	GM2018BKPN-TD	I34
GM2018BKBN-HT	I34	GM2018BKBZ-OV	I34	GM2018BKPN-WC	I34
GM2018BKBN-MW	I34	GM2018BKBZ-TD	I34	GM2018BKPN-WD	I34
GM2018BKBN-OV	I34	GM2018BKBZ-WC	I34	GM2018BKPN-WDR	I34

Wiring Accessories Index

GM2018BKPN-WH	I34	GM2018BTBK	I74	GM2018NBK	I36
GM2018BKPN-WM	I34	GM2018BTPW	I74	GM2018NBK-BL	I36
GM2018BKSB	I34	GM2018GYBS	I34	GM2018NBK-CH	I36
GM2018BKSB-BL	I34	GM2018GYBS-BL	I34	GM2018NBK-DW	I36
GM2018BKSB-CH	I34	GM2018GYBS-CH	I34	GM2018NBK-FD	I36
GM2018BKSB-DW	I34	GM2018GYBS-DW	I34	GM2018NBK-FF	I36
GM2018BKSB-FD	I34	GM2018GYBS-FD	I34	GM2018NBK-FN	I36
GM2018BKSB-FF	I34	GM2018GYBS-FF	I34	GM2018NBK-FZ	I36
GM2018BKSB-FN	I34	GM2018GYBS-FN	I34	GM2018NBK-HB	I36
GM2018BKSB-FZ	I34	GM2018GYBS-FZ	I34	GM2018NBK-HT	I36
GM2018BKSB-HB	I34	GM2018GYBS-HB	I34	GM2018NBK-MW	I36
GM2018BKSB-HT	I34	GM2018GYBS-HT	I34	GM2018NBK-OV	I36
GM2018BKSB-MW	I34	GM2018GYBS-MW	I34	GM2018NBK-TD	I36
GM2018BKSB-OV	I34	GM2018GYBS-OV	I34	GM2018NBK-WC	I36
GM2018BKSB-TD	I34	GM2018GYBS-TD	I34	GM2018NBK-WD	I36
GM2018BKSB-WC	I34	GM2018GYBS-WC	I34	GM2018NBK-WDR	I36
GM2018BKSB-WD	I34	GM2018GYBS-WD	I34	GM2018NBK-WH	I36
GM2018BKSB-WDR	I34	GM2018GYBS-WDR	I34	GM2018NBK-WM	I36
GM2018BKSB-WH	I34	GM2018GYBS-WH	I34	GM2018NBKAB	I36
GM2018BKSB-WM	I34	GM2018GYBS-WM	I34	GM2018NBKAB-BL	I36
GM2018BKSC	I34	GM2018GYSC	I34	GM2018NBKAB-CH	I36
GM2018BKSC-BL	I34	GM2018GYSC-BL	I34	GM2018NBKAB-DW	I36
GM2018BKSC-CH	I34	GM2018GYSC-CH	I34	GM2018NBKAB-FD	I36
GM2018BKSC-DW	I34	GM2018GYSC-DW	I34	GM2018NBKAB-FF	I36
GM2018BKSC-FD	I34	GM2018GYSC-FD	I34	GM2018NBKAB-FN	I36
GM2018BKSC-FF	I34	GM2018GYSC-FF	I34	GM2018NBKAB-FZ	I36
GM2018BKSC-FN	I34	GM2018GYSC-FN	I34	GM2018NBKAB-HB	I36
GM2018BKSC-FZ	I34	GM2018GYSC-FZ	I34	GM2018NBKAB-HT	I36
GM2018BKSC-HB	I34	GM2018GYSC-HB	I34	GM2018NBKAB-MW	I36
GM2018BKSC-HT	I34	GM2018GYSC-HT	I34	GM2018NBKAB-OV	I36
GM2018BKSC-MW	I34	GM2018GYSC-MW	I34	GM2018NBKAB-TD	I36
GM2018BKSC-OV	I34	GM2018GYSC-OV	I34	GM2018NBKAB-WC	I36
GM2018BKSC-TD	I34	GM2018GYSC-TD	I34	GM2018NBKAB-WD	I36
GM2018BKSC-WC	I34	GM2018GYSC-WC	I34	GM2018NBKAB-WDR	I36
GM2018BKSC-WD	I34	GM2018GYSC-WD	I34	GM2018NBKAB-WH	I36
GM2018BKSC-WDR	I34	GM2018GYSC-WDR	I34	GM2018NBKAB-WM	I36
GM2018BKSC-WH	I34	GM2018GYSC-WH	I34	GM2018NBKBN	I36
GM2018BKSC-WM	I34	GM2018GYSC-WM	I34	GM2018NBKBN-BL	I36
GM2018BKSS	I34	GM2018GYSS	I34	GM2018NBKBN-CH	I36
GM2018BKSS-BL	I34	GM2018GYSS-BL	I34	GM2018NBKBN-DW	I36
GM2018BKSS-CH	I34	GM2018GYSS-CH	I34	GM2018NBKBN-FD	I36
GM2018BKSS-DW	I34	GM2018GYSS-DW	I34	GM2018NBKBN-FF	I36
GM2018BKSS-FD	I34	GM2018GYSS-FD	I34	GM2018NBKBN-FN	I36
GM2018BKSS-FF	I34	GM2018GYSS-FF	I34	GM2018NBKBN-FZ	I36
GM2018BKSS-FN	I34	GM2018GYSS-FN	I34	GM2018NBKBN-HB	I36
GM2018BKSS-FZ	I34	GM2018GYSS-FZ	I34	GM2018NBKBN-HT	I36
GM2018BKSS-HB	I34	GM2018GYSS-HB	I34	GM2018NBKBN-MW	I36
GM2018BKSS-HT	I34	GM2018GYSS-HT	I34	GM2018NBKBN-OV	I36
GM2018BKSS-MW	I34	GM2018GYSS-MW	I34	GM2018NBKBN-TD	I36
GM2018BKSS-OV	I34	GM2018GYSS-OV	I34	GM2018NBKBN-WC	I36
GM2018BKSS-TD	I34	GM2018GYSS-TD	I34	GM2018NBKBN-WD	I36
GM2018BKSS-WC	I34	GM2018GYSS-WC	I34	GM2018NBKBN-WDR	I36
GM2018BKSS-WD	I34	GM2018GYSS-WD	I34	GM2018NBKBN-WH	I36
GM2018BKSS-WDR	I34	GM2018GYSS-WDR	I34	GM2018NBKBN-WM	I36
GM2018BKSS-WH	I34	GM2018GYSS-WH	I34	GM2018NBKBR	I36
GM2018BKSS-WM	I34	GM2018GYSS-WM	I34	GM2018NBKBR-BL	I36

Wiring Accessories Index

GM2018NBKBR-CH	I36	GM2018NBKCH-FD	I36	GM2018NBKSB-FN	I36
GM2018NBKBR-DW	I36	GM2018NBKCH-FF	I36	GM2018NBKSB-FZ	I36
GM2018NBKBR-FD	I36	GM2018NBKCH-FN	I36	GM2018NBKSB-HB	I36
GM2018NBKBR-FF	I36	GM2018NBKCH-FZ	I36	GM2018NBKSB-HT	I36
GM2018NBKBR-FN	I36	GM2018NBKCH-HB	I36	GM2018NBKSB-MW	I36
GM2018NBKBR-FZ	I36	GM2018NBKCH-HT	I36	GM2018NBKSB-OV	I36
GM2018NBKBR-HB	I36	GM2018NBKCH-MW	I36	GM2018NBKSB-TD	I36
GM2018NBKBR-HT	I36	GM2018NBKCH-OV	I36	GM2018NBKSB-WC	I36
GM2018NBKBR-MW	I36	GM2018NBKCH-TD	I36	GM2018NBKSB-WD	I36
GM2018NBKBR-OV	I36	GM2018NBKCH-WC	I36	GM2018NBKSB-WDR	I36
GM2018NBKBR-TD	I36	GM2018NBKCH-WD	I36	GM2018NBKSB-WH	I36
GM2018NBKBR-WC	I36	GM2018NBKCH-WDR	I36	GM2018NBKSB-WM	I36
GM2018NBKBR-WD	I36	GM2018NBKCH-WH	I36	GM2018NBKSC	I36
GM2018NBKBR-WDR	I36	GM2018NBKCH-WM	I36	GM2018NBKSC-BL	I36
GM2018NBKBR-WH	I36	GM2018NBKMB	I36	GM2018NBKSC-CH	I36
GM2018NBKBR-WM	I36	GM2018NBKMB-BL	I36	GM2018NBKSC-DW	I36
GM2018NBKBS	I36	GM2018NBKMB-CH	I36	GM2018NBKSC-FD	I36
GM2018NBKBS-BL	I36	GM2018NBKMB-DW	I36	GM2018NBKSC-FF	I36
GM2018NBKBS-CH	I36	GM2018NBKMB-FD	I36	GM2018NBKSC-FN	I36
GM2018NBKBS-DW	I36	GM2018NBKMB-FF	I36	GM2018NBKSC-FZ	I36
GM2018NBKBS-FD	I36	GM2018NBKMB-FN	I36	GM2018NBKSC-HB	I36
GM2018NBKBS-FF	I36	GM2018NBKMB-FZ	I36	GM2018NBKSC-HT	I36
GM2018NBKBS-FN	I36	GM2018NBKMB-HB	I36	GM2018NBKSC-MW	I36
GM2018NBKBS-FZ	I36	GM2018NBKMB-HT	I36	GM2018NBKSC-OV	I36
GM2018NBKBS-HB	I36	GM2018NBKMB-MW	I36	GM2018NBKSC-TD	I36
GM2018NBKBS-HT	I36	GM2018NBKMB-OV	I36	GM2018NBKSC-WC	I36
GM2018NBKBS-MW	I36	GM2018NBKMB-TD	I36	GM2018NBKSC-WD	I36
GM2018NBKBS-OV	I36	GM2018NBKMB-WC	I36	GM2018NBKSC-WDR	I36
GM2018NBKBS-TD	I36	GM2018NBKMB-WD	I36	GM2018NBKSC-WH	I36
GM2018NBKBS-WC	I36	GM2018NBKMB-WDR	I36	GM2018NBKSC-WM	I36
GM2018NBKBS-WD	I36	GM2018NBKMB-WH	I36	GM2018NBKSS	I36
GM2018NBKBS-WDR	I36	GM2018NBKMB-WM	I36	GM2018NBKSS-BL	I36
GM2018NBKBS-WH	I36	GM2018NBKPN	I36	GM2018NBKSS-CH	I36
GM2018NBKBS-WM	I36	GM2018NBKPN-BL	I36	GM2018NBKSS-DW	I36
GM2018NBKBZ	I36	GM2018NBKPN-CH	I36	GM2018NBKSS-FD	I36
GM2018NBKBZ-BL	I36	GM2018NBKPN-DW	I36	GM2018NBKSS-FF	I36
GM2018NBKBZ-CH	I36	GM2018NBKPN-FD	I36	GM2018NBKSS-FN	I36
GM2018NBKBZ-DW	I36	GM2018NBKPN-FF	I36	GM2018NBKSS-FZ	I36
GM2018NBKBZ-FD	I36	GM2018NBKPN-FN	I36	GM2018NBKSS-HB	I36
GM2018NBKBZ-FF	I36	GM2018NBKPN-FZ	I36	GM2018NBKSS-HT	I36
GM2018NBKBZ-FN	I36	GM2018NBKPN-HB	I36	GM2018NBKSS-MW	I36
GM2018NBKBZ-FZ	I36	GM2018NBKPN-HT	I36	GM2018NBKSS-OV	I36
GM2018NBKBZ-HB	I36	GM2018NBKPN-MW	I36	GM2018NBKSS-TD	I36
GM2018NBKBZ-HT	I36	GM2018NBKPN-OV	I36	GM2018NBKSS-WC	I36
GM2018NBKBZ-MW	I36	GM2018NBKPN-TD	I36	GM2018NBKSS-WD	I36
GM2018NBKBZ-OV	I36	GM2018NBKPN-WC	I36	GM2018NBKSS-WDR	I36
GM2018NBKBZ-TD	I36	GM2018NBKPN-WD	I36	GM2018NBKSS-WH	I36
GM2018NBKBZ-WC	I36	GM2018NBKPN-WDR	I36	GM2018NBKSS-WM	I36
GM2018NBKBZ-WD	I36	GM2018NBKPN-WH	I36	GM2018NGYBS	I36
GM2018NBKBZ-WDR	I36	GM2018NBKPN-WM	I36	GM2018NGYBS-BL	I36
GM2018NBKBZ-WH	I36	GM2018NBKSB	I36	GM2018NGYBS-CH	I36
GM2018NBKBZ-WM	I36	GM2018NBKSB-BL	I36	GM2018NGYBS-DW	I36
GM2018NBKCH	I36	GM2018NBKSB-CH	I36	GM2018NGYBS-FD	I36
GM2018NBKCH-BL	I36	GM2018NBKSB-DW	I36	GM2018NGYBS-FF	I36
GM2018NBKCH-CH	I36	GM2018NBKSB-FD	I36	GM2018NGYBS-FN	I36
GM2018NBKCH-DW	I36	GM2018NBKSB-FF	I36	GM2018NGYBS-FZ	I36

Wiring Accessories Index

GM2018NGYBS-HB	I36	GM2018NPW-MW	I36	GM2018NPWCH-TD	I36
GM2018NGYBS-HT	I36	GM2018NPW-OV	I36	GM2018NPWCH-WC	I36
GM2018NGYBS-MW	I36	GM2018NPW-TD	I36	GM2018NPWCH-WD	I36
GM2018NGYBS-OV	I36	GM2018NPW-WC	I36	GM2018NPWCH-WDR	I36
GM2018NGYBS-TD	I36	GM2018NPW-WD	I36	GM2018NPWCH-WH	I36
GM2018NGYBS-WC	I36	GM2018NPW-WDR	I36	GM2018NPWCH-WM	I36
GM2018NGYBS-WD	I36	GM2018NPW-WH	I36	GM2018NPWPN	I36
GM2018NGYBS-WDR	I36	GM2018NPW-WM	I36	GM2018NPWPN-BL	I36
GM2018NGYBS-WH	I36	GM2018NPWBR	I36	GM2018NPWPN-CH	I36
GM2018NGYBS-WM	I36	GM2018NPWBR-BL	I36	GM2018NPWPN-DW	I36
GM2018NGYSC	I36	GM2018NPWBR-CH	I36	GM2018NPWPN-FD	I36
GM2018NGYSC-BL	I36	GM2018NPWBR-DW	I36	GM2018NPWPN-FF	I36
GM2018NGYSC-CH	I36	GM2018NPWBR-FD	I36	GM2018NPWPN-FN	I36
GM2018NGYSC-DW	I36	GM2018NPWBR-FF	I36	GM2018NPWPN-FZ	I36
GM2018NGYSC-FD	I36	GM2018NPWBR-FN	I36	GM2018NPWPN-HB	I36
GM2018NGYSC-FF	I36	GM2018NPWBR-FZ	I36	GM2018NPWPN-HT	I36
GM2018NGYSC-FN	I36	GM2018NPWBR-HB	I36	GM2018NPWPN-MW	I36
GM2018NGYSC-FZ	I36	GM2018NPWBR-HT	I36	GM2018NPWPN-OV	I36
GM2018NGYSC-HB	I36	GM2018NPWBR-MW	I36	GM2018NPWPN-TD	I36
GM2018NGYSC-HT	I36	GM2018NPWBR-OV	I36	GM2018NPWPN-WC	I36
GM2018NGYSC-MW	I36	GM2018NPWBR-TD	I36	GM2018NPWPN-WD	I36
GM2018NGYSC-OV	I36	GM2018NPWBR-WC	I36	GM2018NPWPN-WDR	I36
GM2018NGYSC-TD	I36	GM2018NPWBR-WD	I36	GM2018NPWPN-WH	I36
GM2018NGYSC-WC	I36	GM2018NPWBR-WDR	I36	GM2018NPWPN-WM	I36
GM2018NGYSC-WD	I36	GM2018NPWBR-WH	I36	GM2018NPWSB	I36
GM2018NGYSC-WDR	I36	GM2018NPWBR-WM	I36	GM2018NPWSB-BL	I36
GM2018NGYSC-WH	I36	GM2018NPWBS	I36	GM2018NPWSB-CH	I36
GM2018NGYSC-WM	I36	GM2018NPWBS-BL	I36	GM2018NPWSB-DW	I36
GM2018NGYSS	I36	GM2018NPWBS-CH	I36	GM2018NPWSB-FD	I36
GM2018NGYSS-BL	I36	GM2018NPWBS-DW	I36	GM2018NPWSB-FF	I36
GM2018NGYSS-CH	I36	GM2018NPWBS-FD	I36	GM2018NPWSB-FN	I36
GM2018NGYSS-DW	I36	GM2018NPWBS-FF	I36	GM2018NPWSB-FZ	I36
GM2018NGYSS-FD	I36	GM2018NPWBS-FN	I36	GM2018NPWSB-HB	I36
GM2018NGYSS-FF	I36	GM2018NPWBS-FZ	I36	GM2018NPWSB-HT	I36
GM2018NGYSS-FN	I36	GM2018NPWBS-HB	I36	GM2018NPWSB-MW	I36
GM2018NGYSS-FZ	I36	GM2018NPWBS-HT	I36	GM2018NPWSB-OV	I36
GM2018NGYSS-HB	I36	GM2018NPWBS-MW	I36	GM2018NPWSB-TD	I36
GM2018NGYSS-HT	I36	GM2018NPWBS-OV	I36	GM2018NPWSB-WC	I36
GM2018NGYSS-MW	I36	GM2018NPWBS-TD	I36	GM2018NPWSB-WD	I36
GM2018NGYSS-OV	I36	GM2018NPWBS-WC	I36	GM2018NPWSB-WDR	I36
GM2018NGYSS-TD	I36	GM2018NPWBS-WD	I36	GM2018NPWSB-WH	I36
GM2018NGYSS-WC	I36	GM2018NPWBS-WDR	I36	GM2018NPWSB-WM	I36
GM2018NGYSS-WD	I36	GM2018NPWBS-WH	I36	GM2018NPWSC	I36
GM2018NGYSS-WDR	I36	GM2018NPWBS-WM	I36	GM2018NPWSC-BL	I36
GM2018NGYSS-WH	I36	GM2018NPWCH	I36	GM2018NPWSC-CH	I36
GM2018NGYSS-WM	I36	GM2018NPWCH-BL	I36	GM2018NPWSC-DW	I36
GM2018NPW	I36	GM2018NPWCH-CH	I36	GM2018NPWSC-FD	I36
GM2018NPW-BL	I36	GM2018NPWCH-DW	I36	GM2018NPWSC-FF	I36
GM2018NPW-CH	I36	GM2018NPWCH-FD	I36	GM2018NPWSC-FN	I36
GM2018NPW-DW	I36	GM2018NPWCH-FF	I36	GM2018NPWSC-FZ	I36
GM2018NPW-FD	I36	GM2018NPWCH-FN	I36	GM2018NPWSC-HB	I36
GM2018NPW-FF	I36	GM2018NPWCH-FZ	I36	GM2018NPWSC-HT	I36
GM2018NPW-FN	I36	GM2018NPWCH-HB	I36	GM2018NPWSC-MW	I36
GM2018NPW-FZ	I36	GM2018NPWCH-HT	I36	GM2018NPWSC-OV	I36
GM2018NPW-HB	I36	GM2018NPWCH-MW	I36	GM2018NPWSC-TD	I36
GM2018NPW-HT	I36	GM2018NPWCH-OV	I36	GM2018NPWSC-WC	I36

A21

Wiring Accessories Index

GM2018NPWSC-WD	I36	GM2018PWBR-WH	I34	GM2018PWRD	I34
GM2018NPWSC-WDR	I36	GM2018PWBR-WM	I34	GM2018PWSB	I34
GM2018NPWSC-WH	I36	GM2018PWBS	I34	GM2018PWSB-BL	I34
GM2018NPWSC-WM	I36	GM2018PWBS-BL	I34	GM2018PWSB-CH	I34
GM2018NPWSS	I36	GM2018PWBS-CH	I34	GM2018PWSB-DW	I34
GM2018NPWSS-BL	I36	GM2018PWBS-DW	I34	GM2018PWSB-FD	I34
GM2018NPWSS-CH	I36	GM2018PWBS-FD	I34	GM2018PWSB-FF	I34
GM2018NPWSS-DW	I36	GM2018PWBS-FF	I34	GM2018PWSB-FN	I34
GM2018NPWSS-FD	I36	GM2018PWBS-FN	I34	GM2018PWSB-FZ	I34
GM2018NPWSS-FF	I36	GM2018PWBS-FZ	I34	GM2018PWSB-HB	I34
GM2018NPWSS-FN	I36	GM2018PWBS-HB	I34	GM2018PWSB-HT	I34
GM2018NPWSS-FZ	I36	GM2018PWBS-HT	I34	GM2018PWSB-MW	I34
GM2018NPWSS-HB	I36	GM2018PWBS-MW	I34	GM2018PWSB-OV	I34
GM2018NPWSS-HT	I36	GM2018PWBS-OV	I34	GM2018PWSB-TD	I34
GM2018NPWSS-MW	I36	GM2018PWBS-TD	I34	GM2018PWSB-WC	I34
GM2018NPWSS-OV	I36	GM2018PWBS-WC	I34	GM2018PWSB-WD	I34
GM2018NPWSS-TD	I36	GM2018PWBS-WD	I34	GM2018PWSB-WDR	I34
GM2018NPWSS-WC	I36	GM2018PWBS-WDR	I34	GM2018PWSB-WH	I34
GM2018NPWSS-WD	I36	GM2018PWBS-WH	I34	GM2018PWSB-WM	I34
GM2018NPWSS-WDR	I36	GM2018PWBS-WM	I34	GM2018PWSC	I34
GM2018NPWSS-WH	I36	GM2018PWCH	I34	GM2018PWSC-BL	I34
GM2018NPWSS-WM	I36	GM2018PWCH-BL	I34	GM2018PWSC-CH	I34
GM2018PW	I34	GM2018PWCH-CH	I34	GM2018PWSC-DW	I34
GM2018PW-BL	I34	GM2018PWCH-DW	I34	GM2018PWSC-FD	I34
GM2018PW-CH	I34	GM2018PWCH-FD	I34	GM2018PWSC-FF	I34
GM2018PW-DW	I34	GM2018PWCH-FF	I34	GM2018PWSC-FN	I34
GM2018PW-FD	I34	GM2018PWCH-FN	I34	GM2018PWSC-FZ	I34
GM2018PW-FF	I34	GM2018PWCH-FZ	I34	GM2018PWSC-HB	I34
GM2018PW-FN	I34	GM2018PWCH-HB	I34	GM2018PWSC-HT	I34
GM2018PW-FZ	I34	GM2018PWCH-HT	I34	GM2018PWSC-MW	I34
GM2018PW-HB	I34	GM2018PWCH-MW	I34	GM2018PWSC-OV	I34
GM2018PW-HT	I34	GM2018PWCH-OV	I34	GM2018PWSC-TD	I34
GM2018PW-MW	I34	GM2018PWCH-TD	I34	GM2018PWSC-WC	I34
GM2018PW-OV	I34	GM2018PWCH-WC	I34	GM2018PWSC-WD	I34
GM2018PW-TD	I34	GM2018PWCH-WD	I34	GM2018PWSC-WDR	I34
GM2018PW-WC	I34	GM2018PWCH-WDR	I34	GM2018PWSC-WH	I34
GM2018PW-WD	I34	GM2018PWCH-WH	I34	GM2018PWSC-WM	I34
GM2018PW-WDR	I34	GM2018PWCH-WM	I34	GM2018PWSS	I34
GM2018PW-WH	I34	GM2018PWPN	I34	GM2018PWSS-BL	I34
GM2018PW-WM	I34	GM2018PWPN-BL	I34	GM2018PWSS-CH	I34
GM2018PWBR	I34	GM2018PWPN-CH	I34	GM2018PWSS-DW	I34
GM2018PWBR-BL	I34	GM2018PWPN-DW	I34	GM2018PWSS-FD	I34
GM2018PWBR-CH	I34	GM2018PWPN-FD	I34	GM2018PWSS-FF	I34
GM2018PWBR-DW	I34	GM2018PWPN-FF	I34	GM2018PWSS-FN	I34
GM2018PWBR-FD	I34	GM2018PWPN-FN	I34	GM2018PWSS-FZ	I34
GM2018PWBR-FF	I34	GM2018PWPN-FZ	I34	GM2018PWSS-HB	I34
GM2018PWBR-FN	I34	GM2018PWPN-HB	I34	GM2018PWSS-HT	I34
GM2018PWBR-FZ	I34	GM2018PWPN-HT	I34	GM2018PWSS-MW	I34
GM2018PWBR-HB	I34	GM2018PWPN-MW	I34	GM2018PWSS-OV	I34
GM2018PWBR-HT	I34	GM2018PWPN-OV	I34	GM2018PWSS-TD	I34
GM2018PWBR-MW	I34	GM2018PWPN-TD	I34	GM2018PWSS-WC	I34
GM2018PWBR-OV	I34	GM2018PWPN-WC	I34	GM2018PWSS-WD	I34
GM2018PWBR-TD	I34	GM2018PWPN-WD	I34	GM2018PWSS-WDR	I34
GM2018PWBR-WC	I34	GM2018PWPN-WDR	I34	GM2018PWSS-WH	I34
GM2018PWBR-WD	I34	GM2018PWPN-WH	I34	GM2018PWSS-WM	I34
GM2018PWBR-WDR	I34	GM2018PWPN-WM	I34	GM2028BK	I32

Wiring Accessories Index

GM2028BKAB	I32	GM2046BKBSSET	I60	GM2047-LPWBS	I64
GM2028BKBN	I32	GM2046BKCBZ	I58	GM2047-LPWCH	I64
GM2028BKBR	I32	GM2046BKCBZET	I60	GM2047-LPWPN	I64
GM2028BKBS	I32	GM2046BKCH	I58	GM2047-LPWBS	I64
GM2028BKCBZ	I32	GM2046BKCHET	I60	GM2047-LPWSC	I64
GM2028BKCH	I32	GM2046BKET	I60	GM2047-LPWSS	I64
GM2028BKMB	I32	GM2046BKMB	I58	GM2047BK	I62
GM2028BKPN	I32	GM2046BKMBET	I60	GM2047BKAB	I62
GM2028BKSB	I32	GM2046BKPN	I58	GM2047BKBN	I62
GM2028BKSC	I32	GM2046BKPNET	I60	GM2047BKBR	I62
GM2028BKSS	I32	GM2046BKSB	I58	GM2047BKBS	I62
GM2028BTBK	I74	GM2046BKSBET	I60	GM2047BKCBZ	I62
GM2028BTPW	I74	GM2046BKSC	I58	GM2047BKCH	I62
GM2028GYBS	I32	GM2046BKSCET	I60	GM2047BKMB	I62
GM2028GYSC	I32	GM2046BKSS	I58	GM2047BKPN	I62
GM2028GYSS	I32	GM2046BKSSSET	I60	GM2047BKSB	I62
GM2028PW	I32	GM2046GYBS	I58	GM2047BKSC	I62
GM2028PWBR	I32	GM2046GYBSET	I60	GM2047BKSS	I62
GM2028PWBS	I32	GM2046GYSC	I58	GM2047GYBS	I62
GM2028PWCH	I32	GM2046GYSCET	I60	GM2047GYSC	I62
GM2028PWPN	I32	GM2046GYSS	I58	GM2047GYSS	I62
GM2028PWRD	I32	GM2046GYSSSET	I60	GM2047PW	I62
GM2028PWSB	I32	GM2046PW	I58	GM2047PWBR	I62
GM2028PWSC	I32	GM2046PWBR	I58	GM2047PWBS	I62
GM2028PWSS	I32	GM2046PBRET	I60	GM2047PWCH	I62
GM2029BK	I56	GM2046PWBS	I58	GM2047PWPN	I62
GM2029BKAB	I56	GM2046PBSET	I60	GM2047PWSB	I62
GM2029BKBN	I56	GM2046PWCH	I58	GM2047PWSC	I62
GM2029BKBR	I56	GM2046PWCHET	I60	GM2047PWSS	I62
GM2029BKBS	I56	GM2046PWET	I60	GM2070BK	I38
GM2029BKCBZ	I56	GM2046PWPN	I58	GM2070BKAB	I38
GM2029BKCH	I56	GM2046PWPNET	I60	GM2070BKBN	I38
GM2029BKMB	I56	GM2046PWSB	I58	GM2070BKBR	I38
GM2029BKPN	I56	GM2046PWSBET	I60	GM2070BKBS	I38
GM2029BKSB	I56	GM2046PWSC	I58	GM2070BKCBZ	I38
GM2029BKSC	I56	GM2046PWSCET	I60	GM2070BKCH	I38
GM2029BKSS	I56	GM2046PWSS	I58	GM2070BKMB	I38
GM2029GYBS	I56	GM2046PWSSET	I60	GM2070BKPN	I38
GM2029GYSC	I56	GM2046RDET	I60	GM2070BKSB	I38
GM2029GYSS	I56	GM2047-LBK	I64	GM2070BKSC	I38
GM2029PW	I56	GM2047-LBKAB	I64	GM2070BKSS	I38
GM2029PWBR	I56	GM2047-LBKBN	I64	GM2070GYBS	I38
GM2029PWBS	I56	GM2047-LBKBR	I64	GM2070GYSC	I38
GM2029PWCH	I56	GM2047-LBKBS	I64	GM2070GYSS	I38
GM2029PWPN	I56	GM2047-LBKCBZ	I64	GM2070PW	I38
GM2029PWSB	I56	GM2047-LBKCH	I64	GM2070PWBR	I38
GM2029PWSC	I56	GM2047-LBKMB	I64	GM2070PWBS	I38
GM2029PWSS	I56	GM2047-LBKPN	I64	GM2070PWCH	I38
GM2046BK	I58	GM2047-LBKSB	I64	GM2070PWPN	I38
GM2046BKAB	I58	GM2047-LBKSC	I64	GM2070PWSB	I38
GM2046BKABET	I60	GM2047-LBKSS	I64	GM2070PWSC	I38
GM2046BKBN	I58	GM2047-LGYBS	I64	GM2070PWSS	I38
GM2046BKBNET	I60	GM2047-LGYSC	I64	GM2075BK	I40
GM2046BKBR	I58	GM2047-LGYSS	I64	GM2075BKAB	I40
GM2046BKCBRET	I60	GM2047-LPW	I64	GM2075BKBN	I40
GM2046BKBS	I58	GM2047-LPWBR	I64	GM2075BKBR	I40

A22

A23

Wiring Accessories Index

FPSS522BK	D16	G		GM1030BKCH	150
FPSS522WH	D16			GM1030BKMB	150
FPSS523BK	D16		GA100	GM1030BKPN	150
FPSS523WH	D16		GA100BK	GM1030BKSB	150
FPSS535BK	D11		GM050BK	GM1030BKSC	150
FPSS535WH	D11		GM050BKAB	GM1030BKSS	150
FPSS536BK	D11		GM050BKBN	GM1030GYBS	150
FPSS536WH	D11		GM050BKBR	GM1030GYSC	150
FPSS550BK	D13		GM050BKBS	GM1030GYSS	150
FPSS550WH	D13		GM050BKBZ	GM1030PW	150
FPSS551BK	D13		GM050BKCH	GM1030PWBR	150
FPSS551WH	D13		GM050BKMB	GM1030PWBS	150
FPSS552BK	D13		GM050BKPN	GM1030PWCH	150
FPSS552WH	D13		GM050BKSB	GM1030PWPN	150
FPSS553BK	D13		GM050BKSC	GM1030PWSB	150
FPSS553WH	D13		GM050BKSS	GM1030PWSC	150
FPSS571UBK	D12		GM050GYBS	GM1030PWSS	150
FPSS571UWH	D12		GM050GYSC	GM150BK	188
FPSS580BK	D12		GM050GYSS	GM150BKAB	188
FPSS580WH	D12		GM050PW	GM150BKBN	188
FPSS585BK	D12		GM050PWBR	GM150BKBR	188
FPSS585WH	D12		GM050PWBS	GM150BKBS	188
FPSS586BK	D12		GM050PWCH	GM150BKBZ	188
FPSS586WH	D12		GM050PWPN	GM150BKCH	188
FPSS655BK	D12		GM050PWSB	GM150BKMB	188
FPSS655WH	D12		GM050PWSC	GM150BKPN	188
FPSS660	D16		GM050PWSS	GM150BKSB	188
FPSS722BK	D16		GM1020BK	GM150BKSC	188
FPSS722WH	D16		GM1020BKAB	GM150BKSS	188
FPSS723BK	D16		GM1020BKBN	GM150GYBS	188
FPSS723WH	D16		GM1020BKBR	GM150GYSC	188
FPSS750BK	D13		GM1020BKBS	GM150GYSS	188
FPSS750WH	D13		GM1020BKBZ	GM150PW	188
FPSS751BK	D13		GM1020BKCH	GM150PWBR	188
FPSS751WH	D13		GM1020BKMB	GM150PWBS	188
FPSS752BK	D13		GM1020BKPN	GM150PWCH	188
FPSS752WH	D13		GM1020BKSB	GM150PWPN	188
FPSS753BK	D13		GM1020BKSC	GM150PWSB	188
FPSS753WH	D13		GM1020BKSS	GM150PWSC	188
FS030SS	M36		GM1020GYBS	GM150PWSS	188
FS032SS	M36		GM1020GYSC	GM2001BK	126
FS311SS	K18,M36		GM1020GYSS	GM2001BKAB	126
FS312SS	K18,M36		GM1020PW	GM2001BKBN	126
FU021	M47		GM1020PWBR	GM2001BKBR	126
FU022	M47		GM1020PWBS	GM2001BKBS	126
FU023	M47		GM1020PWCH	GM2001BKBZ	126
FU030	M47		GM1020PWPN	GM2001BKCH	126
FU031	M47		GM1020PWSB	GM2001BKMB	126
FU032	M47		GM1020PWSC	GM2001BKPN	126
FU035	M47		GM1020PWSS	GM2001BKSB	126
FU036	M47		GM1030BK	GM2001BKSC	126
FU037	M47		GM1030BKAB	GM2001BKSS	126
FU038	M47		GM1030BKBN	GM2001BTBK	174
			GM1030BKBR	GM2001BTPW	174
			GM1030BKBS	GM2001GYBS	126
			GM1030BKBZ	GM2001GYSC	126

Wiring Accessories Index

GM2075BKBS	140	GM209018BKBZ	144	GM2485PW	182
GM2075BKBZ	140	GM209018BKCH	144	GM2490BK	180
GM2075BKCH	140	GM209018BKMB	144	GM2490PW	180
GM2075BKMB	140	GM209018BKPN	144	GM2495BK	180
GM2075BKPN	140	GM209018BKSB	144	GM2495PW	180
GM2075BKSB	140	GM209018BKSC	144	GM2496BK	180
GM2075BKSC	140	GM209018BKSS	144	GM2496PW	180
GM2075BKSS	140	GM209018GYBS	144	GM2497BK	180
GM2075GYBS	140	GM209018GYSC	144	GM2497PW	180
GM2075GYSC	140	GM209018GYSS	144	GM2501BK	184
GM2075GYSS	140	GM209018PWBR	144	GM2501PW	184
GM2075PW	140	GM209018PWBS	144	GM2515BK	178
GM2075PWBR	140	GM209018PWCH	144	GM2515WH	178
GM2075PWBS	140	GM209018PWPN	144	GM2586BK	178
GM2075PWCH	140	GM209018PWSB	144	GM2586PW	178
GM2075PWPN	140	GM209018PWSC	144	GM2600BK	176
GM2075PWWD	140	GM209018PWSS	144	GM2600PW	176
GM2075PWSB	140	GM209028BK	146	GM2650BK	176
GM2075PWSC	140	GM209028BKAB	146	GM2650PW	176
GM2075PWSS	140	GM209028BKBN	146	GM9001	190
GM2080BK	170	GM209028BKBR	146	GM9010	190
GM2080GY	170	GM209028BKBS	146	GR100BK	J7
GM2080PW	170	GM209028BKBZ	146	GR100GY	J7
GM2081BK	170	GM209028BKCH	146	GR100PW	J7
GM2081GY	170	GM209028BKMB	146	GR20400	1151
GM2081PW	170	GM209028BKPN	146	GR20600	1151
GM2082BK	170	GM209028BKSB	146		
GM2082GY	170	GM209028BKSC	146		
GM2082PW	170	GM209028BKSS	146		
GM209002BK	142	GM209028GYBS	146		
GM209002BKAB	142	GM209028GYSC	146	MCP085	B34
GM209002BKBN	142	GM209028GYSS	146	MCP086	B34
GM209002BKBR	142	GM209028PWBR	146	MD001BK	J18
GM209002BKBS	142	GM209028PWBS	146	MD001PW	J18
GM209002BKBZ	142	GM209028PWCH	146	MD001WH	J18
GM209002BKCH	142	GM209028PWPN	146	MD002AB	J18
GM209002BKMB	142	GM209028PWSB	146	MD002BK	J18
GM209002BKPN	142	GM209028PWSC	146	MD002BN	J18
GM209002BKSB	142	GM209028PWSS	146	MD002BR	J18
GM209002BKSC	142	GM2300BK	178	MD002BS	J18
GM209002BKSS	142	GM2300PW	178	MD002BZ	J18
GM209002GYBS	142	GM2305BK	184	MD002CH	J18
GM209002GYSC	142	GM2305PW	184	MD002MB	J18
GM209002GYSS	142	GM2405BK	184	MD002PN	J18
GM209002PWBR	142	GM2405PW	184	MD002PW	J18
GM209002PWBS	142	GM2410BK	184	MD002RD	J18
GM209002PWCH	142	GM2410PW	184	MD002SB	J18
GM209002PWPN	142	GM2415BK	184	MD002SC	J18
GM209002PWSB	142	GM2415PW	184	MD002SS	J18
GM209002PWSC	142	GM2460BK	182	MD002WH	J18
GM209002PWSS	142	GM2460PW	182	MD003AB	J23
GM209018BK	144	GM2465BK	182	MD003BK	J23
GM209018BKAB	144	GM2465PW	182	MD003BN	J23
GM209018BKBN	144	GM2470BK	182	MD003BR	J23
GM209018BKBR	144	GM2470PW	182	MD003BS	J23
GM209018BKBS	144	GM2485BK	182	MD003BZ	J23

Wiring Accessories Index

MD003CH	J23	MD009CH	J20	MD018BK-FN	J22
MD003MB	J23	MD009MB	J20	MD018BK-FZ	J22
MD003PN	J23	MD009PN	J20	MD018BK-HB	J22
MD003PW	J23	MD009PW	J20	MD018BK-HT	J22
MD003SB	J23	MD009SB	J20	MD018BK-MW	J22
MD003SC	J23	MD009SC	J20	MD018BK-OV	J22
MD003SS	J23	MD009SS	J20	MD018BK-TD	J22
MD003WH	J23	MD009WH	J20	MD018BK-WC	J22
MD004AB	J21	MD017BK	J28	MD018BK-WD	J22
MD004BK	J21	MD017BKAB	J28	MD018BK-WDR	J22
MD004BN	J21	MD017BKBN	J28	MD018BK-WH	J22
MD004BR	J21	MD017BKBR	J28	MD018BK-WM	J22
MD004BS	J21	MD017BKBS	J28	MD018BN	J22
MD004BZ	J21	MD017BKBZ	J28	MD018BN-BL	J22
MD004CH	J21	MD017BKCH	J28	MD018BN-CH	J22
MD004MB	J21	MD017BKMB	J28	MD018BN-DW	J22
MD004PN	J21	MD017BKPN	J28	MD018BN-FD	J22
MD004PW	J21	MD017BKSB	J28	MD018BN-FF	J22
MD004SB	J21	MD017BKSC	J28	MD018BN-FN	J22
MD004SC	J21	MD017BKSS	J28	MD018BN-FZ	J22
MD004SS	J21	MD017GYBS	J28	MD018BN-HB	J22
MD004WH	J21	MD017GYSC	J28	MD018BN-HT	J22
MD005AB	J29	MD017GYSS	J28	MD018BN-MW	J22
MD005BK	J29	MD017PW	J28	MD018BN-OV	J22
MD005BN	J29	MD017WH	J28	MD018BN-TD	J22
MD005BR	J29	MD017WHBR	J28	MD018BN-WC	J22
MD005BS	J29	MD017WHBS	J28	MD018BN-WD	J22
MD005BZ	J29	MD017WHCH	J28	MD018BN-WDR	J22
MD005CH	J29	MD017WHPN	J28	MD018BN-WH	J22
MD005MB	J29	MD017WHSB	J28	MD018BN-WM	J22
MD005PN	J29	MD017WHSC	J28	MD018BR	J22
MD005PW	J29	MD017WHSS	J28	MD018BR-BL	J22
MD005SB	J29	MD018AB	J22	MD018BR-CH	J22
MD005SC	J29	MD018AB-BL	J22	MD018BR-DW	J22
MD005SS	J29	MD018AB-CH	J22	MD018BR-FD	J22
MD005WH	J29	MD018AB-DW	J22	MD018BR-FF	J22
MD008AB	J26	MD018AB-FD	J22	MD018BR-FN	J22
MD008BK	J26	MD018AB-FF	J22	MD018BR-FZ	J22
MD008BN	J26	MD018AB-FN	J22	MD018BR-HB	J22
MD008BR	J26	MD018AB-FZ	J22	MD018BR-HT	J22
MD008BS	J26	MD018AB-HB	J22	MD018BR-MW	J22
MD008BZ	J26	MD018AB-HT	J22	MD018BR-OV	J22
MD008CH	J26	MD018AB-MW	J22	MD018BR-TD	J22
MD008MB	J26	MD018AB-OV	J22	MD018BR-WC	J22
MD008PN	J26	MD018AB-TD	J22	MD018BR-WD	J22
MD008PW	J26	MD018AB-WC	J22	MD018BR-WDR	J22
MD008SB	J26	MD018AB-WD	J22	MD018BR-WH	J22
MD008SC	J26	MD018AB-WDR	J22	MD018BR-WM	J22
MD008SS	J26	MD018AB-WH	J22	MD018BS	J22
MD008WH	J26	MD018AB-WM	J22	MD018BS-BL	J22
MD009AB	J20	MD018BK	J22	MD018BS-CH	J22
MD009BK	J20	MD018BK-BL	J22	MD018BS-DW	J22
MD009BN	J20	MD018BK-CH	J22	MD018BS-FD	J22
MD009BR	J20	MD018BK-DW	J22	MD018BS-FF	J22
MD009BS	J20	MD018BK-FD	J22	MD018BS-FN	J22
MD009BZ	J20	MD018BK-FF	J22	MD018BS-FZ	J22

Wiring Accessories Index

MD018BS-HB	J22	MD018MB-MW	J22	MD018SB-OV	J22
MD018BS-HT	J22	MD018MB-OV	J22	MD018SB-TD	J22
MD018BS-MW	J22	MD018MB-TD	J22	MD018SB-WC	J22
MD018BS-OV	J22	MD018MB-WC	J22	MD018SB-WD	J22
MD018BS-TD	J22	MD018MB-WD	J22	MD018SB-WDR	J22
MD018BS-WC	J22	MD018MB-WDR	J22	MD018SB-WH	J22
MD018BS-WD	J22	MD018MB-WH	J22	MD018SB-WM	J22
MD018BS-WDR	J22	MD018MB-WM	J22	MD018SC	J22
MD018BS-WH	J22	MD018PN	J22	MD018SC-BL	J22
MD018BS-WM	J22	MD018PN-BL	J22	MD018SC-CH	J22
MD018BZ	J22	MD018PN-CH	J22	MD018SC-DW	J22
MD018BZ-BL	J22	MD018PN-DW	J22	MD018SC-FD	J22
MD018BZ-CH	J22	MD018PN-FD	J22	MD018SC-FF	J22
MD018BZ-DW	J22	MD018PN-FF	J22	MD018SC-FN	J22
MD018BZ-FD	J22	MD018PN-FN	J22	MD018SC-FZ	J22
MD018BZ-FF	J22	MD018PN-FZ	J22	MD018SC-HB	J22
MD018BZ-FN	J22	MD018PN-HB	J22	MD018SC-HT	J22
MD018BZ-FZ	J22	MD018PN-HT	J22	MD018SC-MW	J22
MD018BZ-HB	J22	MD018PN-MW	J22	MD018SC-OV	J22
MD018BZ-HT	J22	MD018PN-OV	J22	MD018SC-TD	J22
MD018BZ-MW	J22	MD018PN-TD	J22	MD018SC-WC	J22
MD018BZ-OV	J22	MD018PN-WC	J22	MD018SC-WD	J22
MD018BZ-TD	J22	MD018PN-WD	J22	MD018SC-WDR	J22
MD018BZ-WC	J22	MD018PN-WDR	J22	MD018SC-WH	J22
MD018BZ-WD	J22	MD018PN-WH	J22	MD018SC-WM	J22
MD018BZ-WDR	J22	MD018PN-WM	J22	MD018SS	J22
MD018BZ-WH	J22	MD018PW	J22	MD018SS-BL	J22
MD018BZ-WM	J22	MD018PW-BL	J22	MD018SS-CH	J22
MD018CH	J22	MD018PW-CH	J22	MD018SS-DW	J22
MD018CH-BL	J22	MD018PW-DW	J22	MD018SS-FD	J22
MD018CH-CH	J22	MD018PW-FD	J22	MD018SS-FF	J22
MD018CH-DW	J22	MD018PW-FF	J22	MD018SS-FN	J22
MD018CH-FD	J22	MD018PW-FN	J22	MD018SS-FZ	J22
MD018CH-FF	J22	MD018PW-FZ	J22	MD018SS-HB	J22
MD018CH-FN	J22	MD018PW-HB	J22	MD018SS-HT	J22
MD018CH-FZ	J22	MD018PW-HT	J22	MD018SS-MW	J22
MD018CH-HB	J22	MD018PW-MW	J22	MD018SS-OV	J22
MD018CH-HT	J22	MD018PW-OV	J22	MD018SS-TD	J22
MD018CH-MW	J22	MD018PW-TD	J22	MD018SS-WC	J22
MD018CH-OV	J22	MD018PW-WC	J22	MD018SS-WD	J22
MD018CH-TD	J22	MD018PW-WD	J22	MD018SS-WDR	J22
MD018CH-WC	J22	MD018PW-WDR	J22	MD018SS-WH	J22
MD018CH-WD	J22	MD018PW-WH	J22	MD018SS-WM	J22
MD018CH-WDR	J22	MD018PW-WM	J22	MD018WH	J22
MD018CH-WH	J22	MD018RD	J22	MD018WH-BL	J22
MD018CH-WM	J22	MD018SB	J22	MD018WH-CH	J22
MD018MB	J22	MD018SB-BL	J22	MD018WH-DW	J22
MD018MB-BL	J22	MD018SB-CH	J22	MD018WH-FD	J22
MD018MB-CH	J22	MD018SB-DW	J22	MD018WH-FF	J22
MD018MB-DW	J22	MD018SB-FD	J22	MD018WH-FN	J22
MD018MB-FD	J22	MD018SB-FF	J22	MD018WH-FZ	J22
MD018MB-FF	J22	MD018SB-FN	J22	MD018WH-HB	J22
MD018MB-FN	J22	MD018SB-FZ	J22	MD018WH-HT	J22
MD018MB-FZ	J22	MD018SB-HB	J22	MD018WH-MW	J22
MD018MB-HB	J22	MD018SB-HT	J22	MD018WH-OV	J22
MD018MB-HT	J22	MD018SB-MW	J22	MD018WH-TD	J22

Wiring Accessories Index

MD018WH-WC	J22	MD022BN-BL	J34	MD022BZ-DW	J34
MD018WH-WD	J22	MD022BN-CH	J34	MD022BZ-FD	J34
MD018WH-WDR	J22	MD022BN-DW	J34	MD022BZ-FF	J34
MD018WH-WH	J22	MD022BN-FD	J34	MD022BZ-FN	J34
MD018WH-WM	J22	MD022BN-FF	J34	MD022BZ-FZ	J34
MD020AB	J32	MD022BN-FN	J34	MD022BZ-HB	J34
MD020BK	J32	MD022BN-FZ	J34	MD022BZ-HT	J34
MD020BN	J32	MD022BN-HB	J34	MD022BZ-MW	J34
MD020BR	J32	MD022BN-HT	J34	MD022BZ-OV	J34
MD020BS	J32	MD022BN-MW	J34	MD022BZ-TD	J34
MD020BZ	J32	MD022BN-OV	J34	MD022BZ-WC	J34
MD020CH	J32	MD022BN-TD	J34	MD022BZ-WD	J34
MD020MB	J32	MD022BN-WC	J34	MD022BZ-WDR	J34
MD020PN	J32	MD022BN-WD	J34	MD022BZ-WH	J34
MD020PW	J32	MD022BN-WDR	J34	MD022BZ-WM	J34
MD020SB	J32	MD022BN-WH	J34	MD022CH	J34
MD020SC	J32	MD022BN-WM	J34	MD022CH-BL	J34
MD020SS	J32	MD022BR	J34	MD022CH-CH	J34
MD020WH	J32	MD022BR-BL	J34	MD022CH-DW	J34
MD022AB	J34	MD022BR-CH	J34	MD022CH-FD	J34
MD022AB-BL	J34	MD022BR-DW	J34	MD022CH-FF	J34
MD022AB-CH	J34	MD022BR-FD	J34	MD022CH-FN	J34
MD022AB-DW	J34	MD022BR-FF	J34	MD022CH-FZ	J34
MD022AB-FD	J34	MD022BR-FN	J34	MD022CH-HB	J34
MD022AB-FF	J34	MD022BR-FZ	J34	MD022CH-HT	J34
MD022AB-FN	J34	MD022BR-HB	J34	MD022CH-MW	J34
MD022AB-FZ	J34	MD022BR-HT	J34	MD022CH-OV	J34
MD022AB-HB	J34	MD022BR-MW	J34	MD022CH-TD	J34
MD022AB-HT	J34	MD022BR-OV	J34	MD022CH-WC	J34
MD022AB-MW	J34	MD022BR-TD	J34	MD022CH-WD	J34
MD022AB-OV	J34	MD022BR-WC	J34	MD022CH-WDR	J34
MD022AB-TD	J34	MD022BR-WD	J34	MD022CH-WH	J34
MD022AB-WC	J34	MD022BR-WDR	J34	MD022CH-WM	J34
MD022AB-WD	J34	MD022BR-WH	J34	MD022MB	J34
MD022AB-WDR	J34	MD022BR-WM	J34	MD022MB-BL	J34
MD022AB-WH	J34	MD022BS	J34	MD022MB-CH	J34
MD022AB-WM	J34	MD022BS-BL	J34	MD022MB-DW	J34
MD022BK	J34	MD022BS-CH	J34	MD022MB-FD	J34
MD022BK-BL	J34	MD022BS-DW	J34	MD022MB-FF	J34
MD022BK-CH	J34	MD022BS-FD	J34	MD022MB-FN	J34
MD022BK-DW	J34	MD022BS-FF	J34	MD022MB-FZ	J34
MD022BK-FD	J34	MD022BS-FN	J34	MD022MB-HB	J34
MD022BK-FF	J34	MD022BS-FZ	J34	MD022MB-HT	J34
MD022BK-FN	J34	MD022BS-HB	J34	MD022MB-MW	J34
MD022BK-FZ	J34	MD022BS-HT	J34	MD022MB-OV	J34
MD022BK-HB	J34	MD022BS-MW	J34	MD022MB-TD	J34
MD022BK-HT	J34	MD022BS-OV	J34	MD022MB-WC	J34
MD022BK-MW	J34	MD022BS-TD	J34	MD022MB-WD	J34
MD022BK-OV	J34	MD022BS-WC	J34	MD022MB-WDR	J34
MD022BK-TD	J34	MD022BS-WD	J34	MD022MB-WH	J34
MD022BK-WC	J34	MD022BS-WDR	J34	MD022MB-WM	J34
MD022BK-WD	J34	MD022BS-WH	J34	MD022PN	J34
MD022BK-WDR	J34	MD022BS-WM	J34	MD022PN-BL	J34
MD022BK-WH	J34	MD022BZ	J34	MD022PN-CH	J34
MD022BK-WM	J34	MD022BZ-BL	J34	MD022PN-DW	J34
MD022BN	J34	MD022BZ-CH	J34	MD022PN-FD	J34

Wiring Accessories Index

MD022PN-FF	J34	MD022SC-FZ	J34	MD023AB-HT	J35
MD022PN-FN	J34	MD022SC-HB	J34	MD023AB-MW	J35
MD022PN-FZ	J34	MD022SC-HT	J34	MD023AB-OV	J35
MD022PN-HB	J34	MD022SC-MW	J34	MD023AB-TD	J35
MD022PN-HT	J34	MD022SC-OV	J34	MD023AB-WC	J35
MD022PN-MW	J34	MD022SC-TD	J34	MD023AB-WD	J35
MD022PN-OV	J34	MD022SC-WC	J34	MD023AB-WDR	J35
MD022PN-TD	J34	MD022SC-WD	J34	MD023AB-WH	J35
MD022PN-WC	J34	MD022SC-WDR	J34	MD023AB-WM	J35
MD022PN-WD	J34	MD022SC-WH	J34	MD023BK	J35
MD022PN-WDR	J34	MD022SC-WM	J34	MD023BK-BL	J35
MD022PN-WH	J34	MD022SS	J34	MD023BK-CH	J35
MD022PN-WM	J34	MD022SS-BL	J34	MD023BK-DW	J35
MD022PW	J34	MD022SS-CH	J34	MD023BK-FD	J35
MD022PW-BL	J34	MD022SS-DW	J34	MD023BK-FF	J35
MD022PW-CH	J34	MD022SS-FD	J34	MD023BK-FN	J35
MD022PW-DW	J34	MD022SS-FF	J34	MD023BK-FZ	J35
MD022PW-FD	J34	MD022SS-FN	J34	MD023BK-HB	J35
MD022PW-FF	J34	MD022SS-FZ	J34	MD023BK-HT	J35
MD022PW-FN	J34	MD022SS-HB	J34	MD023BK-MW	J35
MD022PW-FZ	J34	MD022SS-HT	J34	MD023BK-OV	J35
MD022PW-HB	J34	MD022SS-MW	J34	MD023BK-TD	J35
MD022PW-HT	J34	MD022SS-OV	J34	MD023BK-WC	J35
MD022PW-MW	J34	MD022SS-TD	J34	MD023BK-WD	J35
MD022PW-OV	J34	MD022SS-WC	J34	MD023BK-WDR	J35
MD022PW-TD	J34	MD022SS-WD	J34	MD023BK-WH	J35
MD022PW-WC	J34	MD022SS-WDR	J34	MD023BK-WM	J35
MD022PW-WD	J34	MD022SS-WH	J34	MD023BN	J35
MD022PW-WDR	J34	MD022SS-WM	J34	MD023BN-BL	J35
MD022PW-WH	J34	MD022WH	J34	MD023BN-CH	J35
MD022PW-WM	J34	MD022WH-BL	J34	MD023BN-DW	J35
MD022SB	J34	MD022WH-CH	J34	MD023BN-FD	J35
MD022SB-BL	J34	MD022WH-DW	J34	MD023BN-FF	J35
MD022SB-CH	J34	MD022WH-FD	J34	MD023BN-FN	J35
MD022SB-DW	J34	MD022WH-FF	J34	MD023BN-FZ	J35
MD022SB-FD	J34	MD022WH-FN	J34	MD023BN-HB	J35
MD022SB-FF	J34	MD022WH-FZ	J34	MD023BN-HT	J35
MD022SB-FN	J34	MD022WH-HB	J34	MD023BN-MW	J35
MD022SB-FZ	J34	MD022WH-HT	J34	MD023BN-OV	J35
MD022SB-HB	J34	MD022WH-MW	J34	MD023BN-TD	J35
MD022SB-HT	J34	MD022WH-OV	J34	MD023BN-WC	J35
MD022SB-MW	J34	MD022WH-TD	J34	MD023BN-WD	J35
MD022SB-OV	J34	MD022WH-WC	J34	MD023BN-WDR	J35
MD022SB-TD	J34	MD022WH-WD	J34	MD023BN-WH	J35
MD022SB-WC	J34	MD022WH-WDR	J34	MD023BN-WM	J35
MD022SB-WD	J34	MD022WH-WH	J34	MD023BR	J35
MD022SB-WDR	J34	MD022WH-WM	J34	MD023BR-BL	J35
MD022SB-WH	J34	MD023AB	J35	MD023BR-CH	J35
MD022SB-WM	J34	MD023AB-BL	J35	MD023BR-DW	J35
MD022SC	J34	MD023AB-CH	J35	MD023BR-FD	J35
MD022SC-BL	J34	MD023AB-DW	J35	MD023BR-FF	J35
MD022SC-CH	J34	MD023AB-FD	J35	MD023BR-FN	J35
MD022SC-DW	J34	MD023AB-FF	J35	MD023BR-FZ	J35
MD022SC-FD	J34	MD023AB-FN	J35	MD023BR-HB	J35
MD022SC-FF	J34	MD023AB-FZ	J35	MD023BR-HT	J35
MD022SC-FN	J34	MD023AB-HB	J35	MD023BR-MW	J35

Wiring Accessories Index

MD023BR-OV	J35	MD023CH-WC	J35	MD023PW-WDR	J35
MD023BR-TD	J35	MD023CH-WD	J35	MD023PW-WH	J35
MD023BR-WC	J35	MD023CH-WDR	J35	MD023PW-WM	J35
MD023BR-WD	J35	MD023CH-WH	J35	MD023SB	J35
MD023BR-WDR	J35	MD023CH-WM	J35	MD023SB-BL	J35
MD023BR-WH	J35	MD023MB	J35	MD023SB-CH	J35
MD023BR-WM	J35	MD023MB-BL	J35	MD023SB-DW	J35
MD023BS	J35	MD023MB-CH	J35	MD023SB-FD	J35
MD023BS-BL	J35	MD023MB-DW	J35	MD023SB-FF	J35
MD023BS-CH	J35	MD023MB-FD	J35	MD023SB-FN	J35
MD023BS-DW	J35	MD023MB-FF	J35	MD023SB-FZ	J35
MD023BS-FD	J35	MD023MB-FN	J35	MD023SB-HB	J35
MD023BS-FF	J35	MD023MB-FZ	J35	MD023SB-HT	J35
MD023BS-FN	J35	MD023MB-HB	J35	MD023SB-MW	J35
MD023BS-FZ	J35	MD023MB-HT	J35	MD023SB-OV	J35
MD023BS-HB	J35	MD023MB-MW	J35	MD023SB-TD	J35
MD023BS-HT	J35	MD023MB-OV	J35	MD023SB-WC	J35
MD023BS-MW	J35	MD023MB-TD	J35	MD023SB-WD	J35
MD023BS-OV	J35	MD023MB-WC	J35	MD023SB-WDR	J35
MD023BS-TD	J35	MD023MB-WD	J35	MD023SB-WH	J35
MD023BS-WC	J35	MD023MB-WDR	J35	MD023SB-WM	J35
MD023BS-WD	J35	MD023MB-WH	J35	MD023SC	J35
MD023BS-WDR	J35	MD023MB-WM	J35	MD023SC-BL	J35
MD023BS-WH	J35	MD023PN	J35	MD023SC-CH	J35
MD023BS-WM	J35	MD023PN-BL	J35	MD023SC-DW	J35
MD023BZ	J35	MD023PN-CH	J35	MD023SC-FD	J35
MD023BZ-BL	J35	MD023PN-DW	J35	MD023SC-FF	J35
MD023BZ-CH	J35	MD023PN-FD	J35	MD023SC-FN	J35
MD023BZ-DW	J35	MD023PN-FF	J35	MD023SC-FZ	J35
MD023BZ-FD	J35	MD023PN-FN	J35	MD023SC-HB	J35
MD023BZ-FF	J35	MD023PN-FZ	J35	MD023SC-HT	J35
MD023BZ-FN	J35	MD023PN-HB	J35	MD023SC-MW	J35
MD023BZ-FZ	J35	MD023PN-HT	J35	MD023SC-OV	J35
MD023BZ-HB	J35	MD023PN-MW	J35	MD023SC-TD	J35
MD023BZ-HT	J35	MD023PN-OV	J35	MD023SC-WC	J35
MD023BZ-MW	J35	MD023PN-TD	J35	MD023SC-WD	J35
MD023BZ-OV	J35	MD023PN-WC	J35	MD023SC-WDR	J35
MD023BZ-TD	J35	MD023PN-WD	J35	MD023SC-WH	J35
MD023BZ-WC	J35	MD023PN-WDR	J35	MD023SC-WM	J35
MD023BZ-WD	J35	MD023PN-WH	J35	MD023SS	J35
MD023BZ-WDR	J35	MD023PN-WM	J35	MD023SS-BL	J35
MD023BZ-WH	J35	MD023PW	J35	MD023SS-CH	J35
MD023BZ-WM	J35	MD023PW-BL	J35	MD023SS-DW	J35
MD023CH	J35	MD023PW-CH	J35	MD023SS-FD	J35
MD023CH-BL	J35	MD023PW-DW	J35	MD023SS-FF	J35
MD023CH-CH	J35	MD023PW-FD	J35	MD023SS-FN	J35
MD023CH-DW	J35	MD023PW-FF	J35	MD023SS-FZ	J35
MD023CH-FD	J35	MD023PW-FN	J35	MD023SS-HB	J35
MD023CH-FF	J35	MD023PW-FZ	J35	MD023SS-HT	J35
MD023CH-FN	J35	MD023PW-HB	J35	MD023SS-MW	J35
MD023CH-FZ	J35	MD023PW-HT	J35	MD023SS-OV	J35
MD023CH-HB	J35	MD023PW-MW	J35	MD023SS-TD	J35
MD023CH-HT	J35	MD023PW-OV	J35	MD023SS-WC	J35
MD023CH-MW	J35	MD023PW-TD	J35	MD023SS-WD	J35
MD023CH-OV	J35	MD023PW-WC	J35	MD023SS-WDR	J35
MD023CH-TD	J35	MD023PW-WD	J35	MD023SS-WH	J35

Wiring Accessories Index

MD023SS-WM	J35	MD029WH	J24	MD070BK	J30
MD023WH	J35	MD032BK	J33	MD070BN	J30
MD023WH-BL	J35	MD032BN	J33	MD070BR	J30
MD023WH-CH	J35	MD032BS	J33	MD070BS	J30
MD023WH-DW	J35	MD032BZ	J33	MD070BZ	J30
MD023WH-FD	J35	MD032CH	J33	MD070CH	J30
MD023WH-FF	J35	MD032MB	J33	MD070MB	J30
MD023WH-FN	J35	MD032PW	J33	MD070PN	J30
MD023WH-FZ	J35	MD032SC	J33	MD070PW	J30
MD023WH-HB	J35	MD032SS	J33	MD070SB	J30
MD023WH-HT	J35	MD032WH	J33	MD070SC	J30
MD023WH-MW	J35	MD038BK	J20	MD070SS	J30
MD023WH-OV	J35	MD038PW	J20	MD070WH	J30
MD023WH-TD	J35	MD038WH	J20	MD075AB	J31
MD023WH-WC	J35	MD046AB	J25	MD075BK	J31
MD023WH-WD	J35	MD046BK	J25	MD075BN	J31
MD023WH-WDR	J35	MD046BN	J25	MD075BR	J31
MD023WH-WH	J35	MD046BR	J25	MD075BS	J31
MD023WH-WM	J35	MD046BS	J25	MD075BZ	J31
MD024BK	J33	MD046BZ	J25	MD075CH	J31
MD024BN	J33	MD046CH	J25	MD075MB	J31
MD024BS	J33	MD046MB	J25	MD075PN	J31
MD024BZ	J33	MD046PN	J25	MD075PW	J31
MD024CH	J33	MD046PW	J25	MD075SB	J31
MD024MB	J33	MD046RD	J25	MD075SC	J31
MD024PW	J33	MD046RDTT	J25	MD075SS	J31
MD024SC	J33	MD046SB	J25	MD075WH	J31
MD024SS	J33	MD046SC	J25	MD150AB	J36
MD024WH	J33	MD046SS	J25	MD150BK	J36
MD028AB	J19	MD046WH	J25	MD150BN	J36
MD028BK	J19	MD047BK	J27	MD150BR	J36
MD028BN	J19	MD047BKAB	J27	MD150BS	J36
MD028BR	J19	MD047BKBN	J27	MD150BZ	J36
MD028BS	J19	MD047BKBR	J27	MD150CH	J36
MD028BZ	J19	MD047BKBS	J27	MD150MB	J36
MD028CH	J19	MD047BKBZ	J27	MD150PN	J36
MD028MB	J19	MD047BKCH	J27	MD150PW	J36
MD028PN	J19	MD047BKMB	J27	MD150SB	J36
MD028PW	J19	MD047BKPN	J27	MD150SC	J36
MD028SB	J19	MD047BKSB	J27	MD150SS	J36
MD028SC	J19	MD047BKSC	J27	MD150WH	J36
MD028SS	J19	MD047BKSS	J27	MD204PW	J33
MD028WH	J19	MD047GYBS	J27	MD220BK	J32
MD029AB	J24	MD047GYSC	J27	MD220PW	J32
MD029BK	J24	MD047GYSS	J27	MD220WH	J32
MD029BN	J24	MD047PW	J27	MD280	J26
MD029BR	J24	MD047RD	J27	MD281	J26
MD029BS	J24	MD047WH	J27	MD282	J26
MD029BZ	J24	MD047WHBR	J27	MD9001	J37
MD029CH	J24	MD047WHBS	J27	MD9010	J37
MD029MB	J24	MD047WHCH	J27	MD9014	J37
MD029PN	J24	MD047WHPN	J27	MD9102AB	J38
MD029PW	J24	MD047WHSB	J27	MD9102BN	J38
MD029SB	J24	MD047WHSC	J27	MD9102BR	J38
MD029SC	J24	MD047WHSS	J27	MD9102BZ	J38
MD029SS	J24	MD070AB	J30	MD9102CH	J38

A31

Wiring Accessories Index

MD9102MB	J38	MM430BK	K21	MP516CH	K6
MD9102PN	J38	MM430GY	K21	MP516PN	K6
MD9125AB	J38	MM430WH	K21	MP516SS	K6
MD9125BN	J38	MM440BK	K21	MP520	K12
MD9125BR	J38	MM440GY	K21	MP521	K12
MD9125BZ	J38	MM440WH	K21	MP525	K12
MD9125CH	J38	MM450BK	K20	MP526	K12
MD9125MB	J38	MM450GY	K20	MP535	K12
MD9125PN	J38	MM450WH	K20	MP536	K12
MI003	J23-J25	MM460BK	K22	MP603CHBK	C30,K7
MM002BK	K23	MM460GY	K22	MP603CHWH	C30,K7
MM002WH	K23	MM460WH	K22	MP603MBBK	C30,K7
MM010BK	K24	MM465BK	K22	MP603SBBK	C30,K7
MM010WH	K24	MM465GY	K22	MP603SCBK	C30,K7
MM020BK	K24	MM465WH	K22	MP603SCWH	C30,K7
MM020WH	K24	MM470BK	K22	MP606CHBK	C30,K7
MM022BK	K23	MM470GY	K22	MP606CHWH	C30,K7
MM022WH	K23	MM470WH	K22	MP606MBBK	C30,K7
MM023BK	K23	MM480BK	K22	MP606SCBK	C30,K7
MM023WH	K23	MM480GY	K22	MP606SCWH	C30,K7
MM025BK	K23	MM480WH	K22	MP608AB	K5
MM025WH	K23	MM485BK	K22	MP608BN	K5
MM030BK	K24	MM485GY	K22	MP608BR	K5
MM030WH	K24	MM485WH	K22	MP608BS	K5
MM033BK	K24	MM490BK	K25	MP608CH	K5
MM033WH	K24	MM490GY	K25	MP608MBBK	K5
MM038BK	K24	MM490WH	K25	MP608PN	K5
MM038WH	K24	MM491BK	K26	MP608SB	K5
MM047BK	K23	MM491GY	K26	MP608SC	K5
MM047WH	K23	MM491WH	K26	MP608SS	K5
MM1001CW	K25	MM495BK	K25	MP616AB	K6
MM1001WW	K25	MM495GY	K25	MP616BN	K6
MM300BK	K26	MM495WH	K25	MP616BR	K6
MM300GY	K26	MM496BK	K26	MP616BS	K6
MM300WH	K26	MM496GY	K26	MP616CH	K6
MM305BK	K26	MM496WH	K26	MP616MBBK	K6
MM305GY	K26	MM501BK	K25	MP616PN	K6
MM305WH	K26	MM501GY	K25	MP616SB	K6
MM405BK	K20	MM501WH	K25	MP616SC	K6
MM405GY	K20	MM515BK	K24	MP616SS	K6
MM405WH	K20	MM515WH	K24		
MM406BK	K20	MM550BK	K25		
MM406GY	K20	MM550WH	K25		
MM406WH	K20	MM550WHWH	K25		
MM410BK	K20	MM586BK	K24		
MM410GY	K20	MM586GY	K24		
MM410WH	K20	MM586WH	K24		
MM415BK	K20	MM602BK	K27		
MM415GY	K20	MM602WH	K27		
MM415WH	K20	MM620BK	K27		
MM420BK	K21	MP508BR	K5		
MM420GY	K21	MP508SB	K5		
MM420WH	K21	MP510	K12		
MM425BK	K21	MP516AB	K6		
MM425GY	K21	MP516BR	K6		
MM425WH	K21	MP516BS	K6		

O

OA035AG	M14
OA036AG	M14
OA20021AG	M13
OA20022AG	M13
OA20401AG	M13
OA20402AG	M13
OA2652AG	M17
OA2652T	M17
OA2RKAG	M15
OA401AGU	M12
OA402AGU	M12
OA411AGU	M12

Wiring Accessories Index

OA412AGU	M12	PRC1033	M39	PRW122	G24
OA501AG	M15	PRC1440	M38,N10	PRW124	G24
OA502AG	M15	PRC1440RD	M38,N10	PRW127	G24
OA652AG	M17	PRC210	M37	PRW145PL	G11
OA652T	M17	PRC210AG	H18	PRW146PL	G11
OA835T	M16	PRC216	M37	PRW147PL	G11
OA840T	M16	PRC216AG	H18	PRW148PL	G11
OAARCDP036	M16	PRW010	G5	PRW156	G25
		PRW011	G5	PRW157	G25
		PRW012	G5	PRW158	G25
		PRW013	G5	PRW159	G25
		PRW015	G6	PRW161	G10
		PRW017	G22	PRW162	G10
		PRW019	G5	PRW163	G10
		PRW020	G17	PRW1635	G14
		PRW021	G17	PRW164	G10
		PRW022	G17	PRW170	G25
		PRW023	G17	PRW171	G6
		PRW024	G17	PRW172	G6
		PRW025	G6	PRW175	G27
		PRW030	G14	PRW176	G27
		PRW030EX	G14	PRW200	G18
		PRW032	G14	PRW201	G18
		PRW034	G13	PRW202	G18
		PRW035	G14	PRW203	G18
		PRW036	G14	PRW204	G18
		PRW037	G14	PRW20401	I140
		PRW038	G13	PRW20402	I140
		PRW039	G13	PRW20403	I140
		PRW040	G17	PRW20404	I140
		PRW042	G17	PRW205	G18
		PRW049	G16	PRW20506	I141
		PRW050	G16	PRW20508	I141
		PRW051	G16	PRW20509	I142
		PRW052	G16	PRW20512	I142
		PRW053	G16	PRW20518	I143
		PRW060	G22	PRW20524	I144
		PRW061	G22	PRW208	G20
		PRW065	G25	PRW208AG	H18
		PRW066	G25	PRW210	G20
		PRW080	G27	PRW210AG	H18
		PRW081	G27	PRW210RD	H18
		PRW082	G27	PRW211	G20
		PRW083	G27	PRW211AG	H18
		PRW084	G27	PRW211RD	H18
		PRW085	G27	PRW213	G20
		PRW086	G27	PRW213AG	H18
		PRW089	G27	PRW213RD	H18
		PRW090	G22	PRW215	G21
		PRW091	G27	PRW217	G21
		PRW100	G22	PRW218	G21
		PRW1035	G14	PRW230	G27
		PRW1036	G14	PRW235	G27
		PRW1037	G14	PRW240	G27
		PRW105	G5	PRW245	G27
		PRW119	G24	PRW290	G16

P

PA040	M41
PA041A	M41
PA042A	M41
PA165	M46
PA166	M46
PA167	M46
PA175	M46
PA176	M46
PA177	M46
PA301	M46
PA302	M46
PA303	M46
PA310	M46
PA311	M46
PA312	M46
PA320	M46
PA321	M46
PA322	M46
PA330	M46
PA331	M46
PA332	M46
PA340TR	M46
PA380RD	F18,M46
PA380WH	F18,M46
PRC001	M40
PRC003	M40
PRC004	M40
PRC005	M40
PRC006	M39
PRC007	M39
PRC008	M39
PRC009	M37
PRC011	M40
PRC012	M40
PRC015	M39
PRC016	M39
PRC017	M39
PRC020	M40
PRC029	M40
PRC031	M39
PRC033	M39
PRC038	M39
PRC1015	M39
PRC1031	M39

Wiring Accessories Index

PRW291	G16	SCP100PW	E50	SCP200PW	E60,E62
PRW310	G26,K17	SCP100SS	E50	SCP200SS	E60,E62
PRW311	G26,K17	SCP115BK	E64	SCP201BK	E60,E62
PRW31102	I140	SCP115BS	E64	SCP201BS	E60,E62
PRW312	G26,K17	SCP115CH	E64	SCP201CH	E60,E62
PRW401	G7,J14	SCP115MB	E64	SCP201MB	E60,E62
PRW402	G7,J14	SCP115MW	E64	SCP201MW	E60,E62
PRW403	G7,J14	SCP115PW	E64	SCP201PW	E60,E62
PRW404	G7,J14	SCP115SS	E64	SCP201SS	E60,E62
PRW406	G7,J14	SCP120BK	E65	SCP202BK	E61,E63
PRW426	G7,J14	SCP120BS	E65	SCP202BS	E61,E63
PRW432	G7,J14	SCP120CH	E65	SCP202CH	E61,E63
PRW500	G19	SCP120MB	E65	SCP202MB	E61,E63
PRW501	G19	SCP120MW	E65	SCP202MW	E61,E63
PRW502	G19	SCP120PW	E65	SCP202PW	E61,E63
PRW503	G19	SCP120SS	E65	SCP202SS	E61,E63
PRW504	G19	SCP121BK	E65	SCP203BK	E61,E63
PRW505	G19	SCP121BS	E65	SCP203BS	E61,E63
PRW605	G14	SCP121CH	E65	SCP203CH	E61,E63
PRW606	G14	SCP121MB	E65	SCP203MB	E61,E63
PRW612	G8,J5	SCP121MW	E65	SCP203MW	E61,E63
PRW618	G8,J6	SCP121PW	E65	SCP203PW	E61,E63
PRW630	G14	SCP121SS	E65	SCP203SS	E61,E63
PRW635	G14	SCP150BK	E56	SCP20401AB	E38,I104
PRW660	G17	SCP150BS	E56	SCP20401BK	E38,I104
PRW675	G13	SCP150CH	E56	SCP20401BS	E38,I104
PRW771U	G15	SCP150MB	E56	SCP20401BZ	E38,I104
PRW780	G15	SCP150MW	E56	SCP20401CH	E38,I104
PRW785	G15	SCP150PW	E56	SCP20401MB	E38,I104
PRW786	G15	SCP150SS	E56	SCP20401MW	E38,I104
PRW811	G5	SCP151BK	E56	SCP20401PW	E38,I104
PRW812	G5	SCP151BS	E56	SCP20401SS	E38,I104
PRW813	G5	SCP151CH	E56	SCP20402AB	E38,I104
		SCP151MB	E56	SCP20402BK	E38,I104
		SCP151MW	E56	SCP20402BS	E38,I104
		SCP151PW	E56	SCP20402BZ	E38,I104
		SCP151SS	E56	SCP20402CH	E38,I104
SCP060BK	E64	SCP152BK	E56	SCP20402MB	E38,I104
SCP060BS	E64	SCP152BS	E56	SCP20402MW	E38,I104
SCP060CH	E64	SCP152CH	E56	SCP20402PW	E38,I104
SCP060MB	E64	SCP152MB	E56	SCP20402SS	E38,I104
SCP060MW	E64	SCP152MW	E56	SCP20403AB	E39,I105
SCP060PW	E64	SCP152PW	E56	SCP20403BK	E39,I105
SCP060SS	E64	SCP152SS	E56	SCP20403BS	E39,I105
SCP061BK	E64	SCP153BK	E56	SCP20403BZ	E39,I105
SCP061BS	E64	SCP153BS	E56	SCP20403CH	E39,I105
SCP061CH	E64	SCP153CH	E56	SCP20403MB	E39,I105
SCP061MB	E64	SCP153MB	E56	SCP20403MW	E39,I105
SCP061MW	E64	SCP153MW	E56	SCP20403PW	E39,I105
SCP061PW	E64	SCP153PW	E56	SCP20403SS	E39,I105
SCP061SS	E64	SCP153SS	E56	SCP20404AB	E39,I105
SCP100BK	E50	SCP200BK	E60,E62	SCP20404BK	E39,I105
SCP100BS	E50	SCP200BS	E60,E62	SCP20404BS	E39,I105
SCP100CH	E50	SCP200CH	E60,E62	SCP20404BZ	E39,I105
SCP100MB	E50	SCP200MB	E60,E62	SCP20404CH	E39,I105
SCP100MW	E50	SCP200MW	E60,E62	SCP20404MB	E39,I105

S

Wiring Accessories Index

SCP20404MW	E39,I105	SCP224BK	E47	SCP242PW	E45
SCP20404PW	E39,I105	SCP224BS	E47	SCP242SS	E45
SCP20404SS	E39,I105	SCP224CH	E47	SCP243BK	E45
SCP204BK	E61,E63	SCP224MB	E47	SCP243BKCH	E45
SCP204BS	E61,E63	SCP224MW	E47	SCP243BS	E45
SCP204CH	E61,E63	SCP224PW	E47	SCP243CH	E45
SCP204MB	E61,E63	SCP224SS	E47	SCP243MB	E45
SCP204MW	E61,E63	SCP231BK	E66	SCP243MW	E45
SCP204PW	E61,E63	SCP231BS	E66	SCP243PW	E45
SCP204SS	E61,E63	SCP231CH	E66	SCP243SS	E45
SCP20506AB	E41,I107	SCP231MB	E66	SCP244BK	E45
SCP20506BK	E41,I107	SCP231MW	E66	SCP244BKCH	E45
SCP20506BS	E41,I107	SCP231PW	E66	SCP244BS	E45
SCP20506BZ	E41,I107	SCP231SS	E66	SCP244CH	E45
SCP20506CH	E41,I107	SCP232BK	E67	SCP244MB	E45
SCP20506MB	E41,I107	SCP232BS	E67	SCP244MW	E45
SCP20506MW	E41,I107	SCP232CH	E67	SCP244PW	E45
SCP20506PW	E41,I107	SCP232MB	E67	SCP244SS	E45
SCP20506SS	E41,I107	SCP232MW	E67	SCP250BK	E57
SCP20508AB	E41,I107	SCP232PW	E67	SCP250BS	E57
SCP20508BK	E41,I107	SCP232SS	E67	SCP250CH	E57
SCP20508BS	E41,I107	SCP234BK	E51	SCP250MB	E57
SCP20508BZ	E41,I107	SCP234BS	E51	SCP250MW	E57
SCP20508CH	E41,I107	SCP234CH	E51	SCP250PW	E57
SCP20508MB	E41,I107	SCP234MB	E51	SCP250SS	E57
SCP20508MW	E41,I107	SCP234MW	E51	SCP251BK	E57
SCP20508PW	E41,I107	SCP234PW	E51	SCP251BS	E57
SCP20508SS	E41,I107	SCP234SS	E51	SCP251CH	E57
SCP205BK	E61,E63	SCP238BK	E51	SCP251MB	E57
SCP205BS	E61,E63	SCP238BS	E51	SCP251MW	E57
SCP205CH	E61,E63	SCP238CH	E51	SCP251PW	E57
SCP205MB	E61,E63	SCP238MB	E51	SCP251SS	E57
SCP205MW	E61,E63	SCP238MW	E51	SCP252BK	E57
SCP205PW	E61,E63	SCP238PW	E51	SCP252BS	E57
SCP205SS	E61,E63	SCP238SS	E51	SCP252CH	E57
SCP221BK	E46	SCP239BK	E51	SCP252MB	E57
SCP221BS	E46	SCP239BS	E51	SCP252MW	E57
SCP221CH	E46	SCP239CH	E51	SCP252PW	E57
SCP221MB	E46	SCP239MB	E51	SCP252SS	E57
SCP221MW	E46	SCP239MW	E51	SCP253BK	E57
SCP221PW	E46	SCP239PW	E51	SCP253BS	E57
SCP221SS	E46	SCP239SS	E51	SCP253CH	E57
SCP222BK	E47	SCP241BK	E45	SCP253MB	E57
SCP222BS	E47	SCP241BKCH	E45	SCP253MW	E57
SCP222CH	E47	SCP241BS	E45	SCP253PW	E57
SCP222MB	E47	SCP241CH	E45	SCP253SS	E57
SCP222MW	E47	SCP241MB	E45	SCP310AB	E68,K16
SCP222PW	E47	SCP310MW	E45	SCP310BK	E68,K16
SCP222SS	E47	SCP241PW	E45	SCP310BS	E68,K16
SCP223BK	E47	SCP241SS	E45	SCP310BZ	E68,K16
SCP223BS	E47	SCP242BK	E45	SCP310CH	E68,K16
SCP223CH	E47	SCP242BKCH	E45	SCP310MB	E68,K16
SCP223MB	E47	SCP242BS	E45	SCP310MW	E68,K16
SCP223MW	E47	SCP242CH	E45	SCP310PW	E68,K16
SCP223PW	E47	SCP242MB	E45	SCP310SS	E68,K16
SCP223SS	E47	SCP242MW	E45	SCP31102AB	E40,I106

Wiring Accessories Index

SCP31102BK	E40,I106	SCP351BS	E58	SCP404MB	E37
SCP31102BS	E40,I106	SCP351CH	E58	SCP404MW	E37
SCP31102BZ	E40,I106	SCP351MB	E58	SCP404PW	E37
SCP31102CH	E40,I106	SCP351MW	E58	SCP404SS	E37
SCP31102MB	E40,I106	SCP351PW	E58	SCP406AB	E37
SCP31102MW	E40,I106	SCP351RD	E58	SCP406BK	E37
SCP31102PW	E40,I106	SCP351SS	E58	SCP406BS	E37
SCP31102SS	E40,I106	SCP352BK	E58	SCP406BZ	E37
SCP311AB	E68,K16	SCP352BS	E58	SCP406CH	E37
SCP311BK	E68,K16	SCP352CH	E58	SCP406MB	E37
SCP311BS	E68,K16	SCP352MB	E58	SCP406MW	E37
SCP311BZ	E68,K16	SCP352MW	E58	SCP406PW	E37
SCP311CH	E68,K16	SCP352PW	E58	SCP406SS	E37
SCP311MB	E68,K16	SCP352SS	E58	SCP422BK	E48
SCP311MW	E68,K16	SCP353BK	E58	SCP422BS	E48
SCP311PW	E68,K16	SCP353BS	E58	SCP422CH	E48
SCP311SS	E68,K16	SCP353CH	E58	SCP422MB	E48
SCP312AB	E68,K16	SCP353MB	E58	SCP422MW	E48
SCP312BK	E68,K16	SCP353MW	E58	SCP422PW	E48
SCP312BS	E68,K16	SCP353PW	E58	SCP422SS	E48
SCP312BZ	E68,K16	SCP353SS	E58	SCP423BK	E48
SCP312CH	E68,K16	SCP401AB	E42	SCP423BS	E48
SCP312MB	E68,K16	SCP401BK	E36	SCP423CH	E48
SCP312MW	E68,K16	SCP401BS	E36	SCP423MB	E48
SCP312PW	E68,K16	SCP401BZ	E42	SCP423MW	E48
SCP312SS	E68,K16	SCP401CH	E36,	SCP423PW	E48
SCP322BK	E48	SCP401MB	E36,	SCP423SS	E48
SCP322BS	E48	SCP401MW	E36	SCP426AB	E43
SCP322CH	E48	SCP401PW	E36,	SCP426BK	E43
SCP322MB	E48	SCP401RD	E36,	SCP426BS	E43
SCP322MW	E48	SCP401SS	E36,	SCP426BZ	E43
SCP322PW	E48	SCP402AB	E49	SCP426CH	E43
SCP322SS	E48	SCP402BK	E36	SCP426MB	E43
SCP323BK	E48	SCP402BS	E36	SCP426MW	E43
SCP323BS	E48	SCP402BZ	E49	SCP426PW	E43
SCP323CH	E48	SCP402CH	E36,	SCP426SS	E43
SCP323MB	E48	SCP402MB	E36	SCP430BK	E50
SCP323MW	E48	SCP402MW	E36	SCP430BS	E50
SCP323PW	E48	SCP402PW	E36	SCP430CH	E50
SCP323SS	E48	SCP402RD	E36	SCP430MB	E50
SCP324BK	E49	SCP402SS	E36	SCP430MW	E50
SCP324BS	E49	SCP403AB	E42	SCP430PW	E50
SCP324CH	E49	SCP403BK	E36	SCP430SS	E50
SCP324MB	E49	SCP403BS	E36	SCP435BK	E52
SCP324MW	E49	SCP403BZ	E42	SCP435BS	E52
SCP324PW	E49	SCP403CH	E36	SCP435CH	E52
SCP324SS	E49	SCP403MB	E36	SCP435MB	E52
SCP350BK	E58	SCP403MW	E36	SCP435MW	E52
SCP350BS	E58	SCP403PW	E36	SCP435PW	E52
SCP350CH	E58	SCP403RD	E36	SCP435SS	E52
SCP350MB	E58	SCP403SS	E36,	SCP436BK	E52-E53
SCP350MW	E58	SCP404AB	E43	SCP436BS	E52-E53
SCP350PW	E58	SCP404BK	E37	SCP436CH	E52-E53
SCP350RD	E58	SCP404BS	E37	SCP436MB	E52-E53
SCP350SS	E58	SCP404BZ	E43	SCP436MW	E52-E53
SCP351BK	E58	SCP404CH	E37	SCP436PW	E52-E53

Wiring Accessories Index

SCP436RD	E52-E53	SCP655PW	E50	SFAB422	E10
SCP436SS	E52-E53	SCP655SS	E50	SFAB423	E10
SCP450BK	E59	SCP660BK	E49	SFAB424	E10
SCP450BS	E59	SCP660BS	E49	SFAB425BK	E7
SCP450CH	E59	SCP660CH	E49	SFAB500BK	E23
SCP450MB	E59	SCP660MB	E49	SFAB501BK	E23
SCP450MW	E59	SCP660MW	E49	SFAB502BK	E23
SCP450PW	E59	SCP660PW	E49	SFAB503BK	E23
SCP450SS	E59	SCP660SS	E49	SFAB504BK	E23
SCP451BK	E59	SCP835BK	E53-E54	SFAB505BK	E23
SCP451BS	E59	SCP835BS	E53-E54	SFAB520BK	E25
SCP451CH	E59	SCP835CH	E53-E54	SFAB522BK	E25
SCP451MB	E59	SCP835MB	E53-E54	SFAB523BK	E25
SCP451MW	E59	SCP835MW	E53-E54	SFAB535BK	E14
SCP451PW	E59	SCP835PW	E53-E54	SFAB536BK	E14
SCP451SS	E59	SCP835SS	E53-E54	SFAB550BK	E19
SCP452BK	E59	SCP840BK	E54	SFAB551BK	E19
SCP452BS	E59	SCP840BS	E54	SFAB552BK	E19
SCP452CH	E59	SCP840CH	E54	SFAB553BK	E19
SCP452MB	E59	SCP840MB	E54	SFAB571UBK	E16
SCP452MW	E59	SCP840MW	E54	SFAB580BK	E16
SCP452PW	E59	SCP840PW	E54	SFAB585BK	E17
SCP452SS	E59	SCP840SS	E54	SFAB586BK	E17
SCP453BK	E59	SFAB038BK	E26	SFAB655BK	E17
SCP453BS	E59	SFAB060	E27	SFAB660	E17
SCP453CH	E59	SFAB061	E27	SFAB722BK	E25
SCP453MB	E59	SFAB065BK	E29	SFAB723BK	E25
SCP453MW	E59	SFAB066BK	E29	SFAB750BK	E19
SCP453PW	E59	SFAB100BK	E27	SFAB751BK	E19
SCP453SS	E59	SFAB115BK	E30	SFAB752BK	E19
SCP471UBK	E54	SFAB120BK	E30	SFAB753BK	E19
SCP471UBS	E54	SFAB121BK	E30	SFBK011BK	E6
SCP471UCH	E54	SFAB125BK	E30	SFBK012BK	E6
SCP471UMB	E54	SFAB126BK	E30	SFBK013BK	E6
SCP471UMW	E54	SFAB141PL	E8	SFBK019BK	E6
SCP471UPW	E54	SFAB142PL	E8	SFBK020BK	E24
SCP471USS	E54	SFAB143PL	E8	SFBK022BK	E24
SCP480BK	E55	SFAB144PL	E8	SFBK023BK	E24
SCP480BS	E55	SFAB1535BK	E15	SFBK024BK	E27
SCP480CH	E55	SFAB1536BK	E15	SFBK025BK	E6
SCP480MB	E55	SFAB156BK	E29	SFBK034BK	E26
SCP480MW	E55	SFAB157BK	E29	SFBK035BK	E14
SCP480PW	E55	SFAB158BK	E29	SFBK036BK	E14
SCP480SS	E55	SFAB159BK	E29	SFBK038BK	E26
SCP486BK	E55	SFAB161	E9	SFBK039BK	E26
SCP486BS	E55	SFAB162	E9	SFBK050BK	E18
SCP486CH	E55	SFAB163	E9	SFBK051BK	E18
SCP486MB	E55	SFAB164	E9	SFBK052BK	E18
SCP486MW	E55	SFAB170BK	E29	SFBK053BK	E18
SCP486PW	E55	SFAB1836BK	E15	SFBK060	E27
SCP486SS	E55	SFAB411BK	E7	SFBK061	E27
SCP655BK	E50	SFAB412BK	E7	SFBK065BK	E29
SCP655BS	E50	SFAB413BK	E7	SFBK066BK	E29
SCP655CH	E50	SFAB414BK	E7	SFBK100BK	E27
SCP655MB	E50	SFAB416BK	E7	SFBK1035BK	E15
SCP655MW	E50	SFAB421	E10	SFBK1036BK	E15

A36

A37

Wiring Accessories Index

SFBK105BK	E6	SFBS065PW	E29	SFBS414GY	E7
SFBK115BK	E30	SFBS066BK	E29	SFBS414PW	E7
SFBK120BK	E30	SFBS066PW	E29	SFBS416BK	E7
SFBK121BK	E30	SFBS100BK	E27	SFBS416GY	E7
SFBK125BK	E30	SFBS100GY	E27	SFBS416PW	E7
SFBK126BK	E30	SFBS100PW	E27	SFBS421	E10
SFBK141PL	E8	SFBS115BK	E30	SFBS422	E10
SFBK142PL	E8	SFBS115PW	E30	SFBS423	E10
SFBK143PL	E8	SFBS120BK	E30	SFBS424	E10
SFBK144PL	E8	SFBS120PW	E30	SFBS425BK	E7
SFBK156BK	E29	SFBS121BK	E30	SFBS425GY	E7
SFBK157BK	E29	SFBS121PW	E30	SFBS425PW	E7
SFBK158BK	E29	SFBS125BK	E30	SFBS500BK	E23
SFBK159BK	E29	SFBS125PW	E30	SFBS500GY	E23
SFBK161	E9	SFBS126BK	E30	SFBS500PW	E23
SFBK162	E9	SFBS126PW	E30	SFBS501BK	E23
SFBK163	E9	SFBS141PL	E8	SFBS501GY	E23
SFBK164	E9	SFBS142PL	E8	SFBS501PW	E23
SFBK170BK	E29	SFBS143PL	E8	SFBS502BK	E23
SFBK1836BK	E15	SFBS144PL	E8	SFBS502GY	E23
SFBK1840BK	E15	SFBS1535BK	E15	SFBS502PW	E23
SFBK200BK	E22	SFBS1535PW	E15	SFBS503BK	E23
SFBK201BK	E22	SFBS1536BK	E15	SFBS503GY	E23
SFBK202BK	E22	SFBS1536PW	E15	SFBS503PW	E23
SFBK203BK	E22	SFBS156BK	E29	SFBS504BK	E23
SFBK204BK	E22	SFBS156PW	E29	SFBS504GY	E23
SFBK205BK	E22	SFBS157BK	E29	SFBS504PW	E23
SFBK250BK	E20	SFBS157PW	E29	SFBS505BK	E23
SFBK251BK	E20	SFBS158BK	E29	SFBS505GY	E23
SFBK252BK	E20	SFBS158PW	E29	SFBS505PW	E23
SFBK253BK	E20	SFBS159BK	E29	SFBS520BK	E25
SFBK30035BK	A26	SFBS159PW	E29	SFBS520GY	E25
SFBK30036BK	A26	SFBS161	E9	SFBS520PW	E25
SFBK622BK	E24	SFBS162	E9	SFBS522BK	E25
SFBK623BK	E24	SFBS163	E9	SFBS522GY	E25
SFBK630BK	E14	SFBS164	E9	SFBS522PW	E25
SFBK650BK	E18	SFBS170BK	E29	SFBS523BK	E25
SFBK651BK	E18	SFBS170PW	E29	SFBS523GY	E25
SFBK652BK	E18	SFBS1836BK	E15	SFBS523PW	E25
SFBK653BK	E18	SFBS1836PW	E15	SFBS535BK	E14
SFBK655BK	E17	SFBS30035BK	A26	SFBS535GY	E14
SFBK660	E17	SFBS30035GY	A26	SFBS535PW	E14
SFBK771UBK	E16	SFBS30035PW	A26	SFBS536BK	E14
SFBK780BK	E16	SFBS30036BK	A26	SFBS536GY	E14
SFBK785BK	E17	SFBS30036GY	A26	SFBS536PW	E14
SFBK786BK	E17	SFBS30036PW	A26	SFBS550BK	E19
SFBK850BK	E21	SFBS411BK	E7	SFBS550GY	E19
SFBK851BK	E21	SFBS411GY	E7	SFBS550PW	E19
SFBK852BK	E21	SFBS411PW	E7	SFBS551BK	E19
SFBK853BK	E21	SFBS412BK	E7	SFBS551GY	E19
SFBS038BK	E26	SFBS412GY	E7	SFBS551PW	E19
SFBS038GY	E26	SFBS412PW	E7	SFBS552BK	E19
SFBS038PW	E26	SFBS413BK	E7	SFBS552GY	E19
SFBS060	E27	SFBS413GY	E7	SFBS552PW	E19
SFBS061	E27	SFBS413PW	E7	SFBS553BK	E19
SFBS065BK	E29	SFBS414BK	E7	SFBS553GY	E19

Wiring Accessories Index

SFBS553PW	E19	SFBZ156BK	E29	SFCH100PW	E27
SFBS571UBK	E16	SFBZ157BK	E29	SFCH115BK	E30
SFBS571UGY	E16	SFBZ158BK	E29	SFCH115PW	E30
SFBS571UPW	E16	SFBZ159BK	E29	SFCH120BK	E30
SFBS580BK	E16	SFBZ161	E9	SFCH120PW	E30
SFBS580GY	E16	SFBZ162	E9	SFCH121BK	E30
SFBS580PW	E16	SFBZ163	E9	SFCH121PW	E30
SFBS585BK	E17	SFBZ164	E9	SFCH125BK	E30
SFBS585GY	E17	SFBZ170BK	E29	SFCH125PW	E30
SFBS585PW	E17	SFBZ1836BK	E15	SFCH126BK	E30
SFBS586BK	E17	SFBZ411BK	E7	SFCH126PW	E30
SFBS586PW	E17	SFBZ412BK	E7	SFCH141PL	E8
SFBS604BK	K11	SFBZ413BK	E7	SFCH142PL	E8
SFBS604PW	K11	SFBZ414BK	E7	SFCH143PL	E8
SFBS655BK	E17	SFBZ416BK	E7	SFCH144PL	E8
SFBS655GY	E17	SFBZ421	E10	SFCH1535BK	E15
SFBS655PW	E17	SFBZ422	E10	SFCH1535PW	E15
SFBS660	E17	SFBZ423	E10	SFCH1536BK	E15
SFBS684BK	K11	SFBZ424	E10	SFCH1536PW	E15
SFBS684PW	K11	SFBZ425BK	E7	SFCH156BK	E29
SFBS722BK	E25	SFBZ500BK	E23	SFCH156PW	E29
SFBS722GY	E25	SFBZ501BK	E23	SFCH157BK	E29
SFBS722PW	E25	SFBZ502BK	E23	SFCH157PW	E29
SFBS723BK	E25	SFBZ503BK	E23	SFCH158BK	E29
SFBS723GY	E25	SFBZ504BK	E23	SFCH158PW	E29
SFBS723PW	E25	SFBZ505BK	E23	SFCH159BK	E29
SFBS723PW	E25	SFBZ520BK	E25	SFCH159PW	E29
SFBS750BK	E19	SFBZ522BK	E25	SFCH161	E9
SFBS750GY	E19	SFBZ523BK	E25	SFCH162	E9
SFBS750PW	E19	SFBZ535BK	E14	SFCH163	E9
SFBS751BK	E19	SFBZ536BK	E14	SFCH164	E9
SFBS751GY	E19	SFBZ550BK	E19	SFCH170BK	E29
SFBS751PW	E19	SFBZ551BK	E19	SFCH170PW	E29
SFBS752BK	E19	SFBZ552BK	E19	SFCH1836BK	E15
SFBS752GY	E19	SFBZ553BK	E19	SFCH1836PW	E15
SFBS752PW	E19	SFBZ571UBK	E16	SFCH30035BK	A26
SFBS753BK	E19	SFBZ580BK	E16	SFCH30035PW	A26
SFBS753GY	E19	SFBZ585BK	E17	SFCH30036BK	A26
SFBS753PW	E19	SFBZ586BK	E17	SFCH30036PW	A26
SFBZ038BK	E26	SFBZ655BK	E17	SFCH411BK	E7
SFBZ060	E27	SFBZ660	E17	SFCH411PW	E7
SFBZ061	E27	SFBZ722BK	E25	SFCH412BK	E7
SFBZ065BK	E29	SFBZ723BK	E25	SFCH412PW	E7
SFBZ066BK	E29	SFBZ750BK	E19	SFCH413BK	E7
SFBZ100BK	E27	SFBZ751BK	E19	SFCH413PW	E7
SFBZ115BK	E30	SFBZ752BK	E19	SFCH414BK	E7
SFBZ120BK	E30	SFBZ753BK	E19	SFCH414PW	E7
SFBZ121BK	E30	SFCH038BK	E26	SFCH416BK	E7
SFBZ125BK	E30	SFCH038PW	E26	SFCH416PW	E7
SFBZ126BK	E30	SFCH060	E27	SFCH421	E10
SFBZ141PL	E8	SFCH061	E27	SFCH422	E10
SFBZ142PL	E8	SFCH065BK	E29	SFCH423	E10
SFBZ143PL	E8	SFCH065PW	E29	SFCH424	E10
SFBZ144PL	E8	SFCH066BK	E29	SFCH425BK	E7
SFBZ1535BK	E15	SFCH066PW	E29	SFCH425PW	E7
SFBZ1536BK	E15	SFCH100BK	E27	SFCH500BK	E23

A38

A39

Wiring Accessories Index

SFCH500PW	E23	SFMB011BK	E6	SFMB30035BK	A26
SFCH501BK	E23	SFMB012BK	E6	SFMB30036BK	A26
SFCH501PW	E23	SFMB013BK	E6	SFMB622BK	E24
SFCH502BK	E23	SFMB019BK	E6	SFMB623BK	E24
SFCH502PW	E23	SFMB020BK	E24	SFMB630BK	E14
SFCH503BK	E23	SFMB022BK	E24	SFMB650BK	E18
SFCH503PW	E23	SFMB023BK	E24	SFMB651BK	E18
SFCH504BK	E23	SFMB024BK	E27	SFMB652BK	E18
SFCH504PW	E23	SFMB025BK	E6	SFMB653BK	E18
SFCH505BK	E23	SFMB034BK	E26	SFMB655BK	E17
SFCH505PW	E23	SFMB035BK	E14	SFMB660	E17
SFCH520BK	E25	SFMB036BK	E14	SFMB771UBK	E16
SFCH520PW	E25	SFMB038BK	E26	SFMB780BK	E16
SFCH522BK	E25	SFMB039BK	E26	SFMB785BK	E17
SFCH522PW	E25	SFMB050BK	E18	SFMB786BK	E17
SFCH523BK	E25	SFMB051BK	E18	SFMB850BK	E21
SFCH523PW	E25	SFMB052BK	E18	SFMB851BK	E21
SFCH535BK	E14	SFMB053BK	E18	SFMB852BK	E21
SFCH535PW	E14	SFMB060	E27	SFMB853BK	E21
SFCH536BK	E14	SFMB061	E27	SFMBW011PW	E6
SFCH536PW	E14	SFMB065BK	E29	SFMBW012PW	E6
SFCH550BK	E19	SFMB066BK	E29	SFMBW013PW	E6
SFCH550PW	E19	SFMB100BK	E27	SFMBW019PW	E6
SFCH551BK	E19	SFMB1035BK	E15	SFMBW020PW	E24
SFCH551PW	E19	SFMB1036BK	E15	SFMBW022PW	E24
SFCH552BK	E19	SFMB105BK	E6	SFMBW023PW	E24
SFCH552PW	E19	SFMB115BK	E30	SFMBW024PW	E27
SFCH553BK	E19	SFMB120BK	E30	SFMBW025PW	E6
SFCH553PW	E19	SFMB121BK	E30	SFMBW034PW	E26
SFCH571UBK	E16	SFMB125BK	E30	SFMBW035PW	E14
SFCH571UPW	E16	SFMB126BK	E30	SFMBW036PW	E14
SFCH580BK	E16	SFMB141PL	E8	SFMBW038PW	E26
SFCH580PW	E16	SFMB142PL	E8	SFMBW039PW	E26
SFCH585BK	E17	SFMB143PL	E8	SFMBW050PW	E18
SFCH585PW	E17	SFMB144PL	E8	SFMBW051PW	E18
SFCH586BK	E17	SFMB156BK	E29	SFMBW052PW	E18
SFCH586PW	E17	SFMB157BK	E29	SFMBW053PW	E18
SFCH604BK	K11	SFMB158BK	E29	SFMBW060	E27
SFCH604PW	K11	SFMB159BK	E29	SFMBW061	E27
SFCH655BK	E17	SFMB161	E9	SFMBW065PW	E29
SFCH655PW	E17	SFMB162	E9	SFMBW066PW	E29
SFCH660	E17	SFMB163	E9	SFMBW100PW	E27
SFCH684BK	K11	SFMB164	E9	SFMBW1035PW	E15
SFCH684PW	K11	SFMB170BK	E29	SFMBW1036PW	E15
SFCH722BK	E25	SFMB1836BK	E15	SFMBW105PW	E6
SFCH722PW	E25	SFMB1840BK	E15	SFMBW115PW	E30
SFCH723BK	E25	SFMB200BK	E22	SFMBW120PW	E30
SFCH723PW	E25	SFMB201BK	E22	SFMBW121PW	E30
SFCH750BK	E19	SFMB202BK	E22	SFMBW125PW	E30
SFCH750PW	E19	SFMB203BK	E22	SFMBW126PW	E30
SFCH751BK	E19	SFMB204BK	E22	SFMBW141PL	E8
SFCH751PW	E19	SFMB205BK	E22	SFMBW142PL	E8
SFCH752BK	E19	SFMB250BK	E20	SFMBW143PL	E8
SFCH752PW	E19	SFMB251BK	E20	SFMBW144PL	E8
SFCH753BK	E19	SFMB252BK	E20	SFMBW156PW	E29
SFCH753PW	E19	SFMB253BK	E20	SFMBW157PW	E29

Wiring Accessories Index

SFMW158PW	E29	SFPW060	E27	SFPW853PW	E21
SFMW159PW	E29	SFPW061	E27	SFSS038BK	E26
SFMW161	E9	SFPW065PW	E29	SFSS038GY	E26
SFMW162	E9	SFPW066PW	E29	SFSS038PW	E26
SFMW163	E9	SFPW100PW	E27	SFSS060	E27
SFMW164	E9	SFPW1035PW	E15	SFSS061	E27
SFMW170PW	E29	SFPW1036PW	E15	SFSS065BK	E29
SFMW1836PW	E15	SFPW105PW	E6	SFSS065PW	E29
SFMW1840PW	E15	SFPW115PW	E30	SFSS066BK	E29
SFMW200PW	E22	SFPW120PW	E30	SFSS066PW	E29
SFMW201PW	E22	SFPW121PW	E30	SFSS100BK	E27
SFMW202PW	E22	SFPW125PW	E30	SFSS100GY	E27
SFMW203PW	E22	SFPW126PW	E30	SFSS100PW	E27
SFMW204PW	E22	SFPW141PL	E8	SFSS115BK	E30
SFMW205PW	E22	SFPW142PL	E8	SFSS115PW	E30
SFMW250PW	E20	SFPW143PL	E8	SFSS120BK	E30
SFMW251PW	E20	SFPW144PL	E8	SFSS120PW	E30
SFMW252PW	E20	SFPW156PW	E29	SFSS121BK	E30
SFMW253PW	E20	SFPW157PW	E29	SFSS121PW	E30
SFMW30035PW	A26	SFPW158PW	E29	SFSS125BK	E30
SFMW30036PW	A26	SFPW159PW	E29	SFSS125PW	E30
SFMW622PW	E24	SFPW161	E9	SFSS126BK	E30
SFMW623PW	E24	SFPW162	E9	SFSS126PW	E30
SFMW630PW	E14	SFPW163	E9	SFSS141PL	E8
SFMW650PW	E18	SFPW164	E9	SFSS142PL	E8
SFMW651PW	E18	SFPW170PW	E29	SFSS143PL	E8
SFMW652PW	E18	SFPW1836PW	E15	SFSS144PL	E8
SFMW653PW	E18	SFPW1840PW	E15	SFSS1535BK	E15
SFMW655PW	E17	SFPW200PW	E22	SFSS1535PW	E15
SFMW660	E17	SFPW201PW	E22	SFSS1536BK	E15
SFMW771UPW	E16	SFPW202PW	E22	SFSS1536PW	E15
SFMW780PW	E16	SFPW203PW	E22	SFSS156BK	E29
SFMW785PW	E17	SFPW204PW	E22	SFSS156PW	E29
SFMW786PW	E17	SFPW205PW	E22	SFSS157BK	E29
SFMW850PW	E21	SFPW250PW	E20	SFSS157PW	E29
SFMW851PW	E21	SFPW251PW	E20	SFSS158BK	E29
SFMW852PW	E21	SFPW252PW	E20	SFSS158PW	E29
SFMW853PW	E21	SFPW253PW	E20	SFSS159BK	E29
SFPW011PW	E6	SFPW30035PW	A26	SFSS159PW	E29
SFPW012PW	E6	SFPW30036PW	A26	SFSS161	E9
SFPW013PW	E6	SFPW622PW	E24	SFSS162	E9
SFPW019PW	E6	SFPW623PW	E24	SFSS163	E9
SFPW020PW	E24	SFPW630PW	E14	SFSS164	E9
SFPW022PW	E24	SFPW650PW	E18	SFSS170BK	E29
SFPW023PW	E24	SFPW651PW	E18	SFSS170PW	E29
SFPW024PW	E27	SFPW652PW	E18	SFSS1836BK	E15
SFPW025PW	E6	SFPW653PW	E18	SFSS1836PW	E15
SFPW034PW	E26	SFPW655PW	E17	SFSS30035BK	A26
SFPW035PW	E14	SFPW660	E17	SFSS30035GY	A26
SFPW036PW	E14	SFPW771UPW	E16	SFSS30035PW	A26
SFPW038PW	E26	SFPW780PW	E16	SFSS30036BK	A26
SFPW039PW	E26	SFPW785PW	E17	SFSS30036GY	A26
SFPW050PW	E18	SFPW786PW	E17	SFSS30036PW	A26
SFPW051PW	E18	SFPW850PW	E21	SFSS411BK	E7
SFPW052PW	E18	SFPW851PW	E21	SFSS411GY	E7
SFPW053PW	E18	SFPW852PW	E21	SFSS411PW	E7

A41

Wiring Accessories Index

SFSS412BK	E7	SFSS551GY	E19	SIN022BK	E48
SFSS412GY	E7	SFSS551PW	E19	SIN022PW	E48
SFSS412PW	E7	SFSS552BK	E19	SIN023BK	E48
SFSS413BK	E7	SFSS552GY	E19	SIN023PW	E48
SFSS413GY	E7	SFSS552PW	E19	SIN024BK	E49
SFSS413PW	E7	SFSS553BK	E19	SIN024PW	E49
SFSS414BK	E7	SFSS553GY	E19	SIN025BK	E36
SFSS414GY	E7	SFSS553PW	E19	SIN025PW	E36
SFSS414PW	E7	SFSS571UBK	E16	SIN034BK	E51
SFSS416BK	E7	SFSS571UGY	E16	SIN034PW	E51
SFSS416GY	E7	SFSS571UPW	E16	SIN035BK	E52
SFSS416PW	E7	SFSS580BK	E16	SIN035PW	E52
SFSS421	E10	SFSS580GY	E16	SIN036BK	E52
SFSS422	E10	SFSS580PW	E16	SIN036PW	E52
SFSS423	E10	SFSS585BK	E17	SIN036RD	E52
SFSS424	E10	SFSS585GY	E17	SIN038BK	E51
SFSS425BK	E7	SFSS585PW	E17	SIN038GY	E51
SFSS425GY	E7	SFSS586BK	E17	SIN038PW	E51
SFSS425PW	E7	SFSS586GY	E17	SIN039BK	E51
SFSS500BK	E23	SFSS586PW	E17	SIN039PW	E51
SFSS500GY	E23	SFSS604BK	K11	SIN050BK	E56
SFSS500PW	E23	SFSS604PW	K11	SIN050PW	E56
SFSS501BK	E23	SFSS655BK	E17	SIN051BK	E56
SFSS501GY	E23	SFSS655GY	E17	SIN051PW	E56
SFSS501PW	E23	SFSS655PW	E17	SIN052BK	E56
SFSS502BK	E23	SFSS660	E17	SIN052PW	E56
SFSS502GY	E23	SFSS684BK	K11	SIN053BK	E56
SFSS502PW	E23	SFSS684PW	K11	SIN053PW	E56
SFSS503BK	E23	SFSS722BK	E25	SIN060BK	E64
SFSS503GY	E23	SFSS722GY	E25	SIN060PW	E64
SFSS503PW	E23	SFSS722PW	E25	SIN061BK	E64
SFSS504BK	E23	SFSS723BK	E25	SIN061PW	E64
SFSS504GY	E23	SFSS723GY	E25	SIN065BK	E66
SFSS504PW	E23	SFSS723PW	E25	SIN065PW	E66
SFSS505BK	E23	SFSS750BK	E19	SIN066BK	E67
SFSS505GY	E23	SFSS750GY	E19	SIN066PW	E67
SFSS505PW	E23	SFSS750PW	E19	SIN100BK	E50
SFSS520BK	E25	SFSS751BK	E19	SIN100GY	E50
SFSS520GY	E25	SFSS751GY	E19	SIN100PW	E50
SFSS520PW	E25	SFSS751PW	E19	SIN1035BK	E53
SFSS522BK	E25	SFSS752BK	E19	SIN1035PW	E53
SFSS522GY	E25	SFSS752GY	E19	SIN1036BK	E53
SFSS522PW	E25	SFSS752PW	E19	SIN1036PW	E53
SFSS523BK	E25	SFSS753BK	E19	SIN105BK	E37
SFSS523GY	E25	SFSS753GY	E19	SIN105PW	E37
SFSS523PW	E25	SFSS753PW	E19	SIN115BK	E64
SFSS535BK	E14	SIN011BK	E36	SIN115PW	E64
SFSS535GY	E14	SIN011PW	E36	SIN120BK	E65
SFSS535PW	E14	SIN012BK	E36	SIN120PW	E65
SFSS536BK	E14	SIN012PW	E36	SIN121BK	E65
SFSS536GY	E14	SIN013BK	E36	SIN121PW	E65
SFSS536PW	E14	SIN013PW	E36	SIN125BK	E65
SFSS550BK	E19	SIN019BK	E37	SIN125PW	E65
SFSS550GY	E19	SIN019PW	E37	SIN126BK	E65
SFSS550PW	E19	SIN020BK	E49	SIN126PW	E65
SFSS551BK	E19	SIN020PW	E49	SIN141PL	E45

Wiring Accessories Index

SIN142PL	E45	SIN250BK	E58	SIN414BKCH	E37
SIN143PL	E45	SIN250PW	E58	SIN414BKSS	E37
SIN144PL	E45	SIN251BK	E58	SIN414GYBS	E37
SIN1535BKBS	E53	SIN251PW	E58	SIN414GYSS	E37
SIN1535BKCH	E53	SIN252BK	E58	SIN414PWBS	E37
SIN1535BKSS	E53	SIN252PW	E58	SIN414PWCH	E37
SIN1535PWBS	E53	SIN253BK	E58	SIN414PWSS	E37
SIN1535PWCH	E53	SIN253PW	E58	SIN416BKBS	E37
SIN1535PWSS	E53	SIN256RD	E60	SIN416BKCH	E37
SIN1536BKBS	E53	SIN310BK	E68,K16	SIN416BKSS	E37
SIN1536BKCH	E53	SIN31102BK	E40,I106	SIN416GYBS	E37
SIN1536BKSS	E53	SIN311BK	E68,K16	SIN416GYSS	E37
SIN1536PWBS	E53	SIN312BK	E68,K16	SIN416PWBS	E37
SIN1536PWCH	E53	SIN401BK	E42,J12	SIN416PWCH	E37
SIN1536PWSS	E53	SIN401GY	E42,J12	SIN416PWSS	E37
SIN401PW	E66	SIN420CH	E42,J12	SIN420CH	E46
SIN156PW	E66	SIN401RD	E42,J12	SIN420PN	E46
SIN157BK	E67	SIN402BK	E42,J12	SIN421CH	E46
SIN157PW	E67	SIN402GY	E42,J12	SIN421PN	E46
SIN158BK	E66	SIN402PW	E42,J12	SIN422CH	E47
SIN158PW	E66	SIN402RD	E42,J12	SIN422PN	E47
SIN159BK	E67	SIN403BK	E42,J12	SIN423CH	E47
SIN159PW	E67	SIN403GY	E42,J12	SIN423PN	E47
SIN161	E45	SIN403PW	E42,J12	SIN424CH	E47
SIN162	E45	SIN403RD	E42,J12	SIN424PN	E47
SIN163	E45	SIN404BK	E43,J12	SIN425BKBS	E36
SIN164	E45	SIN404GY	E43,J12	SIN425BKCH	E36
SIN170BK	E67	SIN404PW	E43,J12	SIN425BKSS	E36
SIN170PW	E67	SIN406BK	E43,J12	SIN425GYBS	E36
SIN1835BK	E53	SIN406GY	E43,J12	SIN425GYSS	E36
SIN1835PW	E53	SIN406PW	E43,J12	SIN425PWBS	E36
SIN1836BK	E54	SIN425BKBS	E36	SIN425PWCH	E36
SIN1836BKBS	E54	SIN411BKBS	E36	SIN425PWSS	E36
SIN1836BKCH	E54	SIN411BKSS	E36	SIN426BK	E43,J12
SIN1836BKSS	E54	SIN411GYBS	E36	SIN426GY	E43,J12
SIN411GWSS	E54	SIN426PW	E36	SIN426PW	E43,J12
SIN1836PWBS	E54	SIN411PWBS	E36	SIN500BK	E60
SIN1836PWCH	E54	SIN411PWCH	E36	SIN500BKBS	E62
SIN1836PWSS	E54	SIN411PWSS	E36	SIN500BKCH	E62
SIN1840BK	E54	SIN412BKBS	E36	SIN500BKSS	E62
SIN1840PW	E54	SIN412BKCH	E36	SIN500GYBS	E62
SIN200BK	E60	SIN412BKSS	E36	SIN500GYSS	E62
SIN200PW	E60	SIN412GYBS	E36	SIN500PW	E60
SIN201BK	E60	SIN412GYSS	E36	SIN500PWBS	E62
SIN201PW	E60	SIN412PWBS	E36	SIN500PWCH	E62
SIN20200	E38,I104	SIN412PWCH	E36	SIN500PWSS	E62
SIN202BK	E61	SIN412PWSS	E36	SIN501BK	E60
SIN202PW	E61	SIN413BKBS	E36	SIN501BKBS	E62
SIN203BK	E61	SIN413BKCH	E36	SIN501BKCH	E62
SIN203PW	E61	SIN413BKSS	E36	SIN501BKSS	E62
SIN20400	E39	SIN413GYBS	E36	SIN501GYBS	E62
SIN204BK	E61	SIN413GYSS	E36	SIN501GYSS	E62
SIN204PW	E61	SIN413PWBS	E36	SIN501PW	E60
SIN205BK	E61	SIN413PWCH	E36	SIN501PWBS	E62
SIN205PW	E61	SIN413PWSS	E36	SIN501PWCH	E62
SIN249RD	E60	SIN414BKBS	E37	SIN501PWSS	E62

Wiring Accessories Index

SIN502BK	E61	SIN523BKBS	E48	SIN571UBKBS	E54
SIN502BKBS	E62	SIN523BKCH	E48	SIN571UBKCH	E54
SIN502BKCH	E62	SIN523BKSS	E48	SIN571UBKSS	E54
SIN502BKSS	E62	SIN523GYBS	E48	SIN571UGYBS	E54
SIN502GYBS	E62	SIN523GYSS	E48	SIN571UGYSS	E54
SIN502GYSS	E62	SIN523PWBS	E48	SIN571UPWBS	E54
SIN502PW	E61	SIN523PWCH	E48	SIN571UPWCH	E54
SIN502PWBS	E62	SIN523PWSS	E48	SIN571UPWSS	E54
SIN502PWCH	E62	SIN535BKBS	E52	SIN580BKBS	E55
SIN502PWSS	E62	SIN535BKCH	E52	SIN580BKCH	E55
SIN503BK	E61	SIN535BKSS	E52	SIN580BKSS	E55
SIN503BKBS	E62	SIN535GYBS	E52	SIN580GYBS	E55
SIN503BKCH	E62	SIN535GYSS	E52	SIN580GYSS	E55
SIN503BKSS	E62	SIN535PWBS	E52	SIN580PWBS	E55
SIN503GYBS	E62	SIN535PWCH	E52	SIN580PWCH	E55
SIN503GYSS	E62	SIN535PWSS	E52	SIN580PWSS	E55
SIN503PW	E61	SIN536BKBS	E52	SIN586BKBS	E55
SIN503PWBS	E62	SIN536BKCH	E52	SIN586BKCH	E55
SIN503PWCH	E62	SIN536BKSS	E52	SIN586BKSS	E55
SIN503PWSS	E62	SIN536GYBS	E52	SIN586GYBS	E55
SIN504BK	E61	SIN536GYSS	E52	SIN586GYSS	E55
SIN504BKBS	E63	SIN536PWBS	E52	SIN586PWBS	E55
SIN504BKCH	E63	SIN536PWCH	E52	SIN586PWCH	E55
SIN504BKSS	E63	SIN536PWSS	E52	SIN586PWSS	E55
SIN504GYBS	E63	SIN550BKBS	E56	SIN622BK	E48
SIN504GYSS	E63	SIN550BKCH	E56	SIN622PW	E48
SIN504PW	E61	SIN550BKSS	E56	SIN623BK	E48
SIN504PWBS	E63	SIN550GYBS	E56	SIN623PW	E48
SIN504PWCH	E63	SIN550GYSS	E56	SIN630BK	E50
SIN504PWSS	E63	SIN550PWBS	E56	SIN630PW	E50
SIN505BK	E61	SIN550PWCH	E56	SIN650BK	E57
SIN505BKBS	E63	SIN550PWSS	E56	SIN650PW	E57
SIN505BKCH	E63	SIN551BKBS	E56	SIN651BK	E57
SIN505BKSS	E63	SIN551BKCH	E56	SIN651PW	E57
SIN505GYBS	E63	SIN551BKSS	E56	SIN652BK	E57
SIN505GYSS	E63	SIN551GYBS	E56	SIN652PW	E57
SIN505PW	E61	SIN551GYSS	E56	SIN653BK	E57
SIN505PWBS	E63	SIN551PWBS	E56	SIN653PW	E57
SIN505PWCH	E63	SIN551PWCH	E56	SIN655BK	E50
SIN505PWSS	E63	SIN551PWSS	E56	SIN655GY	E50
SIN520BKBS	E49	SIN552BKBS	E56	SIN655PW	E50
SIN520BKCH	E49	SIN552BKCH	E56	SIN660BK	E49
SIN520BKSS	E49	SIN552BKSS	E56	SIN722BKBS	E48
SIN520GYBS	E49	SIN552GYBS	E56	SIN722BKCH	E48
SIN520GYSS	E49	SIN552GYSS	E56	SIN722BKSS	E48
SIN520PWBS	E49	SIN552PWBS	E56	SIN722GYBS	E48
SIN520PWCH	E49	SIN552PWCH	E56	SIN722GYSS	E48
SIN520PWSS	E49	SIN552PWSS	E56	SIN722PWBS	E48
SIN522BKBS	E48	SIN553BKBS	E56	SIN722PWCH	E48
SIN522BKCH	E48	SIN553BKCH	E56	SIN722PWSS	E48
SIN522BKSS	E48	SIN553BKSS	E56	SIN723BKBS	E48
SIN522GYBS	E48	SIN553GYBS	E56	SIN723BKCH	E48
SIN522GYSS	E48	SIN553GYSS	E56	SIN723BKSS	E48
SIN522PWBS	E48	SIN553PWBS	E56	SIN723GYBS	E48
SIN522PWCH	E48	SIN553PWCH	E56	SIN723GYSS	E48
SIN522PWSS	E48	SIN553PWSS	E56	SIN723PWBS	E48

Wiring Accessories Index

SIN723PWCH	E48	SP018	B34	VPAB023BK	C20
SIN723PWSS	E48	SP021	C32	VPAB024BK	C25
SIN750BKBS	E57	SP022	C32	VPAB025BK	C5
SIN750BKCH	E57	SP023	B34	VPAB035BK	C16
SIN750BKSS	E57	SP024	B34	VPAB036BK	C16
SIN750GYBS	E57	SP1016	N4	VPAB038BK	C17
SIN750GYSS	E57	SP620BK	K27	VPAB039BK	C17
SIN750PWBS	E57	SP620BKAB	K27	VPAB050BK	C18
SIN750PWCH	E57	SP620BKBN	K27	VPAB051BK	C18
SIN750PWSS	E57	SP620BKBR	K27	VPAB052BK	C18
SIN751BKBS	E57	SP620BKBS	K27	VPAB053BK	C18
SIN751BKCH	E57	SP620BKCH	K27	VPAB060	C25
SIN751BKSS	E57	SP620BKPN	K27	VPAB061	C25
SIN751GYBS	E57	SP620BKSB	K27	VPAB065BK	C29
SIN751GYSS	E57	SP620BKSC	K27	VPAB066BK	C29
SIN751PWBS	E57	SP620BKSS	K27	VPAB100BK	C25
SIN751PWCH	E57	SP620MTBK	K27	VPAB105BK	C5
SIN751PWSS	E57	SP620PW	K27	VPAB115BK	C28
SIN752BKBS	E57	SP620WH	K27	VPAB120BK	C28
SIN752BKCH	E57	SP620WHBR	K27	VPAB121BK	C28
SIN752BKSS	E57	SP620WHBS	K27	VPAB125BK	C28
SIN752GYBS	E57	SP620WHCH	K27	VPAB126BK	C28
SIN752GYSS	E57	SP620WHPN	K27	VPAB140PL	C11
SIN752PWBS	E57	SP620WHSB	K27	VPAB152PL	C11
SIN752PWCH	E57	SP620WHSC	K27	VPAB1535BK	C17
SIN752PWSS	E57	SP620WHSS	K27	VPAB1536BK	C17
SIN753BKBS	E57	SP622	D23,M9	VPAB153PL	C11
SIN753BKCH	E57	SP623	M9	VPAB154PL	C11
SIN753BKSS	E57	SP625	M9	VPAB156BK	C29
SIN753GYBS	E57	SP640BN	M9	VPAB157BK	C29
SIN753GYSS	E57	SP640CH	M9	VPAB158BK	C29
SIN753PWBS	E57	SP650BN	C31,M9	VPAB159BK	C29
SIN753PWCH	E57	SP650BR	C31,M9	VPAB161	C10
SIN753PWSS	E57	SP650CH	C31,M9	VPAB162	C10
SIN771UBK	E54	SP650MB	C31,M9	VPAB163	C10
SIN771UPW	E54	SP675BN	C31,M9	VPAB164	C10
SIN780BK	E55	SP675BR	C31,M9	VPAB170BK	C29
SIN780PW	E55	SP675CH	C31,M9	VPAB1836BK	C17
SIN786BK	E55	SP675MB	C31,M9	VPAB185	C11
SIN786PW	E55	SP900	J37	VPAB186	C11
SIN835BK				VPAB200BK	C22
SIN850BK	E59			VPAB201BK	C22
SIN850PW	E59			VPAB202BK	C22
SIN851BK	E59	V		VPAB203BK	C22
SIN851PW	E59	VP095BK	A32,C32	VPAB20401	I120
SIN852BK	E59	VP095GY	A32,C32	VPAB20402	I120
SIN852PW	E59	VP095WH	A32,C32	VPAB20403	I121
SIN853BK	E59	VP096BK	A32,C32	VPAB20404	I121
SIN853PW	E59	VP096GY	A32,C32	VPAB204BK	C22
SP011	C32	VP096WH	A32,C32	VPAB20506	I123
SP012	C32	VPAB011BK	C5	VPAB20508	I123
SP013	C32	VPAB012BK	C5	VPAB20509	I124
SP014	C32	VPAB013BK	C5	VPAB20512	I124
SP015	B34	VPAB019BK	C5	VPAB20518	I125
SP016	B34	VPAB020BK	C20	VPAB20524	I126
SP017	B34	VPAB022BK	C20	VPAB205BK	C22

Wiring Accessories Index

VPAB30535BK	A25	VPAB723BK	C21	VPBN162	C10
VPAB30536BK	A25	VPAB750BK	C19	VPBN163	C10
VPAB310	C30,K14	VPAB751BK	C19	VPBN164	C10
VPAB311	C30,K14	VPAB752BK	C19	VPBN170BK	C29
VPAB31102	I122	VPAB753BK	C19	VPBN1836BK	C17
VPAB312	C30,K14	VPAB771UBK	C14	VPBN185	C11
VPAB401BK	C7,J10	VPAB780BK	C15	VPBN186	C11
VPAB402BK	C7,J10	VPAB785BK	C15	VPBN200BK	C22
VPAB403BK	C7,J10	VPAB786BK	C15	VPBN201BK	C22
VPAB404BK	C7,J10	VPAG20506	I135	VPBN202BK	C22
VPAB406BK	C7,J10	VPAG20508	I135	VPBN203BK	C22
VPAB411BK	C6	VPAG20509	I136	VPBN20401	I120
VPAB412BK	C6	VPAG20512	I136	VPBN20402	I120
VPAB413BK	C6	VPAG20518	I137	VPBN20403	I121
VPAB414BK	C6	VPAG20524	I138	VPBN20404	I121
VPAB416BK	C6	VPAG512	H9,J5	VPBN204BK	C22
VPAB421	C12	VPAG518	H9,J6	VPBN20506	I123
VPAB422	C12	VPBN011BK	C5	VPBN20508	I123
VPAB423	C12	VPBN012BK	C5	VPBN20509	I124
VPAB424	C12	VPBN013BK	C5	VPBN20512	I124
VPAB425BK	C6	VPBN019BK	C5	VPBN20518	I125
VPAB426BK	C7,J10	VPBN020BK	C20	VPBN20524	I126
VPAB432BK	C7,J10	VPBN022BK	C20	VPBN205BK	C22
VPAB471BK	C7,J10	VPBN023BK	C20	VPBN30535BK	A25
VPAB472BK	C7,J10	VPBN024BK	C25	VPBN30536BK	A25
VPAB500BK	C23	VPBN025BK	C5	VPBN310	C30,K14
VPAB501BK	C23	VPBN035BK	C16	VPBN311	C30,K14
VPAB502BK	C23	VPBN036BK	C16	VPBN31102	I122
VPAB503BK	C23	VPBN038BK	C17	VPBN312	C30,K14
VPAB504BK	C23	VPBN039BK	C17	VPBN401BK	C7,J10
VPAB505BK	C23	VPBN050BK	C18	VPBN402BK	C7,J10
VPAB512	C8,J8	VPBN051BK	C18	VPBN403BK	C7,J10
VPAB518	C8,J8	VPBN052BK	C18	VPBN404BK	C7,J10
VPAB520BK	C21	VPBN053BK	C18	VPBN406BK	C7,J10
VPAB522BK	C21	VPBN060	C25	VPBN411BK	C6
VPAB523BK	C21	VPBN061	C25	VPBN412BK	C6
VPAB535BK	C16	VPBN065BK	C29	VPBN413BK	C6
VPAB536BK	C16	VPBN066BK	C29	VPBN414BK	C6
VPAB550BK	C19	VPBN100BK	C25	VPBN416BK	C6
VPAB551BK	C19	VPBN105BK	C5	VPBN421	C12
VPAB552BK	C19	VPBN115BK	C28	VPBN422	C12
VPAB553BK	C19	VPBN120BK	C28	VPBN423	C12
VPAB571UBK	C14	VPBN121BK	C28	VPBN424	C12
VPAB580BK	C15	VPBN125BK	C28	VPBN425BK	C6
VPAB585BK	C15	VPBN126BK	C28	VPBN426BK	C7,J10
VPAB586BK	C15	VPBN140PL	C11	VPBN471BK	C7,J10
VPAB622BK	C20	VPBN152PL	C11	VPBN472BK	C7,J10
VPAB623BK	C20	VPBN1535BK	C17	VPBN500BK	C23
VPAB650BK	C18	VPBN1536BK	C17	VPBN501BK	C23
VPAB651BK	C18	VPBN153PL	C11	VPBN502BK	C23
VPAB652BK	C18	VPBN154PL	C11	VPBN503BK	C23
VPAB653BK	C18	VPBN156BK	C29	VPBN504BK	C23
VPAB655BK	C24	VPBN157BK	C29	VPBN505BK	C23
VPAB660	C24	VPBN158BK	C29	VPBN512	C8,J8
VPAB675BK	C24	VPBN159BK	C29	VPBN518	C8,J8
VPAB722BK	C21	VPBN161	C10	VPBN520BK	C21

Wiring Accessories Index

VPBN522BK	C21	VPBR039WH	C17	VPBR200WH	C22
VPBN523BK	C21	VPBR050BK	C18	VPBR201BK	C22
VPBN535BK	C16	VPBR050WH	C18	VPBR201WH	C22
VPBN536BK	C16	VPBR051BK	C18	VPBR202BK	C22
VPBN550BK	C19	VPBR051WH	C18	VPBR202WH	C22
VPBN551BK	C19	VPBR052BK	C18	VPBR203BK	C22
VPBN552BK	C19	VPBR052WH	C18	VPBR203WH	C22
VPBN553BK	C19	VPBR053BK	C18	VPBR20401	I120
VPBN571UBK	C14	VPBR053WH	C18	VPBR20402	I120
VPBN580BK	C15	VPBR060	C25	VPBR20403	I121
VPBN585BK	C15	VPBR061	C25	VPBR20404	I121
VPBN586BK	C15	VPBR065BK	C29	VPBR204BK	C22
VPBN622BK	C20	VPBR065WH	C29	VPBR204WH	C22
VPBN623BK	C20	VPBR066BK	C29	VPBR20506	I123
VPBN650BK	C18	VPBR066WH	C29	VPBR20508	I123
VPBR100BK	C18	VPBR100BK	C25	VPBR20509	I124
VPBN652BK	C18	VPBR100WH	C25	VPBR20512	I124
VPBN653BK	C18	VPBR105BK	C5	VPBR20518	I125
VPBN655BK	C24	VPBR105WH	C5	VPBR20524	I126
VPBR115BK	C24	VPBR115BK	C28	VPBR205BK	C22
VPBN675BK	C24	VPBR115WH	C28	VPBR205WH	C22
VPBN722BK	C21	VPBR120BK	C28	VPBR30535BK	A25
VPBN723BK	C21	VPBR120WH	C28	VPBR30535WH	A25
VPBN750BK	C19	VPBR121BK	C28	VPBR30536BK	A25
VPBN751BK	C19	VPBR121WH	C28	VPBR30536WH	A25
VPBN752BK	C19	VPBR125BK	C28	VPBR310	C30,K14
VPBN753BK	C19	VPBR125WH	C28	VPBR311	C30,K14
VPBR771UBK	C14	VPBR126BK	C28	VPBR31102	I122
VPBN780BK	C15	VPBR126WH	C28	VPBR312	C30,K14
VPBN785BK	C15	VPBR140PL	C11	VPBR401BK	C7,J10
VPBN786BK	C15	VPBR152PL	C11	VPBR401WH	C7,J10
VPBR011BK	C5	VPBR1535BK	C17	VPBR402BK	C7,J10
VPBR011WH	C5	VPBR1535WH	C17	VPBR402WH	C7,J10
VPBR012BK	C5	VPBR1536BK	C17	VPBR403BK	C7,J10
VPBR012WH	C5	VPBR1536WH	C17	VPBR403WH	C7,J10
VPBR013BK	C5	VPBR153PL	C11	VPBR404BK	C7,J10
VPBR013WH	C5	VPBR154PL	C11	VPBR404WH	C7,J10
VPBR019BK	C5	VPBR156BK	C29	VPBR406BK	C7,J10
VPBR019WH	C5	VPBR156WH	C29	VPBR406WH	C7,J10
VPBR020BK	C20	VPBR157BK	C29	VPBR411BK	C6
VPBR020WH	C20	VPBR157WH	C29	VPBR411WH	C6
VPBR022BK	C20	VPBR158BK	C29	VPBR412BK	C6
VPBR022WH	C20	VPBR158WH	C29	VPBR412WH	C6
VPBR023BK	C20	VPBR159BK	C29	VPBR413BK	C6
VPBR023WH	C20	VPBR159WH	C29	VPBR413WH	C6
VPBR024BK	C25	VPBR161	C10	VPBR414BK	C6
VPBR024WH	C25	VPBR162	C10	VPBR414WH	C6
VPBR025BK	C5	VPBR163	C10	VPBR416BK	C6
VPBR025WH	C5	VPBR164	C10	VPBR416WH	C6
VPBR035BK	C16	VPBR170BK	C29	VPBR421	C12
VPBR035WH	C16	VPBR170WH	C29	VPBR422	C12
VPBR036BK	C16	VPBR1836BK	C17	VPBR423	C12
VPBR036WH	C16	VPBR1836WH	C17	VPBR424	C12
VPBR038BK	C17	VPBR185	C11	VPBR425BK	C6
VPBR038WH	C17	VPBR186	C11	VPBR425WH	C6
VPBR039BK	C17	VPBR200BK	C22	VPBR426BK	C7,J10

A47

Wiring Accessories Index

VPBR426WH	C7,J10	VPBR751BK	C19	VPCH105BK	C5
VPBR471BK	C7,J10	VPBR751WH	C19	VPCH105WH	C5
VPBR471WH	C7,J10	VPBR752BK	C19	VPCH115BK	C28
VPBR472BK	C7,J10	VPBR752WH	C19	VPCH115WH	C28
VPBR472WH	C7,J10	VPBR753BK	C19	VPCH120BK	C28
VPBR512	C8,J8	VPBR753WH	C19	VPCH120WH	C28
VPBR518	C8,J8	VPBR771UBK	C14	VPCH121BK	C28
VPBR520BK	C21	VPBR771UWH	C14	VPCH121WH	C28
VPBR520WH	C21	VPBR780BK	C15	VPCH125BK	C28
VPBR522BK	C21	VPBR780WH	C15	VPCH125WH	C28
VPBR522WH	C21	VPBR785BK	C15	VPCH126BK	C28
VPBR523BK	C21	VPBR785WH	C15	VPCH126WH	C28
VPBR523WH	C21	VPBR786BK	C15	VPCH140PL	C11
VPBR535BK	C16	VPBR786WH	C15	VPCH152PL	C11
VPBR535WH	C16	VPCH011BK	C5	VPCH1535BK	C17
VPBR536BK	C16	VPCH011WH	C5	VPCH1535WH	C17
VPBR536WH	C16	VPCH012BK	C5	VPCH1536BK	C17
VPBR550BK	C19	VPCH012WH	C5	VPCH1536WH	C17
VPBR550WH	C19	VPCH013BK	C5	VPCH153PL	C11
VPBR551BK	C19	VPCH013WH	C5	VPCH154PL	C11
VPBR551WH	C19	VPCH019BK	C5	VPCH156BK	C29
VPBR552BK	C19	VPCH019WH	C5	VPCH156WH	C29
VPBR552WH	C19	VPCH020BK	C20	VPCH157BK	C29
VPBR553BK	C19	VPCH020WH	C20	VPCH157WH	C29
VPBR553WH	C19	VPCH022BK	C20	VPCH158BK	C29
VPBR571UBK	C14	VPCH022WH	C20	VPCH158WH	C29
VPBR571UWH	C14	VPCH023BK	C20	VPCH159BK	C29
VPBR580BK	C15	VPCH023WH	C20	VPCH159WH	C29
VPBR580WH	C15	VPCH024BK	C25	VPCH161	C10
VPBR585BK	C15	VPCH024WH	C25	VPCH162	C10
VPBR585WH	C15	VPCH025BK	C5	VPCH163	C10
VPBR586BK	C15	VPCH025WH	C5	VPCH164	C10
VPBR586WH	C15	VPCH035BK	C16	VPCH170BK	C29
VPBR622BK	C20	VPCH035WH	C16	VPCH170WH	C29
VPBR622WH	C20	VPCH036BK	C16	VPCH1836BK	C17
VPBR623BK	C20	VPCH036WH	C16	VPCH1836WH	C17
VPBR623WH	C20	VPCH038BK	C17	VPCH185	C11
VPBR650BK	C18	VPCH038WH	C17	VPCH186	C11
VPBR650WH	C18	VPCH039BK	C17	VPCH200BK	C22
VPBR651BK	C18	VPCH039WH	C17	VPCH200WH	C22
VPBR651WH	C18	VPCH050BK	C18	VPCH201BK	C22
VPBR652BK	C18	VPCH050WH	C18	VPCH201WH	C22
VPBR652WH	C18	VPCH051BK	C18	VPCH202BK	C22
VPBR653BK	C18	VPCH051WH	C18	VPCH202WH	C22
VPBR653WH	C18	VPCH052BK	C18	VPCH203BK	C22
VPBR655BK	C24	VPCH052WH	C18	VPCH203WH	C22
VPBR655WH	C24	VPCH053BK	C18	VPCH20401	I120
VPBR660	C24	VPCH053WH	C18	VPCH20402	I120
VPBR675BK	C24	VPCH060	C25	VPCH20403	I121
VPBR675WH	C24	VPCH061	C25	VPCH20404	I121
VPBR722BK	C21	VPCH065BK	C29	VPCH204BK	C22
VPBR722WH	C21	VPCH065WH	C29	VPCH204WH	C22
VPBR723BK	C21	VPCH066BK	C29	VPCH20506	I123
VPBR723WH	C21	VPCH066WH	C29	VPCH20508	I123
VPBR750BK	C19	VPCH100BK	C25	VPCH20509	I124
VPBR750WH	C19	VPCH100WH	C25	VPCH20512	I124

Wiring Accessories Index

VPCH20518	I125	VPCH505BK	C23	VPCH750WH	C19
VPCH20524	I126	VPCH505WH	C23	VPCH751BK	C19
VPCH205BK	C22	VPCH512	C8,J8	VPCH751WH	C19
VPCH205WH	C22	VPCH518	C8,J8	VPCH752BK	C19
VPCH30535BK	A25	VPCH520BK	C21	VPCH752WH	C19
VPCH30535WH	A25	VPCH520WH	C21	VPCH753BK	C19
VPCH30536BK	A25	VPCH522BK	C21	VPCH753WH	C19
VPCH30536WH	A25	VPCH522WH	C21	VPCH771UBK	C14
VPCH310	C30,K14	VPCH523BK	C21	VPCH771UWH	C14
VPCH311	C30,K14	VPCH523WH	C21	VPCH780BK	C15
VPCH31102	I122	VPCH535BK	C16	VPCH780WH	C15
VPCH312	C30,K14	VPCH535WH	C16	VPCH785BK	C15
VPCH401BK	C7,J10	VPCH536BK	C16	VPCH785WH	C15
VPCH401WH	C7,J10	VPCH536WH	C16	VPCH786BK	C15
VPCH402BK	C7,J10	VPCH550BK	C19	VPCH786WH	C15
VPCH402WH	C7,J10	VPCH550WH	C19	VPMB024BK	C25
VPCH403BK	C7,J10	VPCH551BK	C19	VPMB038BK	C17
VPCH403WH	C7,J10	VPCH551WH	C19	VPMB039BK	C17
VPCH404BK	C7,J10	VPCH552BK	C19	VPMB060	C25
VPCH404WH	C7,J10	VPCH552WH	C19	VPMB061	C25
VPCH406BK	C7,J10	VPCH553BK	C19	VPMB065BK	C29
VPCH406WH	C7,J10	VPCH553WH	C19	VPMB066BK	C29
VPCH411BK	C6	VPCH571UBK	C14	VPMB100BK	C25
VPCH411WH	C6	VPCH571UWH	C14	VPMB115BK	C28
VPCH412BK	C6	VPCH580BK	C15	VPMB120BK	C28
VPCH412WH	C6	VPCH580WH	C15	VPMB121BK	C28
VPCH413BK	C6	VPCH585BK	C15	VPMB125BK	C28
VPCH413WH	C6	VPCH585WH	C15	VPMB126BK	C28
VPCH414BK	C6	VPCH586BK	C15	VPMB140PL	C11
VPCH414WH	C6	VPCH586WH	C15	VPMB152PL	C11
VPCH416BK	C6	VPCH604BK	C30,K9	VPMB1535BK	C17
VPCH416WH	C6	VPCH604WH	C30,K9	VPMB1536BK	C17
VPCH421	C12	VPCH622BK	C20	VPMB153PL	C11
VPCH422	C12	VPCH622WH	C20	VPMB154PL	C11
VPCH423	C12	VPCH623BK	C20	VPMB156BK	C29
VPCH424	C12	VPCH623WH	C20	VPMB157BK	C29
VPCH425BK	C6	VPCH650BK	C18	VPMB158BK	C29
VPCH425WH	C6	VPCH650WH	C18	VPMB159BK	C29
VPCH426BK	C7,J10	VPCH651BK	C18	VPMB161	C10
VPCH426WH	C7,J10	VPCH651WH	C18	VPMB162	C10
VPCH432BK	C7,J10	VPCH652BK	C18	VPMB163	C10
VPCH432WH	C7,J10	VPCH652WH	C18	VPMB164	C10
VPCH471BK	C7,J10	VPCH653BK	C18	VPMB170BK	C29
VPCH471WH	C7,J10	VPCH653WH	C18	VPMB1836BK	C17
VPCH472BK	C7,J10	VPCH655BK	C24	VPMB20401	I120
VPCH472WH	C7,J10	VPCH655WH	C24	VPMB20402	I120
VPCH500BK	C23	VPCH660	C24	VPMB20403	I121
VPCH500WH	C23	VPCH675BK	C24	VPMB20404	I121
VPCH501BK	C23	VPCH675WH	C24	VPMB20506	I123
VPCH501WH	C23	VPCH684BK	C30,K9	VPMB20508	I123
VPCH502BK	C23	VPCH684WH	C30,K9	VPMB20509	I124
VPCH502WH	C23	VPCH722BK	C21	VPMB20512	I124
VPCH503BK	C23	VPCH722WH	C21	VPMB20518	I125
VPCH503WH	C23	VPCH723BK	C21	VPMB20524	I126
VPCH504BK	C23	VPCH723WH	C21	VPMB30535BK	A25
VPCH504WH	C23	VPCH750BK	C19	VPMB30536BK	A25

Wiring Accessories Index

VPMB310	C30,K14	VPPN013WH	C5	VPPN154PL	C11
VPMB311	C30,K14	VPPN019BK	C5	VPPN156BK	C29
VPMB31102	I122	VPPN019WH	C5	VPPN156WH	C29
VPMB312	C30,K14	VPPN020BK	C20	VPPN157BK	C29
VPMB401BK	C7,J10	VPPN020WH	C20	VPPN157WH	C29
VPMB402BK	C7,J10	VPPN022BK	C20	VPPN158BK	C29
VPMB403BK	C7,J10	VPPN022WH	C20	VPPN158WH	C29
VPMB404BK	C7,J10	VPPN023BK	C20	VPPN159BK	C29
VPMB406BK	C7,J10	VPPN023WH	C20	VPPN159WH	C29
VPMB411BK	C6	VPPN024BK	C25	VPPN161	C10
VPMB412BK	C6	VPPN024WH	C25	VPPN162	C10
VPMB413BK	C6	VPPN025BK	C5	VPPN163	C10
VPMB414BK	C6	VPPN025WH	C5	VPPN164	C10
VPMB416BK	C6	VPPN035BK	C16	VPPN170BK	C29
VPMB421	C12	VPPN035WH	C16	VPPN170WH	C29
VPMB422	C12	VPPN036BK	C16	VPPN1836BK	C17
VPMB423	C12	VPPN036WH	C16	VPPN1836WH	C17
VPMB424	C12	VPPN038BK	C17	VPPN185	C11
VPMB425BK	C6	VPPN038WH	C17	VPPN186	C11
VPMB426BK	C7,J10	VPPN039BK	C17	VPPN200BK	C22
VPMB471BK	C7,J10	VPPN039WH	C17	VPPN200WH	C22
VPMB472BK	C7,J10	VPPN050BK	C18	VPPN201BK	C22
VPMB500BK	C23	VPPN050WH	C18	VPPN201WH	C22
VPMB501BK	C23	VPPN051BK	C18	VPPN202BK	C22
VPMB502BK	C23	VPPN051WH	C18	VPPN202WH	C22
VPMB503BK	C23	VPPN052BK	C18	VPPN203BK	C22
VPMB504BK	C23	VPPN052WH	C18	VPPN203WH	C22
VPMB505BK	C23	VPPN053BK	C18	VPPN20401	I120
VPMB512	C8,J8	VPPN053WH	C18	VPPN20402	I120
VPMB518	C8,J8	VPPN060	C25	VPPN20403	I121
VPMB520BK	C21	VPPN061	C25	VPPN20404	I121
VPMB522BK	C21	VPPN065BK	C29	VPPN204BK	C22
VPMB523BK	C21	VPPN065WH	C29	VPPN204WH	C22
VPMB535BK	C16	VPPN066BK	C29	VPPN20506	I123
VPMB536BK	C16	VPPN066WH	C29	VPPN20508	I123
VPMB550BK	C19	VPPN100BK	C25	VPPN20509	I124
VPMB551BK	C19	VPPN100WH	C25	VPPN20512	I124
VPMB552BK	C19	VPPN105BK	C5	VPPN20518	I125
VPMB553BK	C19	VPPN105WH	C5	VPPN20524	I126
VPMB571UBK	C14	VPPN115BK	C28	VPPN205BK	C22
VPMB580BK	C15	VPPN115WH	C28	VPPN205WH	C22
VPMB585BK	C15	VPPN120BK	C28	VPPN30535BK	A25
VPMB586BK	C15	VPPN120WH	C28	VPPN30535WH	A25
VPMB655BK	C24	VPPN121BK	C28	VPPN30536BK	A25
VPMB660	C24	VPPN121WH	C28	VPPN30536WH	A25
VPMB722BK	C21	VPPN125BK	C28	VPPN310	C30,K14
VPMB723BK	C21	VPPN125WH	C28	VPPN311	C30,K14
VPMB750BK	C19	VPPN126BK	C28	VPPN31102	I122
VPMB751BK	C19	VPPN126WH	C28	VPPN312	C30,K14
VPMB752BK	C19	VPPN140PL	C11	VPPN401BK	C7,J10
VPMB753BK	C19	VPPN152PL	C11	VPPN401WH	C7,J10
VPPN011BK	C5	VPPN153BK	C17	VPPN402BK	C7,J10
VPPN011WH	C5	VPPN1535WH	C17	VPPN402WH	C7,J10
VPPN012BK	C5	VPPN1536BK	C17	VPPN403BK	C7,J10
VPPN012WH	C5	VPPN1536WH	C17	VPPN403WH	C7,J10
VPPN013BK	C5	VPPN153PL	C11	VPPN404BK	C7,J10

Wiring Accessories Index

VPPN404WH	C7,J10	VPPN553WH	C19	VPSB022BK	C20
VPPN406BK	C7,J10	VPPN571UBK	C14	VPSB022WH	C20
VPPN406WH	C7,J10	VPPN571UWH	C14	VPSB023BK	C20
VPPN411BK	C6	VPPN580BK	C15	VPSB023WH	C20
VPPN411WH	C6	VPPN580WH	C15	VPSB024BK	C25
VPPN412BK	C6	VPPN585BK	C15	VPSB024WH	C25
VPPN412WH	C6	VPPN585WH	C15	VPSB025BK	C5
VPPN413BK	C6	VPPN586BK	C15	VPSB025WH	C5
VPPN413WH	C6	VPPN586WH	C15	VPSB035BK	C16
VPPN414BK	C6	VPPN622BK	C20	VPSB035WH	C16
VPPN414WH	C6	VPPN622WH	C20	VPSB036BK	C16
VPPN416BK	C6	VPPN623BK	C20	VPSB036WH	C16
VPPN416WH	C6	VPPN623WH	C20	VPSB038BK	C17
VPPN421	C12	VPPN650BK	C18	VPSB038WH	C17
VPPN422	C12	VPPN650WH	C18	VPSB039BK	C17
VPPN423	C12	VPPN651BK	C18	VPSB039WH	C17
VPPN424	C12	VPPN651WH	C18	VPSB050BK	C18
VPPN425BK	C6	VPPN652BK	C18	VPSB050WH	C18
VPPN425WH	C6	VPPN652WH	C18	VPSB051BK	C18
VPPN426BK	C7,J10	VPPN653BK	C18	VPSB051WH	C18
VPPN426WH	C7,J10	VPPN653WH	C18	VPSB052BK	C18
VPPN471BK	C7,J10	VPPN655BK	C24	VPSB052WH	C18
VPPN471WH	C7,J10	VPPN655WH	C24	VPSB053BK	C18
VPPN472BK	C7,J10	VPPN660	C24	VPSB053WH	C18
VPPN472WH	C7,J10	VPPN675BK	C24	VPSB060	C25
VPPN500BK	C23	VPPN675WH	C24	VPSB061	C25
VPPN500WH	C23	VPPN722BK	C21	VPSB065BK	C29
VPPN501BK	C23	VPPN722WH	C21	VPSB065WH	C29
VPPN501WH	C23	VPPN723BK	C21	VPSB066BK	C29
VPPN502BK	C23	VPPN723WH	C21	VPSB066WH	C29
VPPN502WH	C23	VPPN750BK	C19	VPSB100BK	C25
VPPN503BK	C23	VPPN750WH	C19	VPSB100WH	C25
VPPN503WH	C23	VPPN751BK	C19	VPSB105BK	C5
VPPN504BK	C23	VPPN751WH	C19	VPSB105WH	C5
VPPN504WH	C23	VPPN752BK	C19	VPSB115BK	C28
VPPN505BK	C23	VPPN752WH	C19	VPSB115WH	C28
VPPN505WH	C23	VPPN753BK	C19	VPSB120BK	C28
VPPN512	C8,J8	VPPN753WH	C19	VPSB120WH	C28
VPPN518	C8,J8	VPPN771UBK	C14	VPSB121BK	C28
VPPN520BK	C21	VPPN771UWH	C14	VPSB121WH	C28
VPPN520WH	C21	VPPN780BK	C15	VPSB125BK	C28
VPPN522BK	C21	VPPN780WH	C15	VPSB125WH	C28
VPPN522WH	C21	VPPN785BK	C15	VPSB126BK	C28
VPPN523BK	C21	VPPN785WH	C15	VPSB126WH	C28
VPPN523WH	C21	VPPN786BK	C15	VPSB140PL	C11
VPPN535BK	C16	VPPN786WH	C15	VPSB152PL	C11
VPPN535WH	C16	VPSB011BK	C5	VPSB1535BK	C17
VPPN536BK	C16	VPSB011WH	C5	VPSB1535WH	C17
VPPN536WH	C16	VPSB012BK	C5	VPSB1536BK	C17
VPPN550BK	C19	VPSB012WH	C5	VPSB1536WH	C17
VPPN550WH	C19	VPSB013BK	C5	VPSB153PL	C11
VPPN551BK	C19	VPSB013WH	C5	VPSB154PL	C11
VPPN551WH	C19	VPSB019BK	C5	VPSB156BK	C29
VPPN552BK	C19	VPSB019WH	C5	VPSB156WH	C29
VPPN552WH	C19	VPSB020BK	C20	VPSB157BK	C29
VPPN553BK	C19	VPSB020WH	C20	VPSB157WH	C29

A50

A51

Wiring Accessories Index

VPSB158BK	C29	VPSB412BK	C6	VPSB652BK	C18
VPSB158WH	C29	VPSB412WH	C6	VPSB652WH	C18
VPSB159BK	C29	VPSB413BK	C6	VPSB653BK	C18
VPSB159WH	C29	VPSB413WH	C6	VPSB653WH	C18
VPSB161	C10	VPSB414BK	C6	VPSB655BK	C24
VPSB162	C10	VPSB414WH	C6	VPSB655WH	C24
VPSB163	C10	VPSB416BK	C6	VPSB660	C24
VPSB164	C10	VPSB416WH	C6	VPSB675BK	C24
VPSB170BK	C29	VPSB421	C12	VPSB675WH	C24
VPSB170WH	C29	VPSB422	C12	VPSB722BK	C21
VPSB1836BK	C17	VPSB423	C12	VPSB722WH	C21
VPSB1836WH	C17	VPSB424	C12	VPSB723BK	C21
VPSB185	C11	VPSB425BK	C6	VPSB723WH	C21
VPSB186	C11	VPSB425WH	C6	VPSB750BK	C19
VPSB200BK	C22	VPSB426BK	C7,J10	VPSB750WH	C19
VPSB200WH	C22	VPSB426WH	C7,J10	VPSB751BK	C19
VPSB201BK	C22	VPSB471BK	C7,J10	VPSB751WH	C19
VPSB201WH	C22	VPSB471WH	C7,J10	VPSB752BK	C19
VPSB202BK	C22	VPSB472BK	C7,J10	VPSB752WH	C19
VPSB202WH	C22	VPSB472WH	C7,J10	VPSB753BK	C19
VPSB203BK	C22	VPSB512	C8,J8	VPSB753WH	C19
VPSB203WH	C22	VPSB518	C8,J8	VPSB771UBK	C14
VPSB20401	I120	VPSB520BK	C21	VPSB771UWH	C14
VPSB20402	I120	VPSB520WH	C21	VPSB780BK	C15
VPSB20403	I121	VPSB522BK	C21	VPSB780WH	C15
VPSB20404	I121	VPSB522WH	C21	VPSB785BK	C15
VPSB204BK	C22	VPSB523BK	C21	VPSB785WH	C15
VPSB204WH	C22	VPSB523WH	C21	VPSB786BK	C15
VPSB20506	I123	VPSB535BK	C16	VPSB786WH	C15
VPSB20508	I123	VPSB535WH	C16	VPSB786WH	C15
VPSB20509	I124	VPSB536BK	C16	VPSB786WH	C15
VPSB20512	I124	VPSB536WH	C16	VPSB786WH	C15
VPSB20518	I125	VPSB550BK	C19	VPSB786WH	C15
VPSB20524	I126	VPSB550WH	C19	VPSB786WH	C15
VPSB205BK	C22	VPSB551BK	C19	VPSB786WH	C15
VPSB205WH	C22	VPSB551WH	C19	VPSB786WH	C15
VPSB30535BK	A25	VPSB552BK	C19	VPSB786WH	C15
VPSB30535WH	A25	VPSB552WH	C19	VPSB786WH	C15
VPSB30536BK	A25	VPSB553BK	C19	VPSB786WH	C15
VPSB30536WH	A25	VPSB553WH	C19	VPSB786WH	C15
VPSB310	C30,K14	VPSB571UBK	C14	VPSB786WH	C15
VPSB311	C30,K14	VPSB571UWH	C14	VPSB786WH	C15
VPSB31102	I122	VPSB580BK	C15	VPSB786WH	C15
VPSB312	C30,K14	VPSB580WH	C15	VPSB786WH	C15
VPSB401BK	C7,J10	VPSB585BK	C15	VPSB786WH	C15
VPSB401WH	C7,J10	VPSB585WH	C15	VPSB786WH	C15
VPSB402BK	C7,J10	VPSB586BK	C15	VPSB786WH	C15
VPSB402WH	C7,J10	VPSB586WH	C15	VPSB786WH	C15
VPSB403BK	C7,J10	VPSB622BK	C20	VPSB786WH	C15
VPSB403WH	C7,J10	VPSB622WH	C20	VPSB786WH	C15
VPSB404BK	C7,J10	VPSB623BK	C20	VPSB786WH	C15
VPSB404WH	C7,J10	VPSB623WH	C20	VPSB786WH	C15
VPSB406BK	C7,J10	VPSB650BK	C18	VPSB786WH	C15
VPSB406WH	C7,J10	VPSB650WH	C18	VPSB786WH	C15
VPSB411BK	C6	VPSB651BK	C18	VPSB786WH	C15
VPSB411WH	C6	VPSB651WH	C18	VPSB786WH	C15

Wiring Accessories Index

VPSC050BK	C18	VPSC200WH	C22	VPSC414GY	C6
VPSC050WH	C18	VPSC201BK	C22	VPSC414WH	C6
VPSC051BK	C18	VPSC201WH	C22	VPSC416BK	C6
VPSC051WH	C18	VPSC202BK	C22	VPSC416GY	C6
VPSC052BK	C18	VPSC202WH	C22	VPSC416WH	C6
VPSC052WH	C18	VPSC203BK	C22	VPSC421	C12
VPSC053BK	C18	VPSC203WH	C22	VPSC422	C12
VPSC053WH	C18	VPSC20401	I120	VPSC423	C12
VPSC060	C25	VPSC20402	I120	VPSC424	C12
VPSC061	C25	VPSC20403	I121	VPSC425BK	C6
VPSC065BK	C29	VPSC20404	I121	VPSC425GY	C6
VPSC065WH	C29	VPSC204BK	C22	VPSC425WH	C6
VPSC066BK	C29	VPSC204WH	C22	VPSC426BK	C7,J10
VPSC066WH	C29	VPSC20506	I123	VPSC426GY	C7,J10
VPSC100BK	C25	VPSC20508	I123	VPSC426WH	C7,J10
VPSC100GY	C25	VPSC20509	I124	VPSC432BK	C7,J10
VPSC100WH	C25	VPSC20512	I124	VPSC432GY	C7,J10
VPSC105BK	C5	VPSC20518	I125	VPSC432WH	C7,J10
VPSC105WH	C5	VPSC20524	I126	VPSC471BK	C7,J10
VPSC115BK	C28	VPSC205BK	C22	VPSC471GY	C7,J10
VPSC115WH	C28	VPSC205WH	C22	VPSC471WH	C7,J10
VPSC120BK	C28	VPSC30535BK	A25	VPSC472BK	C7,J10
VPSC120WH	C28	VPSC30535GY	A25	VPSC472GY	C7,J10
VPSC121BK	C28	VPSC30535WH	A25	VPSC472WH	C7,J10
VPSC121WH	C28	VPSC30536BK	A25	VPSC500BK	C23
VPSC125BK	C28	VPSC30536GY	A25	VPSC500GY	C23
VPSC125WH	C28	VPSC30536WH	A25	VPSC500WH	C23
VPSC126BK	C28	VPSC310	C30,K14	VPSC501BK	C23
VPSC126WH	C28	VPSC311	C30,K14	VPSC501GY	C23
VPSC140PL	C11	VPSC31102	I122	VPSC501WH	C23
VPSC152PL	C11	VPSC312	C30,K14	VPSC502BK	C23
VPSC1535BK	C17	VPSC401BK	C7,J10	VPSC502GY	C23
VPSC1535WH	C17	VPSC401GY	C7,J10	VPSC502WH	C23
VPSC1536BK	C17	VPSC401WH	C7,J10	VPSC503BK	C23
VPSC1536WH	C17	VPSC402BK	C7,J10	VPSC503GY	C23
VPSC159BK	C11	VPSC402GY	C7,J10	VPSC503WH	C23
VPSC154PL	C11	VPSC402WH	C7,J10	VPSC504BK	C23
VPSC156BK	C29	VPSC403BK	C7,J10	VPSC504GY	C23
VPSC156WH	C29	VPSC403GY	C7,J10	VPSC504WH	C23
VPSC157BK	C29	VPSC403WH	C7,J10	VPSC505BK	C23
VPSC157WH	C29	VPSC404BK	C7,J10	VPSC505GY	C23
VPSC158BK	C29	VPSC404GY	C7,J10	VPSC505WH	C23
VPSC158WH	C29	VPSC404WH	C7,J10	VPSC512	C8,J8
VPSC159WH	C29	VPSC406BK	C7,J10	VPSC518	C8,J8
VPSC161	C10	VPSC406GY	C7,J10	VPSC520BK	C21
VPSC162	C10	VPSC406WH	C7,J10	VPSC520GY	C21
VPSC163	C10	VPSC411BK	C6	VPSC520WH	C21
VPSC164	C10	VPSC411GY	C6	VPSC522BK	C21
VPSC164	C10	VPSC411WH	C6	VPSC522GY	C21
VPSC170BK	C29	VPSC412BK	C6	VPSC522WH	C21
VPSC170WH	C29	VPSC412GY	C6	VPSC523BK	C21
VPSC1836BK	C17	VPSC412WH	C6	VPSC523GY	C21
VPSC1836WH	C17	VPSC413BK	C6	VPSC523WH	C21
VPSC185	C11	VPSC413GY	C6	VPSC530BK	C16
VPSC186	C11	VPSC413WH	C6	VPSC530WH	C16
VPSC200BK	C22	VPSC414BK	C6	VPSC532BK	C16

A52

A53

Wiring Accessories Index

VPSC532WH	C16	VPSC723BK	C21	VPSS053BK	C18
VPSC535BK	C16	VPSC723GY	C21	VPSS053WH	C18
VPSC535GY	C16	VPSC723WH	C21	VPSS060	C25
VPSC535WH	C16	VPSC750BK	C19	VPSS061	C25
VPSC536BK	C16	VPSC750GY	C19	VPSS065BK	C29
VPSC536GY	C16	VPSC750WH	C19	VPSS065WH	C29
VPSC536WH	C16	VPSC751BK	C19	VPSS066BK	C29
VPSC550BK	C19	VPSC751GY	C19	VPSS066WH	C29
VPSC550GY	C19	VPSC751WH	C19	VPSS100BK	C25
VPSC550WH	C19	VPSC752BK	C19	VPSS100GY	C25
VPSC551BK	C19	VPSC752GY	C19	VPSS100WH	C25
VPSC551GY	C19	VPSC752WH	C19	VPSS105BK	C5
VPSC551WH	C19	VPSC753BK	C19	VPSS105WH	C5
VPSC552BK	C19	VPSC753GY	C19	VPSS115BK	C28
VPSC552GY	C19	VPSC753WH	C19	VPSS115WH	C28
VPSC552WH	C19	VPSC771UBK	C14	VPSS120BK	C28
VPSC553BK	C19	VPSC771UWH	C14	VPSS120WH	C28
VPSC553GY	C19	VPSC780BK	C15	VPSS121BK	C28
VPSC553WH	C19	VPSC780WH	C15	VPSS121WH	C28
VPSC571UBK	C14	VPSC785BK	C15	VPSS125BK	C28
VPSC571UGY	C14	VPSC785WH	C15	VPSS125WH	C28
VPSC571UWH	C14	VPSC786BK	C15	VPSS126BK	C28
VPSC580BK	C15	VPSC786WH	C15	VPSS126WH	C28
VPSC580GY	C15	VPSS011BK	C5	VPSS140PL	C11
VPSC580WH	C15	VPSS011WH	C5	VPSS152PL	C11
VPSC585BK	C15	VPSS012BK	C5	VPSS153BK	C17
VPSC585GY	C15	VPSS012WH	C5	VPSS1535WH	C17
VPSC585WH	C15	VPSS013BK	C5	VPSS1536BK	C17
VPSC586BK	C15	VPSS013WH	C5	VPSS1536WH	C17
VPSC586GY	C15	VPSS019BK	C5	VPSS153PL	C11
VPSC586WH	C15	VPSS019WH	C5	VPSS154PL	C11
VPSC604BK	C30,K9	VPSS020BK	C20	VPSS156BK	C29
VPSC604WH	C30,K9	VPSS020WH	C20	VPSS156WH	C29
VPSC622BK	C20	VPSS022BK	C20	VPSS157BK	C29
VPSC622WH	C20	VPSS022WH	C20	VPSS157WH	C29
VPSC623BK	C20	VPSS023BK	C20	VPSS158BK	C29
VPSC623WH	C20	VPSS023WH	C20	VPSS158WH	C29
VPSC650BK	C18	VPSS024BK	C25	VPSS159BK	C29
VPSC650WH	C18	VPSS024WH	C25	VPSS159WH	C29
VPSC651BK	C18	VPSS025BK	C5	VPSS161	C10
VPSC651WH	C18	VPSS025WH	C5	VPSS162	C10
VPSC652BK	C18	VPSS035BK	C16	VPSS163	C10
VPSC652WH	C18	VPSS035WH	C16	VPSS164	C10
VPSC653BK	C18	VPSS036BK	C16	VPSS170BK	C29
VPSC653WH	C18	VPSS036WH	C16	VPSS170WH	C29
VPSC655BK	C24	VPSS038BK	C17	VPSS1836BK	C17
VPSC655GY	C24	VPSS038GY	C17	VPSS1836WH	C17
VPSC655WH	C24	VPSS038WH	C17	VPSS185	C11
VPSC660	C24	VPSS039BK	C17	VPSS186	C11
VPSC675BK	C24	VPSS039WH	C17	VPSS200BK	C22
VPSC675WH	C24	VPSS050BK	C18	VPSS200WH	C22
VPSC684BK	C30,K9	VPSS050WH	C18	VPSS201BK	C22
VPSC684WH	C30,K9	VPSS051BK	C18	VPSS201WH	C22
VPSC722BK	C21	VPSS051WH	C18	VPSS202BK	C22
VPSC722GY	C21	VPSS052BK	C18	VPSS202WH	C22
VPSC722WH	C21	VPSS052WH	C18	VPSS203BK	C22

Wiring Accessories Index

VPSS203WH	C22	VPSS422	C12	VPSS551BK	C19
VPSS20401	I120	VPSS423	C12	VPSS551GY	C19
VPSS20402	I120	VPSS424	C12	VPSS551WH	C19
VPSS20403	I121	VPSS425BK	C6	VPSS552BK	C19
VPSS20404	I121	VPSS425GY	C6	VPSS552GY	C19
VPSS204BK	C22	VPSS425WH	C6	VPSS552WH	C19
VPSS204WH	C22	VPSS426BK	C7,J10	VPSS553BK	C19
VPSS20506	I123	VPSS426GY	C7,J10	VPSS553GY	C19
VPSS20508	I123	VPSS426WH	C7,J10	VPSS553WH	C19
VPSS20509	I124	VPSS432BK	C7,J10	VPSS571UBK	C14
VPSS20512	I124	VPSS432GY	C7,J10	VPSS571UGY	C14
VPSS20518	I125	VPSS432WH	C7,J10	VPSS571UWH	C14
VPSS20524	I126	VPSS471BK	C7,J10	VPSS580BK	C15
VPSS205BK	C22	VPSS471GY	C7,J10	VPSS580GY	C15
VPSS205WH	C22	VPSS471WH	C7,J10	VPSS580WH	C15
VPSS30535BK	A25	VPSS472BK	C7,J10	VPSS585BK	C15
VPSS30535GY	A25	VPSS472GY	C7,J10	VPSS585GY	C15
VPSS30535WH	A25	VPSS472WH	C7,J10	VPSS585WH	C15
VPSS30536BK	A25	VPSS500BK	C23	VPSS586BK	C15
VPSS30536GY	A25	VPSS500GY	C23	VPSS586GY	C15
VPSS30536WH	A25	VPSS500WH	C23	VPSS586WH	C15
VPSS310	C30,K14	VPSS501BK	C23	VPSS604BK	C30,K9
VPSS311	C30,K14	VPSS501GY	C23	VPSS604WH	C30,K9
VPSS31102	I122	VPSS501WH	C23	VPSS622BK	C20
VPSS312	C30,K14	VPSS502BK	C23	VPSS622WH	C20
VPSS401BK	C7,J10	VPSS502GY	C23	VPSS623BK	C20
VPSS401GY	C7,J10	VPSS502WH	C23	VPSS623WH	C20
VPSS401WH	C7,J10	VPSS503BK	C23	VPSS650BK	C18
VPSS402BK	C7,J10	VPSS503GY	C23	VPSS650WH	C18
VPSS402GY	C7,J10	VPSS503WH	C23	VPSS651BK	C18
VPSS402WH	C7,J10	VPSS504BK	C23	VPSS651WH	C18
VPSS403BK	C7,J10	VPSS504GY	C23	VPSS652BK	C18
VPSS403GY	C7,J10	VPSS504WH	C23	VPSS652WH	C18
VPSS403WH	C7,J10	VPSS505BK	C23	VPSS653BK	C18
VPSS404BK	C7,J10	VPSS505GY	C23	VPSS653WH	C18
VPSS404GY	C7,J10	VPSS505WH	C23	VPSS655BK	C24
VPSS404WH	C7,J10	VPSS512	C8,J8	VPSS655GY	C24
VPSS406BK	C7,J10	VPSS518	C8,J8	VPSS655WH	C24
VPSS406GY	C7,J10	VPSS520BK	C21	VPSS660	C24
VPSS406WH	C7,J10	VPSS520GY	C21	VPSS675BK	C24
VPSS411BK	C6	VPSS520WH	C21	VPSS675WH	C24
VPSS411GY	C6	VPSS522BK	C21	VPSS684BK	C30,K9
VPSS411WH	C6	VPSS522GY	C21	VPSS684WH	C30,K9
VPSS412BK	C6	VPSS522WH	C21	VPSS722BK	C21
VPSS412GY	C6	VPSS523BK	C21	VPSS722GY	C21
VPSS412WH	C6	VPSS523GY	C21	VPSS722WH	C21
VPSS413BK	C6	VPSS523WH	C21	VPSS723BK	C21
VPSS413GY	C6	VPSS535BK	C16	VPSS723GY	C21
VPSS413WH	C6	VPSS535GY	C16	VPSS723WH	C21
VPSS414BK	C6	VPSS535WH	C16	VPSS750BK	C19
VPSS414GY	C6	VPSS536BK	C16	VPSS750GY	C19
VPSS414WH	C6	VPSS536GY	C16	VPSS750WH	C19
VPSS416BK	C6	VPSS536WH	C16	VPSS751BK	C19
VPSS416GY	C6	VPSS550BK	C19	VPSS751GY	C19
VPSS416WH	C6	VPSS550GY	C19	VPSS751WH	C19
VPSS421	C12	VPSS550WH	C19	VPSS752BK	C19

A54

A55



WORLD
LAND
TRUST™

www.carbonbalancedprint.com
CBP2262



United Kingdom
Scolmore House, Mariner,
Lichfield Road Industrial Estate,
Tamworth, Staffordshire,
B79 7UL

T: +44 (0)1827 63454
E: sales@scolmore.com

www.scolmore.com

Southern Ireland
18 Corrig Road,
Sandyford Industrial Estate,
Dublin D18 WV79,
Ireland

T: +353 (1) 2811 122
F: +353 (1) 2811 224
E: sales@clicklighthouse.ie

www.clicklighthouse.ie

Scolmore Middle East
Lake Central Tower,
Office 1803,
Business Bay,
Dubai, UAE

UAE Office: +971 4589 6552
E: sales@scolmoreme.com

www.scolmoreme.com