

# JC1001/WH

## V50

V50 Fire-rated LED downlight 6W 700lm IP65 WH



### Features & Benefits

- Two colour selectable from below the ceiling 3000K & 4000K
- Ultra-low profile suitable for shallow 50mm ceiling voids
- Tested for use in fire-rated ceilings
- IP65 suitable for bathrooms (internal use only)
- Strong protected spring clips
- Fast push-fit termination with remote driver
- Twist & lock bezel design
- Available as complete fixture (JC1001) or without bezel (JC1001/NB)
- JC1001/NB requires separate bezel (JC1006)
- 2 years standard warranty extends to a 3 year commercial warranty or 5 year domestic warranty when registered within the first year of purchase (See Website for terms and conditions)
- This product contains a light source of energy efficiency class D



### General Information

Mounting	Recessed
Trade Name	V50
Environment	Indoor
Product Group	Fire-rated Downlights
Color Finish	White
Product Shape	Round
Product Range	V50
Overall Dimensions	Ø84 x 67.7
Height (mm)	67.7
Diameter (mm)	84
Product Weight(kg)	0.29
Light Source	LED
Light Source Features	Colour Selectable
Additional Information	Maximum ceiling thickness is 30mm Black, Brushed Brass, Brushed Nickel or Chrome Replacement Bezel; Concealer Ring; Converter Plate
Luminaire Accessories	

Overall dimensions (mm) Rim	<b>Ø84</b>
Recommended product location	<b>Indoor use only</b>
Minimum Void Requirement	<b>50mm</b>
Method of fix	<b>Recessed with Spring Clips</b>
Product Aperture Size	<b>70mm</b>
IP Rating	<b>IP65</b>
Duration of Fire protection ( Mins)	<b>Tested for use in fire-rated ceilings. Full information and up-to-date fire testing certificates for ceiling system types are available on JCC.CO.UK</b>
Origin of manufacturer	<b>Made In China</b>
Warranty	<b>7 years( Terms &amp; conditions apply)</b>
Dimming Protocol Compatibility	<b>Triac</b>
Driver manufacturer	<b>JCC</b>
LED manufacturer/type	<b>Hongli</b>
Lighting Product Type 1	<b>Fired Rated Downlights</b>
Customs Tariff code**	<b>9405421000</b>

## Electrical

Voltage Rating	<b>230-240</b>
Primary Running Current(Amp)	<b>0.042</b>
Inrush current(Amps)	<b>0.325A</b>
Operating Frequency Hz	<b>50/60Hz</b>
Secondary running current(mA)	<b>145</b>
Constant Current or Constant Voltage	<b>CC</b>
Luminaire Circuit Wattage1	<b>6</b>
Class	<b>II</b>
Output Voltage Max/Range (VDC)	<b>30-44</b>
Input Electrical Connections	<b>Push Fit Terminals LEN Loop In/Loop Out</b>
Dimmable	<b>Yes</b>
Max No. In Run	<b>30</b>

## Thermals

Insulation Coverage	<b>Loosely Cover with Mineral Wool Insulation</b>
Minimum Void Requirement	<b>50mm</b>
Operating Temperature Range °C	<b>0 to 26</b>

## Performance Data

LED Life (Hours)*	<b>51000</b>
Energy Rating	<b>This product contains a light source of energy efficiency class D</b>
Actual Lumen Output1	<b>650</b>
Actual Lumen Output2	<b>700</b>
Lumens Per Circuit Watt1	<b>108</b>
Lumens Per Circuit Watt2	<b>116</b>
Color Rendering Index	<b>80-89</b>

CRI: Ra	80
Correlated Colour Temperature1	3000K
Correlated Colour Temperature2	4000K
Beam Angle °	60
LOR (Light Output Ratio) %	100
Photometry Available	Yes: available on request.

## Construction




Primary Material	<b>Steel</b>
Lens	<b>Polycarbonate</b>
Heat Sink	<b>Aluminium</b>
Driver Housing	<b>Polycarbonate</b>
Rim or Attachment	<b>Die-cast Aluminium</b>

## Packaging

Product Packaged Weight(kg)	<b>0.4</b>
Quantity Per Outer Carton	<b>30</b>
Product Bar Code EAN-13 Number	<b>5052544081231</b>

## Standards & Approvals

Manufactured in accordance to	<b>BS EN 60598:2015, 2-1, 2-2</b>
CE Marked	<b>Yes</b>
UKCA Marked	<b>Yes</b>
Date code/Purchase order No.	<b>Yes</b>
WEEE symbol	<b>Yes</b>
Certificate Of Conformity	<b>Available on request</b>
Accredited Members	<b>LIA, ISO9001-2015, ISO14001-2015</b>

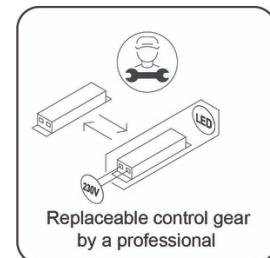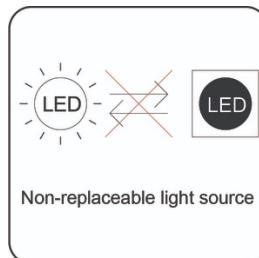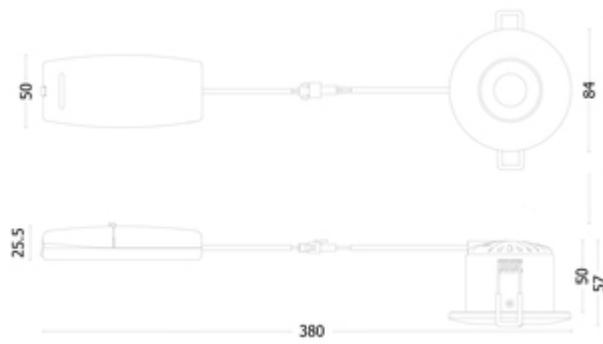



\*Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

\*\*JCC Lighting Limited makes every effort to ensure that the Customs Tariff information in this document is timely and accurate. However, it's not possible for us to assure the absolute veracity and completeness of that information, as errors may occur. The placement of any inaccurate tariff information is completely unintentional. JCC Lighting Limited reserves the right, in its sole discretion, to correct any errors or omissions to the tariff code and to make any and all changes contained in this document at any time and without notice. It is the sole responsibility of the importer to ensure that the commodity code advised is correct for the products/goods being supplied by JCC Lighting Limited. JCC Lighting Limited does not assume any liabilities, losses, costs, and expenses arising out of or related to the importers use of this commodity code or the information related to the import of any JCC Lighting products.

---

JCC Lighting LTD, Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT.

Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | [sales@jcc.co.uk](mailto:sales@jcc.co.uk) | [www.jcc.co.uk](http://www.jcc.co.uk)

Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 257 [20/11/2025]