


Technical Data Sheet



Tempest Indirect

400-500L	32°	0°	32°
200-300L	38°	0°	38°
90-170L	42°	0°	42°

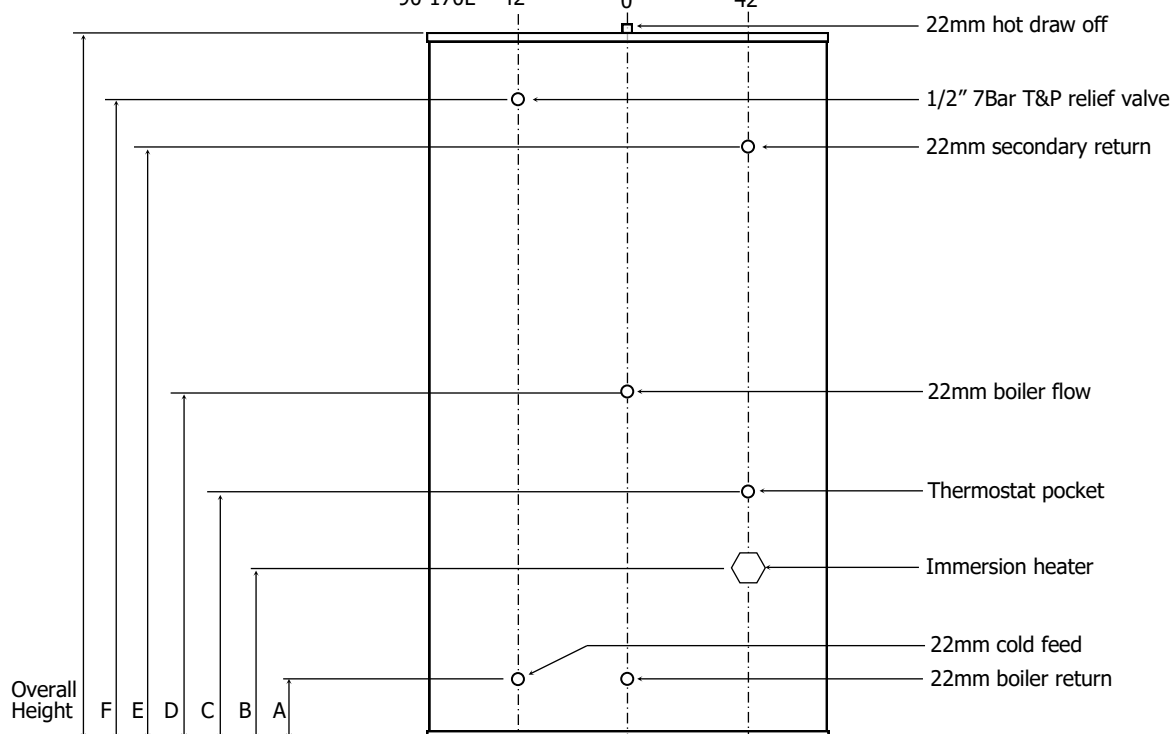

All unvented cylinders come with an unvented component kit to suit.

Capacity (L)	90	125	150	170	200	250	300
Height (mm)	750	935	1060	1200	1150	1500	1780
Diameter (mm)	510	510	510	510	580	580	580
A (mm)	170	170	170	170	195	195	195
B (mm)	200	200	200	200	225	225	225
C (mm)	400	400	400	450	475	555	555
D (mm)	495	495	495	600	625	825	845
E (mm)	-	-	-	-	815	975	1255
F (mm)	550	750	880	1030	930	1300	1550

Capacity (L)	90	125	150	170	200	250	300
Reheat from cold (minutes)	26	36	37	36	33	35	40
Reheat from 70% draw-off (minutes)	18	25	6	25	24	25	29
ERP Band	C	C	C	C	C	C	C
Immersion Rating (kw)	3	3	3	3	3	3	3
Standing Heat Loss (kwh/24hrs)	1.37	1.48	1.72	1.92	2.04	2.16	2.32



T: 01952 257961
F: 01952 253452

E: sales@telford-group.com
W: www.telford-group.com