


Alarm Cable

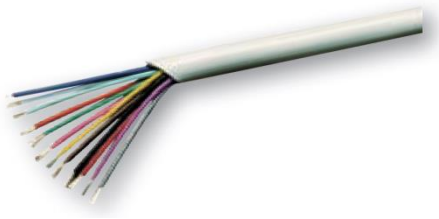

Description

This range of alarm cable is suitable for modern day installation

Features

Conductor

- Stranded tinned copper clad aluminium
- 7 x 0.19mm Ø nominal

Insulation

- PVC
- ±0.10mm

Rip cord

- White Nylon

Sheath

- Standard PVC
- White
- 4.3± 0.20mm Ø

Range

4 Core Alarm Cable	630WH
6 Core Alarm Cable	631WH
8 Core Alarm Cable	632WH

Technical Specification

Conductor resistance	< 16.03Ω @ 20°C, DC
Insulation resistance	>500MΩ/m @ 20°C
Rated temperature	80°C
Rated voltage	300V
Insulation colours	4 core Blue, yellow, red, black
	6 core Blue, yellow, red, black, white, green
	8 core Green, white, red, blue, yellow, black, brown, orange

Standards

- RoHS