



Masonite in the UK has brought together a collection of industry-leading manufacturers to offer an inspirational range of internal and external doors and doorset solutions that will help you define the contemporary spaces of today and tomorrow. Whether you're looking for latest trends, the most practical fittings or the most realistic price point, with Masonite there is no compromise.



It's not just a door.
It's a first impression.
It's a key piece of furniture.
It's a connection to the world.

Inspiring designs made by experienced manufacturers.

That's why at Masonite we make life and living better by designing and producing doors that address human needs for comfort, safety, security and convenience.

About Us	7
What's New	
+ New Stocking Policy	13
Product Ranges	5
+ Portfolio Premium Veneer	14
+ Premdor Standard Veneer	20
+ Premdor Moulded	26
+ Premdor Moulded Glazed	40
+ Premdor Paint Grade	48
+ Premdor External Flush	53
+ Premdor Glazed Fire Doors	54
Internal Doorsets Premdor	62
External Doorsets	90
French and Folding Doorsets	106
Technical Information	114





Product Ranges


Masonite in the UK offer a wide range of products for every application designed with your needs in mind.

Use this quick reference guide to browse our product categories to help you find the right product solution to get your project started.

Portfolio Premium Veneer



Premdor Standard Veneer

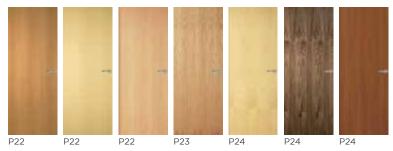

Premdor Moulded




Premdor Moulded Glazed Go to the relevant page to discover the full range



Premdor Paint Grade Premdor External Flush





Premdor Glazed Fire Doors







The Masonite UK Family

We've brought the industry expertise of leading manufacturers under one roof.

Internal Doors

Premdor®

Doors

Portfolio

Premium Veneer Doors

Premdor Doorsets

Internal & Apartment Entrance Doorsets

External Doors

Door-Stop International®

Composite Doorsets

Solidor®

Composite Doorsets

Defining Doors

Doors are one of the prime design elements in a home, office or commercial building.



PORTFOLIO PREMIUM VENEER

PREMDOR STANDARD VENEER PREMDOR MOULDED Our doors offer the versatility and high-quality finish you'd expect from a market-leading brand. Veneered, moulded, glazed or pre-hung doorsets ready to express your individual style.



PREMDOR MOULDED GLAZED PREMDOR PAINT GRADE DOORS





Restyling your interior? The first step is research.

With so many inspiring interiors out there along with masses of information on the latest styles and trends, what once was an exciting prospect can quickly transform into a daunting task.

That's where we can help.

With no plan and products, there's no progress. Offering instant access to interior design expertise, Masonite provides the guidance you need to explore your way through each trend.

Get the latest trend insights in the form of blogs, videos and carefully curated images. Most importantly, find out how you can 'get the look' and apply it to your space with exclusive access to featured products and how to buy. With every month unlocking additional assets for each trend launched throughout the year, we will help you to bring inspiration home.



















Portfolio Premium Veneer

Portfolio is a range of interior doors made with the idea of 'more' in mind. With veneers hand-crafted in Italy and finished doors manufactured in the UK, Portfolio doors are designed to bring more original ideas, more personality as well as more innovative tones, textures and moods to interior spaces.

Oak 2 Stile

				Durador Vertical	Oak Vertical	Oak 2 Stile
		Core	Door Size	Code	Code	Code
	THE RESERVE OF THE PERSON NAMED IN		926 x 2040 x 40mm Standard Metric	71129	_	_
		aĽ	826 x 2040 x 40mm Standard Metric	71138		
	THE RESERVE AND ADDRESS OF THE PERSON NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TO T	Standard	726 x 2040 x 40mm Standard Metric	71137		
	THE RESERVE OF THE PARTY OF THE	ţа	626 x 2040 x 40mm Standard Metric	71136		
		S	526 x 2040 x 40mm Standard Metric	71135		-
			426 x 2040 x 40mm Standard Metric	71134	-	-
			864 x 1981 x 35mm (2'10" x 6'6")	71177	-	-
	-2		838 x 1981 x 35mm (2'9" x 6'6")	71114		
	COLUMN TO SERVICE		813 x 2032 x 35mm (2'8" x 6'8")	71139		
	THE RESERVE OF THE PERSON NAMED IN		762 x 1981 x 35mm (2'6" x 6'6")	71111		
	Control of the last of the las		711 x 1981 x 35mm (2'4" x 6'6")	71115		
	AND RESIDENCE TO SECURITION OF THE PERSON NAMED IN		686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6")	<u>71116</u> 71117		
	CONTRACTOR OF STREET		533 x 1981 x 35mm (1'9" x 6'6")	71118		
	STATE OF THE PARTY OF		457 x 1981 x 35mm (1'6" x 6'6")	71119	-	_
		Core	Door Size	Code	Code	Code
		olid	926 x 2040 x 40mm Standard Metric		58629	32629
)		30	826 x 2040 x 40mm Standard Metric		58638	32638
		0,	726 x 2040 x 40mm Standard Metric		58637	32637
)	DESTRUCTION OF THE PROPERTY OF		626 x 2040 x 40mm Standard Metric		58636	32636
			526 x 2040 x 40mm Standard Metric 426 x 2040 x 40mm Standard Metric		<u>58635</u>	
))	CONTRACTOR OF THE PARTY OF THE		864 x 1981 x 35mm (2'10" x 6'6")		58677	32677
			838 x 1981 x 35mm (2'9" x 6'6")		58614	32614
	30 P 20 11		813 x 2032 x 35mm (2'8" x 6'8")		58669	32639
			762 x 1981 x 35mm (2'6" x 6'6")	-	58611	31611
			711 x 1981 x 35mm (2'4" x 6'6")	-	58662	-
			686 x 1981 x 35mm (2'3" x 6'6")		58616	32616
	CONTROL OF THE PARTY		610 x 1981 x 35mm (2'0" x 6'6")		58617	32617
			533 x 1981 x 35mm (1'9" x 6'6")		58618	
	A 24 30 1		457 x 1981 x 35mm (1'6" x 6'6")		58619	
	Company of the	eld	Door Size	Code	Code	Code
	CHAIN PART AND LA	Fireshi				
	A STATE OF THE PARTY OF THE PAR	<u>e</u>	926 x 2040 x 44mm Standard Metric	71229	58029	32729
	The state of the s		826 x 2040 x 44mm Standard Metric	71238	58038	32738
		30	726 x 2040 x 44mm Standard Metric 626 x 2040 x 44mm Standard Metric	71237 71236	58037 58036	32737 32736
		FD	526 x 2040 x 44mm Standard Metric	71235	58035	- 32/30
-		ш	426 x 2040 x 44mm Standard Metric	71234	58034	
)	Name and Address of the Owner, where the Parket of the Owner, where the Owner, which is the Owner, where the Owner, which is the Owner, where the Owner, which is the		914 x 1981 x 44mm (3'0" x 6'6")	71278	58078	-
			864 x 1981 x 44mm (2'10" x 6'6")	71277	58077	32777
5			838 x 1981 x 44mm (2'9" x 6'6")	71214	58014	32714
,			813 x 2032 x 44mm (2'8" x 6'8")	71239	58069	32739
			762 x 1981 x 44mm (2'6" x 6'6")	71211	58011	22611
			711 x 1981 x 44mm (2'4" x 6'6")	71215	58062	70716
	A STATE OF THE PARTY OF THE PAR		686 x 1981 x 44mm (2'3" x 6'6")	71216	58016	32716
			610 x 1981 x 44mm (2'0" x 6'6") 533 x 1981 x 44mm (1'9" x 6'6")	71217 71218	58017 58018	32717
			457 x 1981 x 44mm (1'6" x 6'6")	71219	58019	
		L				
		Firemaster	Door Size	Code	Code	Code
		Ĕ	926 x 2040 x 54mm Standard Metric	71329	61329	32829
		i.	826 x 2040 x 54mm Standard Metric	71338	61338	32838
			726 x 2040 x 54mm Standard Metric	71337	61337	32837
		D60	626 x 2040 x 54mm Standard Metric	71336	61336	32836
		FD	838 x 1981 x 54mm (2'9" x 6'6")	71314	61314	32814
		4	813 x 2032 x 54mm (2'8" x 6'8")	71339	61369	32839
			762 x 1981 x 54mm (2'6" x 6'6") 686 x 1981 x 54mm (2'3" x 6'6")	71311 71316	61311	32811
			000 A 1301 A 3411111 C 3 X 0 0 1	71.510	OLOID	3/8ID

686 x 1981 x 54mm (2'3" x 6'6")

Walnut Vertical



Walnut 2 Stile



Door Size

Solid (

926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 526 x 2040 x 40mm Standard Metric 426 x 2040 x 40mm Standard Metric 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 813 x 2032 x 35mm (2'8" x 6'8") 762 x 1981 x 35mm (2'6" x 6'6") 711 x 1981 x 35mm (2'4" x 6'6") 686 x 1981 x 35mm (2'4" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6") 533 x 1981 x 35mm (1'9" x 6'6") 457 x 1981 x 35mm (1'6" x 6'6")

Door Size 926 x 2040 826 x 2040

FD30

926 x 2040 x 44mm Standard Metric 826 x 2040 x 44mm Standard Metric 726 x 2040 x 44mm Standard Metric 626 x 2040 x 44mm Standard Metric 526 x 2040 x 44mm Standard Metric 426 x 2040 x 44mm Standard Metric 914 x 1981 x 44mm (3'0" x 6'6") 864 x 1981 x 44mm (2'10" x 6'6") 838 x 1981 x 44mm (2'9" x 6'6") 813 x 2032 x 44mm (2'8" x 6'8") 762 x 1981 x 44mm (2'6" x 6'6") 711 x 1981 x 44mm (2'4" x 6'6") 686 x 1981 x 44mm (2'3" x 6'6") 610 x 1981 x 44mm (2'0" x 6'6") 533 x 1981 x 44mm (1'9" x 6'6") 457 x 1981 x 44mm (1'6" x 6'6")

Firemaster

FD60

926 x 2040 x 54mm Standard Metric 826 x 2040 x 54mm Standard Metric 726 x 2040 x 54mm Standard Metric 626 x 2040 x 54mm Standard Metric

838 x 1981 x 54mm (2'9" x 6'6") 813 x 2032 x 54mm (2'8" x 6'8") 762 x 1981 x 54mm (2'6" x 6'6") 686 x 1981 x 54mm (2'3" x 6'6") Walnut Vertical Walnut 2 Stile

Code Code

62519

Code

Code

In Stock

See P13



See P112



See P114



Stocking Policy

Green Tint Flashed items are available from stock on a 3 day leadtime from key order date, terms and conditions apply, see page 123 for further details.







Solid Core **Door Size**

926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 526 x 2040 x 40mm Standard Metric 426 x 2040 x 40mm Standard Metric 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 813 x 2032 x 35mm (2'8" x 6'8") 762 x 1981 x 35mm (2'6" x 6'6") 711 x 1981 x 35mm (2'4" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6") 533 x 1981 x 35mm (1'9" x 6'6") 457 x 1981 x 35mm (1'6" x 6'6")

Fireshield

FD30

926 x 2040 x 44mm Standard Metric 826 x 2040 x 44mm Standard Metric 726 x 2040 x 44mm Standard Metric 626 x 2040 x 44mm Standard Metric 526 x 2040 x 44mm Standard Metric 426 x 2040 x 44mm Standard Metric 914 x 1981 x 44mm (3'0" x 6'6") 864 x 1981 x 44mm (2'10" x 6'6") 838 x 1981 x 44mm (2'9" x 6'6") 813 x 2032 x 44mm (2'8" x 6'8") 762 x 1981 x 44mm (2'6" x 6'6") 711 x 1981 x 44mm (2'4" x 6'6") 686 x 1981 x 44mm (2'3" x 6'6") 610 x 1981 x 44mm (2'0" x 6'6") 533 x 1981 x 44mm (1'9" x 6'6") 457 x 1981 x 44mm (1'6" x 6'6")

Firemaster **Door Size**

FD60

926 x 2040 x 54mm Standard Metric 826 x 2040 x 54mm Standard Metric 726 x 2040 x 54mm Standard Metric 626 x 2040 x 54mm Standard Metric 838 x 1981 x 54mm (2'9" x 6'6") 813 x 2032 x 54mm (2'8" x 6'8") 762 x 1981 x 54mm (2'6" x 6'6") 686 x 1981 x 54mm (2'3" x 6'6")

Light Grey Light Grev Horizontal 2 Stile

Light Grey

4 Line Horizontal

89429

89438

89437

89436

89435

89434

89477

89414

89469

89411

89415

89416

89417

89418

89419

88029

88038

88037

88036

88035

88034

88077

88014

88069

88011

88015

88016

88017

88018

88019

88729 88129 88738 88138 88737 88137 88136 88736 88735 88734 88778 88177 88777 88714 88114 88169 88769 88711 88111 88715 88116 88716 88717 88117 88718

Code	Code	Code
85729	85129	83929
85738	85138	83938
85737	85137	83937
85736	85136	83936
85714	85114	83914
85769	85169	83969
85711	85111	83911
85716	85116	83916

Charcoal 4 Line Horizontal





Charcoal Horizontal

Solid Core **Door Size** 926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 526 x 2040 x 40mm Standard Metric 426 x 2040 x 40mm Standard Metric 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 813 x 2032 x 35mm (2'8" x 6'8") 762 x 1981 x 35mm (2'6" x 6'6") 711 x 1981 x 35mm (2'4" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6") 533 x 1981 x 35mm (1'9" x 6'6")

89929 89938 89937 89936 89935 89934 89977 89914 89969 89911 89915 89916 89917 89918 457 x 1981 x 35mm (1'6" x 6'6") 89919

Fireshield **Door Size** 926 x 2040 x 44mm Standard Metric 826 x 2040 x 44mm Standard Metric 726 x 2040 x 44mm Standard Metric 626 x 2040 x 44mm Standard Metric 526 x 2040 x 44mm Standard Metric 426 x 2040 x 44mm Standard Metric 914 x 1981 x 44mm (3'0" x 6'6") 864 x 1981 x 44mm (2'10" x 6'6") 838 x 1981 x 44mm (2'9" x 6'6") 813 x 2032 x 44mm (2'8" x 6'8") 762 x 1981 x 44mm (2'6" x 6'6") 711 x 1981 x 44mm (2'4" x 6'6") 686 x 1981 x 44mm (2'3" x 6'6") 610 x 1981 x 44mm (2'0" x 6'6") 533 x 1981 x 44mm (1'9" x 6'6")

Door Size 926 x 2040 x 54mm Standard Metric 826 x 2040 x 54mm Standard Metric 726 x 2040 x 54mm Standard Metric 626 x 2040 x 54mm Standard Metric 838 x 1981 x 54mm (2'9" x 6'6") 813 x 2032 x 54mm (2'8" x 6'8") 762 x 1981 x 54mm (2'6" x 6'6") 686 x 1981 x 54mm (2'3" x 6'6")

457 x 1981 x 44mm (1'6" x 6'6")

Firemaster

FD60

Charcoal

4 Line Horizontal





⁹ Information See P114





Standard Veneer

Simple and elegant, veneered doors have the ability to complement any interior.

Combining design and expert craftmanship Premdor veneered doors are created by hand-laying high-quality natural timber veneers over both faces of the doors core, whilst also concealing the edges.





Anegre

4.	
Core	Door Size
_	926 x 2040 x 40mm Standard Metric
Standard	826 x 2040 x 40mm Standard Metric
DC	726 x 2040 x 40mm Standard Metric
ţ	626 x 2040 x 40mm Standard Metric
J)	526 x 2040 x 40mm Standard Metric
	426 x 2040 x 40mm Standard Metric
	864 x 1981 x 35mm (2'10" x 6'6")
	838 x 1981 x 35mm (2'9" x 6'6")
	813 x 2032 x 35mm (2'8" x 6'8")
	762 x 1981 x 35mm (2'6" x 6'6")
	711 x 1981 x 35mm (2'4" x 6'6")
	686 x 1981 x 35mm (2'3" x 6'6")
	610 x 1981 x 35mm (2'0" x 6'6")
	533 x 1981 x 35mm (1'9" x 6'6")
	457 x 1981 x 35mm (1'6" x 6'6")

FD30 Fireshield	Door Size
es	926 x 2040 x 44mm Standard Metric
i≒	826 x 2040 x 44mm Standard Metric
0	726 x 2040 x 44mm Standard Metric
)3(626 x 2040 x 44mm Standard Metric
	526 x 2040 x 44mm Standard Metric
	426 x 2040 x 44mm Standard Metric
	914 x 1981 x 44mm (3'0" x 6'6")
	864 x 1981 x 44mm (2'10" x 6'6")
	838 x 1981 x 44mm (2'9" x 6'6")
	813 x 2032 x 44mm (2'8" x 6'8")
	762 x 1981 x 44mm (2'6" x 6'6")
	711 x 1981 x 44mm (2'4" x 6'6")
	686 x 1981 x 44mm (2'3" x 6'6")
	610 x 1981 x 44mm (2'0" x 6'6")
	533 x 1981 x 44mm (1'9" x 6'6")
	457 x 1981 x 44mm (1'6" x 6'6")

Firemaster	Door Size
Ξ	926 x 2040 x 54mm Standard Metric
iге	826 x 2040 x 54mm Standard Metric
	726 x 2040 x 54mm Standard Metric
9	626 x 2040 x 54mm Standard Metric
	838 x 1981 x 54mm (2'9" x 6'6")
Щ	813 x 2032 x 54mm (2'8" x 6'8")
	762 x 1981 x 54mm (2'6" x 6'6")
	686 x 1981 x 54mm (2'3" x 6'6")

Code	Code	Code
10729	18429	15129
10738	18438	15138
10737	18437	15137
10736	18436	15136
10735	18435	15135
10734	18434	15134
10777	18477	15177
10714	18414	15114
10739	18439	15139
10711	18411	15111
10715	18415	15115
10716	18416	15116
10717	18417	15117
10718	18418	15118
10719	18419	15119

Koto

Anegre

Steamed Beech

Code	Code	Code
10829	29429	29829
10838	29438	29838
10837	29437	29837
10836	29436	29836
10835	29435	29835
10834	29434	29834
10878	29478	29878
10877	29477	29877
10866	29414	29814
10865	29469	29869
10864	29411	29811
10815	29462	29862
10867	29416	29816
10863	29417	29817
10818	29418	29818
10819	29419	29819

Code	Code	Code
18929	18029	17929
18938	18038	17938
18937	18037	17937
18936	18036	17936
18914	18014	17914
18939	18039	17939
18911	18011	17911
18916	18016	17916



American White Oak

Standard Core **Door Size** 926 x 2040 x 40mm Standard Metric 826 726 626 526 426 864 838 813 x 762 > 711 x 686 610 x 533

x 2040 x 40mm Standard Metric	15329
x 2040 x 40mm Standard Metric	15338
x 2040 x 40mm Standard Metric	15337
x 2040 x 40mm Standard Metric	15336
x 2040 x 40mm Standard Metric	15335
x 2040 x 40mm Standard Metric	15334
x 1981 x 35mm (2'10" x 6'6")	15377
x 1981 x 35mm (2'9" x 6'6")	15314
x 2032 x 35mm (2'8" x 6'8")	15339
x 1981 x 35mm (2'6" x 6'6")	15311
: 1981 x 35mm (2'4" x 6'6")	15315
x 1981 x 35mm (2'3" x 6'6")	15316
x 1981 x 35mm (2'0" x 6'6")	15317
x 1981 x 35mm (1'9" x 6'6")	15318
x 1981 x 35mm (1'6" x 6'6")	15319

Door Size
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
813 x 2032 x 35mm (2'8" x 6'8")
762 x 1981 x 35mm (2'6" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")
610 x 1981 x 35mm (2'0" x 6'6")
533 x 1981 x 35mm (1'9" x 6'6")
457 x 1981 x 35mm (1'6" x 6'6")
381 x 1981 x 35mm (1'3" x 6'6")

457

Solid Core

FD30 Fireshield

Door Size
926 x 2040 x 44mm Standard Metric
826 x 2040 x 44mm Standard Metric
726 x 2040 x 44mm Standard Metric
626 x 2040 x 44mm Standard Metric
526 x 2040 x 44mm Standard Metric
426 x 2040 x 44mm Standard Metric
914 x 1981 x 44mm (3'0" x 6'6")
864 x 1981 x 44mm (2'10" x 6'6")
838 x 1981 x 44mm (2'9" x 6'6")
813 x 2032 x 44mm (2'8" x 6'8")
762 x 1981 x 44mm (2'6" x 6'6")
711 x 1981 x 44mm (2'4" x 6'6")
686 x 1981 x 44mm (2'3" x 6'6")
610 x 1981 x 44mm (2'0" x 6'6")
533 x 1981 x 44mm (1'9" x 6'6")
457 x 1981 x 44mm (1'6" x 6'6")
610 x 1981 x 44mm (2'0" x 6'6") 533 x 1981 x 44mm (1'9" x 6'6")

Door	Size
926 x 2	040 x 44mm Standard Metric
826 x 2	040 x 44mm Standard Metric
726 x 2	040 x 44mm Standard Metric
626 x 2	040 x 44mm Standard Metric
526 x 2	040 x 44mm Standard Metric
426 x 2	040 x 44mm Standard Metric
864 x 1	981 x 44mm (2'10" x 6'6")
838 x 1	981 x 44mm (2'9" x 6'6")
813 x 20	032 x 44mm (2'8" x 6'8")
762 x 19	981 x 44mm (2'6" x 6'6")
711 x 19	81 x 44mm (2'4" x 6'6")
686 x 1	981 x 44mm (2'3" x 6'6")
610 x 19	981 x 44mm (2'0" x 6'6")
533 x 1	981 x 44mm (1'9" x 6'6")
457 x 1	981 x 44mm (1'6" x 6'6")

ion	Door Size
ζţ	926 x 2040 x 44mm Standard Metric
itr	826 x 2040 x 44mm Standard Metric
SUC	726 x 2040 x 44mm Standard Metric
Ö	626 x 2040 x 44mm Standard Metric
D	526 x 2040 x 44mm Standard Metric
Ψ.	426 x 2040 x 44mm Standard Metric
FD30 Fireshield Framed Construction	864 x 1981 x 44mm (2'10" x 6'6")
	838 x 1981 x 44mm (2'9" x 6'6")
	813 x 2032 x 44mm (2'8" x 6'8")
	762 x 1981 x 44mm (2'6" x 6'6")
Ğ	711 x 1981 x 44mm (2'4" x 6'6")
D30 Fi	686 x 1981 x 44mm (2'3" x 6'6")
	610 x 1981 x 44mm (2'0" x 6'6")
	533 x 1981 x 44mm (1'9" x 6'6")
ш	457 x 1981 x 44mm (1'6" x 6'6")
,	
FD60 Firemaster	Door Size
ЭS	926 x 2040 x 54mm Standard Metric
Ĕ	826 x 2040 x 54mm Standard Metric
Ō	726 x 2040 x 54mm Standard Metric
iΞ	626 x 2040 x 54mm Standard Metric
$\overline{}$	838 x 1981 x 54mm (2'9" x 6'6")
9	813 x 2032 x 54mm (2'8" x 6'8")
\Box	762 x 1981 x 54mm (2'6" x 6'6")
ш	686 x 1981 x 54mm (2'3" x 6'6")

Door Size	
926 x 2040 x 54mm Standard Metric	
826 x 2040 x 54mm Standard Metric	
726 x 2040 x 54mm Standard Metric	
626 x 2040 x 54mm Standard Metric	
838 x 1981 x 54mm (2'9" x 6'6")	
813 x 2032 x 54mm (2'8" x 6'8")	
762 x 1981 x 54mm (2'6" x 6'6")	
686 x 1981 x 54mm (2'3" x 6'6")	

13400
Code
25329
25338
25337
25336
25335
25334
25378
25377
25314
25369
25311
25362
25316
25363
25318
25319

Code
81515
81512
81509
81506
81503
81501
81514
81513
81511
81510
81508
81507
81505
81504
81502
0 - 1 -

81502
Code
10929
10938
10937
10936
10914
10939
10911
10916

In Stock

See P13



See P112



See P114

Sapele





		-	÷

ore	Door Size
Ŭ	926 x 2040 x
0	826 x 2040 x
a	726 x 2040 x
0	626 x 2040 x
an	526 x 2040 x
St	426 x 2040 x
0,	864 x 1981 x 3
	838 x 1981 x 3
	813 x 2032 x 3
	762 x 1981 x 35
	711 x 1981 x 35
	686 x 1981 x 3
	610 x 1981 x 35

FD30 Fireshield

FD30 Fireshield Framed Construction

Door Size
926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
526 x 2040 x 40mm Standard Metric
426 x 2040 x 40mm Standard Metric
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
813 x 2032 x 35mm (2'8" x 6'8")
762 x 1981 x 35mm (2'6" x 6'6")
711 x 1981 x 35mm (2'4" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")
610 x 1981 x 35mm (2'0" x 6'6")
533 x 1981 x 35mm (1'9" x 6'6")
457 x 1981 x 35mm (1'6" x 6'6")
381 x 1981 x 35mm (1'3" x 6'6")

Code	
17029	
17038	
17037	_
17036	_
17035	_
17034	_
17077	_
17014	_
17039	_
17011	_
17015	_
17016	_
17017	_
17018	_
17019	_
-	_
	_
Code	
27029	_

European Ash

Code
18129
18138
18137
18136
18135
18134
18177
18114
18139
18111
18115
18116
18117
18118
18119
18120
Code
29129
00170

Sapele

Door Size
926 x 2040 x 44mm Standard Metric
826 x 2040 x 44mm Standard Metric
726 x 2040 x 44mm Standard Metric
626 x 2040 x 44mm Standard Metric
526 x 2040 x 44mm Standard Metric
426 x 2040 x 44mm Standard Metric
807 x 2000 x 44mm Standard Metric
914 x 1981 x 44mm (3'0" x 6'6")
864 x 1981 x 44mm (2'10" x 6'6")
838 x 1981 x 44mm (2'9" x 6'6")
813 x 2032 x 44mm (2'8" x 6'8")
762 x 1981 x 44mm (2'6" x 6'6")
711 x 1981 x 44mm (2'4" x 6'6")
686 x 1981 x 44mm (2'3" x 6'6")
610 x 1981 x 44mm (2'0" x 6'6")
533 x 1981 x 44mm (1'9" x 6'6")
457 x 1981 x 44mm (1'6" x 6'6")

Code	Code	Code
27029	12565	29129
27038	12562	29138
27037	12559	29137
27036	12556	29136
27035	12553	29135
27034	12551	29134
-	-	29148
27078	12566	29178
27077	12564	29177
27014	12563	29114
27069	12561	29139
27011	12560	29111
27062	12558	29115
27016	12557	29116
27017	12555	29117
27018	12554	29118
27019	12552	29119

American Black Walnut

12535

Do	oor Size
92	6 x 2040 x 44mm Standard Metric
82	6 x 2040 x 44mm Standard Metric
72	6 x 2040 x 44mm Standard Metric
62	6 x 2040 x 44mm Standard Metric
52	6 x 2040 x 44mm Standard Metric
42	6 x 2040 x 44mm Standard Metric
84	6 x 1981 x 44mm (2'10" x 6'6")
83	8 x 1981 x 44mm (2'9" x 6'6")
813	3 x 2032 x 44mm (2'8" x 6'8")
76	2 x 1981 x 44mm (2'6" x 6'6")
711	x 1981 x 44mm (2'4" x 6'6")
68	6 x 1981 x 44mm (2'3" x 6'6")
610	0 x 1981 x 44mm (2'0" x 6'6")
53	3 x 1981 x 44mm (1'9" x 6'6")
45	7 x 1981 x 44mm (1'6" x 6'6")

27019		12552	29119
Code		Code	Code
81315		81586	-
81312		81583	-
81309		81580	-
81306		81577	-
81303		81574	-
81301		81572	-
81314		81585	-
81313		81584	-
81311		81582	-
81310	_	81581	-
81308		81579	-
81307		81578	-
81305		81576	-
81304		81575	-
81302		81573	-

master	Door Size
as	926 x 2040 x 54mm Standard Metric
Ë	826 x 2040 x 54mm Standard Metric
ē	726 x 2040 x 54mm Standard Metric
Fire	626 x 2040 x 54mm Standard Metric
0	838 x 1981 x 54mm (2'9" x 6'6")
9	813 x 2032 x 54mm (2'8" x 6'8")
FD	762 x 1981 x 54mm (2'6" x 6'6")
	686 x 1981 x 54mm (2'3" x 6'6")

Code	
15829	
15838	
15837	
15836	
15814	
15839	
15811	
15816	

Option Plus

Code	(
12587	
12586	
12585	
12584	
12573	
12572	
12571	
12570	
	_

Code
26429
26438
26437
26436
26414
26439
26411
26416







See P13

See P114







Moulded

The moulded door, a timeless classic. Suitable for any home, its versatility gives you the opportunity to make your interior yours.

Our speciality, a moulded door can come in all shapes and sizes, whether it be the standard 4 panel textured, or contemporary ladder design.











See P114

See P112

Core

Standard

926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 526 x 2040 x 40mm Standard Metric 914 x 1981 x 35mm (3'0" x 6'6") 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 711 x 1981 x 35mm (2'4" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6") 533 x 1981 x 35mm (1'9" x 6'6") 457 x 1981 x 35mm (1'6" x 6'6")

Door Size

926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 526 x 2040 x 40mm Standard Metric 914 x 1981 x 35mm (3'0" x 6'6") 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 711 x 1981 x 35mm (2'4" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6") 533 x 1981 x 35mm (1'9" x 6'6") 457 x 1981 x 35mm (1'6" x 6'6")

Door Size

Sound

Fireshield

926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 526 x 2040 x 40mm Standard Metric 914 x 1981 x 35mm (3'0" x 6'6") 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 711 x 1981 x 35mm (2'4" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6") 533 x 1981 x 35mm (1'9" x 6'6") 457 x 1981 x 35mm (1'6" x 6'6")

Door Size

926 x 2040 x 44mm Standard Metric 826 x 2040 x 44mm Standard Metric 726 x 2040 x 44mm Standard Metric 626 x 2040 x 44mm Standard Metric 526 x 2040 x 44mm Standard Metric 914 x 1981 x 44mm (3'0" x 6'6") 864 x 1981 x 44mm (2'10" x 6'6" 838 x 1981 x 44mm (2'9" x 6'6") 762 x 1981 x 44mm (2'6" x 6'6") 711 x 1981 x 44mm (2'4" x 6'6") 686 x 1981 x 44mm (2'3" x 6'6") 610 x 1981 x 44mm (2'0" x 6'6") 533 x 1981 x 44mm (1'9" x 6'6") 457 x 1981 x 44mm (1'6" x 6'6")

Firemaster

926 x 2040 x 54mm Standard Metric 826 x 2040 x 54mm Standard Metric 726 x 2040 x 54mm Standard Metric 626 x 2040 x 54mm Standard Metric 526 x 2040 x 54mm Standard Metric 914 x 1981 x 54mm (3'0" x 6'6") 864 x 1981 x 54mm (2'10" x 6'6") 838 x 1981 x 54mm (2'9" x 6'6") 762 x 1981 x 54mm (2'6" x 6'6") 711 x 1981 x 54mm (2'4" x 6'6") 686 x 1981 x 54mm (2'3" x 6'6") 610 x 1981 x 54mm (2'0" x 6'6") 533 x 1981 x 54mm (1'9" x 6'6") 457 x 1981 x 54mm (1'6" x 6'6")

Shallow Moulded 2 Panel Smooth Shallow 3 Panel Smooth

Code Code







See P13



See P112



See P114

Standard Core **Door Size**

500.0.20
926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
526 x 2040 x 40mm Standard Metric
914 x 1981 x 35mm (3'0" x 6'6")
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
813 x 2032 x 35mm (2'8" x 6'8")
762 x 1981 x 35mm (2'6" x 6'6")
711 x 1981 x 35mm (2'4" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")
610 x 1981 x 35mm (2'0" x 6'6")
533 x 1981 x 35mm (1'9" x 6'6")
457 x 1981 x 35mm (1'6" x 6'6")

Door Size

Semi Solid

Safe 'N' Sound

FD30 Fireshield

DOOL 2126
926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
526 x 2040 x 40mm Standard Metric
914 x 1981 x 35mm (3'0" x 6'6")
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")
610 x 1981 x 35mm (2'0" x 6'6")
533 x 1981 x 35mm (1'9" x 6'6")
457 x 1981 x 35mm (1'6" x 6'6")

Door Size
926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
526 x 2040 x 40mm Standard Metric
914 x 1981 x 35mm (3'0" x 6'6")
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")
610 x 1981 x 35mm (2'0" x 6'6")
533 x 1981 x 35mm (1'9" x 6'6")
457 x 1981 x 35mm (1'6" x 6'6")

Door Size
926 x 2040 x 44mm Standard Metric
826 x 2040 x 44mm Standard Metric
726 x 2040 x 44mm Standard Metric
626 x 2040 x 44mm Standard Metric
526 x 2040 x 44mm Standard Metric
914 x 1981 x 44mm (3'0" x 6'6")
864 x 1981 x 44mm (2'10" x 6'6")
838 x 1981 x 44mm (2'9" x 6'6")
813 x 2032 x 44mm (2'8" x 6'8")
762 x 1981 x 44mm (2'6" x 6'6")
711 x 1981 x 44mm (2'4" x 6'6")
686 x 1981 x 44mm (2'3" x 6'6")
610 x 1981 x 44mm (2'0" x 6'6")
533 x 1981 x 44mm (1'9" x 6'6")
457 x 1981 x 44mm (1'6" x 6'6")

FD60 Firemaster **Door Size**

D001 3120
926 x 2040 x 54mm Standard Metric
826 x 2040 x 54mm Standard Metric
726 x 2040 x 54mm Standard Metric
626 x 2040 x 54mm Standard Metric
914 x 1981 x 54mm (3'0" x 6'6")
838 x 1981 x 54mm (2'9" x 6'6")
813 x 2032 x 54mm (2'8" x 6'8")
762 x 1981 x 54mm (2'6" x 6'6")
686 x 1981 x 54mm (2'3" x 6'6")

Ladder Smooth 1 Panel Smooth

Code	
49229	
49238	
49237	
49236	
49235	

9229	46129
9238	46138
9237	46137
9236	46136
9235	46135
9280	46180
9277	46177
9214	46114
9239	46139
19211	46111
9215	46115
9216	46116
9217	46117
9218	46118
-	46119

49237	46137
49236	46136
49235	46135
49280	46180
49277	46177
49214	46114
49239	46139
49211	46111
49215	46115
49216	46116
49217	46117
49218	46118
-	46119
Code	Code
49629	53029
49629	53029
49629 49638	53029 53038
49629 49638 49637	53029 53038 53037
49629 49638 49637 49636	53029 53038 53038
49629 49638 49637 49636 49635	53029 53038 53037 53039 53039
49629 49638 49637 49636 49635 49680	53029 53038 53039 53039 53039
49629 49638 49637 49636 49635 49680 49677	53029 53038 5303 53039 53080 53077
49629 49638 49637 49636 49635 49680 49677 49614	53029 53039 53039 53039 53080 53077 53014
49629 49638 49637 49636 49635 49680 49677 49614 49611	53029 53038 53033 53036 53039 53080 53077 53014
49629 49638 49637 49636 49635 49680 49677 49614 49611	53029 53038 5303 53039 53039 53077 53014 53016
49629 49638 49637 49636 49635 49680 49677 49614 49611 49616 49617	53029 53038 53033 53039 53039 53080 53077 53014 53010 53016

Code	Code
52929	66329
52938	66338
52937	66337
52936	66336
52935	66335
52980	66380
52977	66377
52914	66314
52911	66311
52916	66316
52917	66317
52918	66318
	66319
Code	Code
Code 49329	Code 46229
49329	46229
49329 49338	46229 46238
49329 49338 49337	46229 46238 46237
49329 49338 49337 49336	46229 46238 46237 46236
49329 49338 49337 49336 49335	46229 46238 46237 46236 46235
49329 49338 49337 49336 49335 49380	46229 46238 46237 46236 46235 46280
49329 49338 49337 49336 49335 49380 49377	46229 46238 46237 46236 46235 46280 46277
49329 49338 49337 49336 49335 49380 49377 49314	46229 46238 46237 46236 46235 46280 46277 46214
49329 49338 49337 49336 49335 49380 49377 49314 49339	46229 46238 46237 46236 46235 46280 46277 46214 46239
49329 49338 49337 49336 49335 49380 49377 49314 49339 49311	46229 46238 46237 46236 46235 46280 46277 46214 46239
49329 49338 49337 49336 49335 49380 49377 49314 49339 49311 49315	46229 46238 46237 46236 46235 46280 46277 46214 46239 46211 46215
49329 49338 49337 49336 49335 49380 49377 49314 49339 49311 49315	46229 46238 46237 46236 46235 46280 46277 46214 46239 46211 46215

.oae	Code
9329	46229
9338	46238
9337	46237
9336	46236
9335	46235
9380	46280
9377	46277
19314	46214
9339	46239
49311	46211
19315	46215
19316	46216
19317	46217
19318	46218
-	46219

13303

13304 13305 13306

13313 13289

Code
49429
49438
49437
49436
49480
49414
49439
49411
49416



Horizontal Smooth

926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
526 x 2040 x 40mm Standard Metric
914 x 1981 x 35mm (3'0" x 6'6")
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
813 x 2032 x 35mm (2'8" x 6'8")
762 x 1981 x 35mm (2'6" x 6'6")

711 x 1981 x 35mm (2'4" x 6'6")

686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6") 533 x 1981 x 35mm (1'9" x 6'6") 457 x 1981 x 35mm (1'6" x 6'6")

Door Size

Standard Core

926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 526 x 2040 x 40mm Standard Metric 914 x 1981 x 35mm (3'0" x 6'6") 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6") 533 x 1981 x 35mm (1'9" x 6'6")

457 x 1981 x 35mm (1'6" x 6'6")

Door Size
926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
526 x 2040 x 40mm Standard Metric
914 x 1981 x 35mm (3'0" x 6'6")
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")
610 x 1981 x 35mm (2'0" x 6'6")
533 x 1981 x 35mm (1'9" x 6'6")
457 x 1981 x 35mm (1'6" x 6'6")

FD30 Fireshield

Safe 'N' Sound

Door Size 926 x 2040 x 44mm Standard Metric 826 x 2040 x 44mm Standard Metric $726 \times 2040 \times 44$ mm Standard Metric 626 x 2040 x 44mm Standard Metric 526 x 2040 x 44mm Standard Metric 914 x 1981 x 44mm (3'0" x 6'6") 864 x 1981 x 44mm (2'10" x 6'6") 838 x 1981 x 44mm (2'9" x 6'6") 813 x 2032 x 44mm (2'8" x 6'8") 762 x 1981 x 44mm (2'6" x 6'6") 711 x 1981 x 44mm (2'4" x 6'6") 686 x 1981 x 44mm (2'3" x 6'6") 610 x 1981 x 44mm (2'0" x 6'6") 533 x 198<u>1 x 44mm (1'9" x 6'6")</u> 457 x 1981 x 44mm (1'6" x 6'6")

FD60 Firemaster

Door Size	
926 x 2040 x 54mm Standard Met	ric
826 x 2040 x 54mm Standard Met	ric
726 x 2040 x 54mm Standard Met	ric
626 x 2040 x 54mm Standard Met	ric
914 x 1981 x 54mm (3'0" x 6'6")	
838 x 1981 x 54mm (2'9" x 6'6")	
813 x 2032 x 54mm (2'8" x 6'8")	
762 x 1981 x 54mm (2'6" x 6'6")	
686 x 1981 x 54mm (2'3" x 6'6")	

46329
46338
46337
46336
46335
46380
46377
46314
46339
46311
46315
46316
46317
46318
46319

Code

48229
48238
48237
48236
48235
48280
48277
48214
48211
48216
48217
48218
48219

Code

Code	
48329	
48338	
48337	
48336	
48335	
48380	
48377	
48314	
48311	
48316	
48317	
48318	
48319	

Code
46429
46438
46437
46436
46435
46480
46477
46414
46439
46411
46415
46416
46417
46418
46419

Code

13329
13338
13337
13336
13340
13307
13314
13308
13316

In Stock See P13



See P112



See P114



Core

Standard

Solid

Sound

Ž

Fireshield

FD30

926 x 2040 x 40mm Standard Metric

826 x 2040 x 40mm Standard Metric

726 x 2040 x 40mm Standard Metric

626 x 2040 x 40mm Standard Metric

914 x 1981 x 35mm (3'0" x 6'6")

864 x 1981 x 35mm (2'10" x 6'6")

838 x 1981 x 35mm (2'9" x 6'6")

813 x 2032 x 35mm (2'8" x 6'8")

762 x 1981 x 35mm (2'6" x 6'6")

711 x 1981 x 35mm (2'4" x 6'6")

686 x 1981 x 35mm (2'3" x 6'6")

610 x 1981 x 35mm (2'0" x 6'6")

533 x 1981 x 35mm (1'9" x 6'6")

926 x 2040 x 40mm Standard Metric

826 x 2040 x 40mm Standard Metric

726 x 2040 x 40mm Standard Metric

626 x 2040 x 40mm Standard Metric

526 x 2040 x 40mm Standard Metric 914 x 1981 x 35mm (3'0" x 6'6")

864 x 1981 x 35mm (2'10" x 6'6")

838 x 1981 x 35mm (2'9" x 6'6")

762 x 1981 x 35mm (2'6" x 6'6")

686 x 1981 x 35mm (2'3" x 6'6")

610 x 1981 x 35mm (2'0" x 6'6")

533 x 1981 x 35mm (1'9" x 6'6")

926 x 2040 x 40mm Standard Metric

826 x 2040 x 40mm Standard Metric

726 x 2040 x 40mm Standard Metric

626 x 2040 x 40mm Standard Metric

914 x 1981 x 35mm (3'0" x 6'6") 864 x 1981 x 35mm (2'10" x 6'6")

838 x 1981 x 35mm (2'9" x 6'6")

762 x 1981 x 35mm (2'6" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6")

610 x 1981 x 35mm (2'0" x 6'6")

533 x 1981 x 35mm (1'9" x 6'6")

926 x 2040 x 44mm Standard Metric

826 x 2040 x 44mm Standard Metric

726 x 2040 x 44mm Standard Metric

626 x 2040 x 44mm Standard Metric

914 x 1981 x 44mm (3'0" x 6'6")

864 x 1981 x 44mm (2'10" x 6'6")

838 x 1981 x 44mm (2'9" x 6'6")

813 x 2032 x 44mm (2'8" x 6'8")

762 x 1981 x 44mm (2'6" x 6'6")

711 x 1981 x 44mm (2'4" x 6'6")

686 x 1981 x 44mm (2'3" x 6'6")

610 x 1981 x 44mm (2'0" x 6'6")

533 x 1981 x 44mm (1'9" x 6'6")

926 x 2040 x 54mm Standard Metric

826 x 2040 x 54mm Standard Metric

726 x 2040 x 54mm Standard Metric

626 x 2040 x 54mm Standard Metric

Door Size

Door Size

Door Size

Door Size





In Stock

See P112

See P13



See P114

Vertical 5 Panel Textured Vertical 5 Panel Smooth

Code

32114

32113

32112

32111

32110

32109

32108

32107 32106 32105 32104 32103 37518

Code

Code

Code

32281 32280

914 x 1981 x 54mm (3'0" x 6'6")

864 x 1981 x 44mm (2'10" x 6'6")

C)
Q)
7	-
Ξ	5
F	,
\geq	
D)
-	-
_	
2	2
C)
	-
_	
5	5
Ç)
۲	
9	
a	5
Ć	
מטמנו	5
ñ	
-	
	J



¹ Two Panel Smooth 457mm (1'6") and 533mm (1'9") doors have reduced stile widths.



See P13



See P112



See P114

Standard Core Door Size

	D001 3126		
	926 x 2040 x 40mm Standard Metric		
	826 x 2040 x 40mm Standard Metric		
	726 x 2040 x 40mm Standard Metric		
	626 x 2040 x 40mm Standard Metric		
	526 x 2040 x 40mm Standard Metric		
	914 x 1981 x 35mm (3'0" x 6'6")		
	864 x 1981 x 35mm (2'10" x 6'6")		
	838 x 1981 x 35mm (2'9" x 6'6")		
	813 x 2032 x 35mm (2'8" x 6'8")		
	762 x 1981 x 35mm (2'6" x 6'6")		
711 x 1981 x 35mm (2'4" x 6'6")			
	686 x 1981 x 35mm (2'3" x 6'6")		
	610 x 1981 x 35mm (2'0" x 6'6")		
	533 x 1981 x 35mm (1'9" x 6'6")		
	457 x 1981 x 35mm (1'6" x 6'6")		

Door Size

Semi Solid

Safe 'N' Sound

500.0.20
926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
526 x 2040 x 40mm Standard Metric
914 x 1981 x 35mm (3'0" x 6'6")
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")
610 x 1981 x 35mm (2'0" x 6'6")
533 x 1981 x 35mm (1'9" x 6'6")
457 x 1981 x 35mm (1'6" x 6'6")

Door Size			
	926 x 2040 x 40mm Standard Metric		
	826 x 2040 x 40mm Standard Metric		
	726 x 2040 x 40mm Standard Metric		
	626 x 2040 x 40mm Standard Metric		
	526 x 2040 x 40mm Standard Metric		
	914 x 1981 x 35mm (3'0" x 6'6")		
	864 x 1981 x 35mm (2'10" x 6'6")		
	838 x 1981 x 35mm (2'9" x 6'6")		
	762 x 1981 x 35mm (2'6" x 6'6")		
	686 x 1981 x 35mm (2'3" x 6'6")		
	610 x 1981 x 35mm (2'0" x 6'6")		
	533 x 1981 x 35mm (1'9" x 6'6")		
	457 x 1981 x 35mm (1'6" x 6'6")		

FD30 Fireshield

Door Size			
926 x 2040 x 44mm Standard Metric			
826 x 2040 x 44mm Standard Metric			
726 x 2040 x 44mm Standard Metric			
626 x 2040 x 44mm Standard Metric			
526 x 2040 x 44mm Standard Metric			
914 x 1981 x 44mm (3'0" x 6'6")			
864 x 1981 x 44mm (2'10" x 6'6")			
838 x 1981 x 44mm (2'9" x 6'6")			
813 x 2032 x 44mm (2'8" x 6'8")			
762 x 1981 x 44mm (2'6" x 6'6")			
711 x 1981 x 44mm (2'4" x 6'6")			
686 x 1981 x 44mm (2'3" x 6'6")			
610 x 1981 x 44mm (2'0" x 6'6")			
533 x 1981 x 44mm (1'9" x 6'6")			
457 x 1981 x 44mm (1'6" x 6'6")			

FD60 Firemaster

Door Size
926 x 2040 x 54mm Standard Metric
826 x 2040 x 54mm Standard Metric
726 x 2040 x 54mm Standard Metric
626 x 2040 x 54mm Standard Metric
914 x 1981 x 54mm (3'0" x 6'6")
838 x 1981 x 54mm (2'9" x 6'6")
813 x 2032 x 54mm (2'8" x 6'8")
762 x 1981 x 54mm (2'6" x 6'6")
686 x 1981 x 54mm (2'3" x 6'6")

2 Panel

2 Panel

Arch Top Textured

Smooth			
Code			
15429			
15438			
15437			
15436			
15435			
15480			
15477			
15414			
15439			
15411			
15415			
15416			
15417			
15418 ¹			
15419 ¹			

Code	Code
16029	01629
16038	01638
16037	01637
16036	01636
16035	01635
16080	01680
16077	-
16014	01605
16011	01604
16016	01603
16017	01602
-	01606
_	01601

Code	Code
17729	12229
17738	12238
17737	12237
17736	12236
17735	12235
17780	12280
17777	-
17714	12214
17711	12211
17716	12216
17717	12217
17718 ¹	-

Code		Code
17829		23029
17838		23038
17837		23037
17836		23036
17835		23035
17880		23080
17877		-
17814		23014
17839		23039
17811		23011
17815	-	23015
17816		23016
17817		23017
17818 ¹	-	23018
17819 ¹	-	-

Couc
13238
13236
13233
13231
13240
13237
13235
13234
13232

13206
13203
13201
13210
13207
13205
13204
13202





² Two panels only.



See P13



See P112



See P114

Standard Core **Door Size**

926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
526 x 2040 x 40mm Standard Metric
914 x 1981 x 35mm (3'0" x 6'6")
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
813 x 2032 x 35mm (2'8" x 6'8")
762 x 1981 x 35mm (2'6" x 6'6")
711 x 1981 x 35mm (2'4" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")
610 x 1981 x 35mm (2'0" x 6'6")
533 x 1981 x 35mm (1'9" x 6'6")
457 x 1981 x 35mm (1'6" x 6'6")

Door Size

Semi Solid

Safe 'N' Sound

926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
526 x 2040 x 40mm Standard Metric
914 x 1981 x 35mm (3'0" x 6'6")
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")
610 x 1981 x 35mm (2'0" x 6'6")
533 x 1981 x 35mm (1'9" x 6'6")
457 x 1981 x 35mm (1'6" x 6'6")

Door Size

DOOL 2176
926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
526 x 2040 x 40mm Standard Metric
914 x 1981 x 35mm (3'0" x 6'6")
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")
610 x 1981 x 35mm (2'0" x 6'6")
533 x 1981 x 35mm (1'9" x 6'6")
457 x 1981 x 35mm (1'6" x 6'6")

FD30 Fireshield

Door Size
926 x 2040 x 44mm Standard Metric
826 x 2040 x 44mm Standard Metric
726 x 2040 x 44mm Standard Metric
626 x 2040 x 44mm Standard Metric
526 x 2040 x 44mm Standard Metric
914 x 1981 x 44mm (3'0" x 6'6")
864 x 1981 x 44mm (2'10" x 6'6")
838 x 1981 x 44mm (2'9" x 6'6")
813 x 2032 x 44mm (2'8" x 6'8")
762 x 1981 x 44mm (2'6" x 6'6")
711 x 1981 x 44mm (2'4" x 6'6")
686 x 1981 x 44mm (2'3" x 6'6")
610 x 1981 x 44mm (2'0" x 6'6")
533 x 1981 x 44mm (1'9" x 6'6")
457 x 1981 x 44mm (1'6" x 6'6")

Firemaster	Door Size
as	926 x 2040 x 54mm Standard Metric
Ě	826 x 2040 x 54mm Standard Metric
ē	726 x 2040 x 54mm Standard Metric
iΞ	626 x 2040 x 54mm Standard Metric
0	914 x 1981 x 54mm (3'0" x 6'6")
9	838 x 1981 x 54mm (2'9" x 6'6")
\Box	813 x 2032 x 54mm (2'8" x 6'8")
Ш	762 x 1981 x 54mm (2'6" x 6'6")
	686 x 1981 x 54mm (2'3" x 6'6")

4 Panel Smooth

Code	
13629	
13638	
13637	
13636	
13635 ²	
13680	
13677	
13614	
13639	
13611	
13615	
13616	
13617	
13618 ²	
13619 ²	

Code
15229
15238
15237
15236
15235 ²
15280
15277
15214
15211
15216
15217
15218 ²
15219 ²

Code
15729
15738
15737
15736
15735 ²
15780
15777
15714
15711
15716
15717
15718 ²
15719 ²

Code
30329
30338
30337
30336
30335 ²
30380
30377
30314
30339
30311
30315
30316
30317
30318 ²
30319 ²

Code
13258
13256
13253
13251
13260
13257
13255
13254
13252





² Two Panels only.

Door Size

Core

Standard

926 x 2040 x 40mm Standard Metric 864 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 526 x 2040 x 40mm Standard Metric 914 x 1981 x 35mm (3'0" x 6'6") 864 x 1981 x 35mm (2'10" x 6'6" 838 x 1981 x 35mm (2'9" x 6'6") 813 x 2032 x 35mm (2'8" x 6'8") 762 x 1981 x 35mm (2'6" x 6'6") 711 x 1981 x 35mm (2'4" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6") 533 x 1981 x 35mm (1'9" x 6'6") 457 x 1981 x 35mm (1'6" x 6'6")

Door Size

926 x 2040 x 40mm Standard Metric 864 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 526 x 2040 x 40mm Standard Metric 914 x 1981 x 35mm (3'0" x 6'6") 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6") 533 x 1981 x 35mm (1'9" x 6'6") 457 x 1981 x 35mm (1'6" x 6'6")

Door Size

926 x 2040 x 40mm Standard Metric 864 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 526 x 2040 x 40mm Standard Metric 914 x 1981 x 35mm (3'0" x 6'6") 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6") 533 x 1981 x 35mm (1'9" x 6'6") 457 x 1981 x 35mm (1'6" x 6'6")

Fireshield

Ž

Door Size 926 x 2040 x 44mm Standard Metric 864 x 2040 x 44mm Standard Metric 826 x 2040 x 44mm Standard Metric 726 x 2040 x 44mm Standard Metric 626 x 2040 x 44mm Standard Metric 526 x 2040 x 44mm Standard Metric 914 x 1981 x 44mm (3'0" x 6'6") 864 x 1981 x 44mm (2'10" x 6'6") 838 x 1981 x 44mm (2'9" x 6'6") 813 x 2032 x 44mm (2'8" x 6'8") 711 x 1981 x 44mm (2'4" x 6'6") 762 x 1981 x 44mm (2'6" x 6'6") 686 x 1981 x 44mm (2'3" x 6'6") 610 x 1981 x 44mm (2'0" x 6'6") 533 x 1981 x 44mm (1'9" x 6'6") 457 x 1981 x 44mm (1'6" x 6'6")

Firemaster

FD60

926 x 2040 x 54mm Standard Metric 826 x 2040 x 54mm Standard Metric 726 x 2040 x 54mm Standard Metric 626 x 2040 x 54mm Standard Metric 914 x 1981 x 54mm (3'0" x 6'6") 838 x 1981 x 54mm (2'9" x 6'6") 813 x 2032 x 54mm (2'8" x 6'8") 762 x 1981 x 54mm (2'6" x 6'6") 686 x 1981 x 54mm (2'3" x 6'6")

4 Panel Textured

Code	
12629	
12678	
12638	
12637	
12636	
12635 ²	
12680	
12677	
12614	
12639	
12611	
12615	
12616	
12617	
12618 ²	

12619²

Code

Code 23729

13262

Bi-Fold

Door Size To suit opening size	Code
762 x 1981 x 35mm (2'6" x 6'6")	14867
610 x 1981 x 35mm (2'0" x 6'6")	14865

Replacement Bi-Fold Track & Fitting Pack

Door Size To suit opening size	Code
762 x 1981 x 35mm (2'6" x 6'6")	51122
610 x 1981 x 35mm (2'2" x 6'6")	43083



See P13



See P112



See P114

Panel Smooth

Door Size

Standard Core 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 711 x 1981 x 35mm (2'4" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6") 533 x 1981 x 35mm (1'9" x 6'6") 457 x 1981 x 35mm (1'6" x 6'6")

5 Panel Smooth

Code

58514 58511

Fireshield FD30

Door Size

Door Size

826 x 2040 x 44mm Standard Metric 726 x 2040 x 44mm Standard Metric 626 x 2040 x 44mm Standard Metric 914 x 1981 x 44mm (3'0" x 6'6") 838 x 1981 x 44mm (2'9" x 6'6") 762 x 1981 x 44mm (2'6" x 6'6") 711 x 1981 x 44mm (2'4" x 6'6") 686 x 1981 x 44mm (2'3" x 6'6") 610 x 1981 x 44mm (2'0" x 6'6")

FD60 Firemaster

826 x 2040 x 54mm Standard Metric 726 x 2040 x 54mm Standard Metric 626 x 2040 x 54mm Standard Metric 914 x 1981 x 54mm (3'0" x 6'6") 838 x 1981 x 54mm (2'9" x 6'6") 762 x 1981 x 54mm (2'6" x 6'6") 686 x 1981 x 54mm (2'3" x 6'6")

In Stock

See P112

See P13

Technical Information

See P114







Three Panels only.

Core Standard

Door Size

926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 526 x 2040 x 40mm Standard Metric 914 x 1981 x 35mm (3'0" x 6'6") 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 813 x 2032 x 35mm (2'8" x 6'8") 762 x 1981 x 35mm (2'6" x 6'6") 711 x 1981 x 35mm (2'4" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6") 533 x 1981 x 35mm (1'9" x 6'6") 457 x 1981 x 35mm (1'6" x 6'6")

Solid Door Size

926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 526 x 2040 x 40mm Standard Metric 914 x 1981 x 35mm (3'0" x 6'6") 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6") 533 x 1981 x 35mm (1'9" x 6'6") 457 x 1981 x 35mm (1'6" x 6'6")

Sound Door Size

926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 526 x 2040 x 40mm Standard Metric 914 x 1981 x 35mm (3'0" x 6'6") 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6") 533 x 1981 x 35mm (1'9" x 6'6") 457 x 1981 x 35mm (1'6" x 6'6")

Fireshield

Ž

926 x 2040 x 44mm Standard Metric 826 x 2040 x 44mm Standard Metric 726 x 2040 x 44mm Standard Metric 626 x 2040 x 44mm Standard Metric 526 x 2040 x 44mm Standard Metric 914 x 1981 x 44mm (3'0" x 6'6") 864 x 1981 x 44mm (2'10" x 6'6") 838 x 1981 x 44mm (2'9" x 6'6") 813 x 2032 x 44mm (2'8" x 6'8") 762 x 1981 x 44mm (2'6" x 6'6") 711 x 1981 x 44mm (2'4" x 6'6") 686 x 1981 x 44mm (2'3" x 6'6") 610 x 1981 x 44mm (2'0" x 6'6") 533 x 1981 x 44mm (1'9" x 6'6") 457 x 1981 x 44mm (1'6" x 6'6")

Firemaster

Door Size

926 x 2040 x 54mm Standard Metric 826 x 2040 x 54mm Standard Metric 726 x 2040 x 54mm Standard Metric 626 x 2040 x 54mm Standard Metric 914 x 1981 x 54mm (3'0" x 6'6") 838 x 1981 x 54mm (2'9" x 6'6") 813 x 2032 x 54mm (2'8" x 6'8") 762 x 1981 x 54mm (2'6" x 6'6") 686 x 1981 x 54mm (2'3" x 6'6")

6 Panel Smooth

Code 13529 13538 13537 13536 13535 3 13580 13577 13514 13539 13511 13515 13516 13517

Code

13518 ³

13519 ³

Couc
21729
21738
21737
21736
21735 3
21780
21777
21714
21711
21716
21717
21718 3
21719 ³

Code

Couc	
25429	
25438	
25437	
25436	
25435 ³	
25480	
25477	
25414	
25411	
25416	
25417	
25418 ³	
25419 ³	

24029

13278 13276

Bi-Fold

Door Size To suit opening size	Code
914 x 1981 x 35mm (3'0" x 6'6")	13368
762 x 1981 x 35mm (2'6" x 6'6")	13367
686 x 1981 x 35mm (2'3" x 6'6")	13366
610 x 1981 x 35mm (2'0" x 6'6")	13365

Replacement Bi-Fold Track & Fitting Pack

Door Size To suit opening size	Code
914 x 1981 x 35mm (3'0" x 6'6")	43081
762 x 1981 x 35mm (2'6" x 6'6")	51122
686 x 1981 x 35mm (2'3" x 6'6")	51123
610 x 1981 x 35mm (2'0" x 6'6")	43083

See P112

See P13

In Stock

See P114





³ Three Panels only.





See P112



See P114

Standard Core Door Size

926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
526 x 2040 x 40mm Standard Metric
914 x 1981 x 35mm (3'0" x 6'6")
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
813 x 2032 x 35mm (2'8" x 6'8")
762 x 1981 x 35mm (2'6" x 6'6")
711 x 1981 x 35mm (2'4" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")
610 x 1981 x 35mm (2'0" x 6'6")
533 x 1981 x 35mm (1'9" x 6'6")
457 x 1981 x 35mm (1'6" x 6'6")

Door Size

Semi Solid

D001 0.120
926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
526 x 2040 x 40mm Standard Metric
914 x 1981 x 35mm (3'0" x 6'6")
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
610 x 1981 x 35mm (2'0" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")
533 x 1981 x 35mm (1'9" x 6'6")
457 x 1981 x 35mm (1'6" x 6'6")

Door Size
926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
526 x 2040 x 40mm Standard Metric
914 x 1981 x 35mm (3'0" x 6'6")
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")
610 x 1981 x 35mm (2'0" x 6'6")
533 x 1981 x 35mm (1'9" x 6'6")
457 x 1981 x 35mm (1'6" x 6'6")

FD30 Fireshield

Safe 'N' Sound

Door	Size
926 x	2040 x 44mm Standard Metric
826 x	2040 x 44mm Standard Metric
726 x :	2040 x 44mm Standard Metric
626 x	2040 x 44mm Standard Metric
526 x	2040 x 44mm Standard Metric
914 x 1	981 x 44mm (3'0" x 6'6")
864 x	1981 x 44mm (2'10" x 6'6")
838 x	1981 x 44mm (2'9" x 6'6")
813 x 2	2032 x 44mm (2'8" x 6'8")
762 x ⁻	1981 x 44mm (2'6" x 6'6")
711 x 19	981 x 44mm (2'4" x 6'6")
686 x	1981 x 44mm (2'3" x 6'6")
610 x 1	981 x 44mm (2'0" x 6'6")
533 x	1981 x 44mm (1'9" x 6'6")
457 x	1981 x 44mm (1'6" x 6'6")

FD60 Firemaster

Do	or Size
926	x 2040 x 54mm Standard Metric
826	x 2040 x 54mm Standard Metric
726	x 2040 x 54mm Standard Metric
626	x 2040 x 54mm Standard Metric
914	x 1981 x 54mm (3'0" x 6'6")
838	x 1981 x 54mm (2'9" x 6'6")
813	x 2032 x 54mm (2'8" x 6'8")
762	x 1981 x 54mm (2'6" x 6'6")
686	x 1981 x 54mm (2'3" x 6'6")

6 Panel Textured

Code
12429
12438
12437
12436
12435 ³
12480
12477
12414
12439
12411
12415
12416
12417
12418 ³
12419 ³

Code	
20329	
20338	
20337	
20336	
20335 3	
20380	
20377	
20314	
20311	
20317	
20316	
20318 ³	
20319 ³	

Code
23929
23938
23937
23936
23935 3
23980
23977
23914
23911
23916
23917
23918 ³
23919 ³

Code	
23429	
23438	
23437	
23436	
23435 3	
23480	
23477	
23414	
23439	
23411	
23457	
23416	
23417	
23418 ³	
23419 ³	

13288

13286 13283

13281 13291 13287

13285 13284 13282

Door Size To suit opening size	Code
914 x 1981 x 35mm (3'0" x 6'6")	43081
762 x 1981 x 35mm (2'6" x 6'6")	51122
686 x 1981 x 35mm (2'3" x 6'6")	51123
610 x 1981 x 35mm (2'0" x 6'6")	43083

Bi-Fold

Door Size To suit opening size	Code
914 x 1981 x 35mm (3'0" x 6'6")	14768
762 x 1981 x 35mm (2'6" x 6'6")	14767
686 x 1981 x 35mm (2'3" x 6'6")	14766
610 x 1981 x 35mm (2'0" x 6'6")	14765

Replacement Bi-Fold Track & Fitting Pack





Moulded Glazed

If you've considered removing a wall but are worried that you'll miss the divide once it's gone, or keen to reinstate some sort of partition between two rooms, a glazed moulded door could be the answer.

Bathe your home in natural light, brighten dark corners and expand the feeling of space.







926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6")

67320 67321

67322

67323

67316

67317

67318

67319

72029 72038 72037

72036

4 Light Clear Glazed

686 x 1981 x 35mm (2'3" x 6'6")



Door Size
926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")

4 Light	Clear	Glazed	FD30	Fireshield



Door Size	Code
926 x 2040 x 44mm Standard Metric	77329
826 x 2040 x 44mm Standard Metric	77338
838 x 1981 x 44mm (2'9" x 6'6")	77314
762 x 1981 x 44mm (2'6" x 6'6")	77311

1 Panel White Leaded Clear Glazed 🐸



Door Size	Code
926 x 2040 x 40mm Standard Metric	67304
826 x 2040 x 40mm Standard Metric	67305
726 x 2040 x 40mm Standard Metric	67306
626 x 2040 x 40mm Standard Metric	67307
864 x 1981 x 35mm (2'10" x 6'6")	67300
838 x 1981 x 35mm (2'9" x 6'6")	67301
762 x 1981 x 35mm (2'6" x 6'6")	67302
686 x 1981 x 35mm (2'3" x 6'6")	67303

1 Panel Chrome Leaded Clear Glazed



Door Size
926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")

Code	
67312	
67313	
67314	
67315	
67308	
67309	
67310	
67311	








See P114



3 Light Clear Glazed



Door Size

926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")

Code

75029	
75038	
75037	
75036	
75077	
75014	
75011	
75016	

4 Light Clear Glazed



Door Size

926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
686 v 1081 v 75mm (2'7" v 6'6")

75129
75138
75137
75136
75177
75114
75111
75116

Half Light Clear Etched Glazed




Door Size

926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
686 v 1981 v 35mm (2'3" v 6'6")

31104	
31105	
31106	
31100	
31101	
31102	
31103	

1 Light Clear Etched Glazed &



Door Size
926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")

Code
71729
71738
71737
71736
71777
71714
71711
71716

¾ Light Clear Glazed 💹



Door Size

826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")

77838
77837
77836
77877
77814
77811
77816

5 Light Clear Glazed 🐸



Door Size

826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")

77938
77937
77936
77977
77914
77911
77916

Horizontal 4 Line 4 Light Smooth Glazed

4 Line Clear Glazed 🐸



Door Size 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6")

67324
67325
67326
67327

4 Line, 4 Light Clear Glazed



Door Size
926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")

Code
75229
75238
75237
75236

75277
75214
75211
75216

FD30 Fireshield 4 Line, 4 Light Clear Glazed



Door Size 926 x 2040 x 44mm Standard Metric 826 x 2040 x 44mm Standard Metric 838 x 1981 x 44mm (2'9" x 6'6") 762 x 1981 x 44mm (2'6" x 6'6")

Code
77429
77438
77414
77411





Door Size
838 x 1981 x 35mm (2'9" x 6'6")
762 x 1981 x 35mm (2'6" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")
610 x 1981 x 35mm (2'0" x 6'6")

4 Line, Narrow Offset Clear Glazed



Door Size	Code
926 x 2040 x 40mm Standard Metric	76829
826 x 2040 x 40mm Standard Metric	76838
726 x 2040 x 40mm Standard Metric	76837
626 x 2040 x 40mm Standard Metric	76836
864 x 1981 x 35mm (2'10" x 6'6")	76877
838 x 1981 x 35mm (2'9" x 6'6")	76814
762 x 1981 x 35mm (2'6" x 6'6")	76811
686 x 1981 x 35mm (2'3" x 6'6")	76816

FD30 Fireshield 4 Line, Narrow Offset Clear Glazed



Door Size
926 x 2040 x 44mm Standard Metric
826 x 2040 x 44mm Standard Metric
838 x 1981 x 44mm (2'9" x 6'6")
762 x 1981 x 44mm (2'6" x 6'6")
762 x 1981 x 44mm (2'6" x 6'6")

Code	
77529	
77538	
77514	
77511	









See P114

Manitoba 6 Light Textured Glazed





Ontario Smooth 10 Light Chrome Glazing Bars 🐸



826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 526 x 2040 x 40mm Standard Metric 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6")


Code
58840
58838
58836
58834
58842
58841
58839
58837
58835

Ontario Textured 10 Light Chrome Glazing Bars 😓



Door Size	Code
826 x 2040 x 40mm Standard Metric	92448
726 x 2040 x 40mm Standard Metric	92447
626 x 2040 x 40mm Standard Metric	92446
526 x 2040 x 40mm Standard Metric	92445
864 x 1981 x 35mm (2'10" x 6'6")	92487
838 x 1981 x 35mm (2'9" x 6'6")	92464
762 x 1981 x 35mm (2'6" x 6'6")	92461
686 x 1981 x 35mm (2'3" x 6'6")	92467
610 x 1981 x 35mm (2'0" x 6'6")	92465

Manitoba Textured 6 Light Chrome Glazing Bars



826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'6" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6")	Door Size
626 x 2040 x 40mm Standard Metric 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6")	826 x 2040 x 40mm Standard Metric
864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6")	726 x 2040 x 40mm Standard Metric
838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6")	626 x 2040 x 40mm Standard Metric
762 x 1981 x 35mm (2'6" x 6'6")	864 x 1981 x 35mm (2'10" x 6'6")
	838 x 1981 x 35mm (2'9" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")	762 x 1981 x 35mm (2'6" x 6'6")
- 000 X 1001 X 0011111 (2 0 X 0 0)	686 x 1981 x 35mm (2'3" x 6'6")

Code
92248
92247
92246
92287
92264
92261
92263



See P115



See P112



See P114





6 Light White Leading



926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6")

6 Light Chrome Leading



926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6")

10 Light White Leading 🐸




Door Size

926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6")

Code

10 Light Chrome Leading 😓



926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6")



See P115



See P112



See P114





6 Light White Leading



926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6")

6 Light Chrome Leading



Door Size

926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6")

10 Light White Leading 🐸




Door Size

926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6")

Code

10 Light Chrome Leading 👪



926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 762 x 1981 x 35mm (2'6" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6")



See P115



See P112



See P114





Paint Grade

The Premdor interior Paint Grade range has developed to become a firm trade favourite.

When contract budgets are tight and minimum installation times are paramount, this range has been found to be the ideal solution.



	<i>S</i>	5
	1	
(1)
7		5
(τ	5
Ć	5)
4)
9		
7	т	
Ċ	ĭ	



Standard Core Door Size

Door Size
926 x 2040 x 40mm Standard Metric
826 x 2040 x 40mm Standard Metric
726 x 2040 x 40mm Standard Metric
626 x 2040 x 40mm Standard Metric
526 x 2040 x 40mm Standard Metric
864 x 1981 x 35mm (2'10" x 6'6")
838 x 1981 x 35mm (2'9" x 6'6")
813 x 2032 x 35mm (2'8" x 6'8")
762 x 1981 x 35mm (2'6" x 6'6")
711 x 1981 x 35mm (2'4" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")
610 x 1981 x 35mm (2'0" x 6'6")
533 x 1981 x 35mm (1'9" x 6'6")
457 x 1981 x 35mm (1'6" x 6'6")
381 x 1981 x 35mm (1'3" x 6'6")
610 x 1829 x 35mm (2'0" x 6'0")

Paint Grade Plus

Paint Grade Plus Lipped

Code	Code
13129	35731
13138	35738
13137	35737
13136	35736
13135	35735
13177	35777
13114	35714
13139	35739
13111	35711
13115	35715
13116	35716
13117	35717
13118	35718
13119	35719
13120	35720
13124	35724

Door Size

ExtraCore

838 x 1981 x 35mm (2'9" x 6'6")
813 x 2032 x 35mm (2'8" x 6'8")
762 x 1981 x 35mm (2'6" x 6'6")
686 x 1981 x 35mm (2'3" x 6'6")
610 x 1981 x 35mm (2'0" x 6'6")
533 x 1981 x 35mm (1'9" x 6'6")
457 x 1981 x 35mm (1'6" x 6'6")
381 x 1981 x 35mm (1'3" x 6'6")

Code
13180
13187
13181
13182
13183
13184
13185
13186

FD30 Fireshield Door Size

926 x 2040 x 44mm Standard Metric
826 x 2040 x 44mm Standard Metric
726 x 2040 x 44mm Standard Metric
626 x 2040 x 44mm Standard Metric
526 x 2040 x 44mm Standard Metric
426 x 2040 x 44mm Standard Metric
914 x 1981 x 44mm (3'0" x 6'6")
864 x 1981 x 44mm (2'10" x 6'6")
838 x 1981 x 44mm (2'9" x 6'6")
813 x 2032 x 44mm (2'8" x 6'8")
762 x 1981 x 44mm (2'6" x 6'6")
711 x 1981 x 44mm (2'4" x 6'6")
686 x 1981 x 44mm (2'3" x 6'6")
610 x 1981 x 44mm (2'0" x 6'6")
533 x 1981 x 44mm (1'9" x 6'6")
457 x 1981 x 44mm (1'6" x 6'6")

Code	Code
23129	36929
23138	36938
23137	36937
23136	36936
23135	36935
23134	36934
23155	36955
23177	36977
23114	36914
23139	36939
23111	36911
23115	36967
23116	36916
23117	36917
23118	36918
23119	36919

FD60 Firemaster **Door Size**

926 x 2040 x 54mm Standard Metric
826 x 2040 x 54mm Standard Metric
726 x 2040 x 54mm Standard Metric
626 x 2040 x 54mm Standard Metric
838 x 1981 x 54mm (2'9" x 6'6")
813 x 2032 x 54mm (2'8" x 6'8")
762 x 1981 x 54mm (2'6" x 6'6")
686 x 1981 x 54mm (2'3" x 6'6")

Code
23193
23192
23191
23190
23183
23182
23181
23180

In Stock

See P13



See P112



See P114



Green Tint Flashed items are available from stock on a 3 day lead-time from key order date, terms and conditions apply, see page 123 for further details.



Door Size

Standard Core 926 x 2040 x 40mm Standard Metric 826 x 2040 x 40mm Standard Metric 726 x 2040 x 40mm Standard Metric 626 x 2040 x 40mm Standard Metric $526 \times 2040 \times 40 \text{mm}$ Standard Metric 426 x 2040 x 40mm Standard Metric 914 x 1981 x 35mm (3'0" x 6'6") 864 x 1981 x 35mm (2'10" x 6'6") 838 x 1981 x 35mm (2'9" x 6'6") 813 x 2032 x 35mm (2'8" x 6'8") 762 x 1981 x 35mm (2'6" x 6'6") 711 x 1981 x 35mm (2'4" x 6'6") 686 x 1981 x 35mm (2'3" x 6'6") 610 x 1981 x 35mm (2'0" x 6'6") 533 x 1981 x 35mm (1'9" x 6'6") 457 x 1981 x 35mm (1'6" x 6'6")

381 x 1981 x 35mm (1'3" x 6'6")

Thick 40mm

Door Size

838 x 1981 x 40mm (2'9" x 6'6") 813 x 2032 x 40mm (2'8" x 6'8") 762 x 1981 x 40mm (2'6" x 6'6") 686 x 1981 x 40mm (2'3" x 6'6") 610 x 1981 x 40mm (2'0" x 6'6") 533 x 1981 x 40mm (1'9" x 6'6") 457 x 1981 x 40mm (1'6" x 6'6")

Code

Fireshield FD30 F

Door Size

926 x 2040 x 44mm Standard Metric 826 x 2040 x 44mm Standard Metric 726 x 2040 x 44mm Standard Metric 626 x 2040 x 44mm Standard Metric 526 x 2040 x 44mm Standard Metric 426 x 2040 x 44mm Standard Metric 914 x 1981 x 44mm (3'0" x 6'6") 864 x 1981 x 44mm (2'10" x 6'6") 838 x 1981 x 44mm (2'9" x 6'6") 813 x 2032 x 44mm (2'8" x 6'8") 762 x 1981 x 44mm (2'6" x 6'6") 711 x 1981 x 44mm (2'4" x 6'6") 686 x 1981 x 44mm (2'3" x 6'6") 610 x 1981 x 44mm (2'0" x 6'6") 533 x 1981 x 44mm (1'9" x 6'6") 457 x 1981 x 44mm (1'6" x 6'6")

22129

Firemaster FD60

Door Size

926 x 2040 x 54mm Standard Metric 826 x 2040 x 54mm Standard Metric 726 x 2040 x 54mm Standard Metric 626 x 2040 x 54mm Standard Metric 838 x 1981 x 54mm (2'9" x 6'6") 813 x 2032 x 54mm (2'8" x 6'8") 762 x 1981 x 54mm (2'6" x 6'6") 686 x 1981 x 54mm (2'3" x 6'6")

Code

22119

In Stock

See P13



See P112



See P114



Stocking Policy

External

Flush F2X*

21248

21214

21239 21211

22463

22460 22461 22462

-

External Flush F2X







Standard Core

Door Size
826 x 2040 x 44mm Standard Metric
726 x 2040 x 44mm Standard Metric
807 x 2000 x 44mm Standard Metric
838 x 1981 x 44mm (2'9" x 6'6")
813 x 2032 x 44mm (2'8" x 6'8")
762 x 1981 x 44mm (2'6" x 6'6")
686 x 1981 x 44mm (2'3" x 6'6")
610 x 1981 x 44mm (2'0" x 6'6")

Flush F1X Code 21138 21137 21148 21114 21139 21111 21116 21117

External

External Flush F4X*
Code
-
-
21448
21414
21439
21411
-
-

FD30 Fireshield

Door Size
926 x 2040 x 44mm Standard Metric
826 x 2040 x 44mm Standard Metric
726 x 2040 x 44mm Standard Metric
807 x 2000 x 44mm Standard Metric
914 x 1981 x 44mm (3'0" x 6'6")
864 x 1981 x 44mm (2'10" x 6'6")
838 x 1981 x 44mm (2'9" x 6'6")
813 x 2032 x 44mm (2'8" x 6'8")
762 x 1981 x 44mm (2'6" x 6'6")
686 x 1981 x 44mm (2'3" x 6'6")

Code
22329
22338
22337
22348
22355
22377
22314
22339
22311
22316

Code
-
-
-
22471
-
-
22468
22469
22470
-

Aperture dimensions to suit door size

Door Size		
F2X		
807 x 2000mm Standard Metric	553mm	502mm
838 x 1981mm (2'9" x 6'6")	584mm	483mm
813 x 2032mm (2'8" x 6'8")	559mm	533mm
762 x 1981mm (2'6" x 6'6")	508mm	483mm

Door Size		
F4X		
807 x 2000mm Standard Metric	553mm	806mm
838 x 1981mm (2'9" x 6'6")	584mm	787mm
813 x 2032mm (2'8" x 6'8")	559mm	838mm
762 x 1981mm (2'6" x 6'6")	508mm	787mm

* F2X and F4X Standard Core doors are supplied un-glazed.



See P13



See P112



See P114





Glazed Fire Doors

A fire door can often be the last barrier between you and a blaze that could end up saving your life.

To ensure you are protected Masonite in the UK manufacture a varied selection of styles of interior FD30 and FD60 solid and glazed fire doors to suit all tastes, whatever your interior design style.

For clear advice on fire doors, and a freeto-download 'Best Practice Guide' to selecting, installing, using and maintaining fire doors, please visit **firedoors.bwf.org.uk**

Flush Glazed Options

Flush glazed fire doors in 3 easy steps.

1. Choose your door and size

Where applicable select door, size and design from our Portfolio, Standard Veneer and Paint Grade ranges.

2. Choose your glazing design

Select a glazing option from the designs shown to the right.

3. Choose your glass type

From the table, select the glass type required.

Style Code	Aperture Dimensions	Top Margin	Side Margin	35mm NFR Clear Glazed (non-fire rated)	FD30 Clear Wired Glazed	FD30 Clear Glazed	FD30 Obscure Glazed
				Available On Portfolio Solid Core Only	Available	Available	Available
1G	450 x 450mm	127mm	‡	✓	✓	✓	✓
3G	150 x 700mm	127mm	127mm	✓	✓	✓	✓
7G	150 x 914mm	127mm	127mm	✓	✓	✓	✓
8G§	508 x 914mm	127mm	‡	✓	✓	✓	✓
10G	245 x 245mm x 5no	127mm	‡	✓	✓	✓	✓
16G	150 x 775mm top / 700mm bottom	127mm	127mm	✓	✓	✓	✓
18G	150 x 1150mm	406mm	127mm	✓	✓	✓	✓
19G	400 x 1654mm ¹	127mm	‡	✓	✓	✓	-
19G	508 x 1654mm ²	127mm	‡	✓	✓	✓	-
20G	150 x 1440mm	127mm	127mm	✓	✓	✓	✓
21G	150 x 775mm top / 150 x 450mm bottom	127mm	127mm	✓	✓	✓	✓
22G	245 x 245mm x 4no	#	‡	✓	✓	✓	✓
23G	200 x 400mm x 3no	#	‡	✓	✓	✓	✓
24G	400 x 200mm x 3no	#	‡	✓	✓	✓	✓
25G	150 x 1440mm	#	127mm	✓	✓	✓	✓
26G	245 x 245mm x 4no	#	127mm	✓	✓	✓	✓
27G	200 x 300mm x 4no	#	127mm	✓	✓	✓	✓
28G	200 x 400mm x 3no	#	127mm	✓	✓	✓	✓
29G	150 x 1440mm	#	‡	✓	✓	✓	✓
30G	150 x 1150mm (Central)	406mm	Equal	✓	✓	✓	✓
50R¥	500 x 300 x 4no	#	127mm	✓	-	-	-


Appropriate styles adhere to Part B and Part M of the Building Regulations, making them ideal for communal areas where mobility could be an issue.

For pricing please contact your local distributor or the sales office on:

0844 209 0008

- * Glazing is an additional cost to the door slab.
- ¥ 50R design recommended for domestic use only
- ‡ Side margin variable according to door width
- # Top margin variable depending on the height of the door
- § Not available in doors less than 762mm wide
- ¹ 610-686mm widths
- ² 726-926mm widths
- 50 Fireshield FD30 fire rated
- 60 Firemaster FD60 fire rated
- Part M Mobility

Please note 35mm NFR clear glazed doors are non-fire rated.

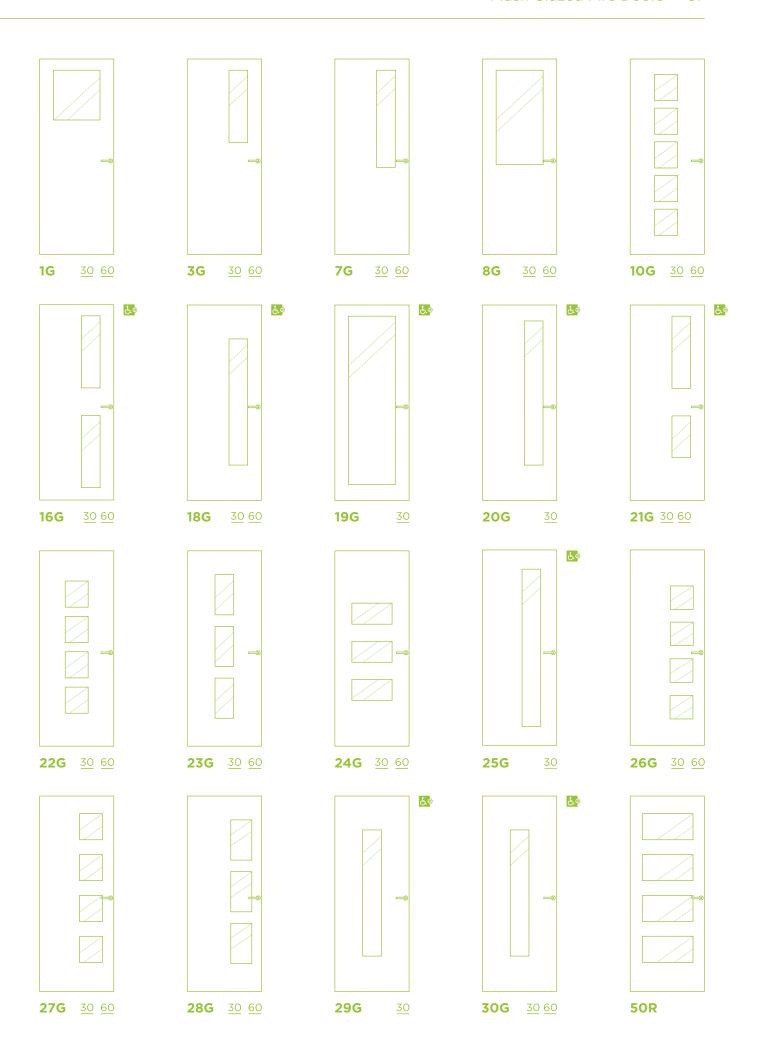

Popular styles and sizes coded for ease of ordering.














See P112

See P114

See P115

Further designs are available, please refer to page 57 to view the full range.

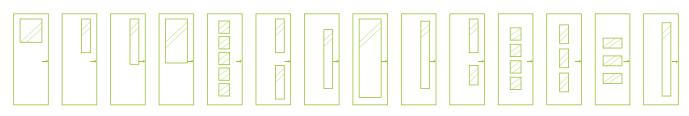





FD30 Fireshield Wired Glazed 16G &

	Door Size	Code
	926 x 2040 x 44mm Standard Metric	27003
	826 x 2040 x 44mm Standard Metric	27004
	838 x 1981 x 44mm (2'9" x 6'6")	27002
	762 x 1981 x 44mm (2'6" x 6'6")	27001
III		

762 x 1981 x 44mm (2'6" x 6'6")

926 x 2040 x 44mm Standard Metric 25303 826 x 2040 x 44mm Standard Metric 25304 838 x 1981 x 44mm (2'9" x 6'6") 25302 25301

FD30 Fireshield Wired Glazed 16G &

FD30 Fireshield Clear Glazed 16G 😓

Door Size	Code
926 x 2040 x 44mm Standard Metric	26993
826 x 2040 x 44mm Standard Metric	26992
838 x 1981 x 44mm (2'9" x 6'6")	26991
762 x 1981 x 44mm (2'6" x 6'6")	26990



П	Door Size	Code
	926 x 2040 x 44mm Standard Metric	25293
╚	826 x 2040 x 44mm Standard Metric	25292
П	838 x 1981 x 44mm (2'9" x 6'6")	25291
	762 x 1981 x 44mm (2'6" x 6'6")	25290
Ш		

FD30 Fireshield Wired Glazed 18G 😓

Door Size	Code
926 x 2040 x 44mm Standard Metric	27007
826 x 2040 x 44mm Standard Metric	27008
838 x 1981 x 44mm (2'9" x 6'6")	27006
762 x 1981 x 44mm (2'6" x 6'6")	27005

FD30 Fireshield Wired Glazed 18G 😓

Door Size	Code
926 x 2040 x 44mm Standard Metric	25307
826 x 2040 x 44mm Standard Metric	25308
838 x 1981 x 44mm (2'9" x 6'6")	25306
762 x 1981 x 44mm (2'6" x 6'6")	25305

FD30 Fireshield Clear Glazed 18G 😓

oor Size	Code	Door Size
26 x 2040 x 44mm Standard Metric	26997	926 x 2040 x 44mm Standard Metric
26 x 2040 x 44mm Standard Metric	26996	826 x 2040 x 44mm Standard Metric
338 x 1981 x 44mm (2'9" x 6'6")	26995	838 x 1981 x 44mm (2'9" x 6'6")
762 x 1981 x 44mm (2'6" x 6'6")	26994	762 x 1981 x 44mm (2'6" x 6'6")

Popular Paint Grade FD30 Glazed Lipped

Popular styles and sizes coded for ease of ordering.

FD30 Fireshield Clear Glazed 1G

Door Size
926 x 2040 x 44mm Standard Metric
826 x 2040 x 44mm Standard Metric
838 x 1981 x 44mm (2'9" x 6'6")
762 x 1981 x 44mm (2'6" x 6'6")

Code
69703
69702
69701
69700

FD30 Fireshield Wired Glazed 1G

Door Size	Code
926 x 2040 x 44mm Standard Metric	22262
826 x 2040 x 44mm Standard Metric	22261
838 x 1981 x 44mm (2'9" x 6'6")	22264
762 x 1981 x 44mm (2'6" x 6'6")	22263


FD30 Fireshield Clear Glazed 3G

Door Size	Code
926 x 2040 x 44mm Standard Metric	69707
826 x 2040 x 44mm Standard Metric	69706
838 x 1981 x 44mm (2'9" x 6'6")	69705
762 x 1981 x 44mm (2'6" x 6'6")	69704





762 x 1981 x 44mm (2'6" x 6'6")



Door Size	Code
926 x 2040 x 44mm Standard Metric	22286
826 x 2040 x 44mm Standard Metric	22287
838 x 1981 x 44mm (2'9" x 6'6")	22285
762 x 1981 x 44mm (2'6" x 6'6")	22284

FD30 Fireshield Wired Glazed 16G

ED 70		01	CI 1100	
FD30	Fireshield	Clear	Glazed 18G	G.O


Door Size	Code
926 x 2040 x 44mm Standard Metric	69715
826 x 2040 x 44mm Standard Metric	69714
838 x 1981 x 44mm (2'9" x 6'6")	69713
762 x 1981 x 44mm (2'6" x 6'6")	69712






Further designs are available, please refer to page 57 to view the full range.


69708

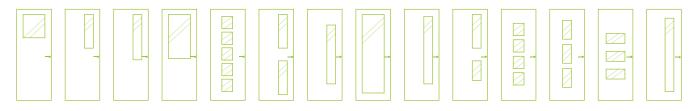

Moulded M4G



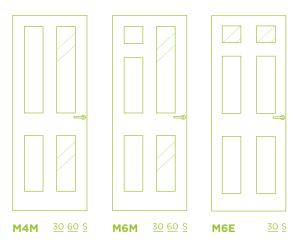

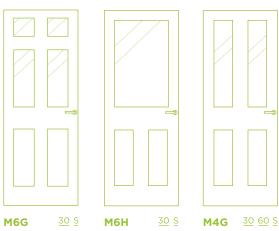

- All designs shown are available as FD30 fire doors and Safe 'N' Sound (non-fire rated) core constructions.
- FD60 fire doors available for M4M, M6M and M4G designs.
- Glazed FD30 fire doors are supplied with clear unwired fire rated glass fitted as standard. Wired option also available upon request.
- Obscure glass option available on Safe 'N' Sound doors only.
- Other glazing styles available upon request.
- Primed timber glazing cassette, and bead (foil wrapped MDF) as standard.
- White base coated textured or smooth moulded panel facings.
 - 30 Fireshield FD30 fire rated
 - 60 Firemaster FD60 fire rated
 - Safe 'N' Sound (non fire rated)



See P115







See P114

For pricing and availability, please contact our sales office: 0844 209 0008

Note: Fire door performance is only guaranteed if the overall fire doorset assembly is correctly installed and maintained throughout the product's lifecycle.





Door Slab and Components or a Complete Doorset Solution?

What's the difference?

Time to find out more.....

With Premdor's complete doorset solutions...





DOORSETS

The difference between choosing a door slab and components versus a complete doorset solution.

A door slab needs to be installed into a compatible frame, complete with its essential ironmongery, and other components such as intumescent protection to ensure performance in the event of a fire.

A complete doorset solution combines all the essential components from door frame, ironmongery and intumescent seals (for fire doorsets) into one complete, factory-assembled product, delivered directly from one manufacturer.

The Premdor complete doorset solution is tested as a complete system and to the required specification, taking the time and effort out of separately sourcing individual components.





Reducing installation issues and snagging costs, more cost effective.

Third-party certification

More layers of assurance.



Less time sourcing compatible and certificated components.

With Premdor's complete doorset solutions...



PREMDOR

DOORSETS

Complete doorset solutions that do more.

The Power of PREMDOR

Premdor draws on almost a century of global manufacturing expertise from across the Masonite Group. We specialise in fire and non-fire doorsets and our offer is designed to provide stakeholders with robust assurance that the heavy lifting is already done for you.

Our complete doorset solutions are:

✓ Proven:

We only produce fire doorset solutions that are third party certificated to offer layers of traceability and assurance to our stakeholders. We conduct our testing on product samples that are manufactured under independent third party witness controls.

- Transparent and comprehensive third party certification
- Enhanced assurance and traceability

✓ Fast:

Our complete doorset solutions simplify and speed up installations by combining all components meaning a competent person can install our SpeedSet Doorsets in under 30 minutes*.

- Install in under 30 minutes*
- Helps with project deadlines

✓ Flexible:

Our SpeedSet Interior Doorset adjustable linings and hinges allow easy modification to address variations in wall thickness and wall aperture variation you may encounter on site, ensuring a precise fit and efficient installation.

- Adaptable product features
- Simplify complicated installations

✓ Easy:

Remove guesswork from your installations with doorset solutions that combine components into one complete system.

- Repeatable complete installations
- Reducing issues and cost

✓ Safe and Secure:

Have more confidence in the knowledge that our SoundSecure Entrance Doorsets are supported by primary test evidence and independent third party certification schemes, as well as being Secured by Design accredited, offering an enhanced safety and security solution for residents.

- Third-party certification
- More confident decisions
- More peace of mind

^{*} in a controlled environment.

PREMDOI

SPEEDSET INTERIOR DOORSETS

The SpeedSet Interior Doorset is designed for fast installation, allowing each doorset to be installed in under 30 minutes by a competent person.*

The doorset lining is adjustable, allowing easy modification for variation within a given wall thickness to ensure a precise fit and efficient installation.

* in a controlled environment.



PREMDOR

COMMUNAL DOORSETS



The Solid Rebated Communal Doorset is a timber framed internal doorset associated with the internal communal areas of busy buildings.

The communal doorset is available as an FD30 or FD60 rating. Both fire doorsets come with intumescent and smoke seals pre-installed within the frame. A non-fire doorset option is also available.



PREMDOR

SOUNDSECURE ENTRANCE DOORSETS



The SoundSecure Entrance Doorset offers outstanding fire, security, smoke leakage and sound reduction properties, making it ideal for the complex performance demands of apartment entrances.

Supplied as either FD30 or FD60 rated fire doorsets, the SoundSecure is independently certified and tested within the Certifire and Certisecure third party certification schemes, as well as being Secured by Design accredited.



PREMDO

INTEGRAL GARAGE DOORSETS



Doors within integral garages are classed as an entry-point into a property so need to be as secure as any exterior door.

The Integral Garage Doorset provides a practical solution for entrances to the home from the garage providing performance for both fire safety and security.

As a PAS 24 tested and certified by Certisecure product, this doorset complies with security standards specified in Part Q, helping to reassure residents that their door can resist physical attack by a burglar.



SpeedSet Internal Doorsets

You're all set:

Fast installations: A competent person can install our SpeedSet doorsets in under 30 minutes.*

Repeatable complete installations, reducing installation and snagging costs, more cost effective.

Adaptable product features to tackle complicated installations.



Effective



Installation



Risk Reduction



Certifire Approved



Options to comply with Building Regulations Part E



10 Year Guarantee (Door & Frame)

^{*} in a controlled environment.

Product Information

The SpeedSet Interior Doorset is designed for fast installation, allowing each doorset to be installed in under 30 minutes.*

The doorset lining is adjustable, allowing easy modification to address variations in wall thickness you may encounter on site, ensuring a precise fit and efficient installation.

Door

- SpeedSet doorsets can be supplied in a variety of door styles, please refer to page 86 & 87 for further guidance.
- FD30 fire single door or double door configurations are available (pairs supplied unassembled for ease of transportation and handling).

2 Architrave

- White repaintable foil faced MDF architrave.
- Supplied pre-mitred.
- Supplied cut to length, minimal site decoration required.
- Various styles available.

Ironmongery

- Factory pre-serviced/fitted adjustable hinge, lock and latch options.
- Door handles need to be purchased separately via your preferred supplier.

4 Lining

- White re-coatable foil faced 25mm moisture resistant MDF linings.
- Lining widths, 77mm, 90mm, 95mm, 100mm, 115mm, 125mm, 133mm, 150mm to 300mm.
- Linings are adjustable by +/- 10mm with the exception of 77mm which is +10mm only and 300mm which is -10mm only.
- Minimal site decoration required.

6 Hinges

- Pre-hung on three adjustable hinges.
- Hinges allow adjustment to control gap between door and frame.
- Optional bearing butt hinge available on 44mm doors.

Open Stop

• 12mm factory fitted door stop as standard.

Fixing Pack

• Components and step by step fitting instructions.

3 Core Options

• Available with Premdor's Standard Core, Semi Solid, Safe 'N' Sound, Solid Core and FD30 fire doors.

SpeedSet Doorsets can be delivered in plot lots as required by your build programme. Individual doorsets are packaged and braced for safe transportation and storage and labelled to identify exact plot location.







^{*} in a controlled environment.

SpeedSet Interior Doorsets Ironmongery & Accessories

Hinges

Doors are factory pre-hung on three CE Marked adjustable chrome effect hinges (bearing Class 13 hinge option available in chrome effect and satin silver). After installation and if necessary, the door to stop gap can be adjusted.

Fixing Brackets & Screws

All fixing brackets and screws required are supplied with the SpeedSet doorset. Fixing brackets and fixing screws are hidden by the architrave.

Door Stop


12mm factory fitted door stops as standard.

Lining

Manufactured from 25mm moisture resistant medium density fibreboard (MDF). FD30 doorsets come complete with intumescent strips fitted to jambs and head as standard, smoke seals available upon request.

Handles

Please note, door handles are not supplied.



65mm Latch

CE Marked Chrome Effect



Bath Lock

CE Marked Chrome Effect



Roller Catch

Chrome Effect (Applied to door pairs only, not available on FD30 fire doors)



Adjustable Hinge

Chrome Effect (Standard)



Shootbolt (optional)

Chrome Effect (Applies to door pairs only)




Bearing Hinge

Chrome Effect or Satin Silver (Optional 44mm FD30 doors only)


Architrave Designs

Architraves are supplied unassembled, but cut to length, pre-mitred and machined for 'butterfly' joining clips to connect the components together. Final installation on site is completed by gluing the architrave into the pre- machined architrave groove in the door lining using a standard construction adhesive.

White re-coatable foil faced finish frame and architrave requires minimum on site decoration, making it significantly easier to paint than a traditional timber lining.

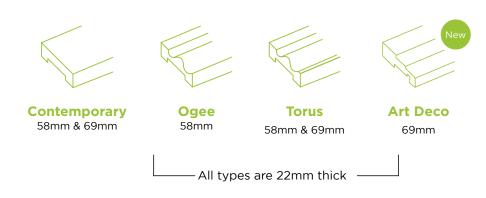

SpeedSet Interior Doorsets Technical Specification

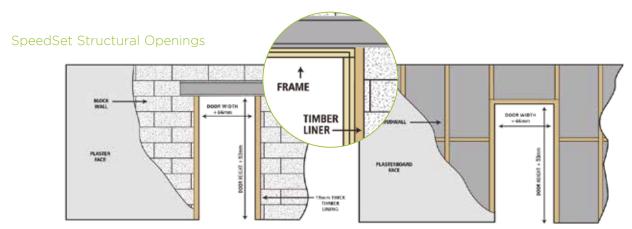

Stud wall drawing for illustration purposes only.

914 x 1981mm	(3' 0" x 6' 6")	980 x 2029mm
864 x 1981mm	(2'10" x 6' 6")	930 x 2029mm
838 x 1981mm	(2' 9" x 6' 6")	904 x 2029mm
762 x 1981mm	(2' 6" x 6' 6")	828 x 2029mm
711 x 1981mm	(2' 4" x 6' 6")	777 x 2029mm
686 x 1981mm	(2' 3" x 6' 6")	752 x 2029mm
610 x 1981mm	(2' 0" x 6' 6")	676 x 2029mm
533 x 1981mm	(1' 9" x 6' 6")	599 x 2029mm
457 x 1981mm	(1' 6" x 6' 6")	523 x 2029mm

Standard door size		Brickwork opening size
926 x 2040mm	Standard Metric	992 x 2088mm
826 x 2040mm	Standard Metric	892 x 2088mm
726 x 2040mm	Standard Metric	792 x 2088mm
626 x 2040mm	Standard Metric	692 x 2088mm
526 x 2040mm	Standard Metric	592 x 2088mm

Restrictions may apply on some door sizes. Bespoke sizes and pairs available upon request.


Door pair size square meeting stiles (SMS)	Brickwork opening size
1220 x 1981mm	1289 x 2029mm
1524 x 1981mm	1593 x 2029mm
1676 x 1981mm	1745 x 2029mm
1252 x 2040mm	1321 x 2088mm
1452 x 2040mm	1521 x 2088mm
1652 x 2040mm	1721 x 2088mm

Linings are available in a range of sizes and are adjustable up to +/- 10mm to suit wall thickness variation.


Please refer to the installation instructions for further guidance on adjustments.

Pairs supplied unassembled to ease handling.


Lining Dimensions

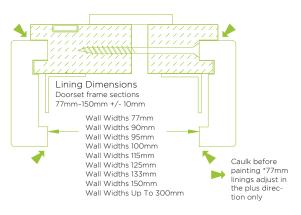


Operational Drawing

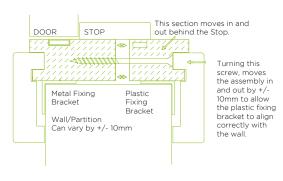

Door Handing



Viewed from Pull Side



Communal Doorsets

You're all set:



Timber framed internal doorset for use in communal areas.

Commercial and residential projects where doors are in frequent use.

The FD30 and FD60 solutions both come with intumescent and cold smoke seals pre-installed within the frame.



FD60

FD30 & FD60 Options



Equal and Un-equal Pair Options



Certifire Approved



Glazed Options Available



10 Year Guarantee (Door & Frame)

Product Information

The solid rebated Communal Doorset is a timber framed internal doorset associated with the internal communal areas of busy buildings.

Available in FD30 and FD60. Both fire doorsets come with intumescent and cold smoke seals pre-installed within the frame. A non fire doorset option is also available.

Door

- FD30 (44mm thick) and FD60 (54mm thick) doors.
- Non-fire option available.
- Doorsets are fully Certifire certificated once installed in line with certification.
- A wide range of doors and sizes including glazed options available.
- Equal and un-equal pairs available.

Door Frame

- FD30 doorsets are supplied with engineered softwood frames.
- FD60 doorsets are supplied with hardwood frames.
- Variations on frame finishes are available including raw timber, base stain and primed finish - please contact our team to discuss your required specifications.

Intrumescent and Seals

 Intumescent and cold smoke seals pre-installed within the frame.

Hinges and Locks

- Single doorsets are pre-hung and pre-fitted with bearing butt hinges.
- Numerous lock types available including FB2 or Euro-sash lock.

Architraves

• Architraves are not supplied.

Door Closer

 Assa Abloy DC200A V-arm and DC500A slide arm surface mounted door closers are available on request.



Communal Doorsets Ironmongery & Accessories

Locks

Lock types available for specification include 5 lever sash lock or dead lock, Euro sash lock or dead lock, FB2 lock, plus other latches such as a tubular latch or bath lock.

Hinge Type

3x Grade 13, CE marked Stainless Steel butt hinges (chrome effect or satin silver) with intumescent protection.

Intumescent / Smoke / Acoustic Seal

FD30 Doorsets include a 15mm x 4mm intumescent strip. FD60 Doorsets include 2 x 15mm x 4mm intumescent strips. Cold smoke and acoustic seal can be specified as required.

Dropseal & Under Door Threshold

Doorsets can be specified with a dropseal. The variable height dropseal has a mechanism which lifts the seal clear of the floor as soon as the door is opened by a few millimetres. The seal is self-levelling and when fitted with the under door threshold will accommodate an under door gap of up to 12mm. An extruded aluminium threshold will be supplied where a dropseal is requested. An optional hardwood threshold is available on request. The aluminium threshold must be fitted for compliance.

Door Closers

Doorsets may be specified with a door closer. Options include V-arm or Slide Arm in silver or stainless steel. Assa Abloy DC500A Cam-action Slide Arm Door Closer and DC200A Rack and Pinion V-Arm Door Closer available on request. Suitable for both FD30 & FD60 fire doorsets, these surface mounted door closers are certified by Certifire, bear the CE mark and are available in silver or stainless steel finish. Door closers will be supplied loose for fitting on site.

Handles, Pull Handles, Push Plates, Kick Plates

Please note, door handles, pull handles, push plates or kick plates are not provided.

Shootbolt

A shootbolt (to head of door) can be specified with door pairs.



Bath Lock

CE Marked Chrome Effect



Bearing Hinge

Chrome Effect or Satin Silver (Optional 44mm FD30 doors only)



Dropseal



Under Door Threshold



V-Arm Door Closer



Side Arm Door Closer



Shootbolt (optional)

Chrome Effect (Applies to door pairs only)


Communal Doorsets Technical Specification


Door Widths


Building Regulations Part M demand specific dimensions for doors and corridors, which have been calculated to assist the mobility of wheelchairs and prams into, and within, the dwelling. Details of our clear opening widths are shown in the table below.

Frame

FD30 doorsets supplied with a softwood frame. FD60 doorsets are supplied with a hardwood frame. Single door and door pairs available.







Door Width	Clear Opening FD30		Overall Frame Width			Clear Opening		Brickwork Opening
			FD30	FD30	FD60		FD60	FD60
914mm x 1981mm	44mm	884mm	998mm	1008mm	54mm	872mm	986mm	996mm
864mm x 1981mm	44mm	834mm	948mm	958mm	54mm	822mm	936mm	946mm
838mm x 1981mm	44mm	808mm	922mm	932mm	54mm	796mm	910mm	920mm
813mm x 2032mm	44mm	783mm	897mm	907mm	54mm	771mm	885mm	895mm
762mm x 1981mm	44mm	732mm	846mm	856mm	54mm	720mm	834mm	844mm
711mm x 1981mm	44mm	681mm	795mm	805mm	54mm	669mm	783mm	793mm
686mm x 1981mm	44mm	656mm	770mm	780mm	54mm	644mm	758mm	768mm
610mm x 1981mm	44mm	580mm	694mm	704mm	54mm	568mm	682mm	692mm
533mm x 1981mm	44mm	503mm	617mm	627mm	54mm	491mm	605mm	615mm
457mm x 1981mm	44mm	427mm	541mm	551mm	54mm	415mm	529mm	539mm
926mm x 2040mm	44mm	896mm	1010mm	1020mm	54mm	884mm	998mm	1008mm
826mm x 2040mm	44mm	796mm	910mm	920mm	54mm	784mm	898mm	908mm
726mm x 2040mm	44mm	696mm	810mm	820mm	54mm	684mm	798mm	808mm
626mm x 2040mm	44mm	596mm	710mm	720mm	54mm	584mm	698mm	708mm
526mm x 2040mm	44mm	496mm	610mm	620mm	54mm	484mm	598mm	608mm
426mm x 2040mm	44mm	396mm	510mm	520mm	54mm	384mm	498mm	508mm

(Effective clear opening, assuming door can open past 90 Degrees. Based on a 18mm stop, 7mm hinge throw and a 3mm edge gap.)

SoundSecure Entrance Doorsets

You're all set:

FD30 or FD60 fire doors in a variety of designs.

Secured by Design accreditation, meaning more peace of mind.

Third-party certification, more layers of assurance.



Secured by Design Accredited



Opening Widths for Part M Requirements



10 Year Guarantee



Acoustic Seal Options Available for Part E Requirements



FD30 & FD60 Options



White primed frame as standard on FD30 options



Fast Track selected FD30 options available on a reduced lead-time

Product Information

The SoundSecure Entrance Doorset offers outstanding fire, security, smoke leakage and sound reduction properties, making it ideal for the complex performance demands of apartment entrances.

Supplied as either FD30 or FD60 rated fire doorsets, the SoundSecure is independently certified and tested within the Certifire and Certisecure third party certification schemes, as well as being Secured by Design accredited.

1 Door

- SoundSecure doorsets can be supplied in a variety of FD30 (44mm thick) and FD60 (54mm thick) fire door options.
- All doorsets are supplied with full Secured by Design approval.
- Door widths available: 838mm, 864mm, 914mm and 926mm.
- Special sizes available upon request.

2 Door Closer

• SoundSecure doorsets are supplied with a door closer that is tested and CE marked to EN 1154. Door closer options include Assa Abloy DC200A V-arm or DC500A slide arm, in silver or stainless steel finish. The V-arm option in silver is offered as the default option. Other upgradeable variants available if required.

3 Door Frames

- FD30 doorsets are supplied with engineered softwood frames.
- FD60 doorsets are supplied with hardwood frames.
- Variations on finish are available including raw timber, base stain and primed finish please contact our team to discuss your required specifications.

4 Lock, Handle and Cylinder System

- Secured by Design three point multipoint locking system complete with lever handles.
- · Lock and handles can be used in both solid or split spindle modes.
- · Locks are fitted with an escape (thumb turn) cylinder.
- 3* High Security cylinder with ergonomic thumbturn and secure cam design. Designed with multiple security features including anti-pick, anti-drill, anti-bump and a sacrificial snap section.

5 Intumescent, Smoke and Acoustic Seals

 Acoustic/cold smoke/draught seal and intumescent seals incorporated at the frame head and jambs.

6 Hinges

• Doors are hung on three compatible grade 13 stainless steel security hinges.

Threshold Dropseal

• Self levelling drop seal is fitted at the bottom of the door as standard.

8 Door Viewer

- Chrome security door viewer supplied as standard.
- Other upgradeable variants available if required.
- Standard door viewer included, with optional positioning available for mobility requirements.

Threshold


 Aluminium threshold plate supplied as standard and must be fitted for compliance. Optional hardwood threshold available on request.

Security Chain

• Chrome security door chain included, TS003 compliant.

• Fire Rated Letter Plate and Cowl

• Optional TS008 compliant plate and security cowl.

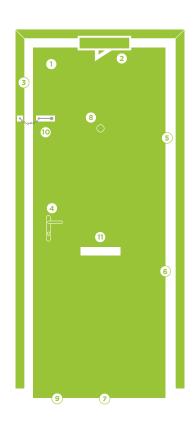

SoundSecure Entrance Doorsets Ironmongery & Accessories

Locks & Cylinders

All doorsets are supplied with Secured by Design accreditation and feature a 3 point multipoint lock with an anti bump EuroProfile lock cylinder incorporating an internal thumb turn.

Hinge Type

3x Grade 13, CE marked Stainless Steel butt hinges with intumescent protection.

Letterplate

Optional TS008 compliant brushed or polished stainless steel letter plate and security cowl.

Handles

Lever handles are available in chrome (or optional silver) and can be fitted for use in either solid or split spindle modes.

Door Viewer

A chrome (or optional silver) security door viewer is supplied as standard. Low and high height locations available for accessibility requirements.

Door Chair

A chrome (or optional silver) security door chain is included to complement the system, compliant to TS003.

Threshold Dropseal

A variable height dropseal concealed within the base of the door leaf includes a new, higher efficiency mechanism which lifts the seal clear of the floor as soon as the door is opened by a few millimetres. The seal is self-levelling when fitted with the under door aluminium threshold.

Under Door Threshold

An extruded aluminium threshold is supplied as standard and must be fitted for compliance. An optional hardwood threshold is available on request.



Chrome Handles and Thumb Turn-Key Cylinder

(Silver option available)



Chrome Security Door Viewer

(Silver option available)



Threshold Dropseal



Chrome Security Chain
(Silver option available)



Fire Rated Letter Plate and Cowl

(Brushed or polished stainless steel available)



Under Door Threshold



Cylinder

Secured by Design

SoundSecure door and frame assembly meets the Secured by Design scheme requirements and is independently tested and certificated by the Certifire / Certisecure schemes, covering fire, security and smoke leakage. Premdor hold an SBD licence for this product. Where a Secured by Design specification is not required, please ask for a quotation for our cost effective non-Secured by Design option.

SoundSecure Entrance Doorsets Technical Specification

Cold Smoke / Acoustic Seal

Cold Smoke and acoutsic seal fitted into timber frames.

Door Widths

Building Regulations Part M demand specific dimensions for doors and corridors, which have been calculated to assist the mobility of wheelchairs and prams into, and within, the dwelling. Details of our clear opening widths are shown in the table below.

Intumescent Seal

FD30 10mm x 4mm strip and 15mm x 4mm strip. FD60 2 x 15mm x 4mm strips.

Door Closers

Assa Abloy DC500A Cam-action Slide Arm Door Closer

Suitable for FD30 fire doorsets. Designed with variable closing force EN 1-4 and conforming to EN 1154, this slide arm surface mounted door closer is certified by Certifire under CF5096 and bears the CE mark. Available in silver or stainless steel finish.

Door closers will be supplied loose for fitting on site.

Assa Abloy DC200A Rack and Pinion V-Arm Door Closer

Suitable for both FD30 & FD60 fire doorsets. Designed with variable closing force EN 2-4 and conforming to EN 1154, this V-arm surface mounted door closer is certified by Certifire under CF5098 and bears the CE mark. Available in silver or stainless steel finish.

Door closers will be supplied loose for fitting on site.



Side Arm Door Closer



V-Arm Door Closer

Clear opening dimensions for doors are determined by a number of components, the table below summarises this information by door size:

Door Width	Clear Opening FD30		Overall Frame Size	Brickwork Opening	Clear Opening		Overall Frame Size	Brickwork Opening
Boot Width	FD30		FD30	FD30	FD60		FD60	FD60
914mm x 1981mm	44mm	851mm	998mm x 2036mm	1008mm x 2046mm	54mm	838mm	986mm x 2030mm	996mm x 2040mm
864mm x 1981mm	44mm	801mm	948mm x 2036mm	958mm x 2046mm	54mm	788mm	936mm x 2030mm	946mm x 2040mm
838mm x 1981mm	44mm	775mm	922mm x 2036mm	932mm x 2046mm	54mm	762mm	910mm x 2030mm	920mm x 2040mm
926mm x 2040mm	44mm	863mm	1010mm x 2095mm	1020mm x 2105mm	54mm	850mm	998mm x 2089mm	1008mm x 2099mm


Fast Track SoundSecure FD30 Entrance Doorsets





NEW FD30 Fast Track service now available

on selected styles and sizes, ready for delivery within 15 days!

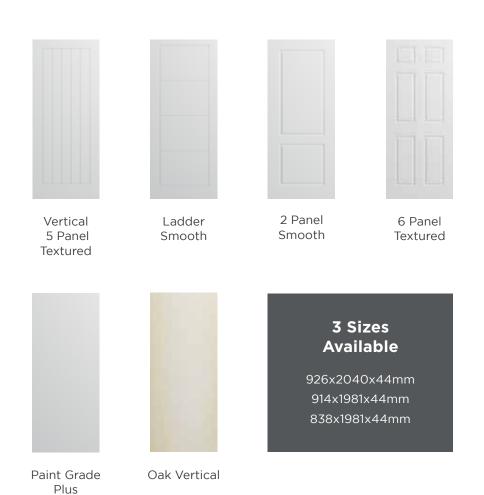

4 Line

Horizontal

Smooth

For a competitive quote contact your local Area Sales Manager or our Estimating Team at **estimating@masonite.com**

Integral Garage Doorsets

You're all set:

A practical solution for entrances to the home from the garage.

PAS 24 tested and certified by Certisecure, complying with security standards specified in Part Q.

Provides performance for both fire safety and security.



Secured by Design Accredited



10 Year Guarantee



FD30 **Options**



Opening Widths for Part M Requirements



Acoustic **Seal Options** Available for Part E Requirements



White primed frame as standard

Product Information

Integral Garage Doorsets provide a practical solution for entrances to the home from the garage, providing performance in fire safety and security.

As a PAS 24 tested product certified by Certisecure, this doorset complies with security standards specified in Part Q, demonstrating resistance physical attack by a burglar.

Door

- Integral Garage doorsets can be supplied in a variety of FD30 (44mm) fire door options.
- All doorsets are supplied with full Secured by Design approval.
- Door widths available: 838mm, 864mm, 914mm and 926mm.
- · Special sizes available upon request.

2 Door Closer

- Door closer options include Assa Abloy DC200A V-arm or DC500A slide arm, in silver or stainless steel finish.
- The V-arm option in silver is offered as the default option with other variants available for specification.
- Door closers are tested and CE marked to EN 1154.

3 Door Frame

- FD30 doorsets are supplied with engineered softwood frames.
- FD60 doorsets are supplied with hardwood frames.
- Variations on finish are available including raw timber, base stain and primed finish - please contact our team to discuss your required specifications.

4 Lock, Handle and Cylinder System

- Secured by Design three point multipoint locking system complete with lever handles.
- Lock and handles can be used in both solid or split spindle modes.
- Locks are fitted with an escape (thumb turn) cylinder.
- 3* High Security cylinder with ergonomic thumbturn and patented secure cam design. Designed with multiple security features including anti-pick, anti-drill, anti-bump and a sacrificial snap section.

5 Intumescent, Smoke and Acoustic Seals

• Acoustic/cold smoke/draught seal and intumescent seals incorporated at the frame head and jambs.

6 Hinges

• Doors are hung on three compatible grade 13 stainless steel security hinges.


Threshold Dropseal

• Self levelling drop seal is fitted at the bottom of the door as standard.

8 Threshold

• Aluminium threshold plate supplied as standard and must be fitted for compliance. Optional hardwood threshold available on request.



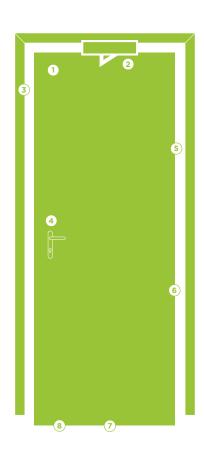

Integral Garage Doorsets Ironmongery & Accessories

Locks & Cylinder

All doorsets are supplied with a 3 point multipoint lock with an anti bump EuroProfile lock cylinder incorporating an internal thumb turn.

Cylinder

Hinge Type

3x Grade 13, CE marked Stainless Steel butt hinges with intumescent protection.

Handles

Lever handles are available in chrome (or optional silver) and can be fitted for use in either solid or split spindle modes.

Threshold Dropseal

A variable height dropseal concealed within the base of the door leaf includes a new, higher efficiency mechanism which lifts the seal clear of the floor as soon as the door is opened by a few millimetres. The seal is self-levelling when fitted with the under door aluminium threshold.



Chrome Handles and Thumb Turn-Key Cylinder

(Silver option available)

Threshold Dropseal

Under Door Threshold

An extruded aluminium threshold is supplied as standard and must be fitted for compliance. An optional hardwood threshold is available on request.

Intumescent Seal

FD30 10mm x 4mm strip and 15mm x 4mm strip.

Cold Smoke / Acoustic Seal

Cold Smoke and acoustic seal fitted into timber frames.



Under Door Threshold

Integral Garage Doorsets Technical Specification

Door Closers

Assa Abloy DC500A Cam-action Slide Arm Door Closer

Suitable for FD30 fire doorsets. Designed with variable closing force EN 1-4 and conforming to EN 1154, this slide arm surface mounted door closer is certified by Certifire under CF5096 and bears the CE mark.

Available in silver or stainless steel finish.

Door closers will be supplied loose for fitting on site.

Assa Abloy DC200A Rack and Pinion V-Arm Door Closer

Suitable for FD30 fire doorsets.

Designed with variable closing force EN 2-4 and conforming to EN 1154, this V-arm surface mounted door closer is certified by Certifire under CF5098 and bears the CE mark.

Available in silver or stainless steel finish.

Door closers will be supplied loose for fitting on site.



Side Arm Door Closer



V-Arm Door Closer

Door Widths

Building Regulations Part M demand specific dimensions for doors and corridors, which have been calculated to assist the mobility of wheelchairs and prams into, and within, the dwelling. Details of our clear opening widths are shown in the table below.

Clear opening dimensions for doors are determined by a number of components, the table below summarises this information by door size:

Door Width	Clear Opening FD30		Overall Frame Size	Brickwork Opening	
Bool Width	FD30		FD30	FD30	
914mm x 1981mm	44mm	851mm	998mm x 2036mm	1008mm x 2046mm	
864mm x 1981mm	44mm	801mm	948mm x 2036mm	958mm x 2046mm	
838mm x 1981mm	44mm	775mm	922mm x 2036mm	932mm x 2046mm	
926mm x 2040mm	44mm	863mm	1010mm x 2095mm	1020mm x 2105mm	


(Based on a 18mm stop, 7mm hinge throw and a 3mm edge gap.)

Moulded Door Designs

More design options available, please speak to your account manager.






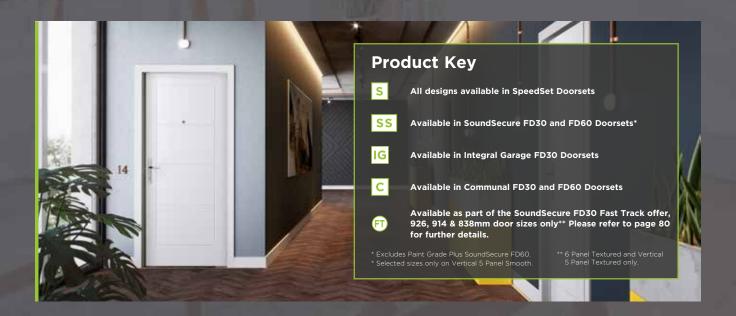

Flush Door Designs

More design options available, please speak to your account manager.

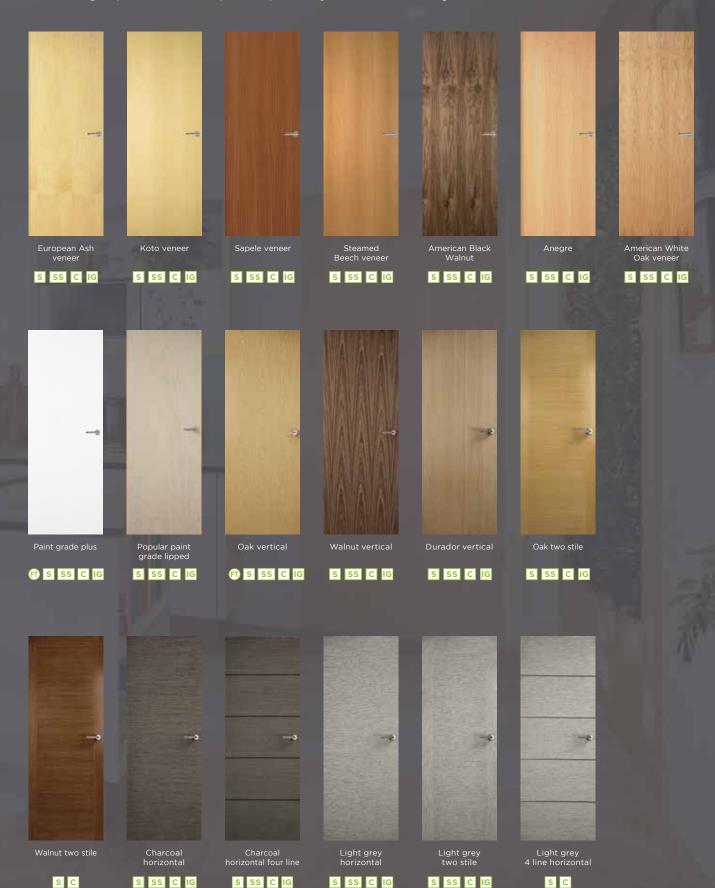





Dual Certified Fire & Security Timber Composite Entrance Doorsets with GRP Facings

Our Door-Stop fire doorsets are designed with safety in mind

Developed with safety in mind

Our Door-Stop dual certified fire doorsets are passed for both fire and security performance.

With a strict "critical to safety" framework detailing the various quality checks throughout the production of every fire doorset we manufacture, you have added peace of mind that your new fire door systems are fit for purpose.

With ten styles in a choice of eleven painted colours we can offer design flexibility and doorset personalisation.



Please visit our website for further details

www.masonite.co.uk/firedoorsets






External Doorsets

Transform your front door into a stylish and stunning entrance to your home.

Unique colours, the latest high security hardware and beautiful features are just some of the reasons why choosing one of our external doorsets will give your property instant kerb appeal and you peace of mind.

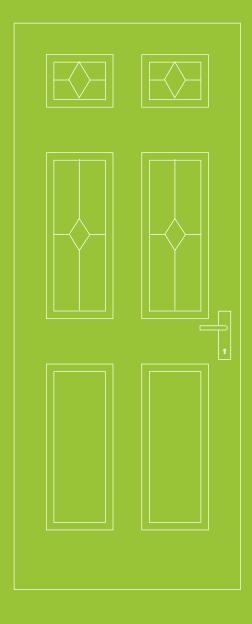





Make an Entrance

No other brand has a more respected, trusted and widely installed range of quality external doorsets than Masonite.

An innovative range of product specifications, designs and price options. Our exterior Composite door collection will give your home the look it deserves.



Door-Stop International®

900 billion combinations of GRP composite doorsets configured in one minute through a 5 step online ordering system.



Solidor[®]

Stunning designs, unparalleled security and a unique 48mm solid timber core. No other composite door comes close to competing with Solidor in terms of sophistication and performance.







The Trade's Favourite Composite Door

We don't believe in compromising on quality. We've brought together materials to give you the very best in strength, easy maintenance, security, and weather resistance. Looks great too!

At the heart of every Door-Stop door is style, strength and security. With an easy to use configurator tool to determine your door specification; including the option to colour both sides of your door, choosing Door-Stop is an easy choice, the colour of your door on the other hand, may not be.

All doors delivered, ready to install, with fast and reliable lead times.

GET IN TOUCH

www.door-stop.co.uk


01623 446336





TS008 Letterplate

Colour matched to the furniture suite. Internal cowl, white.

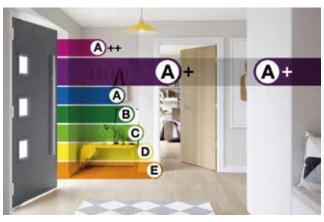

Security

At Door-Stop we're serious about providing the assurance you need for you and your customer. Our doors are part Q compliant, tested to BS 6375 Parts 1,2 and 3 and PAS 24 British standards.

Energy Rated

Tested for thermal efficiency, each Door-Stop door is given a U-Value rating that fits well within the current building regulations U-Value requirements.







Secured by Design

If anyone knows about security, it's the Police. Our Secured by Design option meets their national standard for safer homes. It's not only Police-approved – it's recognised by many insurance companies. So as well as enjoying an added sense of safety, you could get a discount on your home insurance cover, too.

Weather Tested

The average rainfall in the UK is between 700mm a year in East Anglia and 3,000mm a year in the Scottish Highlands." We've designed our doors for maximum resilience against the extremes of the British climate.

Tested in accordance with BSEN 1027 — AIR PERMEABILITY — Tested in accordance with BSEN 1026 Tested in accordance with BSEN 12211

*Meteorological Office Statistics



Part M compliant, colour-coded thresholds

We are fixated with offering the best possible looking door. Even though it is only 15mm high, and Part M compliant, the wheelchair threshold can still be seen from outside. That's why Door-Stop wheelchair thresholds will always match the external colour you chose for the door frame. This isn't something you need to select, you just get it as standard.




Contemporary Furniture

A front door speaks volumes about a property. Now you can make even nore of a statement with our range of contemporary furniture suites that can ransform your door into a real property feature.

Choose from the Long Bar handle suite, the ultra-modern Square suite, the slegant Bow Handle suite, or the timeless Classic suite.

These hardware choices are undeniably elegant, but also incredibly hard wearing. Crafted from stainless steel, they will endure the demands of the British weather and everyday use season after season.

CLASSIC MOULDED DOORS

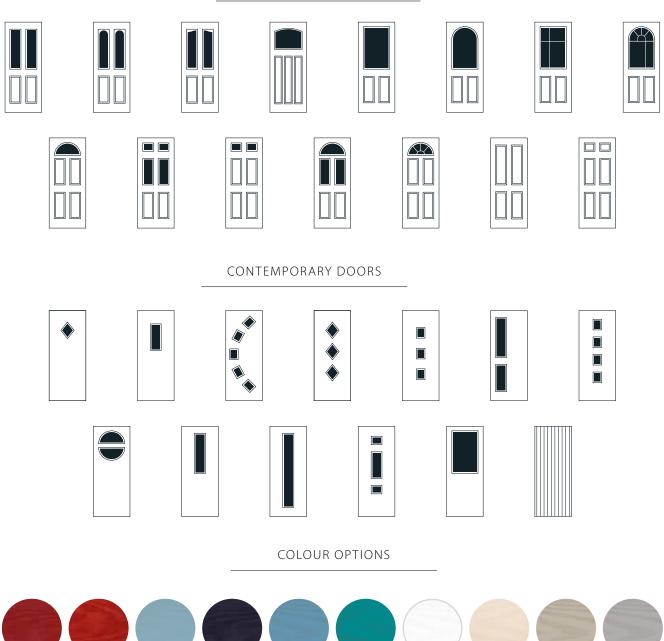



Visit www.door-stop.co.uk and try our easy 5-step door configurator to see all our options





The UK's best composite doors

Born in 2004, Solidor has firmly established itself as the nation's favourite manufacturer and supplier of composite doors.

Fitted and installed via a nationwide network of approved installers, the extensive Solidor range of composite doors are widely admired for their stunning design and unparalleled security. No other composite door comes close to competing with Solidor in terms of sophistication and performance.

Key features

A unique 48mm solid timber core

An industry leading range of colour options

A robust thermoplastic skin

Hidden edge banding


Chamfered or sculptured frame options

PAS24: 2016 Certified

Designer furniture

Stylish. Secure. Solidor.

www.solidor.co.uk 01782 847300

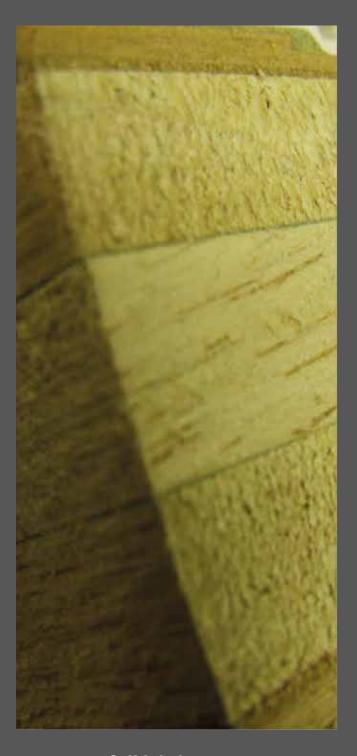



Solid timber core

All of our composite doors are based on our proven 48mm design that is 10% thicker than our nearest competitors and offers incredible around-the-clock protection. The added thickness of a Solidor is because it is manufactured from a solid timber core, which helps make it the most durable composite door on the market.

Secure as standard

Britain's most secure composite doors have just got even better thanks to Ultion. Fitted as standard in every Solidor, this revolutionary locking system will remain locked, when locked.

Supreme Security Accreditations

















Beautiful glazing

A fine selection of beautiful glass to perfectly complement each door style. Including the Modernist Range, inspired by classical artistic styles, such as art deco, minimalism, and the impressionist movement. The Modernist Range of glass is unique to Solidor.









A wide range of accessories

A range of beautiful accessories for our composite doors, including an array of elegantly styled and finished hinges, handles, letter plates and door knockers.



A colourful entrance

At Solidor we offer the market's largest range of colours which currently stands at 21. Homeowners now have the choice to be as unique as possible and opt for two different finishes for each side of their Solidor.

Whilst most of our competitors are limited with choice, we've developed a colour range worthy of any home.



Stable and French doors

Many of our Traditional and Italia collection door styles can be transformed into stable and French doors. You can even opt for different colours, inside and out!

Stylish. Secure. Solidor.



www.solidor.co.uk 01782 847300

Traditional

COLLECTION

The Traditional collection from Solidor, brings classic designs into the modern era. Each door design is suited to both traditional and modern properties alike, and will add a touch of elegance to every home.




THE Italia COLLECTION

The Italia collection from Solidor is a new generation of truly contemporary designs which will add a touch of style to your home. Carefully designed and crafted from the finest materials, every door in the Italia collection has a definite style inspired by the Italian passion for design.



Side panels

We offer matching side panels for our full range of doors in full height and half height options. There's also a complete range of matching glass designs from our extensive range, so your side panel will be in complete harmony with your front door.

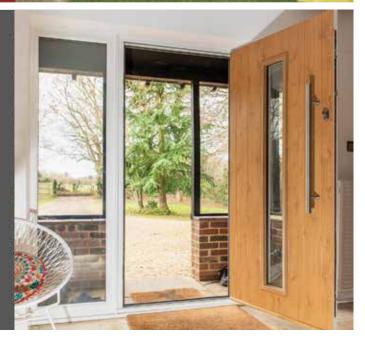

A colourful entrance

Standard colour options * Available as a door and/or frame option



Discover the Solidor Sales Generator



The Solidor Sales Generator allows your customers to design their own personal Solidor door, and send the enquiry directly to you.

- ✓ Fully mobile responsive for all devices
- User friendly and tested interface
- Easy to integrate into any website
- Fully branded to your company
- Sends your personalised emails to customers
- Lead generation
- Include full Solidor Range

Visit www.solidor.co.uk or call 01782 847300 to find out how Solidor can help you grow your composite door business

Stylish. Secure. Solidor.

www.solidor.co.uk 01782 847300





Exterior French and Folding

Design trends aren't just restricted to the inside of our homes. Show stopping French and folding doors can instantly create the impression of a much larger, more vibrant space.

Still one of the most popular concepts in interior design around 'inviting the outside in' French and Folding doors allow you to completely open up the back of your house to the garden. This can be great in the summer to expand your living area outdoors, but also create a seamless connection between your home and the green spaces beyond the whole year round.

This trend will continue to thrive, so whatever your style, enjoy making it vour own.

Oak French Doors

Oak Folding Doors

White French Doors

White Folding Doors

Oak French Doors

PART L COMPLIANT



Bring the Outside In

- The doors are 54mm thick, with both the doors and frames built using a modern engineered construction, with a hardwood core and 1.2mm oak surface.
- Sets are supplied 'ready to assemble', with most components pre-machined at our factory.
- The 54mm double glazed units incorporate special Low 'E' thermal glass, which is toughened to BS EN 12150 and BS EN 12600.
- Supplied unassembled for on site assembly, with full fitting instructions included.
- Our sets incorporate double weather and draught seals.
- Supplied with Zinc alloy concealed hinges with Polished Chrome handle.
- Doors are open out only; the main opening door is not reversible.

Door Size	Code
1190 x 2090mm (4ft approx)	FDPFO 04S
1490 x 2090mm (5ft approx)	FDPFO 05S
1790 x 2090mm (6ft approx)	FDPFO 06S

All doors are to the nearest metric equivalent size (allow an extra 10mm for brickwork opening sizes). Pre-glazed with 54mm Argon filled Low 'E' double glazed units. U Value 1.4 W/m2•K

Oak Folding Doors

PART L COMPLIANT



A Touch of Elegance

- Door sets are factory finished with 3 coats of high-build micro-porous finish applied and ready to install on-site.
- All sets incorporate a 3 point insurance rated PAS 23/24 tested lock on the main access door and lockable slide bolt on the inside.
- These pre-glazed oak veneered sets are unique in that they are reversible, allowing the choice of right or left hand opening.
- Supplied unassembled for on site assembly, with full fitting instructions included.
- The doors are 54mm thick, with both the doors and frames built using a modern engineered construction, with a hardwood core and 1.2mm oak surface.
- Oak folding doors are supplied with a fully finished oak cill with aluminium sub cill for drainage.

Door Size	Code
1790 x 2090mm (6ft approx)	54PFO 06S
2090 x 2090mm (7ft approx)	54PFO 07S
2390 x 2090mm (8ft approx)	54PFO 08S
2690 x 2090mm (9ft approx)	54PFO 09S
2990 x 2090mm (10ft approx)	54PFO 10S
3590 x 2090mm (12ft approx)	54PFO 12S
4190 x 2090mm (14ft approx)	54PFO 14S
4790 x 2090mm (16ft approx)	54PFO 16S

All doors are to the nearest metric equivalent size (allow an extra 10mm for brickwork opening sizes). Pre-glazed with 24mm argon filled Low 'E' double glazed units. U Value 1.4 W/m2•K

White French Doors

PART L COMPLIANT



A Modern Statement

- All of the timber components are manufactured using the latest technology to reduce warping or twisting.
- The doors are 54mm thick, with both the doors and frames built using a modern engineered construction, with a hardwood core and 1.2mm hardwood veneered surface.
- Sets are supplied 'ready to assemble', with most components pre-machined at our factory.
- The 54mm double glazed units incorporate special Low 'E' thermal glass, which is toughened to BS EN 12150 and BS EN 12600.
- Supplied unassembled for on site assembly, with full fitting instructions included.
- Our sets incorporate double weather and draught seals.
- Supplied with Zinc alloy concealed hinges with Polished Chrome handle.
- Doors are open out only; the main opening door is not reversible.

Door Size	Code
1190 x 2090mm (4ft approx)	FDPFW 04S
1490 x 2090mm (5ft approx)	FDPFW 05S
1790 x 2090mm (6ft approx)	FDPFW 06S

All doors are to the nearest metric equivalent size (allow an extra 10mm for brickwork opening sizes). Pre-glazed with 54mm Argon filled Low 'E' double glazed units. U Value 1.4 W/m2•K

White Folding Doors

PART L COMPLIANT



Fully Adjustable

- Our hardwood folding white doors are fully finished using a 3 coat Hi Build Microporus Wood Coating System, so they are ready to install on site without further finishing.
- Sets are fully reversible so can be hung to operate from right to left or left to right.
- The set includes a 3 point locking system plus internal keyed drop bolts for extra security. The 3 point security locks are PAS 23/24 tested.
- Supplied unassembled for on site assembly, with full fitting instructions included.
- The doors are 54mm thick, with both the doors and frames built using a modern engineered construction, with a hardwood core and 1.2mm hardwood veneered surface.
- Folding doors are supplied with a fully finished hardwood cill with aluminium sub cill for drainage.
- Supplied with polished chrome handles and stainless steel hardware.

Door Size	Code
1790 x 2090mm (6ft approx)	54PFW 06S
2090 x 2090mm (7ft approx)	54PFW 07S
2390 x 2090mm (8ft approx)	54PFW 08S
2690 x 2090mm (9ft approx)	54PFW 09S
2990 x 2090mm (10ft approx)	54PFW 10S
3590 x 2090mm (12ft approx)	54PFW 12S
4190 x 2090mm (14ft approx)	54PFW 14S
4790 x 2090mm (16ft approx)	54PFW 16S

All doors are to the nearest metric equivalent size (allow an extra 10mm for brickwork opening sizes). Pre-glazed with 24mm argon filled Low 'E' double glazed units. U Value 1.4 W/m2•K

Option Plus

Save time and cost by adding our factory options to your door. Prices are available on application.



Contact 0844 209 0008



Factory Glazing

- Doors can be supplied fully factory glazed where applicable.
- Available on both Solid Core, Safe 'N' Sound and fire door options.
- Glazed mobility fire doors meet Building Regulation Part M.
- Fire doors available with either clear, clear wired or obscure glass.
- Available on Portfolio, Standard Veneer, Moulded and Paint Grade doors.



Factory Priming (Face only)

- Textured and Smooth Moulded panel and Popular Paint Grade doors can be supplied factory 'face only' primed (RAL9002). Does not include door edges.
- Edge banding available.
- Reduces the number of coats of paint required on site.
- Saves time and reduces on site painting costs.



Supply and Fit Intumescent Seals to Fire Doors

- Standard intumescent and combined intumescent smoke and cold seal available.
- Saves time on site.
- Ensures that the correct seal is accurately fitted to comply with fire test certification.



White Factory Paint (Face Only) Finishing

- Textured and Smooth Moulded panel doors (where applicable) can be supplied factory 'face only' finished in white satin paint (RAL 9003). Does not include door edges.
- Edge banding available on moulded doors.
 Please specify if required.
- Cost effective solution, providing a high-quality durable paint finish.
- Paint finish guaranteed for two years.*
- 'Touch up' paint available for on-site repair.
 Order code: 43075 (can).




Non Standard Sizes

 If our standard sizes do not meet your requirements, variations are available.
 Details and quotation available on request.

N.B. On Moulded doors special sizes may be limited by the configuration of the moulded design.

* Please refer to Masonite.co.uk to view current guarantee information.

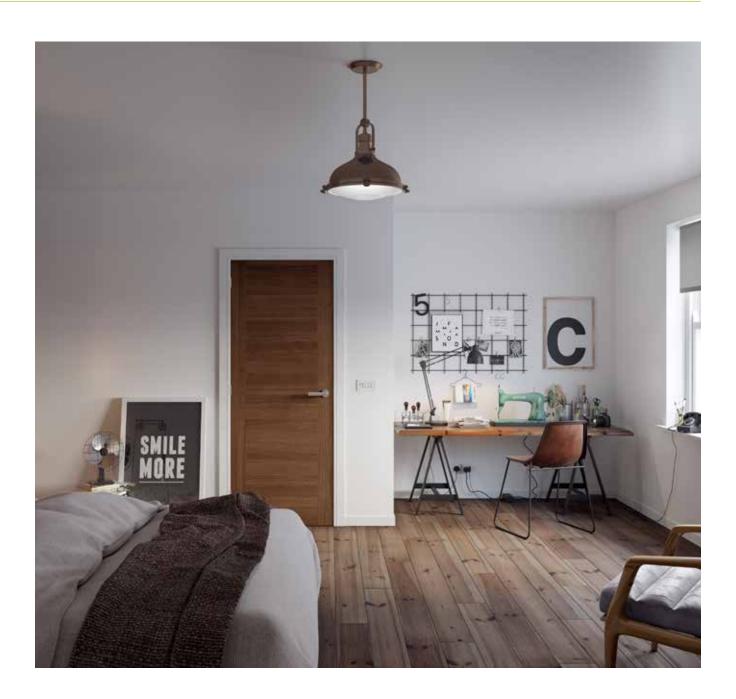

Product Category	Non Fire Door Glazing*	Factory Glazing Fire Doors*	White Factory Paint (Face Only)	Factory Priming (Face Only)	Non Standard Sizes*	Intumescent Brush and Cold Seals (Fire Doors Only)
Portfolio	✓	✓			✓	✓
Portfolio Glazed Fire Doors (Excludes 50R Design)		✓			✓	✓
Standard Veneer		✓			✓	✓
Standard Veneer Glazed Fire Doors		✓				
Moulded (Textured - Excludes Bi-Fold)	✓	✓	✓	✓	✓	✓
Moulded (Smooth - Excludes Bi-Fold)	✓	✓	✓	✓	✓	✓
Paint Grade Plus		✓		✓	✓	✓
Popular Paint Grade		✓		✓	✓	✓
Paint Grade - Glazed Fire Doors		✓				

 $^{^*}$ Availability depends on Portfolio, Veneer and Moulded design and core type.

Technical Information

Moulded Specification

Door Finishing

Moulded panel doors are suitable for on-site paint finish only. Door faces are supplied with a white base coat ready for on-site finishing. Base coat and priming does not seal the door fully against moisture penetration on-site, so it is important to ensure correct handling and storage of products in a dry and temperature controlled environment before fitting. Refer to the Masonite website for storage, handling and finishing guidance.

Factory prime finish (RAL 9002) is available on textured and smooth doors, face only.

White factory paint finishing (RAL 9003) is available on textured and smooth doors, face only.

Bi-fold doors are available with a base coat primer finish only.

Touch Up Paint

Order code: 43075 - Can.

Glazing

Glazed doors are supplied with glass tested to the requirements of BS EN 12600 and BS EN 12150.

On-site preparation may be required to fill bead pin holes.

Vertical 5 panel 1 light and half light clear etched glazed, 5 panel smooth 3/4 light and 5 light clear glazed are suitable for residential use only.

Canadian glazed doors feature individual clear bevelled glass panels.

Manhattan doors feature single pane glazing. The glazing bar effect is created using white or chrome effect decorative leaded detail on both sides.

Interior glazed moulded (page 46), obscure glass is supplied in a Stippolyte design.

Moulded glazed Fireshield FD30 and Firemaster FD60 doors are supplied with clear (unwired) fire resistant glazing systems as standard.

Door Pairs

Horizontal 4 Line Moulded is not suitable to use as door pairs.

When installing Canadian glazed pairs ensure the glass bevel is located on the same side on both doors.

Bi-Fold Doors

Bi-fold doors have the moulded panel design on both sides and are suitable for use as room dividers or wardrobe doors. The doors are supplied pre-hinged with running gear included. Door sizes shown are aperture size, with actual product dimensions slightly smaller to allow for door

gear and clearance.

For track and kit guarantee please contact the sales office.

Factory priming and white factory paint finishing are not available on Bi-fold doors.

Standard Veneer, Portfolio & Paint Grade Specification

Standard Veneer Doors

Veneered doors are manufactured using commercial grade available veneer cuts and timber lippings to complement the door design.

Faces are lacquered for a superior finish (this does not include door edges).

Veneers are natural products, and colour and graining can vary and should be expected, dependent on species.

Book matched standard flush veneers are available, for further information contact the sales office.

Our standard veneer cut specifications are:

Anegre: Mixed crown, half-crown and quarter cut

European Ash: Mixed crown and half-crown

Steamed Beech: Quarter cut only (slip match)

Koto: Quarter cut only Sapele: Quarter cut only

American White Oak: Mixed crown and half-crown

American Black Walnut: Mixed crown and half-crown

Portfolio Doors

Portfolio doors are made with engineered timber veneers that provide an industry leading colour and grain match.

Prolonged exposure to direct sunlight can cause colour changes in these veneers.

All 35mm doors are Solid Core construction with the exception of Durador which is 35mm Standard Core.

Portfolio doors are also available as fire doors with a thickness of 44mm (30 minute fire doors) or 54mm (60 minute fire doors).

Doors are supplied with engineered timber lippings to the two long edges as standard, designed to complement the face finish.

Popular Paint Grade Doors

Paint Grade doors are supplied without a surface finish as standard, with lipped vertical exposed edges and are suitable for paint finish only.

Faces and edges will require surface preparation before finishing on-site.

Paint Grade Plus Doors

Paint Grade Plus doors are manufactured using smooth timber fibre faces, to offer a smooth surface suitable for paint finishing.

Doors are available in a lipped or un-lipped specification.

Door Pairs

Portfolio Charcoal and Light Grey Four Line Horizontal doors are not suitable for door pairs.

Standard timber veneers are a natural material and as such, we cannot guarantee matching grain or colour on any standard flush veneered door style. For book matched veneers, please contact the sales office for further information or advice.

The customer must highlight at the point of order if doors are going to be used in a 'double door' configuration and on opening direction, as this may affect availability and associated components.

Glazing Bead

Paint Grade doors are supplied with timber beads that do not have a surface coating in order to be finished on-site. All other doors are supplied with beading to complement the veneer faces.

Portfolio doors are supplied with co-ordinating glazing bead.

ExtraCORE

ExtraCORE is available in selected styles where extra trimming maybe required on-site, such as refurbishment situations. Approximately 40mm can be trimmed from each door stile or rail without affecting the integrity of the door, although it is recommended that equal dimensions are removed from opposite edges.

For full details and re-sizing limitations please contact the sales office.

Supporting General Product Information -Internal Doors

Masonite in the UK manufacture a wide variety of door styles and specifications. Please reference specific product information to confirm specification

is suitable for the intended use. All products are supplied with specific installation and care and maintenance instructions

Visit www.masonite.co.uk or contact the customer services or sales teams for more information on 0844 209 0008.

Door Thickness

Imperial doors: 35mm ($1^{3}/8$ ") or

44mm (1³/₄") Metric doors: 40mm

Fireshield doors - FD30: 44mm (1³/₄") Firemaster doors - FD60: 54mm (2¹/₈")

Core Specification*



Standard Core:

A multi-cell or spacer pad core for light duty, non-fire rated applications. Specification for catalogue standard core interior and exterior door types.



Semi Solid Core:

Offering additional weight and stability to the 35mm Standard Core door.



Safe 'N' Sound:

Solid core material in a standard 35mm thick door.



Solid Core:

A 35mm solid core construction provides the extra benefits of added strength, durability and flexibility.



Moulded Fireshield FD30:

A high density particle board surrounded by timber framing. This specification may be used on Fireshield and Firemaster doors at our discretion.



PremCor FD30 / FD60: PremCor

is a high-density particle board core material that does not require perimeter timber framing. This design (when fitted with correct and compatible fire resisting components) is third party certified by CERTIFIRE. This specification may be used on Fireshield and Firemaster doors at our discretion.



Framed FD30:

A high-density particle board fire door core surrounded by timber framing. This proven design (when fitted with correct and compatible fire resisting components) is third party certified by CERTIFIRE. This specification may be used on Fireshield and Firemaster doors at our discretion.

*Actual core construction may vary.

Non-Standard Sizes

Non-standard sizes are available on Moulded, Portfolio, Standard Veneer and Paint Grade Plus doors.

30-minute fire doors (up to 2400 mm tall) Paint Grade Plus doors are available upon request.

For further details please contact the sales office.

Pair Maker Kit

Available in White or Oak, suitable for use on 35mm internal doors only.

White: Code 61569 Oak: Code 61570

Fire Doors

Fire doors are tested to relevant British standard or European standards and are third party certified by Warringtonfire, under the CERTIFIRE scheme. Premdor Crosby and Door-Stop International are members of the BWF Fire Door Alliance.

All fire door leaves must be hung in the correct and compatible frame and fitted with the correct and compatible components, glazed apertures, including intumescent protection and ironmongery.

Glazed Fireshield doors are supplied with clear (unwired) fire resistant glazing systems as standard, unless further options are available.

Please refer to relevant certificate and data sheet available from the Certifire website.

Resizing

Standard Core doors and fire doors must not be resized from the top edge as this will remove or damage the fire door label/s and traceability markings. The amount of material that our internal doors and fire doors can be resized on the stiles and threshold edge varies depending on door design and configuration.

Fire doors that are resized in excess of the specified limitations will invalidate third party certification.


Always reference the specific limitations on resizing fire doors by referencing the certificate and data sheet available from the Certifire website.

Standard core doors that are resized in excess of the limitations may affect performance. Always reference the specific limitations detailed on the accompanying product documentation and installation instructions.

Lock Blocks

Standard core doors have a single lock block. The side of the door that the lock block is located is indicated by inkjet markings on the top edge of the door. Always check the location of the lock block before starting installation.

Refer to specific product information regarding compatible ironmongery specification, height and size of lock block and fitting instructions for ironmongery.



Building Regulations

It is the building designer's responsibility and not that of Masonite, to ensure that the correct fire door complies with the relevant Building Regulation guidance, and that the correct specification is used for the particular development, construction or building type used in the building.

Mobility

The range includes size options and glazing designs suitable for use under Approved Document M.

Warranties

Warranties are subject to the products being handled in accordance with our instructions for storage, handling, installation, inspection, maintenance and use, and exclude ironmongery where applicable.

Failure to follow these instructions may invalidate your warranties.

This does not affect your statutory rights.

Please refer to specific product terms and conditions and warranty information for further information.

Environmental and Sustainability Commitment

Our manufacturing and central warehouse facility in the UK is located at Barnsley and has been independently third party accredited to meet the environmental management standard ISO 14001.

All of our timber-based material suppliers are obligated to ensure that, wood is sourced in accordance with local legal forestry and logging controls and is EUDR and UKTR compliant.

The majority of timber used in our manufactured products is certified under, license numbers FSC® (FSC-C016232), PEFC (PEFC/16-37-346), FLEGT, approval.

Please contact us for more information relating to specific door styles, designs and certifications.

Storage and Handling

Doors should be stored and handled as described in our instructions and in accordance with the BS Code of Practice, BS 8000:5 1990.

Doors should be stored flat on a minimum of three equal thickness bearers located along the door length to evenly distribute weight, avoid movement and avoid damage. Product must be kept dry and clean until immediately before finishing. Take care to ensure damage does not occur during moving or handling of doors. Do not store doors or components outside. Do not store doors or components or install in an area that may be subject to extremes of temperature or humidity. Use a dry, well ventilated building. in areas that have not been recently plastered.

It is recommended that unfinished doors be inspected for damage, fully sealed as soon as practicable after delivery. They should be sealed or primed on both faces and all four edges, and should then be fully finished, preferably before installation.

Do not paint over labels or product markings. Fire door labels should not be painted over, removed or damaged. Do not store or install in an area that may be subject to extremes of temperature or humidity. Use a dry, well ventilated building, in areas that have not been recently plastered.

It is recommended that precautions are taken to prevent moisture content build up of timber parts. Particular care is needed in centrally heated or air-conditioned buildings as the rapid change of temperature or moisture (e.g. air conditioning or central heating) can be detrimental to joinery.

It is important that any protective packaging material be left on the door for as long as is practically possible to avoid damage to door surfaces. This is particularly relevant to fully finished products.

It is recommended that if the finish is broken in any way (e.g. trimmed, drilled or cut for hinges etc.) any such exposed area should be sealed and refinished immediately.

Finishing

Decoration should be carried out in accordance with and as described in our installation instructions and in accordance with the manufacturers instructions of the chosen finish. Manufacture and relevant parts of BS 6150 and BS 8000 Part 5.

Products must be clean and dry prior to finishing, and ensure that moisture content equal to the conditions of the intended installation location.

Always follow the manufactures instructions provided with the finishing system that is to be applied.

It is important that the finishing system is balanced by equal application to both sides at the same time to ensure that an imbalance of moisture does not occur, particularly in the decoration of doors.

The complete surface area should be fully treated with topcoat paint prior to installation. All edges and any areas that have been cut, drilled, should be fully finished to limit moisture ingress. Always follow the instructions of the specific finishing product and do not paint over fire door labels.

Masonite in the UK has no control over customer applied finishes of doors and therefore cannot accept any claims for issues/problems of any type relating to customer finishing of the doors.

Do not to use oils (e.g. Danish oil), waxes, polishes or dyes, as they may not adequately seal the door. Coatings must be regularly maintained to prevent a breakdown of the protective surface finish, which could lead to deterioration of the door.

Installation

Doors should be installed as described in our installation instructions and in accordance with the relevant parts of BS Code of Practice, BS 8000:5 and BS 8214 (fire door installation).

Fire Door Installation

Always refer to the specific installation instructions for the specific product. Instructions are supplied with the product and are also available at www.masonite.co.uk

Further information regarding installation methods is provided in the fire door certificates, and data sheets specific to the product being installed. It is important to always follow the instructions to ensure certification is maintained. Certificates and data sheets can be accessed from the Warringtonfire website.

Incorrect installation, the use of incompatible (non certificated) components, or exceeding limitations detailed on the specific accompanying certificate or data sheet will invalidate certification and can affect product performance and may present a safety risk.

The Fitting of Ironmongery

When fitting locks and latches in fire and non-fire doors, it is important to ensure that the construction and performance of the door is not adversely affected.

Ensure you follow the relevant installation instructions and supporting product documentation, including the certificate ad data sheet to confirm location, fixings and any additional intumescent protection required.

The Selection and Fitting of Ironmongery and Intumescent Protection in Fire Doors

Information regarding compatible components, method and location of fitting ironmongery and associated intumescent protection and seals is provided in the fire certificate and accompanying data sheet.

Some items of ironmongery require additional intumescent protection. Reference the fire door certificate and accompanying data sheet to ensure compatible intumescent product and fixings are used, in the correct location.

Exceeding any of the limitations or using incompatible components will invalidate certification and may affect product performance and may present a safety risk.

Glazed Apertures in Fire Doors

Fire doors must not be glazed on site, as this will invalidate certification, may affect product performance and present a safety risk. Always order fire door product with glazed apertures as Masonite in the UK offers a wide variety of glazed aperture styles and designs. Please reference specific product information for available specifications or contact us for further information.

It is recommended that any glazed aperture requirements are highlighted at time of ordering to ensure the work is undertaken under the factory production control system and certification is maintained. Premdor Crosby, part of the Masonite group is third party certificated by Certifire for the preparation and installation of components into apertures in fire doors, doorkits and doorsets.

Other Apertures in Fire Doors

Fire doors may be required to contain a number of other apertures for items such as eye viewers, letter plates, and air transfer grilles or other items or ironmongery; however, there are specific limitations related to these components. These limitations can include the specification of compatible component, the location, fixings and intumescent protection where required. The certificate and data sheet should be referenced to ensure all limitations are upheld and certification is maintained. Exceeding these limitations may invalidate certification and impact on product performance.

Please highlight any other aperture requirements at time of order to ensure the work is undertaken under the factory production control system and certification is maintained.

Exceeding any of the limitations or using incompatible components will invalidate certification, may affect product performance or present a risk to safety. Please reference the certificate and data sheet, available to download from the Warringtonfire website.

General External Door & French and Folding Doorset Specification

External Flush & Glazed Fire Doors

Door Specification

Standard Core doors: $44mm (1^3/4")$ Fireshield doors – FD30: $44mm (1^3/4")$ Firemaster doors – FD60: $54mm (2^{1/8"})$

Construction

External Flush doors are lipped on both long edges with additional timber blocks to support the fixing of ironmongery.

Recommendations

Doors used in exterior positions can face particularly harsh environmental conditions.

Porches or canopies can provide additional protection. It is recommended that regular maintenance is undertaken on the surface finish, to ensure that a suitable level of protection is maintained, and to limit damage or distortion.

Glazing

Standard Core doors (non-fire) are supplied aperture only (unglazed).

All Fireshield FD30 doors are supplied with clear wired fire rated glass to maintain certification.

Glass openings have equal side margins.

Beading

Unglazed (non-fire) flush doors are supplied with bead packs as standard.

Door Finishing

Flush doors are ready for on-site paint finishing and must be fully finished on faces, all edges and ironmongery rebates before installation.

Factory priming is available on F1X face only.

There can be no guarantee against moisture ingress/loss related problems (such as swelling, shrinkage, wrapping, splits and open joints) if the door is not correctly coated with a quality exterior door finish specifically formulated to protect exterior doors.

It is recommended not to use nonpermeable coatings on exterior doors. If using a water-based product, this may lift the fibers of the timber veneer. It is also not recommended to use stain, waxes, polishes, dyes or oils (e.g. Danish oil) as they do not properly seal the door and can lead to delamination of the veneer. Do not apply varnishes to the door as due to resinous nature of some hardwoods there can be adhesion problems causing a breakdown in the coating.

Doors are not treated with preservative. Decoration must be carried out in line with BS 6150 and BS 8000 Part 5.

Weather Protection

To ensure door and door frame provide adequate performance in exposed situations, it is recommended that installation is within a porch or canopy. This is particularly critical with open in doors and pairs.

Letter Plates

Please ensure all letter plates are installed in line with the relevant fire certification and are Certifire approved fire resisting design.

Warranties

Warranties are subject to the products being treated in accordance with our instructions for storage, handling, installation, maintenance and use and exclude ironmongery where applicable.

Failure to follow these instructions may invalidate your guarantee and invalidate certification. This does not affect your statutory rights.

Please refer to specific product and component guarantees for further information.

French and Folding Doorset Specification

Construction

Doors are 54mm thick. Doors and frames are manufactured using an engineered timber construction and have a hardwood core and 1.2mm thick oak or hardwood timber veneer on each visible surface.

Sets are supplied complete with doors, frame, cill, hardware, threshold, locks, handles, weather and draught seals.

Oak folding doors are supplied with a fully finished oak cill, hardwood folding doors are supplied with a fully finished hardwood cill both with aluminium sub cill for drainage.

Finished Frame Sizes

The finished frame height is 2090mm for both French and folding doorsets.

Handing

French sets open outward and are not reversible. The left door is the slave door (viewed from the outside) and the door to the right is the access door (viewed from the outside). Bifold sets are open outwards and are reversible.

Glazing

The 24mm double glazed units incorporate special Low 'E' thermal glass with an argon filling to enhance the thermal performance, the double-glazed units are fitted into the doors so there is no glazing required on site.

Please contact Masonite for further information regarding glass specification, including safety requirements.

Hardware

Folding doorsets are supplied with polished chrome handles and stainless steel hardware.

French doors are supplied with zinc alloy concealed hinges with polished chrome handle.

All sets incorporate a 3 point insurance rated PAS 23/24 tested lock on the main access door and lockable slide bolt on the inside.

Fitting

All sets are supplied unassembled for on-site assembly with full fitting instructions included.

Finishing

The sets have been factory finished with 3 coats of high-build microporous finish applied and ready to install on site without further finishing. The finish incorporates UV protection.

It is very important that the finish on your doorset is inspected and

maintained regularly. This will maintain the protective finish.

The length of time between re-coating depends greatly on exposure to weather and the direction the sliding/folding doors face. The coating will last longer in a sheltered position. However, if the site is south facing, or in a heavy weather exposure area, we recommend checking for break down regularly after purchase and re-coating if necessary.

We recommend that your doorset is maintained and refinished using suitable medium or high-build exterior grade wood finishes. In addition, it's better to refinish as soon as you see any breakdown of the finish.

Don't wait until it's too late and the finish has completely broken down as this may allow moisture into the timber and affect the performance.

We do not recommend the use of yacht varnish, waxes or oil applications to pre-finish our doorsets for external use.

Weather protection

All our sets incorporate double weather and draught seals.

Thermal efficiency

The Building Regulation Part L rating of the whole set is 1.4 (FD) & 1.4 (bifold) W/m2•K which passes the regulations for refurbishment, extensions to existing dwellings or new build homes. The Low 'E' glass used has a 1.1 W/m2•K rating.

Please note that the 'U' values are indicated alongside products for guidance only. Values shown are independently tested by an accredited testing company. The 'U' value indicates thermal efficiency (W/m2•K). The lower the rating can result in greater energy saving. For further information see relevant Building Regulation guidance.

'U' Values

Bifold

Part 'L' 1.4 W/m2•K, Glass 1.1 W/m2•K

French Door

Part 'L' 1.4 W/m2 \bullet K, Glass 1.1 W/m2 \bullet K

Guarantees

Guarantees are subject to the products being treated in accordance with Masonite instructions for storage, handling, installation, inspection and maintenance and use, and exclude ironmongery where applicable. Failure to follow these instructions may invalidate your guarantee and invalidate relevant certification of the product. This does not affect your statutory rights.

Guaranteed for 10 years against door and hardware manufacturing defects. Factory fitted glass carries a 10-year guarantee.


Handing and Brickwork Sizes

Choose between left and right handing – There is no need to order left or right opening sets as our folding sets are all reversible and this can be chosen when the set arrives on site. All our folding doors fold outside to allow maximum use of space in your room.


Brickwork sizes and how your folding doors open.

3 door configuration

6' Brickwork size 1800 x 2100mm 7' Brickwork size 2100 x 2100mm 8' Brickwork size 2400 x 2100mm 9' Brickwork size 2700 x 2100mm




Looking from outside right hand opening



Looking from outside left hand opening

4 door configuration


10' Brickwork size 3000 x 2100mm




Looking from outside left hand opening

5 door configuration

12' Brickwork size 3600 x 2100mm






Looking from outside left hand opening

6 door configuration

14' Brickwork size 4200 x 2100mm 16' Brickwork size 4800 x 2100mm



External Door Storage, Handling, Installation, Maintenance and Use

Storage and Handling

Doors and doorsets should be stored and handles as prescribed in BS Code of Practice BS 8000 5 1990.

Doors and doorsets should be kept dry and clean inside the polythene packaging until immediately before painting/staining. Do not store or install in an area which may be subject to extremes of temperature or humidity. Use a dry well ventilated building in areas which have not been recently plastered.

Doors that are destined to be installed in environments that have high temperature or humidity environmental range should be slowly conditioned to the intended environment to avoid warping or distortion.

Please inform us at the time of tender and order whenever doors are needed for such buildings.

The testing and rapid switching on and off of heating during the construction is detrimental to joinery.

Doorsets are heavy. Make sure that there is sufficient labour to handle doors and components.

- Ensure that employees are trained in manual handling heavy objects.
- Doorsets must be lifted evenly and securely to avoid any bending or damage of components or frames.
- Protective wrapping should be kept in place as long as possible.
- Consider fully any handling risk, including danger from glazed panels.

Installation

It is essential that doors be fully sealed and any air gaps plugged immediately after delivery. They should be sealed and knotted and primed on both face and all four edges, and should then be fully finished, preferably before installation. Any surface subsequently cut should be fully finished before the door is fixed into position, this particularly applies when end grain is exposed. This may not detract from the protective performance; however, a regular regime of maintenance should be undertaken to ensure natural wear and tear of surface finishes is maintained to ensure performance.

It is essential that if the preservative seal is broken in any way (e.g. trimmed, drilled or cut for letterbox, hinges etc.) then any such exposed area should be preservative treated, painted or stained.

Decorative Finished Products

Coated surfaces require regular maintenance and cleaning at least annually to remove surface pollution. Some 'chalking' of the finish may occur over time due to natural erosion of the microporous paint finish.

This may not detract from the protective performance; however, a regular regime of maintenance should be undertaken to ensure natural wear and tear of surface finishes is maintained to ensure performance.

On occasion timber can exude natural resins that can appear after installation. This is a natural process and can be limited by selection of appropriate surface finishing system.

Discolouration can occur which will require attention and maintenance to retain the aesthetics and integrity of the coating. On occasion timber products may exude resin after installation. Typically if resin is present this 'bleeding' cannot be prevented. Discolouration can occur which will require attention and maintenance to retain the aesthetics and integrity of the coating. Resin exudation is excluded from our performance guarantee.

Environmental conditions and exposure can vary significantly according to location. South facing elevations and coastal sites will reduce to some extent the finish life to first maintenance. Our guarantees are intended to cover reasonable average UK conditions.

Finishina

Decoration should be carried out in accordance with and as described in our installation instructions and in accordance with the relevant part of BS 6150 and BS 8000 Part 5.

Products must be clean and dry prior to finishing, having a moisture content which is no greater than the average for the intended location. Always follow the manufacturer's instructions provided with the stain or paint which is to be applied.

The use of dark coloured paint finishes should be avoided on all softwood external joinery to avoid adverse deterioration due to exposure to high temperature environmental conditions. A neutral colour undercoat should be considered when it is desired to finish frames in pastel shades.

It is important that the finishing system is balanced by equal application to ensure that an imbalance of moisture does not occur, particularly in the decoration of doors.

The complete surface area should be fully treated with a suitable topcoat paint or stain prior to installation.

To ensure adequate coverage at least three coats of topcoat paint/stain needs to be applied. All edges, rebates for glazing and any areas which have been cut, drilled, etc. must be fully painted/stained to the same standard as the rest of the door.

It is recommended not to use oil (e.g. Danish oil) waxes, polishes or dyes as they do not properly seal the door and can lead to delamination of the veneer or surface fibers.

Coatings must be regularly maintained to prevent a breakdown of the protective paint or stain finish which can lead to moisture ingress/loss and deterioration of the door.

Maintenance


At annual intervals or more frequently if necessary, inspect and lubricate all ironmongery, hinges, pivoting and sliding parts. Inspect the condition of the decorative and glazing systems on all external joinery at maximum intervals of one year and carry out remedial work as required.

Please contact us for detailed information regarding specific care, maintenance and inspection requirements, including the compatible specification of replacement parts.

Weather protection

It is recommended that exterior doors which are in exposed areas should be protected by a canopy or porch.

Please note: Finger-jointed materials may be used in manufacture, enhancing product stability.

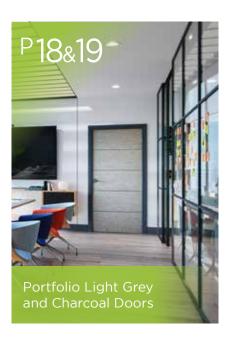









Index

1 Panel Smooth Glazed Moulded	42
1 Panel Smooth Moulded	30
2 Panel Arch Top Textured Moulded	34
2 Panel Smooth Moulded	34
2 Panel Shallow Moulded	29
3 Panel Shallow Moulded	29
4 Panel Bi-fold Textured	36
4 Panel Smooth/Textured Moulded	35 & 36
5 Panel Smooth Glazed Moulded	43
5 Panel Smooth Moulded	37
5 Panel Vertical Glazed Moulded (Half and Full Light)	43
5 Panel Vertical Smooth / Textured Moulded	33
6 Panel Bi-fold Smooth/Textured	39
6 Panel Smooth/Textured Moulded	38 & 39
A	30 & 35
	24
American Black Walnut Flush Veneer	24
American White Oak Flush Veneer	23
Anegre Flush Veneer	22
Apartment Entrance Doorsets	76
Ash Flush Veneer	24
B	
Beech Flush Veneer	22
Bi-fold Interior Doors	36 & 38
C	
Canadian Door Range	45
Charcoal 4 Line Horizontal	19
Charcoal Horizontal	19
Communal Doorsets	72
Contact Us	122
D	
Defining Doors	8 & 9
Door-Stop International	94 - 99
Doorsets	
Doorsets	62 - 105
Door-Stop International Fire Doorsets	62 - 105 88
	88
Door-Stop International Fire Doorsets	88
Door-Stop International Fire Doorsets Duel Certified Doorsets	88
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E	88 88 16
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer	88 88 16
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets	88 88 16 24 90 - 105
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets	88 88 16 24 90 - 105
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Flush	88 88 16 24 90 - 105 88 53
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Flush	88 88 16 24 90 - 105 88 53
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Flush External French & Folding Doorsets F	88 86 16 24 90 - 105 88 53 106 - 11
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Flush External French & Folding Doorsets F FIX Flush - External	86 86 16 24 90 - 105 88 53 106 - 11
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Flush External French & Folding Doorsets F F1X Flush - External F2X Flush - External	88 88 16 24 90 - 105 88 53 106 - 11
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Flush External French & Folding Doorsets F FIX Flush - External F4X Flush - External	88 88 16 24 90 - 105 88 53 106 - 11
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Flush External Flush External French & Folding Doorsets F FIX Flush – External F2X Flush – External F4X Flush – External Flush Glazed Fire Doors – Options & Styles	88 88 16 24 90 - 105 88 53 106 - 11 53 53
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Flush External Flush External French & Folding Doorsets F F1X Flush - External F2X Flush - External F4X Flush - External F1ush Glazed Fire Doors - Options & Styles Folding - External	88 86 24 90 - 105 88 53 106 - 11 53 53 56 109 & 11
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Flush External Flush External French & Folding Doorsets F F1X Flush - External F2X Flush - External F4X Flush - External F1ush Glazed Fire Doors - Options & Styles Folding - External	88 86 24 90 - 105 88 53 106 - 11 53 53 56 109 & 11
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Flush External French & Folding Doorsets F FIX Flush - External F2X Flush - External F4X Flush - External F1ush Glazed Fire Doors - Options & Styles Folding - External French - External G	88 88 16 24 90 - 109 88 53 106 - 11 53 53 54 109 & 11
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Flush External French & Folding Doorsets F FIX Flush - External F2X Flush - External F4X Flush - External Flush Glazed Fire Doors - Options & Styles Folding - External French - External G Glazed Canadian Range	88 88 16 2 ² 90 - 105 88 53 106 - 11 53 53 56 109 & 11 108 & 110
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Flush External French & Folding Doorsets F FIX Flush - External F2X Flush - External F4X Flush - External Flush Glazed Fire Doors - Options & Styles Folding - External French - External G Glazed Canadian Range Glazed Fire Door Range	88 88 16 24 90 - 105 88 53 106 - 11 53 54 109 & 11 108 & 110 45 54 - 6
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Flush External French & Folding Doorsets F F1X Flush - External F2X Flush - External F4X Flush - External Flush Glazed Fire Doors - Options & Styles Folding - External French - External G Glazed Canadian Range Glazed Manhattan Range	88 88 16 24 90 - 105 88 53 106 - 11 53 56 109 & 11 108 & 110 45 54 - 6 46 & 47
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Flush External French & Folding Doorsets F F1X Flush - External F2X Flush - External F4X Flush - External Flush Glazed Fire Doors - Options & Styles Folding - External French - External G Glazed Canadian Range Glazed Manhattan Range Glazed Moulded Range	88 88 16 24 90 - 105 88 53 106 - 11 53 56 109 & 11 108 & 110 45 54 - 6 46 & 47
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Fire Doorsets External French & Folding Doorsets F FIX Flush - External F2X Flush - External F4X Flush - External Flush Glazed Fire Doors - Options & Styles Folding - External French - External G Glazed Canadian Range Glazed Manhattan Range Glazed Moulded Range H	88 88 16 24 90 - 105 88 53 106 - 11 53 53 50 109 & 11 108 & 110 45 54 - 6 46 & 47 40 - 47
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Fire Doorsets External Flush External French & Folding Doorsets F FIX Flush - External F2X Flush - External F4X Flush - External Flush Glazed Fire Doors - Options & Styles Folding - External G Glazed Canadian Range Glazed Fire Door Range Glazed Manhattan Range Glazed Moulded Range H Horizontal 4 Line Smooth Glazed Moulded	88 88 16 24 90 - 105 88 53 106 - 11 53 53 56 109 & 11 108 & 110 45 54 - 6 46 & 47 40 - 47
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Fire Doorsets External Flush External French & Folding Doorsets F FIX Flush - External F2X Flush - External F4X Flush - External Flush Glazed Fire Doors - Options & Styles Folding - External G Glazed Canadian Range Glazed Fire Door Range Glazed Manhattan Range Glazed Moulded Range H Horizontal 4 Line Smooth Glazed Moulded	88 88 16 24 90 - 105 88 53 106 - 11 53 53 56 109 & 11 108 & 110 45 54 - 6 46 & 47 40 - 47
Door-Stop International Fire Doorsets Duel Certified Doorsets Durador Vertical E European Ash Flush Veneer External Doorsets External Fire Doorsets External Fire Doorsets External Flush External French & Folding Doorsets F F1X Flush - External F2X Flush - External F4X Flush - External F1ush Glazed Fire Doors - Options & Styles Folding - External G Glazed Canadian Range Glazed Fire Door Range Glazed Moulded Range H Horizontal 4 Line Smooth Glazed Moulded Horizontal 4 Line Smooth Moulded	

	10 50
Internal Flush Paint Grade	48 - 52
Internal Flush Veneers	20 - 25
Internal Moulded Door Range	26 - 47
K	
Koto Flush Veneer	22
L	
Ladder Smooth Glazed Moulded	43
Ladder Smooth Moulded	30
Light Grey Horizontal	18
Light Grey 2 Stile	18
Light Grey 4 Line Horizontal	18
Lipped Paint Grade Plus	51
M	
Manhattan Glazed Moulded	46 - 47
Manitoba 6 Light Glazed Moulded	45
Moulded Panel Door Range	26 - 47
Moulded Glazed Range	40 - 47
Moulded Glazed Fire Doors	61
N	
0	
Oak French & Folding Doorsets	108 - 109
Oak 2 Stile	16
Oak Flush Veneer	23
Oak Vertical	16
Ontario 10 Light Glazed Moulded	45
Option Plus	112
P	
Paint Grade Plus & Paint Grade Plus Lipped	51
Popular Paint Grade Lipped Glazed Fire Doors	60
Popular Paint Grade Lipped	52
Portfolio Doors	14 - 19
Product Ranges	5
S	
Sapele Flush Veneer	24
Secured by Design Doorset	76 - 81
Sliding (Folding) Doorsets - External	109 & 111
Shallow Moulded 2 Panel Smooth	
	29
Shallow Moulded 3 Panel Smooth	29
Shallow Moulded 3 Panel Smooth Solidor	
	29
Solidor	29 100 - 105 76 - 81
Solidor SoundSecure Doorsets SpeedSet Doorsets	29 100 - 105 76 - 81 68 - 71
Solidor SoundSecure Doorsets SpeedSet Doorsets Steamed Beech Flush Veneer	29 100 - 105 76 - 81 68 - 71 22
Solidor SoundSecure Doorsets SpeedSet Doorsets Steamed Beech Flush Veneer Stocking Policy	29 100 - 105 76 - 81 68 - 71 22 13
Solidor SoundSecure Doorsets SpeedSet Doorsets Steamed Beech Flush Veneer Stocking Policy Storage, Handling & Installation	29 100 - 105 76 - 81 68 - 71 22
Solidor SoundSecure Doorsets SpeedSet Doorsets Steamed Beech Flush Veneer Stocking Policy Storage, Handling & Installation T	29 100 - 105 76 - 81 68 - 71 22 13 119
Solidor SoundSecure Doorsets SpeedSet Doorsets Steamed Beech Flush Veneer Stocking Policy Storage, Handling & Installation T Technical Information	29 100 - 105 76 - 81 68 - 71 22 13 119
Solidor SoundSecure Doorsets SpeedSet Doorsets Steamed Beech Flush Veneer Stocking Policy Storage, Handling & Installation T Technical Information Trends	29 100 - 105 76 - 81 68 - 71 22 13 119
Solidor SoundSecure Doorsets SpeedSet Doorsets Steamed Beech Flush Veneer Stocking Policy Storage, Handling & Installation T Technical Information Trends V	29 100 - 105 76 - 81 68 - 71 22 13 119 114 - 119 10 - 11
Solidor SoundSecure Doorsets SpeedSet Doorsets Steamed Beech Flush Veneer Stocking Policy Storage, Handling & Installation T Technical Information Trends V Veneer Flush Range	29 100 - 105 76 - 81 68 - 71 22 13 119 114 - 119 10 - 11
Solidor SoundSecure Doorsets SpeedSet Doorsets Steamed Beech Flush Veneer Stocking Policy Storage, Handling & Installation T Technical Information Trends V Veneer Flush Range Vertical 5 Panel Textured Glazed Moulded (Half and Full Light)	29 100 - 105 76 - 81 68 - 71 22 13 119 114 - 119 10 - 11 20 - 25 43
Solidor SoundSecure Doorsets SpeedSet Doorsets Steamed Beech Flush Veneer Stocking Policy Storage, Handling & Installation T Technical Information Trends V Veneer Flush Range Vertical 5 Panel Textured Glazed Moulded (Half and Full Light) Vertical 5 Panel Smooth / Textured Moulded	29 100 - 105 76 - 81 68 - 71 22 13 119 114 - 119 10 - 11
Solidor SoundSecure Doorsets SpeedSet Doorsets Steamed Beech Flush Veneer Stocking Policy Storage, Handling & Installation T Technical Information Trends V Veneer Flush Range Vertical 5 Panel Textured Glazed Moulded (Half and Full Light) Vertical 5 Panel Smooth / Textured Moulded W	29 100 - 105 76 - 81 68 - 71 22 13 119 114 - 119 10 - 11 20 - 25 43
Solidor SoundSecure Doorsets SpeedSet Doorsets Steamed Beech Flush Veneer Stocking Policy Storage, Handling & Installation T Technical Information Trends V Veneer Flush Range Vertical 5 Panel Textured Glazed Moulded (Half and Full Light) Vertical 5 Panel Smooth / Textured Moulded	29 100 - 105 76 - 81 68 - 71 22 13 119 114 - 119 10 - 11 20 - 25 43
Solidor SoundSecure Doorsets SpeedSet Doorsets Steamed Beech Flush Veneer Stocking Policy Storage, Handling & Installation T Technical Information Trends V Veneer Flush Range Vertical 5 Panel Textured Glazed Moulded (Half and Full Light) Vertical 5 Panel Smooth / Textured Moulded W	29 100 - 105 76 - 81 68 - 71 22 13 119 114 - 119 10 - 11 20 - 25 43 33
Solidor SoundSecure Doorsets SpeedSet Doorsets Steamed Beech Flush Veneer Stocking Policy Storage, Handling & Installation T Technical Information Trends V Veneer Flush Range Vertical 5 Panel Textured Glazed Moulded (Half and Full Light) Vertical 5 Panel Smooth / Textured Moulded W Walnut Flush Veneer	29 100 - 105 76 - 81 68 - 71 22 13 119 114 - 119 10 - 11 20 - 25 43 33
Solidor SoundSecure Doorsets SpeedSet Doorsets Steamed Beech Flush Veneer Stocking Policy Storage, Handling & Installation T Technical Information Trends V Veneer Flush Range Vertical 5 Panel Textured Glazed Moulded (Half and Full Light) Vertical 5 Panel Smooth / Textured Moulded W Walnut Flush Veneer Walnut Vertical	29 100 - 105 76 - 81 68 - 71 22 13 119 114 - 119 10 - 11 20 - 25 43 33 24
Solidor SoundSecure Doorsets SpeedSet Doorsets Steamed Beech Flush Veneer Stocking Policy Storage, Handling & Installation T Technical Information Trends V Veneer Flush Range Vertical 5 Panel Textured Glazed Moulded (Half and Full Light) Vertical 5 Panel Smooth / Textured Moulded W Walnut Flush Veneer Walnut Vertical Walnut 2 Stile	29 100 - 105 76 - 81 68 - 71 22 13 119 114 - 119 10 - 11 20 - 25 43 33 24 17
Solidor SoundSecure Doorsets SpeedSet Doorsets Steamed Beech Flush Veneer Stocking Policy Storage, Handling & Installation T Technical Information Trends V Veneer Flush Range Vertical 5 Panel Textured Glazed Moulded (Half and Full Light) Vertical 5 Panel Smooth / Textured Moulded W Walnut Flush Veneer Walnut Vertical Walnut 2 Stile What's New	29 100 - 105 76 - 81 68 - 71 22 13 119 114 - 119 10 - 11 20 - 25 43 33 24 17 17

Contact Us

To place or enquire about an order use the details below:





Premdor Internal Doors, Internal Doorsets, French and Folding

Address:

Premdor, Birthwaite Business Park, Huddersfield Road, Darton Barnsley, S75 5JS

Telephone:

0844 209 0008*

Facsimile:

0844 371 5334*

For orders / order amendments email:

barnsleysales@masonite.com

For general enquiries email: customerservices@premdor.com

Website:

masonite.co.uk



External Doorsets

Address:

Door-Stop International Limited Export Drive, Huthwaite Nottingham, NG17 6AF

Telephone:

01623 446336

Email:

sales@door-stop.co.uk partsorders@door-stop.co.uk customerservices@door-stop.co.uk

For orders / order amendments email: doors@door-stop.co.uk

Website:

door-stop.co.uk



External Doorsets (Retail Enquiries)

Address:

Meir Park, Whittle Road, Stoke on Trent, ST3 7TU

Telephone: **01782 847300**

Email:

enquiries@solidor.co.uk

Website: solidor.co.uk



Green Tint Flashed items are available from stock on a 3 day lead-time from key order date, terms and conditions apply, see page 123 for further details.

^{*} Please be advised that calls to our 0844 number may incur additional charges.

How to Code Your Internal Door Order

Internal Door Orders

- Select the numeric code for the chosen door; Interior 6 panel moulded 762 x 1981 x 35mm = 1241
- 2. Select any options required e.g. white factory paint face finishing

How to place your order

Orders can be placed in various ways:

- 1. Order by fax
- 2. Order by post
- 3. Order by email.
- 4. Order by E.D.I. (contact us for details).

The information needed to process your order:

- Your company name and address.
- 2. An order number.
- A postcoded delivery address (including a contact name and telephone number).

For each item ordered:

- 1. The product and any option
- 2. The quantity required.
- 3. The price per unit.
- 4. Quotation number if relevant

General Information

Stocking Policy Terms & Conditions

Green Tint Flashed items are available from stock on a 3 day lead-time from key order date. This lead-time may vary subject to quantity of doors ordered and available stock at time of ordering.

Amendments and Cancellations

Any order amendment or cancellation will not be accepted without prior written agreement, and a charge will be levied for any specific costs incurred.

Delivery

Masonite in the UK delivers across mainland UK on a published multidrop schedule based on key order days for the delivery address postcode area. Please note that delivery dates may change and will vary around bank holidays. Details of the current delivery arrangements can be obtained from Masonite (UK)

Please supply post code details when ordering to avoid unnecessary delay.

Premdor Crosby Limited reserve the right to amend or implement carriage charges, minimum order quantities and storage costs for deliveries to yard or site (including charges for scheduled deliveries that are rejected at delivery point)

For site deliveries please contact the sales office for prices and terms and conditions.

Delivery Lead-Times

Delivery lead-time indications are given subject to the availability of materials and production loadings. Whilst every effort will be made to achieve these dates, they may vary without notice.

After Sales

Masonite in the UK prides itself in providing a complete after sales package. Our after sales service can be contacted through the Sales Office or email customerservices@premdor.com

Environmental Chain of Custody

Please note that where products are supplied with third party environmental accreditation, it is the purchaser's responsibility to ensure continuity of certification as required through the supply chain

Marketing Information

Reproduction

Drawings and photographs are intended as being illustrative only and do not represent a product offering. Colours and photographs depicted are as accurate as photographic and printing processes can allow.

Illustrations

Products are shown glazed and fully finished for illustration purposes only. To confirm details for particular products please check within the relevant specification section.

Catalogue Supplies

For merchant customers who wish to receive copies of our catalogues, please request via masonite.co.uk

Sample Swatches

Masonite offer a wide selection of sample swatches to help you make the right choice. To order visit masonite could

Trade Descriptions Act 1968

In the interest of continuous product design and improvement, Masonite in the UK reserves the right to alter specifications and descriptions or withdraw products without prior notice.

The current specifications of any product are available on request and whilst every effort is made to produce up to date literature, this catalogue should only be regarded as a guide to current specifications

It does not constitute an offer for the sale of any particular product

Terms & Conditions

To view please visit Masonite.co.uk, terms-and-conditions



Premdor®

Internal Doors

Portfolio

Premdor Doorsets

Internal & Apartment Entrance Doorsets

Door-Stop International®

Composite Doorsets

 $\textbf{Solidor}^{^{\texttt{\tiny R}}}$

Composite Doorsets