



## Product

**400MX15CP - Intamix Thermostatic Mixing Valve 15mm with Service valves**

**400MX22CP - Intamix Thermostatic Mixing Valve 22mm with Service valves**

## Technical Specification

<b>Max Inlet Pressure (static):</b>	<b>10 Bar</b>
<b>Min Inlet Pressure (dynamic):</b>	<b>0.2 Bar</b>
<b>Max Inlet Temperature:</b>	<b>85°C</b>
<b>Temperature Adjustment Range:</b>	<b>30°C to 50°C</b>
<b>Temperature Stability:</b>	<b>+/-2°C</b>
<b>Max Pressure Differential:</b>	<b>5:1</b>
<b>Min Temperature Differential Between Hot Inlet &amp; Mixed Outlet to Achieve Cold Water Failsafe:</b>	<b>10°C</b>

## Additional Information

**Supplied with isolating ball valves**

**One valve to suit all applications**

**One piece cartridge for ease of maintenance and replacement**

**High flow rates with low pressure drops**

**TMV3 approved & complies with HTM04-01 DO8**


**TMV2 approved & complies with BSEN1111 & BSEN1287:2017**

**Complies with building regulations Part G**

**WRAS approved**

**Integral check valves & strainers**

**Supplied with 2x EPDM Rubber sealing washers to ensure a water tight seal. (3/4" Washers supplied with 400MX15CP, 1" Washers supplied with 400MX22CP)**

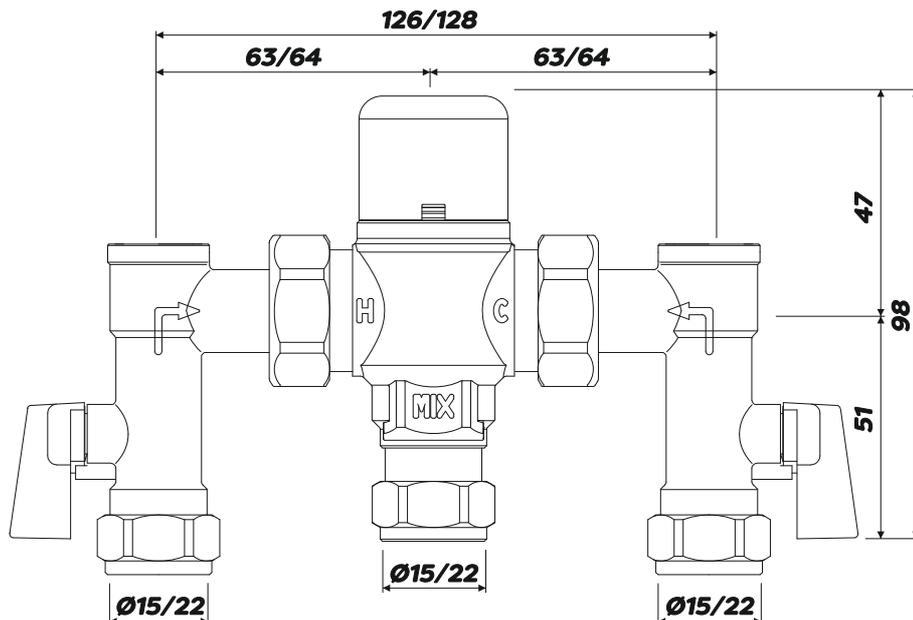

Scan for Installation & Maintenance Instructions

**Intatec, Airfield Industrial Estate, Hixon, Stafford, ST18 0PF**

**T. 01889 272180 F. 01889 272181 E. [sales@intatec.co.uk](mailto:sales@intatec.co.uk)**

**[www.intatec.co.uk](http://www.intatec.co.uk)**

07/22  
E&OE