


Uponor S-Press PLUS reducer PPSU 20-16

1039937

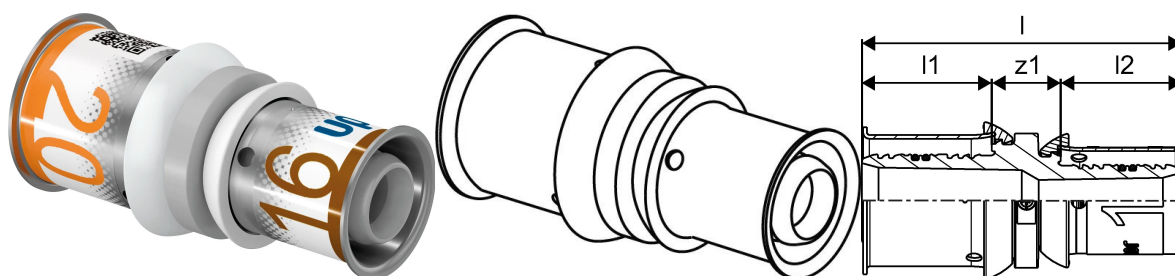

Application information Uponor S-Press PLUS reducer PPSU

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS reducer PPSU 20-16

1039937

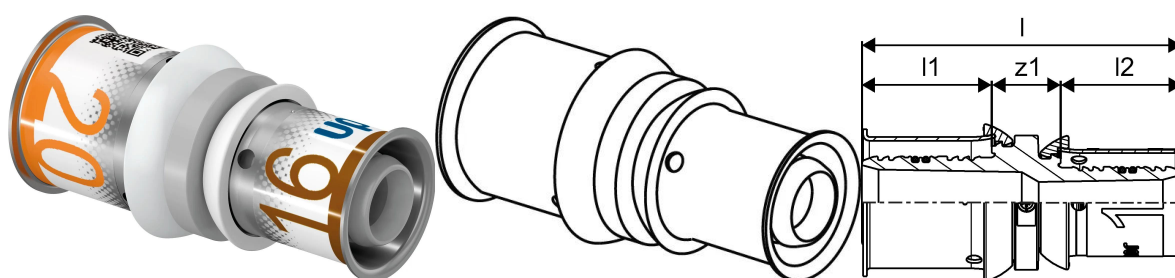

Technical data

Item no EAN	6414905228768
Item no GTIN	06414905228768
Item no VVS	087455120
RSK no.	1899403
Item no NRF	5114389
Item no LVI	1720694
Item (unit of measurement)	pce
Length (l)	53 mm
Length (l1)	21 mm
Length (l2)	20 mm
Packaging Quantity 1	20
Packaging Quantity 3	80
Packaging Quantity 4	7680
Packaging GTIN PL1	06414905634897
Packaging GTIN PL3	06414905477920
Packaging GTIN PL4	06414905477937
Item Unit Length	53
Item Unit Height	26 mm
Item Unit Weight	0,01986 mm
Item Unit Width	26 mm

Documents

Page with all documents

Finland

T +358 (0)20 129 211

www.uponor.com