


Uponor S-Press PLUS tee PPSU 20-20-20

1039945

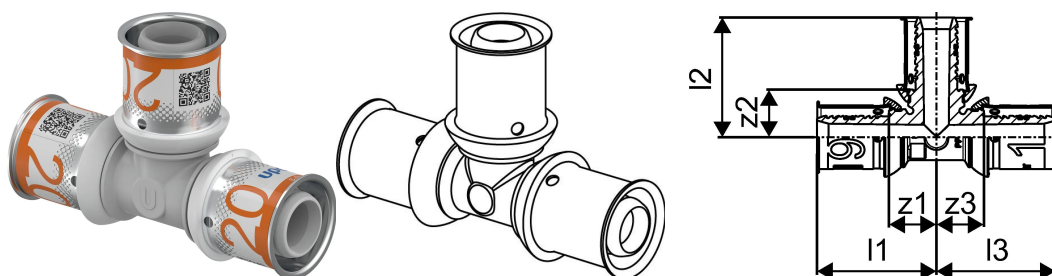

Application information Uponor S-Press PLUS tee PPSU

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS tee PPSU 20-20-20

1039945

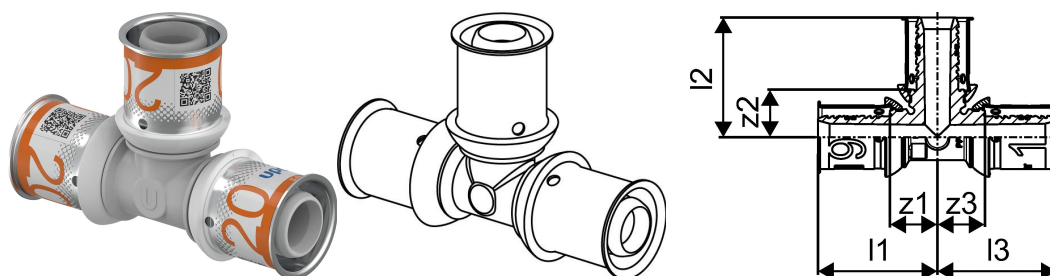

Technical data

Item no EAN	6414905228836
Item no GTIN	06414905228836
Item no VVS	087440120
RSK no.	1807981
Item no NRF	5114398
Item no LVI	1720702
Item (unit of measurement)	pce
Length (l1)	37 mm
Length (l2)	37 mm
Length (l3)	37 mm
Z-measurement z2	16 mm
Z-measurement z3	16 mm
Packaging Quantity 1	10
Packaging Quantity 3	80
Packaging Quantity 4	1920
Packaging GTIN PL1	06414905288977
Packaging GTIN PL3	06414905635214
Packaging GTIN PL4	06414905288984
Item Unit Length	74
Item Unit Height	50 mm
Item Unit Weight	0,0388 mm
Item Unit Width	26 mm

Documents

Page with all documents 

www.uponor.com