

# Data sheet

Part No.

**CB A BK**

**PVC-LSF** 

Description

angle box

Circular box for surface installation with 2 mounting lugs, standard mounting screw spacing 50.8mm (2") for conduit diameters 20mm to 25mm, with brass inserts M 4, without lid


Colour

black, similar to RAL 9005

Standard: BS 4607, EN 60670



Working temperature	Degree of protection (IP)	Number of inlets	Material
-5 to +60°C	IP3X	2	PVC-LSF
Art. no.	Dimensions Ø/L x W x D	For tube diameter	PU
104 253 CB 20/A BK	65 x 32 mm	20 mm	25 pc
104 258 CB 25/A BK	65 x 32 mm	25 mm	25 pc
			300 pc
			240 pc

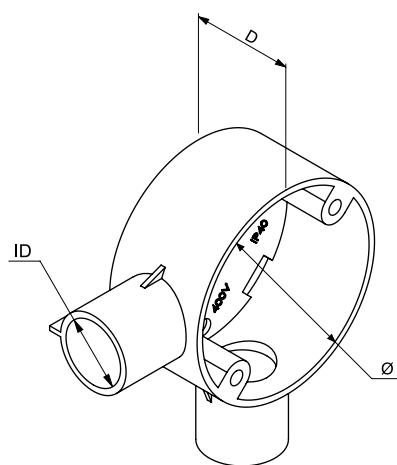

For sale in the UK market only.

All figures refer to standardised test samples and are given to our best knowledge but without further commitment. It is Univolt's belief that information set forth in this Data Sheet is accurate, Univolt, Dietzel GmbH, 1110 Wien, 1. Haidequerstraße 3-5, [www.dietzel-univolt.com](http://www.dietzel-univolt.com), makes no warranty, expressed or implied, with respect thereto and disclaims any liability from reliance thereon. All data are subject to change without prior notice. Fully responsible for the content: UNIVOLT (UK) Ltd. A1 Connect Unit 2, Cole Green Lane, AL7 4FW Welwyn Garden City.