



Kirk Sandall Industrial Estate, Doncaster, South
Yorkshire, DN3 1QR

+44 (0)1302 310 113
enquiries@prosolveproducts.com
www. prosolveproducts.com

ProSolve is trademark of S.T.L Trading Company
Limited
Reg in England No: 5230722
VAT Reg No: 381 3533 58

DATA SHEET

ProSolve® Floor Paints 5L/20L

DESCRIPTION

ProSolve Industrial Floor Paint is quick drying and hard wearing, it is durable against abrasion/impact and exposure to solvents, salt and water. Easy to apply with a brush, roller or sprayer. Suitable for heavy duty commercial and industry areas. Suitable for use on concrete, cement and non-ferrous metal.

TECHNICAL OVERVIEW

Coverage: 5-7m² per litre, dependent on paint thickness.

Touch Dry: 3-4 hours

Recoat Time: Min 24 hours

Substrates: Any suitably cleaned and dry surface

Application Temperature: 10-35°C

Solids by Volume: 55% (ASTM D2697) +/-3%, dependent on colour

VOC Information: 430g per litre (from formula to satisfy EU Solvent Emissions Directive)

Application Method: Brush, Roller or Sprayer

Typical Wet-Film Thickness: 85-135µm per coat

Typical Dry-Film Thickness: 50-100µm per coat

Flash point: +32°C

INSTRUCTIONS

To ensure that you achieve the maximum level of adherence between the paint and the substrate, and achieve a long-lasting finish, we recommend:


Remove any dirt, grease, debris and any loose or flaked old paint

Ensure the surface is clean and completely dry

Apply a Primer and Sealer (like the ProSolve™ Prime and Seal) to ensure a better adhesion of the top coat

Apply the Floor Paint with brush or roller, two coats will provide a better finish

COLOUR CHART

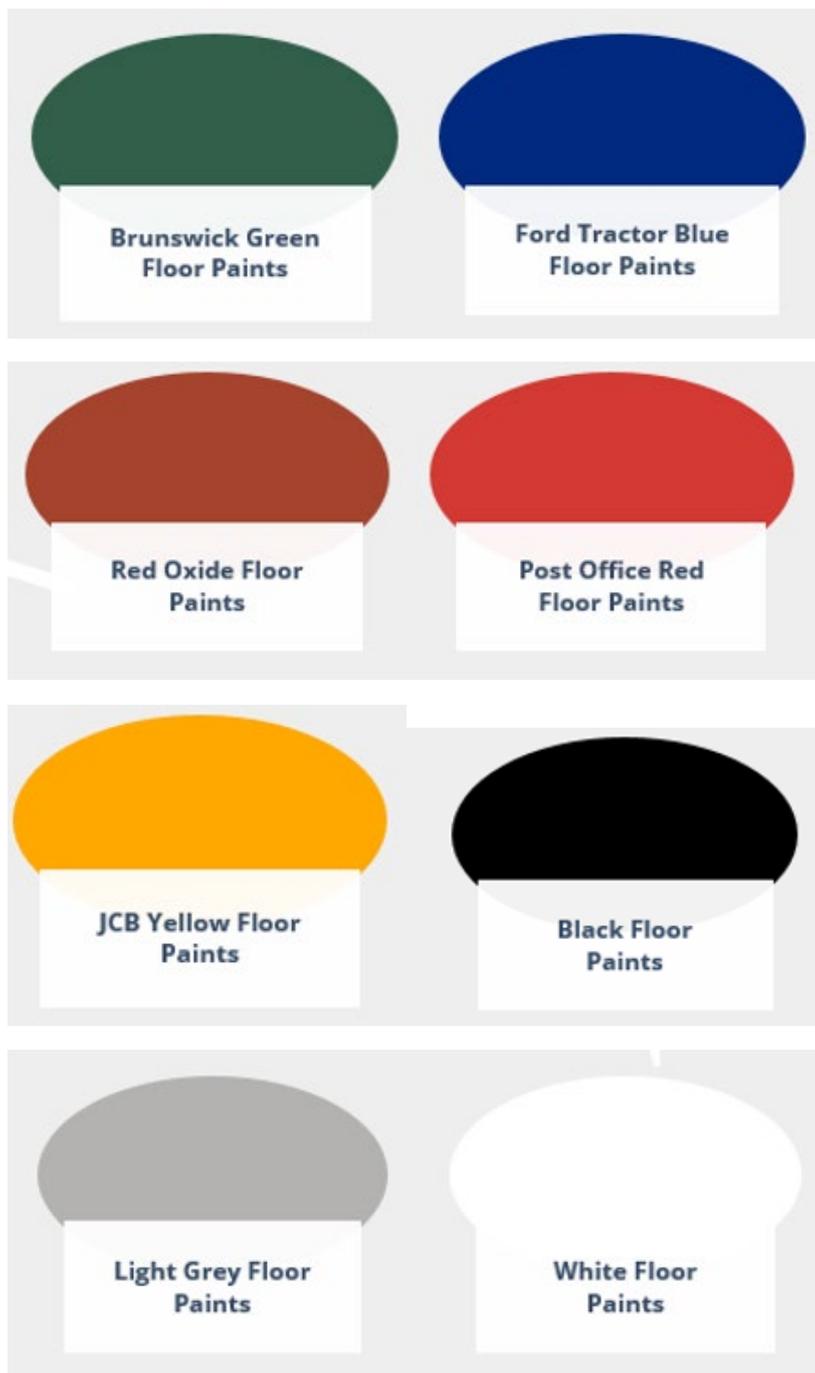

IMPORTANT NOTICE

All statements, technical information and recommendations are based on tests we believe to be reliable as at the date of hereof, but the accuracy or completeness thereof is not guaranteed. Please ensure before using the product that it is suitable for your intended use. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, other than for fraudulent misrepresentation, ProSolve expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information.

BEFORE USE, CONSULT THE SAFETY DATA SHEET OF THE PRODUCT.