


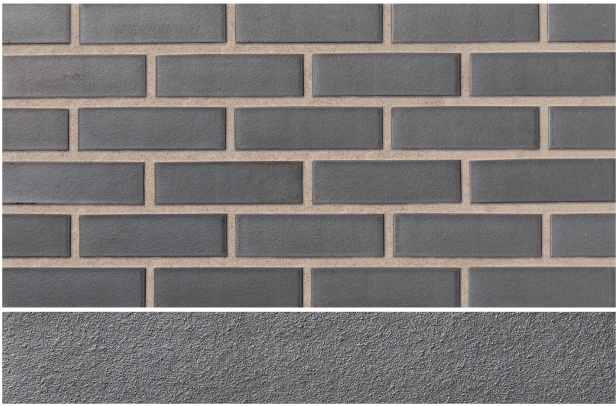

Product Information

Ibstock Code	A5055A
Type	Wirecut Extruded
Facing Description	Smooth
Dry Brick Weight	2.5kg
Pack Quantity	520
Packaging (standard)	Banded (Plastic)
Factory	Imported
EPD	-

Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm)	215x102x65
Size Tolerances Mean & Range	T2 R2
Configuration	Vertically Perforated
Voids (%)	NPD
Compressive Strength (N/mm²)	40
Active Soluble Salts	S2
Water Absorption (% weight)	6
Durability	F2
Gross Dry Density (kg/m³)	1300
Equivalent Thermal Conductivity "K" value 5% Exposed	1.12
Initial Rate of Absorption (Suction Rate) (kg/m²/min)	NPD
EAN	5036335048528