


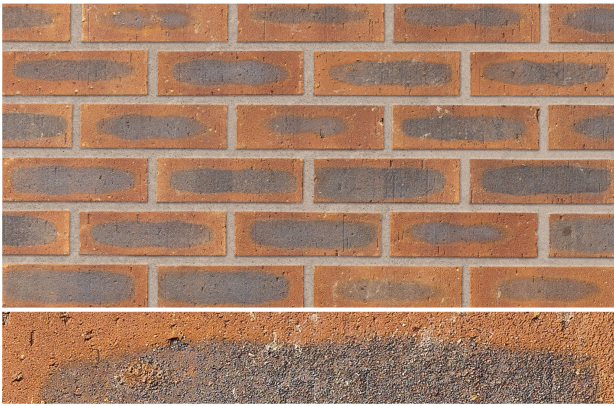

## Product Information

|                      |                                        |
|----------------------|----------------------------------------|
| Ibstock Code         | A2478A                                 |
| Type                 | Wirecut Extruded                       |
| Facing Description   | Rolled                                 |
| Dry Brick Weight     | 1.9kg                                  |
| Pack Quantity        | 475                                    |
| Packaging (standard) | Banded (Plastic) and Stretchwrap       |
| Factory              | Dorket Head                            |
| EPD                  | Dorket Head Product Group 1 (HUB-1123) |

## Technical Specification (to BS EN 771-1)

|                                                       |                       |
|-------------------------------------------------------|-----------------------|
| Brick Dimensions (L x W x H mm)                       | 215x102x65            |
| Size Tolerances Mean & Range                          | T2 R1                 |
| Configuration                                         | Vertically Perforated |
| Voids (%)                                             | 27-32%                |
| Compressive Strength (N/mm²)                          | 40                    |
| Active Soluble Salts                                  | S2                    |
| Water Absorption (% weight)                           | 16                    |
| Durability                                            | F2                    |
| Gross Dry Density (kg/m³)                             | 1390                  |
| Equivalent Thermal Conductivity "K" value 5% Exposed  | 0.91                  |
| Initial Rate of Absorption (Suction Rate) (kg/m²/min) | 1                     |
| EAN                                                   | 5036335014615         |