



B 125

Access Covers

Single Seal



KD30

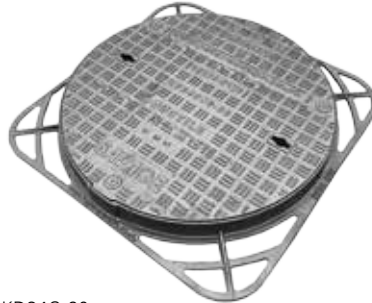

KD34C-60

Features:

- Manufactured to BS EN 124 class B 125
- BSI Kitemarked for third party assurance of quality
- Suitable for slow moving traffic
- Full single seal gives airtight seal when filled with grease
- Ductile iron to ISO 1083 for improved weight to strength ratio
- Black coated finish

Options:

- Standard Locking
- High Security Locking
- Badging e.g. FW, SW
- Safety Grids
- Moly Sealing Grease

Standard Sizes

Code	Clear Opening (mm)	O/all Frame (mm)	Frame Depth (mm)	Weight (kg)
KD300	305 x 305	385 x 385	47	11
D30	433 dia	510 x 510	25	30
KD30	433 dia	510 x 510	25	30
KD31	450 dia	555 dia	22	32
KD3340	600 x 450	692 x 542	44	55
KD3440	600 x 600	690 x 690	40	66
KD34C-60	600 dia	750 x 750	75	79
KD34C-60L*	600 dia	750 x 750	75	79
KD39	900 x 900	1000 x 1000	60	114

*Locked as standard