


# TF Party Wall Roll.

November 2023 | Data Sheet

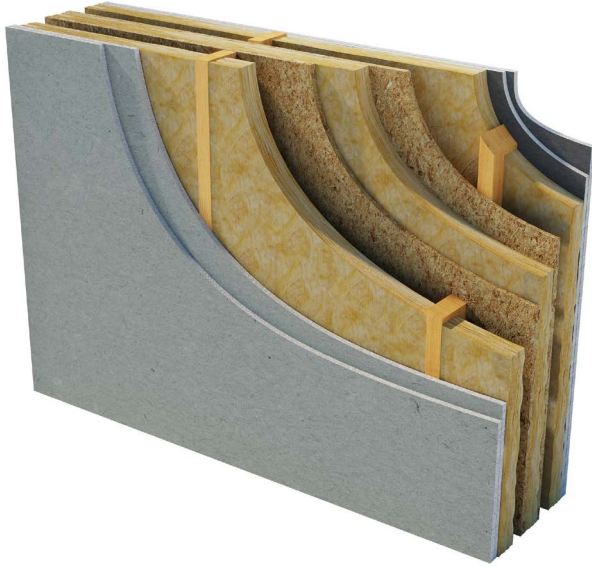

## Description.

Superglass TF Party Wall Roll is a non-combustible glass mineral wool insulation roll. The flexible roll is supplied 2x675mm or 1200mm wide to allow easy installation and minimum on-site cutting and waste.

## Application.

Superglass TF Party Wall Roll is designed to provide thermal and acoustic insulation within timber frame party/separating wall cavities.

Superglass TF Party Wall Roll may be used as a component in Robust Details solutions E-WT-1 and E-WT-2, It may also be used in party wall systems which require on-site pre-completion and can be used as part of a full fill solution to achieve a zero effective U-value.

## Performance.

### Density:

Manufactured at a minimum density of 18kg/m<sup>3</sup>.

### Thermal Conductivity:

Declared thermal conductivity (lambda ( $\lambda$ ) value) of 0.036W/mK.

### Fire Classification:

Deemed non-combustible with a fire classification of Euroclass A1 (the highest possible rating) when tested to BS EN 13501-1 Reaction to Fire.



**Typical applications:**  
Timber frame  
party/separating walls.



Acoustic  
Insulation



Thermal  
Insulation



Non-  
combustible



Easy to  
Install



Recycled  
Content

Intelligent Environments  
**Superglass**

superglass.co.uk

# TF Party Wall Roll.

## Technical Characteristics.

### Product Specification.

Thickness (mm)	Length (m)	Width (mm)	Pack Area (m <sup>2</sup> )	Packs per pallet	Thermal Conductivity (W/mK)	Thermal Resistance (m <sup>2</sup> K/W)	Product Code
60	10.50	2x675	14.175	24	0.036	1.60	5849
60	11.50	1200	13.800	24	0.036	1.60	6012

Please note that all dimensions are nominal.

### Additional Information.

#### Vapour Resistivity

The product has a nominal vapour resistivity of 5 MNs/gm.

#### Environmental credentials.

- ISO 14001 - Environmental Management Systems (EMS) certified. Certificate number: EMS 646508
- Contains no ozone-depleting substances or greenhouse gases. For more information, please refer to the Environmental Product Declaration (EPD).
- Manufactured from up to 84% recycled glass.
- Generic BRE Green Guide Rating of A+.

#### Standards and Approvals.

Manufactured in accordance with:

- BS EN 13162:2012(+A1:2015) Thermal insulation products for buildings - Factory made mineral wool (MW) products.
- BS EN 13172: 2012 Thermal insulation products - Evaluation of conformity.
- BS EN ISO 9001 - Quality Management Systems (QMS). Certificate number: FM 02264.

#### Certifications.

- UKCA certified to BS EN 13162:2012+A1:2015. Certificate number: 0086 CPR 469699.
- CE marked to EN 13162:2012+A1:2015. Certificate number: 0751-CPR-399.0-01.

A copy of the product Declaration of Performance (DoP) can be downloaded from the Superglass website.

#### Handling & Storage.

Due to its physical characteristics, TF Party Wall Roll is quick and easy to handle and install.

The product is supplied compression packed in polythene to provide short term protection only. For long term protection, the product must be stored indoors, or under a waterproof covering and off the ground to protect from weather damage. The product should not be left permanently exposed to the elements.


All Superglass products are non-hygroscopic, will not rot, degrade, or sustain vermin and will not encourage the growth of mould, bacteria, or fungi

# TF Party Wall Roll.

## Technical Characteristics.

### Recommended solutions

## robustdetails® E-WT-1

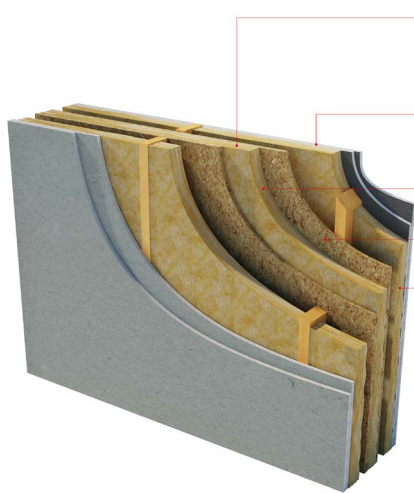

**Wall width:** 240mm (min) between inner faces of wall linings.  
50mm (min) gap between studs (must not be bridged by any diagonal bracing).

**Wall lining:** 2 or more layers of gypsum-based board (total nominal mass per unit area 22 kg/m<sup>2</sup>), both sides - all joints staggered

**Insulation:** SUPERGLASS TF PARTY WALL ROLL


**Sheathing:** Partial sheathing of party wall - Please refer to Robust Details Handbook

**Absorbent material:** 60mm (min) mineral wool batts or quilt (density 10 - 60kg/m<sup>3</sup>) both sides i.e Superglass Multi Acoustic Roll, Superglass Timber & Rafter Roll

**Ties:** Between frames not more than 40mm x 3mm, at 1200mm (min) centres horizontally, one row of ties per storey height vertically.

**External (flanking) wall:** Outer leaf masonry with minimum 50mm cavity.

## robustdetails® E-WT-2

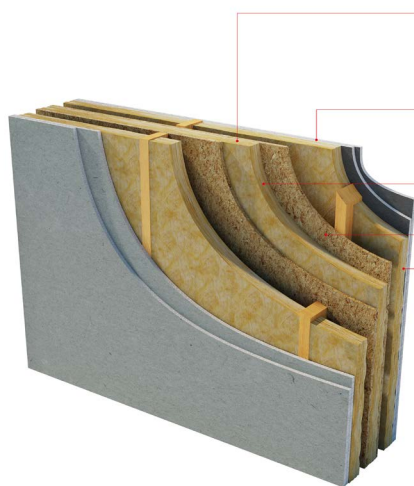

**Wall width:** 240mm (min) between inner faces of wall linings  
50mm (min) cavity (gap between wall panels) 68mm (min) between stud frames

**Wall lining:** 2 or more layers of gypsum-based board (total nominal mass per unit area 22 kg/m<sup>2</sup>), both sides - all joints staggered

**Insulation:** SUPERGLASS TF PARTY WALL ROLL

**Sheathing:** 9mm (min) thick board.

**Absorbent material:** 60mm (min) mineral wool batts or quilt (density 10 - 60kg/m<sup>3</sup>) both sides i.e Superglass Multi Acoustic Roll, Superglass Timber & Rafter Roll

**Ties:** Between frames not more than 40mm x 3mm, at 1200mm (min) centres horizontally, one row of ties per storey height vertically.

**External (flanking) wall:** Outer leaf masonry with minimum 50mm cavity.



Intelligent Environments  
**Superglass**

Superglass Insulation Limited. Thistle Industrial Estate, Kerse Road, Stirling, Scotland FK7 7QQ

### Technical

Hotline: 0808 1645 134

Email: [technical.stirling@etexgroup.com](mailto:technical.stirling@etexgroup.com)

### Customer Services

Tel: 01786 451170

Email: [customerservice.stirling@etexgroup.com](mailto:customerservice.stirling@etexgroup.com)

### Social

[www.facebook.com/superglassinsulationuk](https://www.facebook.com/superglassinsulationuk)

[www.linkedin.com/company/superglassuk/](https://www.linkedin.com/company/superglassuk/)

[www.twitter.com/Superglass\\_UK](https://www.twitter.com/Superglass_UK)

All rights are reserved, including those of photomechanical reproduction and storage in electronic media. Commercial use of the processes and work activities presented in this document is not permitted. Extreme caution was observed when putting together the information, texts and illustrations in this document. Nevertheless, errors cannot quite be ruled out. The publisher and editors cannot assume legal responsibility or any liability whatever for incorrect information and the consequences thereof. The publisher and editors will be grateful for improvement suggestions and details of errors pointed out.

REF: TFR01