

A Solution for Every Problem • A Solution for Every Problem • A Solution for Every Problem • A Solution for Every Problem • A Solution for Every Problem



**NO MORE DAMP**  
**NO MORE ROT**  
**NO MORE CRACKS**  
**WATERPROOFING**

A Solution for Every Problem • A Solution for Every Problem • A Solution for Every Problem • A Solution for Every Problem • A Solution for Every Problem



# CONTENTS

Category	Pages
<b>NO MORE DAMP</b>	
Damp-proofing 'How-To'	3 - 4
Ultracure Damp-proofing Cream	5 - 8
Replastering Specifications	9 - 12
Floors and Walls	13 - 14
Anti-Condensation and Mould Control	15 - 16
External Surface Treatments	17 - 18
Wykamol Eco Range	19 - 20
Waterproofing Membrane Kits	21 - 22
Tanking Systems Guide	23 - 24
<b>NO MORE ROT</b>	
Microtech Ready To Use Treatments	25
Wykabor Timber Treatments	26
Lignum Pro Concentrates	27
<b>NO MORE CRACKS</b>	
No More Cracks Range	29
Crack Stitching Bars	30 - 32
Crack Sealer Plus Kits	33 - 34

Category	Pages
<b>WATERPROOFING</b>	
Wykamol Cavity Drain Membranes	35
Quadproof Ground Gas Membranes	36
Wykamol Membranes and Ancillaries	37 - 39
<b>EXTRAS</b>	
Contractor Training Courses	41
CGS Contractor's Insurance Backed Guarantee Scheme	42



# **DAMP-PROOFING** **'HOW-TO'**

## **DAMP-PROOFING SYSTEM A**

1. KNOCK EXISTING PLASTER OFF THE WALL TO A MINIMUM HEIGHT OF 1 METRE, OR AT LEAST 300 MM ABOVE ANY SIGNS OF DAMPNESS
2. ULTRACURE INSTALLATION
3. FINISH WITH AN APPLICATION OF RENDER WITH NO MORE DAMP RENDERPROOF ADDITIVE
4. APPLY PLASTER FINISH

## **DAMP-PROOFING SYSTEM B**

1. KNOCK EXISTING PLASTER OFF THE WALL TO A MINIMUM HEIGHT OF 1 METRE, OR AT LEAST 300 MM ABOVE ANY SIGNS OF DAMPNESS
2. ULTRACURE INSTALLATION
3. RE-PLASTER USING SALT-INHIBITING AND DAMP RESISTANT NO MORE DAMP RENOVATION PLASTER
4. APPLY PLASTER FINISH

## **DAMP-PROOFING SYSTEM C**

1. KNOCK EXISTING PLASTER OFF THE WALL TO A MINIMUM HEIGHT OF 1 METRE, OR AT LEAST 300 MM ABOVE ANY SIGNS OF DAMPNESS
2. ULTRACURE INSTALLATION
3. LEVEL THE WALL WITH AN APPLICATION OF NO MORE DAMP UNIVERSAL MORTAR
4. APPLY A WATERPROOF COATING OF NO MORE DAMP TANKING SLURRY
5. FINISH WITH AN APPLICATION OF SALT INHIBITING AND DAMP RESISTANT NO MORE DAMP RENOVATION PLASTER
6. APPLY PLASTER FINISH

## **DAMP-PROOFING SYSTEM D**

1. KNOCK EXISTING PLASTER OFF THE WALL TO A MINIMUM HEIGHT OF 1 METRE, OR AT LEAST 300 MM ABOVE ANY SIGNS OF DAMPNESS
2. ULTRACURE INSTALLATION
3. APPLY WYKAMOL DAMP STOP MESH MEMBRANE USING PLUGS AND TAPES PROVIDED IN KIT
4. RE-PLASTER WITH NO MORE DAMP RENOVATION PLASTER
5. APPLY PLASTER FINISH

**START WITH A DAMP PROOF COURSE**



**USE A SALT RESISTANT FINISH**



**FOR RUBBLE FILLED WALLS USE A TANKING SYSTEM**



**MESH MEMBRANES FOR RUBBLE FILLED AND SATURATED WALLS**



# ULTRACURE<sup>®</sup> DAMP PROOF CREAM



# ultracure

## THE ULTIMATE CURE FOR RISING DAMP

Ultracure<sup>®</sup> is one of the leading products on the market for the control of rising damp. The unique silicone emulsion cream is injected into the masonry wall to form a barrier, protecting your walls against harmful salts and damp. Ultracure<sup>®</sup> can be used in conjunction with No More Damp Mesh Membrane Kit and Renderproof or Renovation Plaster.

## ADVANTAGES

- ✓✓ EFFECTIVE FOR AT LEAST 20 YEARS
- ✓✓ BBA APPROVED
- ✓✓ NO HIGH PRESSURE INJECTION PUMP NEEDED
- ✓✓ NO PUMP CLEANING BETWEEN JOBS
- ✓✓ CAN BE USED IN CONJUNCTION WITH DAMPSTOP MESH MEMBRANE KIT
- ✓✓ FINISH WITH NO MORE DAMP RENDERPROOF OR NO MORE DAMP RENOVATION PLASTER
- ✓✓ EASY, FAST AND CLEAN INSTALLATION
- ✓✓ VIRTUALLY ODOURLESS
- ✓✓ CAN BE USED IN ALL TYPES OF MASONRY
- ✓✓ PRECISE DOSING
- ✓✓ LOW HAZARD



For more information please visit: [www.huwsgray.co.uk](http://www.huwsgray.co.uk)

**Rising damp** is a common problem in older properties. In the majority of cases a remedial damp proof course is a cost effective way of resolving your rising damp problem with minimal disturbance.

## NEED ADVICE?

Use the diagram below to help with your Ultracure© application. Always refer to the Technical Datasheet available on our website or scan the barcode to watch our installation video!



### ULTRACURE HOW TO GUIDE



**DEPTH OF HOLE = 90% OF WALL THICKNESS**

\*Internal walls = first available mortar joint

## ULTRACURE© 380 ML KIT

### KIT INCLUDES:

- 8 x 380ml of Ultracure©
- Heavy duty Applicator Gun
- 1 x 12mm x 250mm SDS drill bit
- 1 x 12mm x 160mm SDS drill bit
- 1 x disposable gloves
- 1 x Extended Nozzle
- User Guide



This kit contains everything you need to complete a highly effective damp proof course. Some items are also sold separately.

Product Description	Code	Pack Size	Typical Coverage
Ultracure Complete Kit	GB280040	KIT	1 x 380 ml covers: 115 mm brick thickness = 3.4 linear metres
Ultracure Individual Cartridge	GB280050	380 ml	230 mm brick thickness = 1.75 linear metres



# RISING DAMP SOLUTIONS

## ULTRACURE© 1 LITRE



The Ultracure© 1 Litre comes in a robust tube to prevent damage and is ideal for larger projects. All the accessories for application can be purchased separately.



## 1 LITRE CARTRIDGE GUN AND BRASS NOZZLE KIT



A heavy-duty Applicator Gun and Brass Nozzle for use with the Ultracure© 1 Litre cartridge. The spring and trigger mechanism makes application easy and mess free. 1 Litre tubes sold separately.

Product Description	Code	Pack Size	Typical Coverage
Ultracure 1 Litre Individual Cartridge	GB280045	1 LITRE	1 x 1 Litre Ultracure covers: 115 mm brick thickness = 10 linear metres
Ultracure 1 Litre Gun and Brass Nozzle in a Box	GB280125	KIT	230 mm brick thickness = 5 linear metres

## INJECTION PLUGS

These plastic plugs seal injection holes after the application of an Ultracure© DPC. The injection plugs create a colour matched seal removing the need to cover holes with sand and cement.



Product Description	Code	Pack Size
Brown Injection Plugs	GB280285-A	100
Grey Injection Plugs	GB280285-B	100
Rustic Red Injection Plugs	GB280285-C	100

For more information please visit: [www.huwsgray.co.uk](http://www.huwsgray.co.uk)



For in depth technical advice speak to your Area Technical Manager. Ask in branch for their contact information or call the Wykamol Group Head Office on 0845 400 6666.

## ULTRACURE© 600ML FOIL



The Ultracure© 600 ml foil sausage is easy to transport and perfect for smaller volume projects. Ultracure© 600 ml Applicator Gun and Nozzle Kit is needed for application.

### 600ML APPLICATOR GUN

A heavy-duty Applicator Gun and Nozzle for use with the Ultracure© 600 ml foil sausage. This Applicator Gun is made for precision and helps to reduce wastage. 600 ml foil sausage sold separately.



Product Description	Code	Pack Size	Typical Coverage
Ultracure 600 ml Foil Sausage	GB280047	1	1 x 600 ml covers: 115 mm brick thickness = 6 linear metres
Ultracure 600 ml Gun and Nozzle	GB280051	KIT	230 mm brick thickness = 3 linear metres

### EXTENDED PLASTIC NOZZLE

Ultracure© extended plastic nozzles are available to fit both the Ultracure 380 ml and the Ultracure© 1 Litre cartridges.

- ✓ EASY TO CLEAN OUT
- ✓ ALLOWS FOR PRECISE APPLICATION
- ✓ HELPS PREVENT WASTAGE



- ✓ CAN BE USED MULTIPLE TIMES
- ✓ COST EFFECTIVE NOZZLE

Product Description	Code	Pack Size
380 ml Extended Plastic Nozzle (12 mm diameter)	GB280140	1
1 Litre Extended Plastic Nozzle (12 mm diameter)	GB280120	1

# REPLASTERING SPECIFICATIONS

## RENDERPROOF PLASTER ADDITIVE

Renderproof is an additive designed for use in external and internal render coats to prevent the passage of water and residual salts, usually following the insertion of a DPC.

- ✓ CAN BE USED ON ALL TYPES OF MASONRY
- ✓ REDUCES PORE SIZE IN RENDER
- ✓ PREVENTS PASSAGE OF RESIDUAL GROUND SALTS AND WATER
- ✓ HIGHLY CONCENTRATED - 1 PART RENDERPROOF FOR 24 PARTS WATER



Product Description	Code	Pack Size	Typical Coverage
Renderproof, Pink	GB280440	1 Litre	0.5 Litres per 25 Kg bag of cement
Renderproof, Pink	GB280450	5 Litre	
Renderproof, Pink	GB280455	25 Litre	

## SALT NEUTRALISING TREATMENT



Salt Neutraliser is a surface treatment used to neutralise the harmful effects of salt to your plaster finish. In cases where replastering can be avoided, salt neutraliser is used on the interior walls to prevent residual salts in the masonry from causing future damage to plaster finishes.

- ✓ CAN BE USED ON ALL TYPES OF MASONRY
- ✓ CAN SAVE CONSIDERABLE TIME AND MONEY ON REPLASTERING
- ✓ CAN BE USED IN A CONCENTRATED OR DILUTED FORM
- ✓ CAN BE APPLIED TO PRESERVE INTERIOR PLASTER FINISH
- ✓ CAN BE USED BEFORE REPLASTERING AFTER A DPC

Product Description	Code	Pack Size	Typical Coverage
Salt Neutraliser, Clear	GB280460	5 Litre	Approx. 5m <sup>2</sup> to 10m <sup>2</sup> , dependent on substrate porosity

**Replastering** is often essential after a DPC, as residual salts can damage the plaster finish. Wykamol offer a range of replastering options with waterproofing and salt inhibiting properties.

## RENOVATION PLASTER



Renovation Plaster is a fibre reinforced, lightweight, cementitious plaster to be used as part of a replastering specification after the application of a DPC. It is designed to have similar properties to a 1:1:6 cement:lime:sand plastering mortar, but perlite replaces some of the sand to improve thermal resistance and reduce condensation. Renovation Plaster can be used in conjunction with basement waterproofing systems such as No More Damp Tanking Slurry and is part of our Wykamol Eco Product Range due to its energy saving properties.

- ✓ CONTAINS PERLITE FOR IMPROVED THERMAL PERFORMANCE
- ✓ PREVENTS FORMATION OF BLACK MOULD
- ✓ REDUCES RISK OF CONDENSATION
- ✓ PREVENTS DAMP AND SALT MIGRATION
- ✓ EASY TO USE - VERY LIGHT WEIGHT AND PREMIXED FOR QUALITY CONTROL
- ✓ FIBRE REINFORCED - ELIMINATES CRACKING
- ✓ INHIBITS RUSTING OF ANGLE BEADS, CONDUITS ETC.
- ✓ 20 KG BAG FOR SAFE MANUAL HANDLING

Product Description	Code	Pack Size	Typical Coverage
Renovation Plaster, Grey	GB280130	20 Kg	3 m <sup>2</sup> / 20 Kg bag at 10 mm thickness
Renovation Plaster, Grey, Pallet Rate	GB280130	50 X 20 Kg	

# REPLASTERING SPECIFICATIONS


## SBR LATEX CEMENT ADDITIVE

A specially modified liquid latex to be added to cement based mixes for internal and external use, such as renders, screeds and patching mixes to improve resistance against water and chemicals.



- ✓ CAN BE USED IN AREAS OF CONTINUOUS OR INTERMITTENT WATER CONTACT
- ✓ IMPROVES FLEXIBILITY AND REDUCES CRACKING
- ✓ IMPROVES RESISTANCE TO CHEMICALS AND ABRASION
- ✓ IMPROVES ADHESION
- ✓ IMPROVES WORKABILITY OF MIX
- ✓ ALLOWS THINNER SCREED TO BE LAID
- ✓ IMPARTS HIGH WATER/ SALT RESISTANCE WHEN ADDED TO MIX

Product Description	Code	Pack Size	Typical Coverage
SBR Latex, White	GB280090	5 Litre	Please refer to the Technical Data Sheet or Contact the Wykamol Technical Department
SBR Latex, White	GB280095	25 Litre	

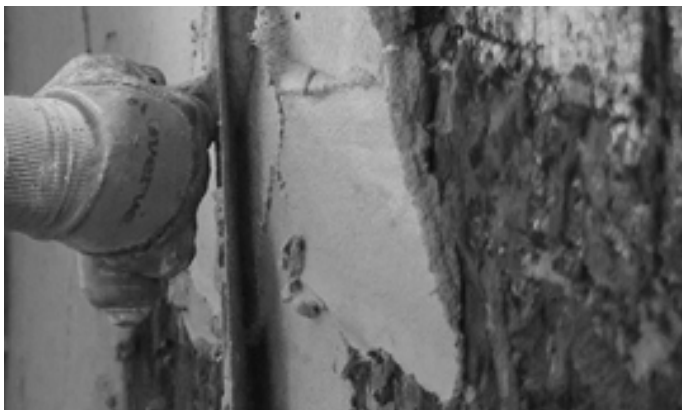

For more information please visit: [www.huwsgray.co.uk](http://www.huwsgray.co.uk)

# DAMPSTOP MESH MEMBRANE KIT



## KIT INCLUDES:

- 1M X 10M of CM3 Mesh Membrane
- 100 fixing plugs
- Fibre Tape

Dampstop Mesh Membrane Kit is a 3mm studded damp proofing membrane which is applied, studs facing the wall, using the fixing plugs and tape provided. The slimline 3 mm thickness of the membrane allows for an even plaster finish across the wall.

- ✓ CAN BE USED IN CONJUNCTION WITH ULTRACURE DPC CREAM
- ✓ CREATES A WARMER WALL TO HELP PREVENT CONDENSATION AND BLACK MOULD
- ✓ FAST DRYING OUT PROCESS AFTER APPLICATION OF CHOSEN FINISH
- ✓ ACCEPTS DIRECT RENDER FINISH AND DOT AND DAB PLASTER BOARD
- ✓ RESISTANT TO HARMFUL SALTS
- ✓ CAN BE APPLIED TO DAMP WALLS
- ✓ EASILY CUT DOWN USING A SHARP BLADE



Product Description	Code	Pack Size	Typical Coverage
Dampstop Mesh Membrane Kit, Clear	GB280220	KIT	10 m <sup>2</sup>
CM3 Mesh Membrane ONLY, Clear	GB280510	1 m x 10 m	10 m <sup>2</sup>
CM3 Mesh Membrane ONLY, Clear	GB280200	1 m x 20 m	20 m <sup>2</sup>
CM3 Mesh Membrane ONLY, Clear	GB280210	2 m x 20 m	40 m <sup>2</sup>

# NO MORE DAMP FOR FLOORS AND WALLS

## EP40 EPOXY FLOOR COATING



EP40 Floor Coating is a water based coating available in grey and clear. EP40 comes in two components, a base and a hardener, which must be thoroughly mixed before application.

- ✓✓ EASY TO APPLY
- ✓✓ EXCELLENT ADHESION TO CONCRETE
- ✓✓ PROVIDES ATTRACTIVE, DUST FREE FINISH
- ✓✓ SUBSTANTIALLY MORE RESISTANCE TO CHEMICALS, FUELS AND LUBRICANTS
- ✓✓ CAN BE USED INTERNALLY AND EXTERNALLY
- ✓✓ FLOOR BECOMES EASIER TO CLEAN WITH IMPERVIOUS FINISH
- ✓✓ CAN BE APPLIED TO GREEN CONCRETE AFTER 7 DAYS
- ✓✓ IDEAL FOR AREAS WITH HIGH FOOT TRAFFIC AND VEHICLES SUCH AS FORKLIFT TRUCKS



Product Description	Code	Pack Size	Typical Coverage
Epoxy Floor Coating, Grey	GB280320	2.5 Litre	1 Litre covers 6m <sup>2</sup> - 8m <sup>2</sup>
Epoxy Floor Coating, Grey	GB280330-A	5 Litre	
Epoxy Floor Coating, Clear	GB280330-B	5 Litre	

For more information please visit: [www.huwsgray.co.uk](http://www.huwsgray.co.uk)

# TECHNOSEAL DAMP-PROOF MEMBRANE PAINT



Technoseal is a SBR latex-based liquid applied membrane for waterproofing applications. Available in black and white.

- ✓✓ NON-TOXIC, NON-HAZARDOUS AND SOLVENT FREE
- ✓✓ CAN BE APPLIED TO DAMP WALLS AND FLOORS
- ✓✓ IDEAL IN VERY WET AREAS - FLOORS AND WALLS IN WET ROOMS
- ✓✓ CAN BE PLASTERED AND BOARDED ON TOP
- ✓✓ EASY APPLICATION BY BRUSH, ROLLER OR HIGH PRESSURE SPRAY
- ✓✓ FOR INTERNAL USE ONLY UNLESS RENDERED/ PROTECTED ON TOP
- ✓✓ APPLY TO BLOCKWORK, STONE, BRICK, TIMBER AND CONCRETE
- ✓✓ TWO COAT APPLICATION



## SUGGESTED APPLICATIONS



Product Description	Code	Pack Size	Typical Coverage
Technoseal, Black	GB280065	5 Litre	Covers upto 5 m <sup>2</sup> in a 2 coat application
Technoseal, White	GB280060	5 Litre	



# ANTI-CONDENSATION AND MOULD CONTROL

## MOULD ERADICATION KIT



### KIT INCLUDES:

- MCS 1 Mould Clear Solution
- MCS 3 Fungicidal Additive x 2
- Soft sponge
- Protective Gloves
- Protective Eyewear
- User Guide

No More Mould Eradication Kit contains everything you need to remove and kill mould growth in your home and prevent it returning. MCS3 Fungicidal Additive also sold separately. Always refer to the Safety Datasheet, which is downloadable from our website, and use the personal protection equipment provided.

- ✓✓ SOLUTION CAN BE USED ON WALLS, CEILINGS, WINDOW REVEALS, FRAMES, DOORS ETC.
- ✓✓ REMOVES AND KILLS MOULD FOR UP TO 5 YEARS
- ✓✓ SOLUTION CLEANS AND STERILISES THE SURFACE

## NO MORE MOULD ADDITIVE



NO MORE MOULD Fungicidal Additive is also available as an individual product. Prevent mould growth before it even happens by including No More Mould in the decoration process.



- ✓✓ FUNGICIDAL ADDITIVE CAN BE ADDED TO EMULSION AND GLOSS PAINTS, WALLPAPER PASTE AND GROUTS
- ✓✓ FUNGICIDAL ADDITIVE PREVENTS FURTHER GROWTH OF MOULD SPORES

Product Description	Code	Pack Size	Typical Coverage
Mould Eradication, Clear	GB280030	KIT	MCS1 covers approx. 12.5 m <sup>2</sup> based on 1 coat application (2 coats can be applied)
Fungicidal Additive ONLY, Clear	GB280035	100 ML	Water based paint - 100 ml/ 5 L of paint Solvent based paint - 50 ml/ 5 L of paint

For more information please visit: [www.huwsgray.co.uk](http://www.huwsgray.co.uk)

# THERMALDRY ANTI-CONDENSATION COATING



No More Damp Thermaldry Anti-Condensation Coating is both thermally insulating and water repelling. It increases the wall temperature, thus reducing the 'dew point', or the temperature at which condensation occurs.

- ✓✓ COATING IS WATERPROOF WHEN DRY AND WALLS ARE WARM TO THE TOUCH
- ✓✓ TAKES UP TO 60% LONGER FOR CONDENSATION TO OCCUR ON WALLS
- ✓✓ CAN BE PAINTED OR WALL PAPERED OVER WITH ANY FINISH, WITHOUT REDUCING ITS EFFECTIVENESS
- ✓✓ SUITABLE FOR ANY INTERIOR WALL - PARTICULARLY EXTERIOR FACING WALLS, BATHROOMS AND KITCHENS
- ✓✓ PREVENTS FORMATION OF BLACK MOULD AND OTHER HARMFUL FUNGI
- ✓✓ ECO-FRIENDLY AND ANTIBACTERIAL
- ✓✓ REDUCES THE RISK OF CONDENSATION
- ✓✓ INCREASES THE LIFE OF YOUR CHOSEN PAINT OR WALLPAPER FINISH



\*Coverage is based on a 2 coat application and dependent on porosity of substrate.

Product Description	Code	Pack Size	Typical Coverage
Thermaldry Anti-Condensation Coating	GB280425	2.5 LITRE	5-6m <sup>2</sup> *
Thermaldry Anti-Condensation Coating	GB280430	5 LITRE	10-12.5m <sup>2</sup> *

# EXTERNAL SURFACE TREATMENTS

## DRYSEAL MASONRY CREAM



Dryseal is a waterproofing cream for the protection of masonry surfaces against water, pollutants and frost/salt damage. Always perform a small test application to ensure finish is as desired.

**UP TO 25 YEARS PROTECTION AGAINST WATER PENETRATION GUARANTEED**

- ✓ EASY APPLICATION BY BRUSH, ROLLER OR LOW PRESSURE SPRAY

✓ PROTECTS AGAINST EFFLORESCENT SALTS WHICH DAMAGE PAINTWORK



✓ BECOMES EFFECTIVE IMMEDIATELY AFTER DRYING (APPROX. 3 HOURS)

✓ CAN BE APPLIED TO DAMP SURFACES
- ✓ IMPROVES INSULATION BY KEEPING SURFACES DRY

✓ ALLOWS SURFACES TO BREATHE

✓ APPEARS WHITE WHEN WET FOR EASY APPLICATION

✓ DRIES COLOURLESS AND DOES NOT STAIN SURFACES

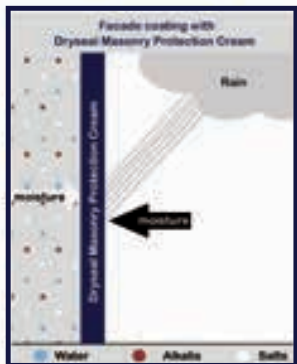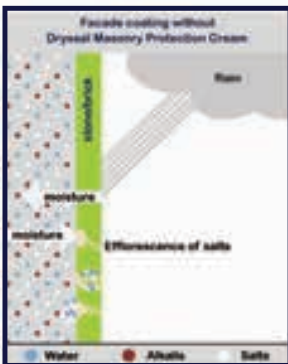

Product Description	Code	Pack Size	Typical Coverage
Dryseal, White (clear when dry)	GB280310	3 Litre	Upto 20 m <sup>2</sup> in a 1 coat application dependent on substrate porosity

For more information please visit: [www.huwsgray.co.uk](http://www.huwsgray.co.uk)

From damp-proofing and waterproofing, to providing an attractive and hardwearing finish: our surface treatments do it all.

## ENVIROSEAL WATER REPELLENT



Enviroseal is an effective, liquid based, solvent free, silicone water repellent which can be used on a wide range of materials. Always perform a small test application to ensure finish is as desired.

- ✓ EASY APPLICATION BY BRUSH, ROLLER OR LOW PRESSURE SPRAY
- ✓ BECOMES EFFECTIVE IMMEDIATELY AFTER DRYING (APPROX. 3 HOURS)
- ✓ WILL SHED WATERBORN DIRT AND SURFACE CONTAMINATION
- ✓ ALLOWS SURFACES TO BREATHE
- ✓ IMPROVES INSULATION
- ✓ CAN BE APPLIED TO DAMP SURFACES



### DRYSEAL AND ENVIROSEAL CAN BE APPLIED TO A WIDE RANGE OF SUBSTRATES



Product Description	Code	Pack Size	Typical Coverage
Enviroseal, White	GB280070	5 Litre	1 Litre covers 5 m <sup>2</sup> in a 2 coat application dependent on substrate porosity
Enviroseal, White	GB280080	25 Litre	

# WYKAMOL ECO RANGE PRODUCTS




**DRYseal**  
the masonry protection system

The Wykamol Eco Range improves the thermal efficiency of your property. By reducing condensation and damp and preventing the growth of black spot mould it can significantly improve internal environments and therefore protect your health. For optimum performance use these 3 products to achieve the ultimate Warmer Wall, even where wet cavity wall insulation is present.

For more information please visit: [www.huwsgray.co.uk](http://www.huwsgray.co.uk)

# THERMAL DRY

ANTI-CONDENSATION COATING

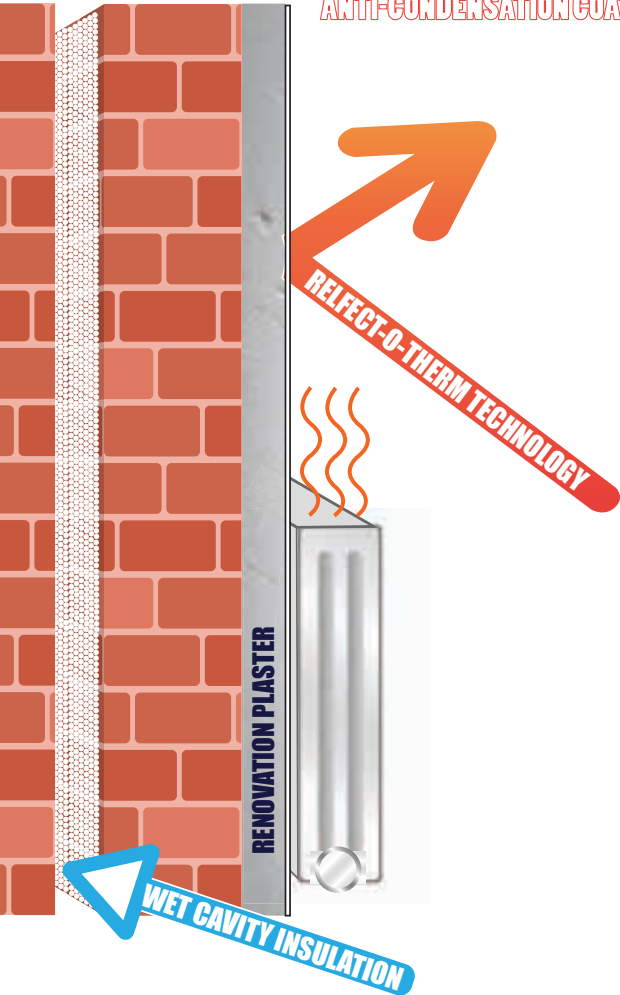

**NO MORE DAMP**  
**RENOVATION PLASTER**

# WATERPROOFING MEMBRANE KITS

## BASELINE 8 MEMBRANE KIT (40M<sup>2</sup>)



### KIT INCLUDES:

- 2M X 20M CM8 Membrane with 8MM Studs
- 200 Fixing plugs with Seals
- Tape

Baseline 8 Membrane Kit is a studded damp proofing and waterproofing membrane which is applied, studs facing the wall, using the fixing plugs and tape provided. Also sold separately:

- CM8 Membrane 2M X 20M
- Accessory Pack containing Plugs and Tape

✓ CAN BE USED BELOW GROUND AS PART OF A WATERPROOFING SYSTEM

✓ IDEAL FOR WALLS WHERE A CHEMICAL DPC IS NOT POSSIBLE E.G. RUBBLE FILLED WALLS

✓ CREATES A WARMER WALL TO HELP PREVENT CONDENSATION AND BLACK MOULD

✓ IDEAL FOR BATTENED DRY WALL SYSTEMS

✓ RESISTANT TO HARMFUL SALTS

✓ FULL WALL PROTECTION AGAINST PENETRATING AND RISING DAMP



**ABOVE GROUND APPLICATION**



**BELOW GROUND APPLICATION**

For more individual membrane options please see Waterproofing Solutions (p 41)

Product Description	Code	Pack Size	Typical Coverage
Baseline 8 Membrane Kit, Clear	GB280020	KIT	40 m <sup>2</sup>
CM8 Membrane Only, Clear	GB280470	2 m x 20 m	40 m <sup>2</sup>
Accessory Pack, Plugs and Tape (No Membrane)	GB280025	KIT	Suitable for 40 m <sup>2</sup> membrane



**For above and below ground structures, No More Damp Membrane Kits are vapour proof and impervious to water, and should be used as part of a cavity drainage system when waterproofing basements.**

## DRY MESH MEMBRANE KIT (20M<sup>2</sup>)



### KIT INCLUDES:

- 2M X 10M CM8 Mesh Membrane with 8MM Studs
- 200 fixing plugs with seals
- Tape

Dry Mesh Membrane Kit is a studded damp proofing membrane which is applied, studs facing the wall, using the plugs and tape provided. Also sold separately:

- CM8 Mesh Membrane 2M X 10M
- Accessory Pack containing Plugs and Tape

✓ RESISTANT TO HARMFUL SALTS

✓ CREATES A WARMER WALL TO HELP PREVENT CONDENSATION AND BLACK MOULD

✓ CAN BE USED BELOW GROUND AS PART OF A WATERPROOFING SYSTEM

✓ FULL WALL PROTECTION AGAINST PENETRATING AND RISING DAMP

✓ ACCEPTS DIRECT RENDER FINISH AND DOT AND DAB PLASTER BOARD

✓ IDEAL FOR WALLS WHERE A CHEMICAL DPC IS NOT POSSIBLE E.G. RUBBLE FILLED WALLS



**ABOVE GROUND APPLICATION**




**BELOW GROUND APPLICATION**

For more individual membrane options please see Waterproofing Solutions (p 41)

Product Description	Code	Pack Size	Typical Coverage
Dry Mesh Membrane Kit, Clear	GB280010	KIT	20 m <sup>2</sup>
Dry Mesh Membrane Only, Clear	GB280500	2 x 20 m	20 m <sup>2</sup>
Accessory Pack, Plugs and Tape (No Membrane)	GB280015	KIT	Suitable for 20 m <sup>2</sup> membrane

# NO MORE DAMP TANKING SYSTEM

Wykamol's No More Damp Tanking System contains an entire range of products, which when used in conjunction with each other, provide a waterproof finish for concrete and masonry. Suitable for both earth retaining walls and below ground structures as part of a BS8102 : 2009 compliant system.

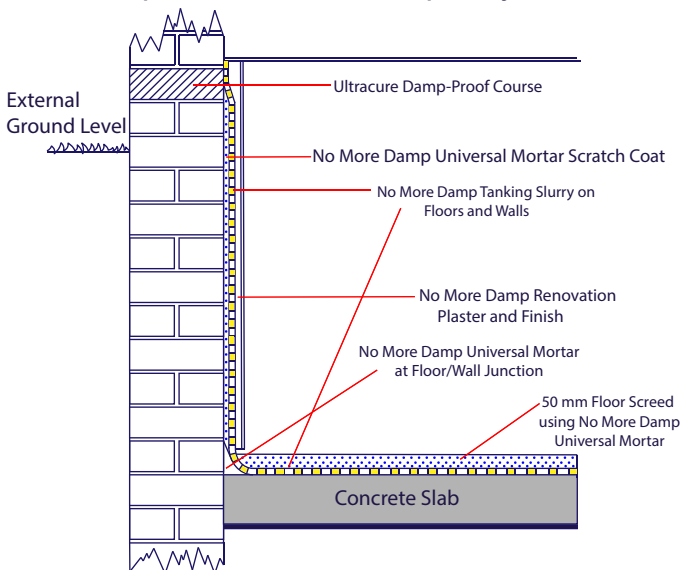

Product Description	Code	Pack Size	Typical Coverage
NMD Waterstop, Grey	GB280170	5KG	Please Refer to DataSheet
NMD Universal Mortar and Fillet Seal	GB280156	25KG	1.4 m <sup>2</sup> at 10 mm thickness
NMD Tanking Slurry Bag in Bucket, Grey	GB280155	20KG	20 Kg bag covers 7 m <sup>2</sup>
NMD Tanking Slurry Bag, Grey	GB280160	20KG	
NMD Tanking Slurry Bag in Bucket, Grey Pallet Rate	GB280155	20KG x 50	
NMD Tanking Slurry Bag, Grey Pallet Rate	GB280160	20KG x 50	

For more information please visit: [www.huwsgray.co.uk](http://www.huwsgray.co.uk)

**For in depth technical advice** speak to your Area Technical Manager. Ask in branch for their contact information or call the Wykamol Group Head Office on 0845 400 6666.

## NO MORE DAMP UNIVERSAL MORTAR AND FILLET SEAL

NO MORE DAMP Universal Mortar is a fibre reinforced, cementitious mortar which can be used for waterproofing, levelling and profiling and as a fillet at wall to floor and wall to wall junctions. **JUST ADD WATER!**



- ✓ ✓ **WIDE RANGE OF APPLICATIONS FROM A SINGLE PRODUCT**
- ✓ ✓ **AN INTEGRAL PART OF THE NO MORE DAMP TANKING SLURRY WATERPROOFING SYSTEM**
- ✓ ✓ **HIGH BOND STRENGTH WHICH ENSURES MONOLITHIC PERFORMANCE**
- ✓ ✓ **FIBRE REINFORCED TO GIVE IMPROVED TENSILE AND IMPACT STRENGTH**
- ✓ ✓ **SUITABLE FOR HORIZONTAL, VERTICAL AND OVERHEAD APPLICATIONS**
- ✓ ✓ **FACTORY BATCHED TO PROVIDE A MORE CONSISTENT QUALITY THAN 3:1 SAND:CEMENT MIX**

## NO MORE DAMP TANKING SLURRY



**NO MORE DAMP Tanking Slurry** is a cementitious waterproofing system. Containing crystalline technology, it is designed to form a permanent waterproof coating to concrete and masonry in basements, cellars, foundations, swimming pools, renders, brickwork, blockwork and many other applications.

- ✓ ✓ **SUPERIOR BOND STRENGTH - BECOMES PART OF THE STRUCTURE**
- ✓ ✓ **PERMANENT WATERPROOFING FOR CONCRETE AND MASONRY**
- ✓ ✓ **SUITABLE FOR USE INTERNALLY AND EXTERNALLY**
- ✓ ✓ **SUITABLE FOR USE ABOVE AND BELOW GROUND**
- ✓ ✓ **JUST ADD WATER**
- ✓ ✓ **SAFE TO USE IN CONTACT WITH POTABLE WATER**
- ✓ ✓ **EASY TO APPLY USING BRUSH, ROLLER OR SPRAY**

# NO MORE ROT

## MICROTECH WOODWORM KILLER

Wykamol's NO MORE ROT Woodworm Killer is a ready-to-use insecticidal treatment which is effective against a wide range of wood boring insects, such as woodworm, killing the infestation and preventing future infestations. Always refer to the safety datasheet prior to application, which is downloadable from our website.



- ✓✓ PROTECTION IS LONG LASTING
- ✓✓ KILLS ACTIVE INFESTATIONS AND PREVENTS FUTURE INFESTATIONS
- ✓✓ MICROEMULSION TECHNOLOGY FOR DEEP PENETRATION OF TIMBER
- ✓✓ CAN BE APPLIED BY BRUSH AND LOW PRESSURE SPRAY
- ✓✓ QUICK DRYING, NON-FLAMMABLE AND VIRTUALLY ODOURLESS

## MICROTECH DUAL PURPOSE

Lignum Wood Preserver is a ready-to-use fungicidal and insecticidal treatment which is effective against a wide range of wood rotting fungi (wet rot and dry rot) and wood boring insects. Always refer to the safety datasheet prior to application, which is downloadable from our website.



- ✓✓ PROTECTION IS LONG LASTING
- ✓✓ KILLS ACTIVE INFESTATIONS AND PREVENTS FUTURE INFESTATIONS
- ✓✓ MICROEMULSION TECHNOLOGY FOR DEEP PENETRATION OF TIMBER
- ✓✓ SUITABLE FOR INTERIOR AND EXTERIOR USE
- ✓✓ QUICK DRYING, NON-FLAMMABLE AND VIRTUALLY ODOURLESS
- ✓✓ CAN BE APPLIED BY BRUSH AND LOW PRESSURE SPRAY

Product Description	Code	Pack Size	Typical Coverage
Microtech Woodworm Killer		5 Litre	Up to 50 m <sup>2</sup>
Microtech Dual Purpose		5 Litre	Curative = Up to 16.5 m <sup>2</sup> Preventative = 25 m <sup>2</sup>

For more information please visit: [www.huwsgray.co.uk](http://www.huwsgray.co.uk)

## WYKABOR 10.1

Wykabor 10.1 is an aqueous wood preservative for the eradication of common furniture beetles and other wood boring insects, and the prevention of fungal decay in sound timbers. Always refer to the safety datasheet prior to application, which is downloadable from our website.



- ✓✓ MULTI-PURPOSE PRESERVATIVE
- ✓✓ HIGHLY PENETRATING
- ✓✓ VERY LOW ODOUR
- ✓✓ NON-FLAMMABLE
- ✓✓ SUITABLE FOR USE ON THE COMMON FURNITURE BEETLE AND OTHER WOOD BORING INSECTS

## WYKABOR 20.1

Wykabor 20.1 is a brushable and injectable gel for use on timbers at high risk of damage by wood boring insects, dry rot and wet rot. It is ideal for joist ends, purling, wall plates, cut ends and rafters. Always refer to the safety datasheet prior to application, which is downloadable from our website.



- ✓✓ HIGHLY PENETRATING PERMANENT PROTECTION
- ✓✓ KILLS ACTIVE INFESTATIONS AND PREVENTS FUTURE INFESTATIONS
- ✓✓ 3 IN 1 TREATMENT - DRY ROT, WET ROT AND WOOD BORING INSECTS
- ✓✓ CAN BE APPLIED BY BRUSH OR INJECTED INTO PRE-DRILLED HOLES
- ✓✓ ODOURLESS, NON-STAINING AND EASY TO HANDLE
- ✓✓ LOW ENVIRONMENTAL HAZARD

Product Description	Code	Pack Size	Typical Coverage
Wykabor 10.1	GB280421	5 Litre	Approx. 20 m <sup>2</sup>
Wykabo 10.1	GB280422	25 Litre	Approx. 100 m <sup>2</sup>
Wykabo 20.1 Gel	GB280423	5 Litre	Approx. 10 - 12.5 m <sup>2</sup>

# NO MORE ROT

## LIGNUM PRO D156 CONCENTRATE

Lignum PRO D156 is a concentrated treatment for the eradication and prevention of wood boring insects and wood destroying and discolouring fungi. It is diluted with water and applied by brush or low pressure spray.



- ✓✓ PROTECTION IS LONG LASTING
- ✓✓ KILLS ACTIVE INFESTATIONS AND PREVENTS FUTURE INFESTATIONS
- ✓✓ MICROEMULSION TECHNOLOGY FOR DEEP PENETRATION OF TIMBER
- ✓✓ CAN BE APPLIED BY BRUSH AND LOW PRESSURE SPRAY
- ✓✓ QUICK DRYING, NON-FLAMMABLE AND VIRTUALLY ODOURLESS
- ✓✓ PREVENTS FUNGAL DECAY AND BLUE STAIN

## LIGNUM PRO I62.5 CONCENTRATE

Lignum PRO I62.5 is a concentrated treatment for the eradication and prevention of wood boring insects. It is diluted with water and applied by brush or low pressure spray.



- ✓✓ PROTECTION IS LONG LASTING
- ✓✓ KILLS ACTIVE INFESTATIONS AND PREVENTS FUTURE INFESTATIONS
- ✓✓ MICROEMULSION TECHNOLOGY FOR DEEP PENETRATION OF TIMBER
- ✓✓ CAN BE APPLIED BY BRUSH AND LOW PRESSURE SPRAY
- ✓✓ QUICK DRYING, NON-FLAMMABLE AND VIRTUALLY ODOURLESS
- ✓✓ PREVENTS FUNGAL DECAY AND BLUE STAIN

Product Description	Code	Pack Size	Typical Coverage Once Diluted
Lignum PRO D156	GB280410	1 Litre	82.5 m <sup>2</sup> - 250 m <sup>2</sup>
Lignum PRO I62.5	GB280420	1 Litre	82.5 m <sup>2</sup> - 125 m <sup>2</sup>

For more information please visit: [www.huwsgray.co.uk](http://www.huwsgray.co.uk)





## **DAMP AND TIMBER COURSES**

**DATES AVAILABLE THROUGH-  
OUT THE YEAR**

**Please ask in branch  
for more details**



# NO MORE CRACKS

**Buildings constructed primarily out of masonry are susceptible to types of movement which will result in structural defects.**

**For the typical structural issues that arise in properties across the UK, Wykamol's NO MORE CRACKS range offer a solution.**

**Retrofit of cavity wall ties, cavity wall tie replacements and remedial crack stitching are just 3 issues which can be rectified by the easy-to-use NO MORE CRACKS Kits.**



For more information please visit: [www.huwsgray.co.uk](http://www.huwsgray.co.uk)

# HELICAL CRACK STITCHING BARS

Helical reinforcement bars are ideal for stitching cracks in brickwork, reconnecting walls either side of the fracture and dissipating load along the length of the helix. The twisted Thor Helical Remedial bars can also be used as bed joint reinforcement to form deep masonry beams that carry and transfer imposed loads.



 Lintel repairs	 Bay Window Repairs	 Cracks near corners of buildings	 Masonry beam creation
			

# NO MORE CRACKS

## NO MORE CRACKS CRACK STITCHING KIT




### KIT INCLUDES:

- 10 x 1 M Thor Helical Crack Stitching Bars in Grade 304 Stainless Steel
- 1 x 10 Kg tub containing 2 x 5 Kg of W60 Flexi Grout (yield = 3 L)
- 1 x Grout-Master Applicator with Hi-Flo Nozzle
- 1 x Mixer paddle
- 1 x Finger Trowel

Product Description	Code	Pack Size
NMC Crack Stitching Kit	GB280300	KIT
Crack Stitching Bar 6 mm x 1000 mm	GB280290	1
Grout-Master Applicator with Hi-Flo Nozzle (yellow)	GB280400	1
W60 Flexi Grout, 2 x 5 Kg in a Bucket	GB280295	10 Kg/ 3 L Yield

## WHERE DO I PLACE CRACKSTITCHING BARS?

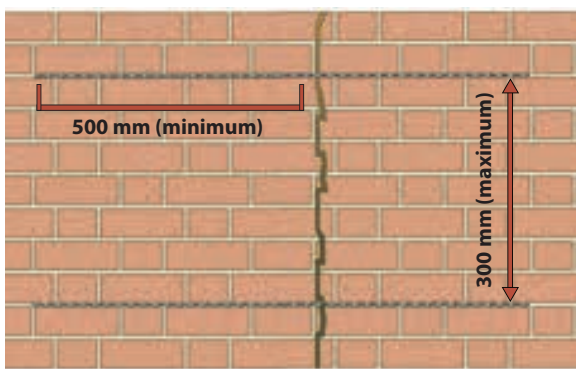


Masonry	Depth of		
	Slot	Grout	Rod
102 mm	30 mm	20 mm	20 mm
215 mm	45 mm	30 mm	30 mm

**Tolerances = + 5 mm / - 0 mm**

For more information please visit: [www.huwsgray.co.uk](http://www.huwsgray.co.uk)

# HOW TO USE CRACK STITCHING BARS

## HOW DO I INSTALL CRACK STITCHING BARS?

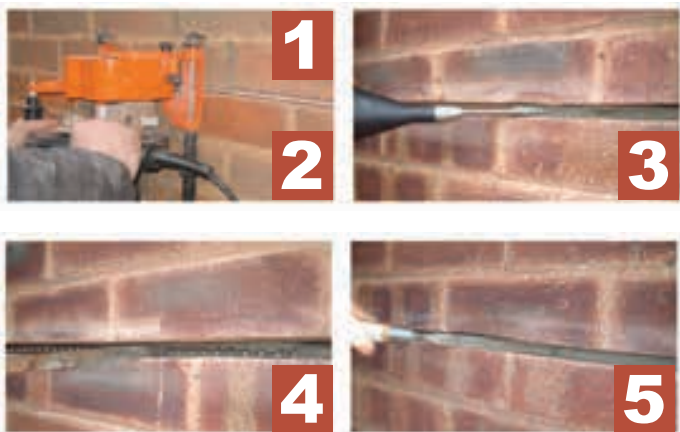

**1**

Chase horizontal slots at 300 mm intervals that extend 500 mm on each side of the crack.

**2**

Clear loose debris from slots and flush thoroughly with water.

**3**

Pump bead of WHO60 cement grout to rear of slot, filling it evenly to approximately two thirds full.

**4**

Push helical crack stitching bar into grout, to approximately two thirds of the slot depth. Trowel displaced grout to firmly encapsulate the bar.

**5**

Make good the wall chase to disguise the slot. Repair cracks between the helically reinforced masonry with Crack Sealer Plus.

**WATCH OUR INSTALLATION VIDEO**



# NO MORE CRACKS

## CRACK SEALER PLUS



### KIT INCLUDES:

- 1 x Crack Sealer Base
- 1 x Crack Sealer Hardener
- 1 x Plunger Plate
- 1 x Piston
- 1 x 400 cc Cartridge
- 1 x Nozzle Set

No More Cracks Crack Sealer Plus is a 2 part epoxy adhesive specifically formulated for repairing fine cracks in brick, block, stone, concrete and masonry.

- ✓✓ PROVIDES A WATERPROOF SEAL
- ✓✓ QUICK AND EASY TO USE
- ✓✓ SUITABLE FOR BRICKS, BLOCKS, RENDER AND CONCRETE
- ✓✓ FILLS CRACKS FROM 2 MM - 12 MM WIDE WITHOUT INJECTION PORTS
- ✓✓ FLEXIBLE 2 MM AND 4 MM INJECTION NOZZLES FOR ULTRA-FINE CRACKS
- ✓✓ GEL RAPIDLY AND CURES WITHIN 12 HOURS



Before

During

After



Before

During

After

Product Description	Code	Pack Size
Crack Sealer Kit for Brick	GB280370-A	300 ml
Crack Sealer Kit for Renders	GB280370-B	300 ml

For more information please visit: [www.huwsgray.co.uk](http://www.huwsgray.co.uk)

## HOW TO USE CRACK SEALER PLUS

**1** Add the content of the smaller container (hardener) to the content of the larger container (base).

**2** Mix the two pastes thoroughly, ideally with a mixing knife.

**3** Place the follower-plate onto the surface of the mixed material, ensuring it sits parallel to the edges of the tub, with the lip pointing upwards

**4** Place the back end of the cartridge centrally over the hole in the follower plate. Press the cartridge firmly and continuously down until the follower plate bottoms on the mixing tub base.

**5** Carefully remove and invert the now full cartridge

**6** Assemble the nozzle adaptor and nozzle and attach to the cartridge. Insert the rear end plunger.



# WATERPROOFING SOLUTIONS



The Wykamol Group are the only UK based manufacturers of waterproofing materials who offer to Design, Advise and Supply all your waterproofing projects.

**Ask in branch to contact your local Technical Expert.**

We will visit site, design your waterproofing specification, provide your local branch with a list of the products you need and deliver them directly to site.

Our Structural Waterproofing specialists can aid you in obtaining a 10 Year Insurance Backed Guarantee, supply products for waterproofing systems Type A, B and C and specify at every stage of a project.

## WYKAMOL CM CAVITY DRAIN MEMBRANES

Wykamol are the only UK manufacturers of HDPE Cavity Drain Membranes and our extensive range offers varying stud heights, for different drainage capacities and membranes with or without mesh, suitable for a range of finishes. For product codes on Cavity Drain Membranes and Ancillaries please see overleaf.



### WATCH OUR BASEMENT WATERPROOFING VIDEO



CREATES A DRY HABITABLE LIVING SPACE IN AREAS PREVIOUSLY SUFFERING FROM DAMP/WET CONDITIONS



WATERPROOF, SALT INHIBITING, ROOT AND CONTAMINANT RESISTANT



QUICK TO INSTALL - MINIMAL PREPARATION NEEDED TO WALL SURFACES



EASY TO FOLD AROUND WINDOWS AND DOORS



EASILY CUT DOWN USING A SHARP BLADE



PART OF A TYPE C CAVITY DRAIN MEMBRANE SYSTEM IN LINE WITH BS8102:2009



CLEAR FOR EASY APPLICATION AND FIXING OF WYKAMOL CM BRICK AND CM PLASTER PLUGS


For more information please visit: [www.huwsgray.co.uk](http://www.huwsgray.co.uk)









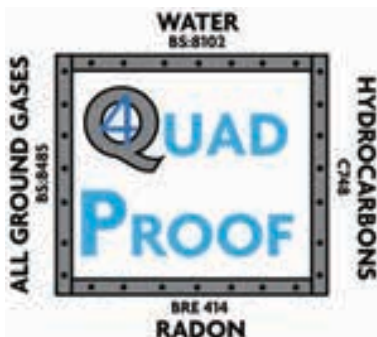

# TYPE C GROUND GAS AND WATERPROOFING MEMBRANES

## QUADPROOF MEMBRANES

The Wykamol Quadproof membrane is a polyethylene membrane available with bonded textile for pre-applied applications or with an all weather adhesive backing for post-applied applications. Quadproof protects against Methane, Carbon Dioxide, Radon, Ground Gases, VOCs, Hydrocarbons, air and moisture.



-  **ALL IN ONE PROTECTION AGAINST METHANE, CARBON DIOXIDE, RADON, GROUND GASES, VOCS, HYDROCARBONS, AIR AND WATER**
-  **FULL SURFACE CONTACT BETWEEN THE MEMBRANE AND CONCRETE**
-  **MANUFACTURED TO MEET THE MOST UP-TO-DATE BRITISH STANDARDS BS8485:2015 AND BS8102:2009**
-  **EXCEPTIONAL CHEMICAL RESISTANCE**
-  **LONG TERM DURABILITY (PERFORMANCE GUARANTEED FOR LIFETIME OF THE BUILDING)**
-  **QUICK AND EASY INSTALLATION**
-  **WATERPROOFING BARRIER TYPE A AND GROUND GASES BARRIER IN ONE**
-  **SUPER BONDING SELF-ADHESIVE BITUMEN (POST-APPLIED)**

Product Description	Code	Pack Size
Quadproof Bond (Pre-applied)	QPBOND	25 m <sup>2</sup>
Quadproof Tank (Post-applied)	QPTANK	20 m <sup>2</sup>
Quadproof Loose Lay	QUADPROOF	50 m <sup>2</sup>
Quadproof Liquid Gas Barrier	QPLGB	15 Kg
Quadproof Primer	QPPRIMER25	25 Litre
Quadproof Reinforcement Flex Tape	QPRFTAPE	1.2 m x 5 m
Quadproof Detailing Strip	QPDSTRIP	1 m x 25 m
Quadproof Tape	QPTAPE	1 m x 15 m
Quadproof Extension Tape	QPEXTAPE	0.3 m x 20 m
Quadproof External Corner Unit	QPEXTCORNER	1
Quadproof Internal Corner Unit	QPINTCORNER	1

# WYKAMOL STRUCTURAL

PRODUCT	CODE	DESCRIPTION	PACK SIZE
	GB280560	CM3 MEMBRANE 2M X 20M, BLACK	40M <sup>2</sup>
	GB280470	CM8 MEMBRANE 2M X 20M, CLEAR	40M <sup>2</sup>
	GB280480	CM8 MEMBRANE 2.4M X 20M, CLEAR	48M <sup>2</sup>
	GB280500	CM8 MESH MEMBRANE 2M X 10M, CLEAR	20M <sup>2</sup>
	GB280400	CM8 MESH MEMBRANE 2 M X 20 M, CLEAR	40M <sup>2</sup>
	GB280540	CM20 MEMBRANE 2M X 10M, BLACK	20M <sup>2</sup>
	GB280550	CM20 MEMBRANE 2M X 20M, BLACK	40M <sup>2</sup>
	GB280590	SUREPROOF MEMBRANE PRIMER	5 L
	GB280580	SUREPROOF EXTERNAL MEMBRANE 1M X 20M	20M <sup>2</sup>
	GB280600	SUREPROOF TAPE 300MM X 20M	1
	GB280770	MICROSEALER	25 L
	GB280250	BRICK PLUGS WITH SEALS	200
	GB280230	WYKAMOL PLASTER PLUG (NO SEALS)	200

# WATERPROOFING ANCILLARIES

PRODUCT	CODE	DESCRIPTION	PACK SIZE
	GB280235	WYKAMOL PLASTER PLUG WITH SEALS	200
	GB280630	WYKAMOL CORNER STRIP 150MM X 20M	1
	GB280640	WYKAMOL OVERSEAL TAPE 75MM X 22.5M	1
	GB280260	FIBRE TAPE FOR MESH MEMBRANES 115MM X 25M	1
	GB280620	WYKAMOL ROPE 10MM X 5M	1
	GB280610	WYKAMOL TAPE 28M X 22M	1
	PUMPONLY3	WYKAMOL PUMP 6.8	1
	PUMPONLY4	WYKAMOL PUMP 12.4	1
	GB280660	SINGLE PUMP SUMP KIT (6.8), TWIN OUTLET + METAL LID	1
	GB280670	DOUBLE PUMP SUMP KIT (2 X 12.5) TWIN OUTLET + METAL LID	1
	GB280680	PUMP SUMP KIT (2 X 6.8), BATTERY BACKUP, TWIN OUTLET + METAL LID	1
	GB280690	PUMP SUMP KIT (2 X 12.5), BATTERY BACKUP, TWIN OUTLET + METAL LID	1
	GB280700	AQUASAFE ALARM WITH BATTERY BACKUP AND BUILT IN SERVICE ALARM	1

PRODUCT	CODE	DESCRIPTION	PACK SIZE
	GB280710	UNIVERSAL CHANNEL OUTLET	1
	GB280720	WATERGUARD CHANNEL 2M	1
	GB280730	WATERGUARD JETTING EYE EXTENSION	1
	GB280740	WATERGUARD DRAINEND LEFT	1
	GB280750	WATERGUARD DRAINEND RIGHT	1
	GB280760	WATERGUARD DRAINOUTLET 34MM	1
	GB280770	WATERGUARD CORNER INTERNAL	1
	GB280780	WATERGUARD CORNER EXTERNAL	1
	GB280790	HEAT RECOVERY VENTILATOR UNIT KHRV150	1
	GB280790-B	HEAT RECOVERY VENTILATION EXTENSION KIT	1
	GB280170	WATERSTOP FAST-SETTING, PLUGGING WATERPROOF MORTAR	5KG
	GB280150	HYDRADRY TANKING SLURRY	20KG BAG



**UPCOMING BASEMENT PROJECT?  
Ask in Branch about Wykamol's  
Design Services,  
Technical Support and Site Visits**

# WYKAMOL

## CONTRACTORS TRAINING COURSES

### TAP INTO SOME OF THE BEST TECHNICAL ADVICE IN THE COUNTRY

The Wykamol Group like to ensure that contractors are installing our products to the highest possible standard and to achieve this, we arrange regular and well attended Contractor's Training Courses throughout the country. Please ask in branch or contact Head Office for information on course availability in your area.

### TRAINING COURSE CONTENT



Wykamol Contractor's Training Courses are suitable for start-up contractors and established contractors who would like to become a Wykamol Registered Installer\* and apply to become a member of CGS - Construction Guarantee Solutions.

\*Becoming a Wykamol Registered Installer is a process which begins with attending a Contractor's Training Course and includes inspection of at least 3 on-site projects. Contractors are then entered into our database against their chosen Merchant Partner and Branch. The awarding of Registered Installer status is at the discretion of the Wykamol Group's Technical Department. The Wykamol Group Limited are not responsible for any work completed by a Registered Installer.

**CGS LIMITED**

# INSURANCE BACKED GUARANTEES



## WHAT IS CGS?

CGS or Construction Guarantee Solutions issue insurance backed guarantees to homeowners when a member of CGS completes a project on their home.

Homeowners are insisting on insurance backed guarantees more and more, as the guarantee is valid in every eventually, even if the contractor is no longer trading. Considering that 70% of all companies go out of business within 20 years, why would you take the chance?

Sticking a pin into a phone book gives you a 20-1 chance of finding a contractor good enough to be backed by an insurance company authorised and regulated by the FSA.

When comparing, quotes ask competing contractors which of these they can offer (if any):

1. Actual insurance period of 10 years (with the option of extending this period when it expires)
2. Independent checking for technical competence
3. Health and safety competence and financial stability
4. Underwriter that is authorised and regulated by the FCA
5. Access to the Financial Ombudsman Service
6. Insurance certificate for each property
7. Security of the Financial Services Compensation Scheme
8. NHBC and Zurich Approved
9. Insurance Premium Tax (IPT) applied (as required by law for all genuine insurance)
10. Automatic free assignment on sale of property
11. Protection against contractor failure for any reason

For more information on becoming a member of CGS and issuing insurance backed guarantees, contact your Area Technical Manager.

Ask in Branch for a list of Contractors who can offer CGS Guarantees.



**WYKAMOL GROUP LTD**

**NETWORK 65 BUSINESS PARK,  
HAPTON, BURNLEY,  
BB11 5TH**

**INFO@WYKAMOL.COM**

**WWW.WYKAMOL.COM**

**0845 400 6666**

