


Product Code: CMA215

Luckinslive 389087472

Description: 45A 1 Gang Cooker Connection Plate

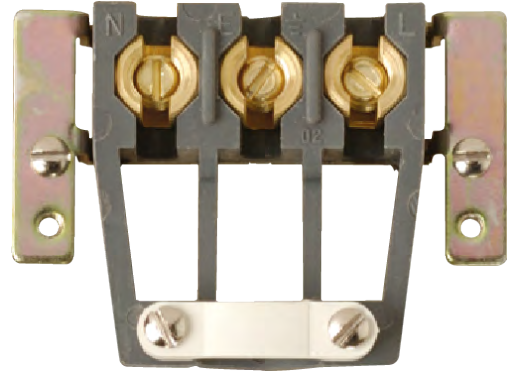

### General Information

Plate Dimensions (mm)	86 (W) x 86 (H) x 22.5 (D)	
Plate Fixing Centres - Horizontal (mm)	60.3	
Style	Rounded Profile	
Colour	Polar White	
Materials	Front Plate: Urea	Earthing Yoke: Mild Steel
	Terminal Housing: Urea	Terminals: Brass
	Terminal Screws: Steel & Yellow Passivated	
Anti Microbial Certified	Yes	
Operating Voltage (AC)	250	Frequency (Hz) 50
Resistive Load Rating (A)	45	
Termination Type	Screw	
Terminal Size (mm)	Ø4.6	Terminal Torque Value (Nm) 0.8
Terminal Capacity - Solid (mm <sup>2</sup> )	2 x 10	
Flex Outlet Available	Yes	
Flex Outlet Location	Bottom of Plate	Flex Outlet Dimension (mm) 20 x 21
Minimum Back Box Depth (mm)	35	
Cable Restraint Supplied	Yes	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	25	

**Standards** BS 5733

### Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.  
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.  
 All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases as well as anti-viral properties against enveloped and non-enveloped viruses.  
 All products have been independently tested with 99.9% of enveloped viruses and 92% of non-enveloped viruses killed off whilst achieving a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

